# Active Maintenance Report: coppock_ekins_kirby_2018

**Coppock, Ekins and Kirby (2018, Quarterly Journal of Political Science): The Long-lasting Effects of Newspaper Op-Eds on Public Opinion**

2026-08-03

## Table of contents


**1 Summary** 2
- 1.1 Does the deposited archive run? . . . 3
- 1.2 Does the maintained rewrite reproduce the paper? . . . 3

**2 Paper overview** 4

**3 Original archive reproducibility** 4

**4 The Table 9 drift** 5

**5 Errata** 6

**6 Ground truth summary** 8
- 6.1 The coverage gate . . . 9

**7 Maintained rewrite** 9

**8 Figure verification** 11

**9 Rewrite verification** 13

**10 Checksums** 13

**11 R environment** 13



**Archived at Zenodo:** doi:10.5281/zenodo.24168328. This DOI always resolves to the latest release of the maintained version.

*Drafted by Claude Opus 5 under the supervision of Alex Coppock.*

This repository holds the actively maintained replication code for Coppock, Ekins and Kirby (2018), together with the reproducibility report that documents what the original archive did and did not do. It is part of a program applying the maintenance proposal in Peer, Orr and Coppock (2021, *PS: Political Science & Politics*, doi 10.1017/S1049096521000366) to a set of published archives.

| | |
|---|---|
| Article | 10.1561/100.00016112 |
| Replication archive | 10.7910/DVN/3KBCJF |
| Pre-analysis plan | osf.io/rmkw3 |

**The data are not redistributed here.** The deposit is 1.4 MB across 20 files and lives at Harvard Dataverse, which is the only copy this repository points at. `download_original.R` fetches it and verifies every file; `original_manifest.csv` pins the file identifiers, sizes and checksums, so the exact bytes this code was written against are recorded in version control even though the bytes themselves are not.

**Repository layout.** `maintained/` is the maintained rewrite: one script per published table or figure, writing to `output/`, which is committed so a reader can compare a fresh run against it without downloading anything. `ground_truth/` ties every published number to the code that produces it, and gates the pipeline on the tie holding. `errata.qmd` corrects the sentences in the article that its own tables contradict. `original/` is created by the download script and is deliberately absent from the repository. This file is the reproducibility report, also available as a PDF in `report/`.

**License.** CC0 1.0 Universal, matching the terms of the deposit this repository maintains. See `LICENSE`.

**To reproduce.** Clone or download the repository, open `coppock_ekins_kirby_2018.Rproj`, and run:

```
source("run_all.R")
```

That fetches the deposit, verifies its 20 files, and produces every table and figure into `maintained/output/`. Required packages: tidyverse, estimatr, lmtest, modelsummary, knitr, kableExtra, here. Paths resolve through `here`, so nothing depends on the working directory. The full run takes well under a minute. A successful run overwrites `maintained/output/`, which is committed: **`git diff` on that folder is the reproduction check.**

# 1 Summary

Two questions, answered before the detail.

## 1.1 Does the deposited archive run?

Almost. Fifteen of the sixteen deposited R scripts execute without error on a current R installation. The sixteenth, `opeds_het_fx_analysis.R`, calls `waldtest()` without ever loading `lmtest`; the package installs from CRAN and one added `library(lmtest)` line fixes it. Every other package the archive names is still on CRAN and still works, including `coefplot`, whose `position_dodgev()` the figure code depends on.

Running is not the same as reproducing, and here the difference is large. Of the 502 published quantities that can be checked against a script, 20 no longer reproduce. 17 of those 20 are in Table 9, which has only eighteen cells. The archive computes those joint F tests as `waldtest(lm_robust(...), lm_robust(...), test = "F")`. When the archive was written, `lmtest::waldtest()` had no robust variance to take from an `lm_robust` object and silently fell back to the classical F test, which is what the article prints. Current `estimatr` supplies the variance, so the identical line now returns an HC2 Wald test instead. Every cell of the table moves. The one cell that still matches to three decimals (MTurk / Flat Tax / Main DV, 0.009) matches by rounding.

No conclusion in the paper turns on the difference. The two tests the article calls significant, Amtrak and Flat Tax on MTurk, stay significant under HC2; the fourteen it calls null stay null.

The remaining 3 failures are not the archive's fault at all. The article's prose reports 3,567 MTurk subjects, 2,169 elite subjects and 1,349 elite Wave 2 responses; its own Tables 1 and 5, the deposited data, and both the archive and the rewrite give 3,571, 2,181 and 1,358. Those are typesetting or transcription slips in the text, not analysis errors, and the tables next to them are right.

## 1.2 Does the maintained rewrite reproduce the paper?

Yes, on every published table cell, and on the prose except where the prose disagrees with the tables. Every one of the 487 cells of Tables 1, 3, 4, 5, 6, 7, 8, 9 and 11 reproduces to the precision the article prints, including all eighteen Table 9 p-values, which the rewrite reaches by reporting the classical F test alongside the HC2 one rather than by choosing between them silently.

9 claims are recorded as failures and every one of them is in the prose. Seven are sentences the article's own tables contradict, and the other two are the two ends of one Discussion sentence whose referent is ambiguous, recorded as unresolved. All nine are gathered as the first seven of the twenty corrections in `coppock_ekins_kirby_2018_errata.pdf`. 9 further quantities are claims about shape that the article states without a number, so they carry the evidence rather than a verdict.

## 2 Paper overview

**Citation**: Coppock, A., Ekins, E. and Kirby, D. (2018). "The long-lasting effects of newspaper op-eds on public opinion." *Quarterly Journal of Political Science*, 13(1), 59-87. DOI: 10.1561/100.00016112

**Summary**: Two randomized panel survey experiments estimate the persuasive effect of real newspaper opinion pieces on policy attitudes. One runs on Amazon Mechanical Turk (N = 3,571), the other on a convenience sample of political and policy elites (N = 2,181) recruited from a list of 32,498 email addresses. Subjects were assigned to read one of five op-eds, on Amtrak, climate change, the flat tax, veterans' health care and Wall Street regulation, or to a control condition that read nothing; the elite study dropped the climate arm for want of sample. Outcomes were measured immediately, ten days later, and, on MTurk only, thirty days later. The op-eds moved attitudes on their target issues by roughly 0.4 to 0.9 points on seven-point scales and 0.3 to 0.7 standard deviations on composite scales, moved attitudes on non-target issues essentially not at all, produced effects that were still visible thirty days later, and produced smaller effects among elites than among the mass public.

## 3 Original archive reproducibility

The deposit is twenty files: three `.RData` data files, sixteen R scripts and a README.

Table 1: Deposited scripts and their status under R 4.6.0.

| Script | Produces | Status |
|---|---|---|
| opeds_source.R | Helper functions, sourced by every other script | Clean |
| opeds_recontact_rates.R | Tables 1 and 5, plus the recontact rates on pp. 66 and 72 | Clean |
| opeds_main_analysis.R | Tables 3, 4, 6 and 7 | Clean |
| opeds_compare_samples.R | Table 8 | Clean |
| opeds_het_fx_analysis.R | Figure 1, Table 9, and the by-party averages on p. 77 | Errors: waldtest() called without |
| opeds_persistence.R | Figure 2 | Clean |
| opeds_agreement.R | Table 11 | Clean |
| opeds_compliance.R | Reading-time claims on pp. 69 and 72 | Clean |
| opeds_monkey.R | A presentation figure that is in neither the article nor the appendix | Clean |
| opeds_het_fx_age_analysis.R | Figure I.10 (appendix) | Clean |
| opeds_persistence_pid.R | Figure H.9 (appendix) | Clean |
| opeds_appendix_attrition.R | Tables D.4 to D.7 (appendix) | Clean |
| opeds_appendix_demographics.R | Tables B.1 to B.3 and Figure B.6 (appendix) | Clean |
| opeds_appendix_distractor.R | Figure C.8 (appendix) | Clean |
| opeds_appendix_heatmaps.R | Figures A.1 to A.5 (appendix) | Clean |
| opeds_appendix_mj.R | Figure C.7 (appendix) | Clean |

Four things are worth recording beyond the single error.

**The one error.** `opeds_het_fx_analysis.R` loads `tidyverse`, `estimatr`, `coefplot` and `reshape2`, then calls `waldtest()` at lines 171 and 200. `waldtest()` belongs to `lmtest`, which is never loaded. The script builds Figure 1 and prints the by-party averages before it dies, so the failure is at the F tests only. Adding `library(lmtest)` is the whole fix.

**The archive's own README undercounts itself.** It states that the archive "has 15 scripts" and lists fifteen. The deposit contains sixteen R files. `opeds_monkey.R` appears in neither the list nor the count; it draws a bar chart of the percentage agreeing with each op-ed author that appears in no part of the published article or appendix.

**The archive writes into itself.** Every script begins with `rm(list = ls())` and a comment instructing the user to set the working directory to the archive folder. Running them there leaves an `Rplots.pdf` behind, which is how the copy of this deposit that seeded this repository came to contain a file the deposit does not. All twenty deposited files verify byte for byte against Dataverse; the stray plot file has been removed, so `original/` now holds the deposit and nothing else.

**Table 7's significance stars are wrong in the archive.** The three other `stargazer()` calls in `opeds_main_analysis.R` pass `p = starprep(..., stat = "p.value")`. The fourth, the one that makes Table 7, omits `stat = "p.value"`, so `stargazer` receives standard errors where it expects p-values and marks every coefficient in the table with a single star. The published Table 7 carries the correct stars, so the version that reached print was not the version the deposit reproduces. Estimates and standard errors are unaffected, and the rewrite's `modelsummary` tables take stars from p-values.

## 4 The Table 9 drift

This is the substantive reproducibility finding, and it is worth stating in full because the mechanism is invisible from the code.

`opeds_het_fx_analysis.R` tests whether treatment effects differ across Democrats, Independents and Republicans by comparing `dv ~ Z + pid_3_cat` against `dv ~ Z * pid_3_cat`:

```
fit_r <- lm_robust(local_formula_r, data = local_df)
fit_u <- lm_robust(local_formula_u, data = local_df)
anova_fit <- waldtest(fit_r, fit_u, test = "F")
```

`lmtest::waldtest()` looks for a `vcov` method on the objects it is given. Older `estimatr` did not export one for `lm_robust`, so `waldtest()` fell through to the classical variance implied by the residuals, and the p-values the article prints are classical F tests. Current `estimatr` does export it, so the same three lines now produce an HC2 Wald test. The author's evident intent, visible in the choice of `lm_robust`, was the robust test; the published numbers are the classical one.

Table 2: Table 9 as published, as the rewrite reproduces it, and as the archive's own code now returns it.

| Sample | Issue | DV | Published | Classical F | HC2 Wald |
|---|---|---|---|---|---|
| MTurk | Amtrak | Main DV | 0.045 | 0.045 | 0.042 |
| MTurk | Amtrak | Scale DV | 0.029 | 0.029 | 0.020 |
| MTurk | Climate | Main DV | 0.845 | 0.845 | 0.883 |
| MTurk | Climate | Scale DV | 0.243 | 0.243 | 0.362 |
| MTurk | Flat Tax | Main DV | 0.009 | 0.009 | 0.009 |
| MTurk | Flat Tax | Scale DV | 0.001 | 0.001 | 0.000 |
| MTurk | Veterans | Main DV | 0.878 | 0.878 | 0.876 |
| MTurk | Veterans | Scale DV | 0.562 | 0.562 | 0.615 |
| MTurk | Wall Street | Main DV | 0.310 | 0.310 | 0.341 |
| MTurk | Wall Street | Scale DV | 0.371 | 0.371 | 0.374 |
| Elite | Amtrak | Main DV | 0.436 | 0.436 | 0.487 |
| Elite | Amtrak | Scale DV | 0.342 | 0.342 | 0.383 |
| Elite | Flat Tax | Main DV | 0.146 | 0.146 | 0.187 |
| Elite | Flat Tax | Scale DV | 0.293 | 0.293 | 0.284 |
| Elite | Veterans | Main DV | 0.434 | 0.434 | 0.431 |
| Elite | Veterans | Scale DV | 0.291 | 0.291 | 0.320 |
| Elite | Wall Street | Main DV | 0.316 | 0.316 | 0.372 |
| Elite | Wall Street | Scale DV | 0.265 | 0.265 | 0.283 |

The rewrite computes both and writes both to `maintained/output/table_9_het_fx_ftests.csv`. The `.tex` table it renders uses the classical column, because that is the published table. `party_ftest()` in `helpers.R` takes `se_type` as a required argument for the same reason: an analysis choice this consequential should not sit in a default.

Every ground truth row in this repository carrying `defect_locus = environment` is a cell of this table, and there are 17 of them. Nothing else in the article moved when the packages did.

## 5 Errata

The rewrite changes no analytical decision, so there is nothing to correct in the code. What there is to correct is in the article: seven ground truth rows carry `defect_locus = paper_internal`, meaning a sentence in the body text disagrees with a table the same article prints. In every case the table is right. A separate audit of the reference list found seven more, described at the end of this section.

Table 3: Sentences in the article that its own tables contradict.

| Claim | In the text | In the data |
|---|---|---|
| MTurk subjects enrolled (p. 66) | 3567 | 3571 |
| Elite subjects who completed the survey (p. 72) | 2169 | 2181 |

| | | |
|---|---|---|
| Elite complete responses in Wave 2 (p. 72) | 1349 | 1358 |
| Largest elite reading-time deficit across the four shared op-eds, seconds (p. 72) | 45 | 45.6 |
| Smallest elite reading-time deficit across the four shared op-eds, seconds (p. 72) | 25 | -30.71 |
| All three named elite on-target main-DV effects significant at $p < 0.001$ (p. 73) | 0.001 | 0.01 |
| Off-diagonal cells in Table 7 (p. 74) | 16 | 12 |
| Elite-sample mean on-target composite-scale effect (p. 82) | 0.30 | 0.2827 |
| MTurk-sample mean on-target composite-scale effect (p. 82) | 0.50 | 0.5216 |

One of those rows is a significance level rather than a quantity, so its computed entry is the strongest of the article's levels that all three effects it names clear: the article names $p < 0.001$, and the 0.01 records that the flat tax effect clears only 0.01.

Those seven rows are six sentences, since the two reading-time rows are the two ends of one published range. With the unresolved Discussion sentence described below, they are set out as the first seven of the twenty numbered corrections in `errata.qmd`, rendered to `coppock_ekins_kirby_2018_errata.pdf` at the repository root, where each entry quotes the published sentence, gives the corrected sentence with the changed token in bold, and computes every number in the corrected sentence from the deposit at render time. Three of the seven are counts of subjects that the prose undercounts. Three more are new here: a reading-time comparison that reverses direction on one of the four op-eds, a significance level stated as $p < 0.001$ for an effect the article's own table stars at $p < 0.01$, and a miscount of the non-target cells of Table 7 as sixteen when the table has twelve. The last is the Discussion's effect range, described below.

The next seven corrections are to the references, and no ground truth row reaches them: every printed entry was sent whole to Crossref and the authoritative record checked back into it, and re-typesetting the article found two more. Kim Traverso's surname is printed "Traveso" in the entry and in both in-text citations; Calavita and Krumholz (2003) is printed as a single author with his given name folded into his surname, in the entry and in the in-text citation; Robert Shapiro and Glenn Dempsey are filed under their given names in the entry for Page, Shapiro and Dempsey (1987), which also breaks off after the volume number; Lynn Vavreck's single-authored 2007 article is cited and listed as "Vavreck et al."; and W. Russell Neuman's surname is printed "Neumann" in the text and in the entry. No citation in the text points at the wrong work.

The last six are misprints the re-typesetting found, none of which touches an estimate: a doubled "the", "op-ends" for "op-eds", two disagreements of number, Table 5's unlabelled Wave 2 rows, and the intercept row of five regression tables labelled "Constant (Constant)".

Two further rows carry `defect_locus = unresolved`. The Discussion says the treatment effects run "between 0.30 and 0.50 standard deviations", and the nine on-target composite-scale effects run from 0.104 to 0.698 with sample means of 0.522 and 0.283, so no reading of the sentence fits the individual effects. The sentence pairs one figure with each study, so the two endpoints are best read as the study-level means, and neither is hedged. It is entry 7 of the

errata, which corrects the printed interval to 0.28 and 0.52; the two unresolved rows are the two ends of that one sentence.

## 6 Ground truth summary

Two files, and they do different jobs.

`ground_truth/published_claims.csv` is the extraction: 699 rows, one for every numeric token the published article prints, each with an identifier, the section or float it sits in, its class and the string the article printed. Table cells were read off 150 dpi renders of the published pages rather than off a text layer, because reading a six-column regression row one column to the left is how this paper produced a phantom typeset erratum once already. Spelled-out numbers were swept for separately, since no token scan sees "five hypotheses" or "four or five questions". 546 of the 699 rows are quantities the pipeline is expected to reproduce; the rest are design assumptions, scale endpoints, citation years and figures transcribed from other people's reports, and they are verified where they are used rather than here.

`ground_truth/coppock_ekins_kirby_2018_ground_truth.csv` is the comparison: 548 rows, keyed to the extraction by identifier. `value_paper` was read from the article and from nowhere else. `value_script` is what the deposited scripts return today; `value_rewrite` is what `maintained/output/` contains.

Table 4: Ground truth coverage by published table.

| Table or claim | Claims | Archive matches | Archive fails | Rewrite matches | Rewrite fails | Unverifiable |
|---|---|---|---|---|---|---|
| Table 1 | 49 | 49 | 0 | 49 | 0 | 0 |
| Table 3 | 70 | 70 | 0 | 70 | 0 | 0 |
| Table 4 | 70 | 70 | 0 | 70 | 0 | 0 |
| Table 5 | 30 | 30 | 0 | 30 | 0 | 0 |
| Table 6 | 48 | 48 | 0 | 48 | 0 | 0 |
| Table 7 | 48 | 48 | 0 | 48 | 0 | 0 |
| Table 8 | 88 | 88 | 0 | 88 | 0 | 0 |
| Table 9 | 18 | 1 | 17 | 18 | 0 | 0 |
| Table 11 | 66 | 66 | 0 | 66 | 0 | 0 |
| Text | 61 | 12 | 3 | 43 | 9 | 9 |

Coverage is every estimate, standard error, constant, R-squared and N printed in Tables 1, 3, 4, 5, 6, 7, 8, 9 and 11, which is all 487 of their cells, plus every quantity the body text states. Table 2 lists the op-eds and prints no number at all. Table 10 is a hand-assembled circulation table built from an auditing bureau's figures, two publishers' internal surveys and a readership share the article assumes, none of which is in the deposit or could be; it is extracted

and classified but not claimed. Figures 1 and 2 print no numbers on their faces, and each still asserts a countable quantity: 54 party-specific estimates and 130 group means respectively, both checked.

### 6.1 The coverage gate

`ground_truth/build_ground_truth.R` runs last in `run_all.R` and stops the pipeline on six checks: that the two ground truth files agree on what the article says, that every claim identifier is real and unique, that every published float is covered and by what fraction of its cells, that a verdict and a defect locus travel together, that `maintained/in_text_claims.R` printed exactly the 546 claims it should have, and that its numbers agree with the ground truth's, value by value.

The last of those is the one that pays. `in_text_claims.R` reaches each number from `maintained/output/` by a path of its own and never reads the ground truth, so a committed comparison value that has drifted away from the scripts cannot survive a run. It caught one on its first execution: Table 3's Amtrak R-squared had been stored as 0.0115, which prints 0.011 against a published 0.012, while the pipeline's 0.01150090 prints 0.012 and matches. The stored value had been rounded to five significant figures, which is enough to land a number exactly on a rounding boundary. Every `value_rewrite` is now carried at full precision.

The gate is a gate and not a generator: this repository's `value_script` and `value_rewrite` columns are committed data rather than the output of a script that runs the deposit and reads back `maintained/output/`. What the gate does instead is make every one of them auditable against a live recomputation on each run.

## 7 Maintained rewrite

Eleven scripts and a `helpers.R`, one per published float, plus three for the in-text quantities and one that reads every published number back beside the sentence that states it.

Table 5: Scripts in maintained/.

| Script | Produces |
|---|---|
| helpers.R | Packages, deposited data, shared labels and three shared estimators |
| table_1_5_design.R | Tables 1 and 5 |
| table_3_4_mturk_effects.R | Tables 3 and 4 |
| table_6_7_elite_effects.R | Tables 6 and 7 |
| table_8_compare_samples.R | Table 8 |
| table_9_het_fx_ftests.R | Table 9, both F tests |
| table_11_agreement.R | Table 11 and its precision-weighted averages |
| figure_1_het_fx_by_party.R | Figure 1 and the by-party estimates behind it |
| figure_2_persistence.R | Figure 2 and the group means behind it |
| text_recontact_rates.R | Enrolment, recontact and chi-square claims, pp. 66 and 72 |

| | |
|---|---|
| text_partisan_pw_averages.R | By-party averages and the Republican-Democrat difference, p. 77 |
| text_reading_time.R | Reading-time claims, pp. 69 and 72 |
| in_text_claims.R | Every published number, printed beside the sentence or cell that states it |

**Substitutions.** `stargazer` plus `sink()` becomes `modelsummary(output = ...)`, which writes straight to a file and takes its stars from p-values. `reshape2::melt()` and `dcast()` become `pivot_longer()` and `pivot_wider()`. `coefplot::position_dodgev()` and `geom_errorbarh()` become `position_dodge()` and `geom_linerange()`, since ggplot2 4.x dodges along a discrete y axis without help. `do(tidy(...))` becomes `reframe(tidy(...))`. `lm()` plus `estimatr::starprep()` becomes `lm_robust(se_type = "HC2")`, which is the same variance estimator reached directly. `xtable` is left behind rather than replaced, because the tables it built are hand-assembled and `knitr::kable` plus `kableExtra` renders them straight into this report. No seeds are set anywhere in the archive and none are needed: nothing here samples.

**Nothing typed in.** The archive's `opeds_compliance.R` ends with two bare subtractions, `160.4120 - 134.00352` and `232.0353 - 186.43233`, whose inputs were copied from a previous run of the same script. The rewrite computes those differences from the data. They come to 26.41 and 45.60 seconds, which is where the article's "25-45 seconds less" comes from.

**A finding that fell out of computing it.** The article says the elite sample "spent 25-45 seconds less time reading our treatment articles than the MTurk sample." Computed across all four arms the two samples share, rather than the two the archive typed in, the differences are:

Table 6: Trimmed mean reading time by arm, MTurk minus elite.

| Op-ed | MTurk (s) | Elite (s) | Difference (s) |
|---|---|---|---|
| Amtrak | 160.4 | 134.0 | 26.4 |
| Flat Tax | 232.0 | 186.4 | 45.6 |
| Veterans | 176.6 | 207.3 | -30.7 |
| Wall Street | 108.9 | 80.4 | 28.5 |

Three arms fall in or near the stated range. On the veterans op-ed the elite sample spent thirty-one seconds more, not less, and the average across the four is 17.4 seconds rather than 25 to 45. This is entry 1 of the errata.

**A defect found in this rewrite and fixed.** `table_11_agreement.R` passed the treatment arm to its fitting function from inside a `mutate()`, where the bare name `arm` resolves to the whole column rather than the current row. Every model was therefore fit on all six arms at once. The script produced 41 rows where the published table has 27, labelled them with repeating topic names, and computed precision-weighted averages of 0.05 and 0.03 where the article reports 0.20 and 0.12. Nothing in the pipeline caught it, because the ground truth had no rows for Table 11 to catch it against. It has 66 now.

## 8 Figure verification

Neither published figure prints a number, so verification is visual against the article, plus a numeric diff of the estimates behind each panel and a count of what each figure plots.

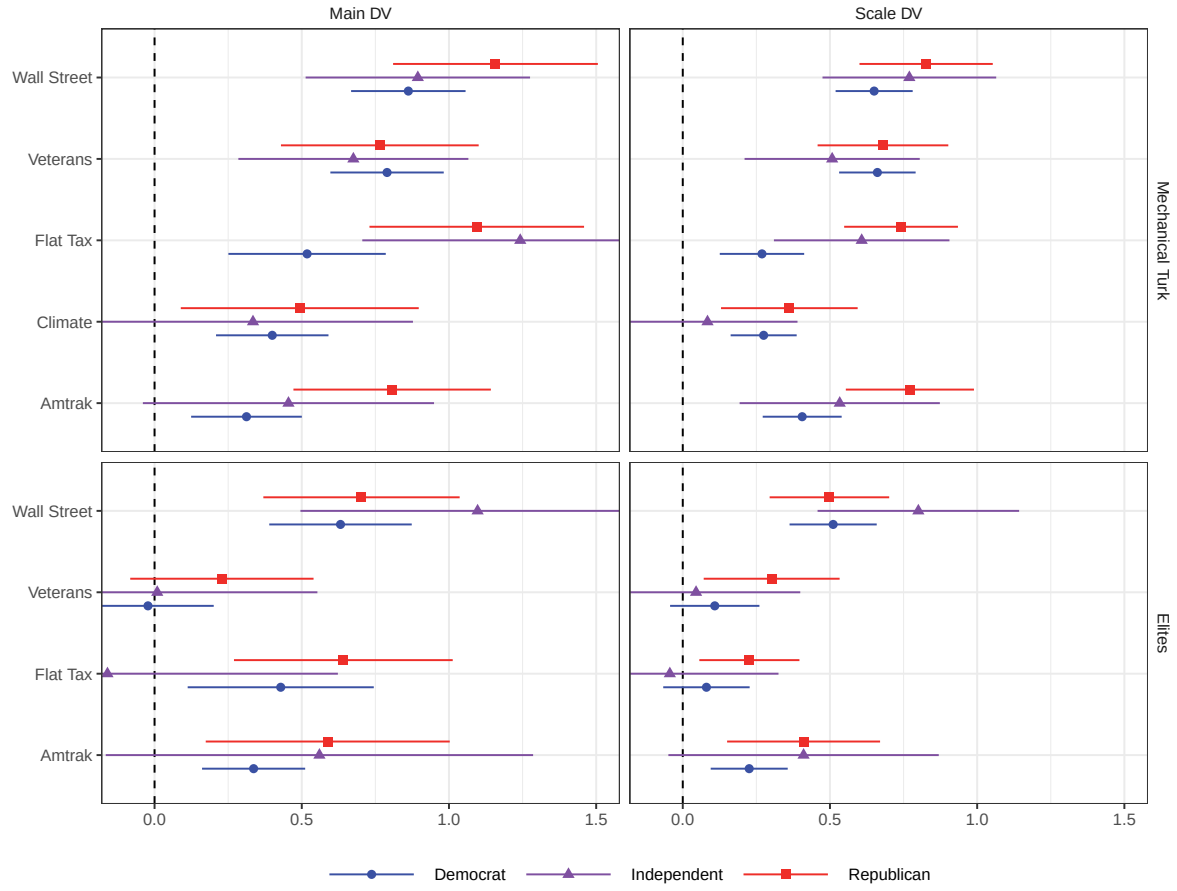



Figure 1, effects of treatment by party and experimental sample. The rewrite reorders the issue axis so the panels read top to bottom in the article's order and drops `coord_flip()`, which the current ggplot2 does not need.

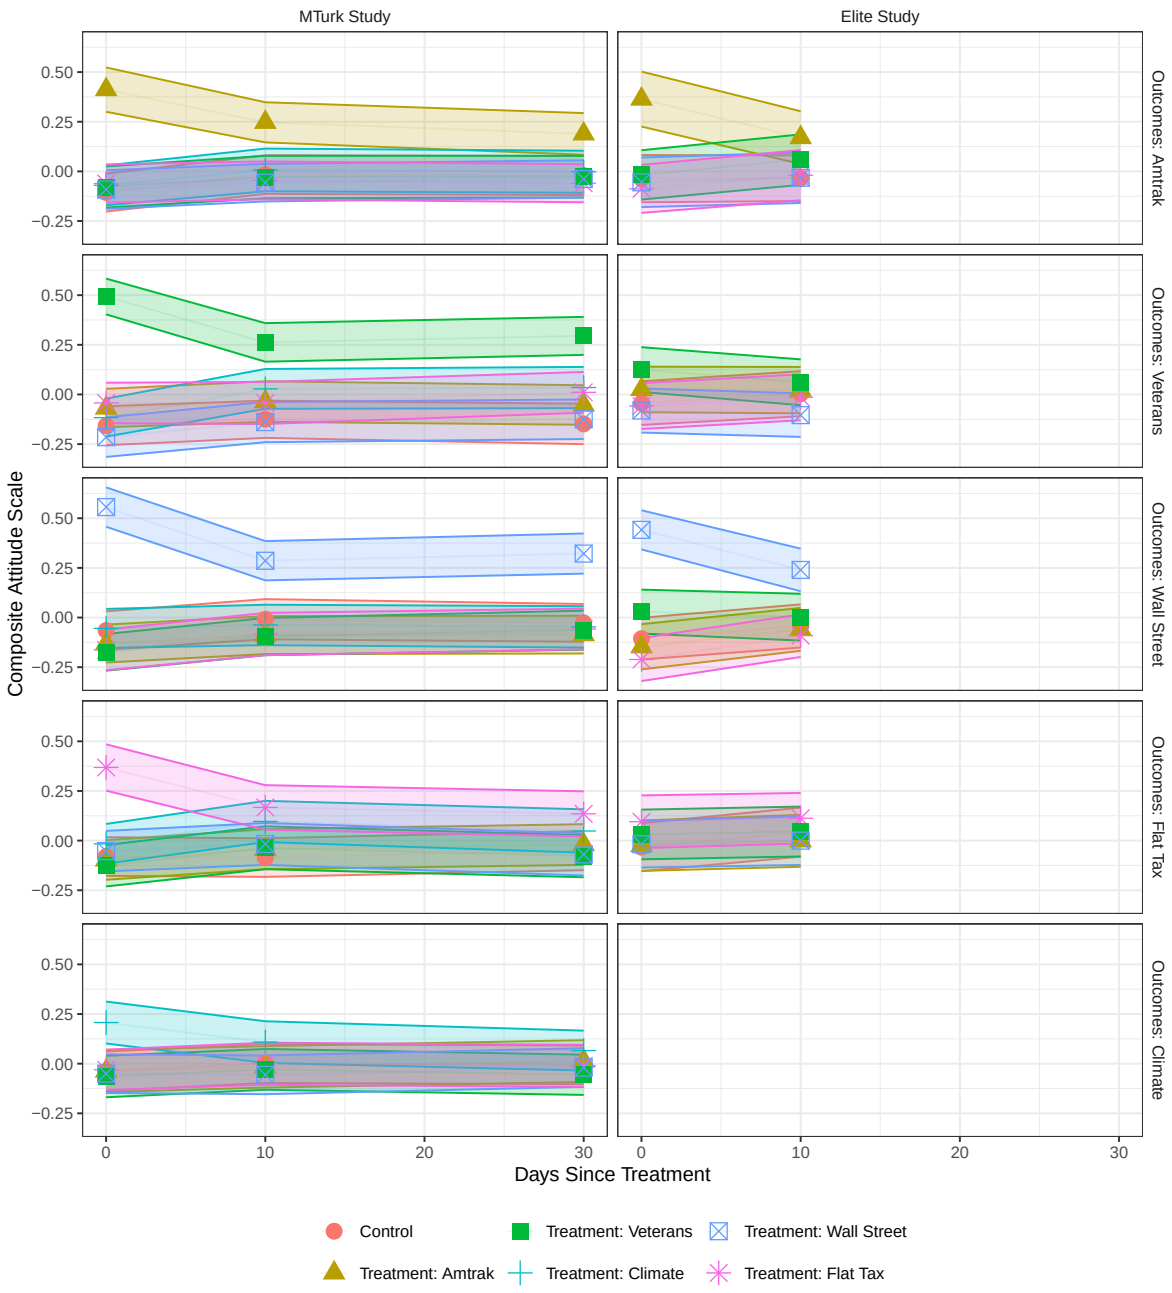



Figure 2, long-term effects of treatment. The archive plots the wave index against an axis relabelled 0, 10 and 30 days, which compresses the ten-day gap and the twenty-day gap to the same width. The rewrite plots the actual day counts.

## 9 Rewrite verification

Every script was run twice from a clean session and the outputs diffed. All twenty-eight CSV, TeX and PNG files are byte-identical between runs; the two PDF figures differ only in the creation timestamp a PDF records internally. Nothing in the rewrite samples, so no seed is involved in that result.

`run_all.R` was run end to end immediately before this report was rendered, so the committed `maintained/output/` is the product of a single ordered run rather than of scripts executed one at a time. The order matters in one place: `text_partisan_pw_averages.R` averages the estimates `figure_1_het_fx_by_party.R` writes, so it runs after it.

## 10 Checksums

All twenty deposited files were fetched from Dataverse with `?format=original` and hashed. The MD5 of what Dataverse serves agrees with the MD5 Dataverse publishes for all twenty, including `elite_opeds_cleaned.RData` and `mturk_opeds_cleaned.RData`, which Dataverse ingested to tabular `.tab` files: the published checksums describe the deposited RData, not the derived table. The local copy that seeded this repository is byte-identical to what the server returns, so nothing in it drifted in the eight years since deposit.

## 11 R environment

Table 7: Environment this report was rendered in.

| Component | Version |
|---|---|
| R | 4.6.2 |
| tidyverse | 2.0.0 |
| estimatr | 2.0.1 |
| lmtest | 0.9.40 |
| modelsummary | 2.6.0 |
| knitr | 1.52 |
| kableExtra | 1.4.1 |
| here | 1.0.2 |

The archive's own README names no R version. The packages it names are `coefplot`, `dplyr`, `estimatr`, `MASS`, `nnet`, `reshape2`, `stargazer`, `tidyverse` and `xtable`; `lmtest` is used but not named, which is the archive's one error.