Reproducibility Report: Kirkland and Coppock (2018)

Candidate Choice Without Party Labels: New Insights from Conjoint Survey Experiments

Table of contents

1 Paper Overview 3

2 Summary 3
- 2.1 Does the deposited archive run? . . . 3
- 2.2 Does the maintained rewrite reproduce the paper? . . . 4

3 Original Archive Reproducibility 5

4 Errata 7

5 Ground Truth Verification 7

6 Maintained Rewrite 8

7 Figure Verification 10

8 Maintained Rewrite Verification 14

9 R Environment 15

Drafted by Claude Opus 5 under the supervision of Alex Coppock.

This repository holds the actively maintained replication code for Kirkland and Coppock (2018), together with the reproducibility report that documents what the original archive did and did not do. It is part of a program applying the maintenance proposal in Peer, Orr and Coppock (2021, *PS: Political Science & Politics*, doi 10.1017/S1049096521000366) to a set of published archives.

Article	10.1007/s11109-017-9414-8
Replication archive	10.7910/DVN/WSUHI3
Pre-analysis plans	none

The data are not redistributed here. The deposit lives at Harvard Dataverse and that is the only copy this repository points at. `download_original.R` fetches it and verifies every file; `original_manifest.csv` records the Dataverse file identifiers, the UNF of each ingested data file, and two checksums per file: the MD5 of the bytes Dataverse serves, which is what this code was written against, and the MD5 Dataverse publishes. Here the two agree for all 10 files. They do not always, so the script verifies against the served bytes and reports any disagreement. Either way the exact bytes are pinned in version control even though the bytes themselves are not.

`recovered/` is different and is committed. The observational analysis behind Table 1 depends on a data file and a script that the deposit does not contain, though its own README lists both. The authors supplied them, and since they exist nowhere else this repository carries them.

Repository layout. `maintained/` is the maintained rewrite: one script per published table or figure, writing to `output/`, which is committed so a reader can compare a fresh run against it without downloading anything. `ground_truth/` ties every published number to the code that produces it. `original/` is created by the download script and is deliberately absent from the repository. This README is the reproducibility report, also available as a PDF in `report/`.

License. CC0 1.0 Universal, matching the terms of the deposit this repository maintains, so nothing in the chain is more restrictive than the archive itself. See `LICENSE`.

To reproduce. Clone or download the repository, open `kirkland_coppock_2018.Rproj`, and run:

```
source("run_all.R")
```

That fetches the deposited archive from Dataverse, verifies its 10 checksums, produces every published table and figure into `maintained/output/`, and rebuilds the ground truth table from those outputs. It takes about a minute. Individual scripts can be run on their own in any order; only `ground_truth/build_ground_truth.R` depends on the others having run first.

Required packages: tidyverse, estimatr, knitr, kableExtra, here. Paths resolve through `here`, so nothing depends on the working directory and the scripts work equally well under `Rscript` outside RStudio. A successful run overwrites `maintained/output/`, which is committed: **`git diff` on that folder is the reproduction check**, and the CSV and PNG output should come back byte-identical. The eleven PDF figures always show as changed, because a PDF records the time it was written; compare their PNG twins instead.

1 Paper Overview

Citation: Kirkland, P. A. and Coppock, A. (2018). Candidate choice without party labels: New insights from conjoint survey experiments. *Political Behavior*, 40(3), 571–591.

Research question: When a ballot carries no party label, what do voters use instead? The paper argues that without the partisan shortcut voters fall back on other indicators of fitness for office, political experience above all.

Design: Three pieces of evidence. An observational record of 1,010 US mayoral elections held between 1945 and 2007 across 225 municipalities, comparing the political experience of winners under partisan and nonpartisan ballots. Then two conjoint survey experiments running the same design on different samples: an MTurk convenience sample (N = 1,204) and a nationally representative YouGov sample (N = 1,200). Each subject judged five successive elections between two candidates whose race, gender, age, career experience, political experience and, in half the elections, party were fully randomized. Outcomes are candidate choice and a 0 to 100 competence rating. Estimation is OLS with standard errors clustered by respondent, and effects are compared across election types by interacting every attribute with an indicator for the nonpartisan ballot.

Main finding: Political experience carries substantially more weight when the party label is withheld. In the MTurk sample the political experience coefficients are about 10 percentage points larger in nonpartisan than in partisan elections, and the same interaction appears in the YouGov sample. The competence ratings move the same way, which is the paper's evidence for the mechanism it proposes. The two samples' estimates correlate at 0.95.

---

2 Summary

Two questions, answered before the detail.

2.1 Does the deposited archive run?

Not as deposited, and the reasons are all about files rather than about code.

The YouGov data cannot be loaded under the name the scripts use. The deposit contains `yougov_replication.xlsx`. It is not a spreadsheet: it is an RData binary carrying the wrong extension, uploaded that way and served that way ever since. Both scripts that need it call `load("yougov_replication.rdata")`, so `yougov_replication.R` and `compare_samples_replication.R` fail on their first data line. Renaming the file, or

loading it under its real name, fixes both, and the extension is the whole of the problem: the bytes are a valid RData file and `load()` reads them without complaint.

Three of the twelve files the archive's README promises were never deposited. The README lists `observational_mayors_replication.rdata`, `observational_replication.R` and `observational_codebook.txt`, along with CSV copies of all three data files. The Dataverse record has ten files and none of those six are among them. Table 1 and the paragraph of observational results that follows it therefore cannot be reproduced from the deposit at all. The authors supplied the missing data and script separately; they are in `recovered/` and the rewrite reads Table 1 from there.

Every data path in the archive is mis-cased. The scripts call `load("mturk_replication.rdata")` and `load("base_categories.rdata")`; the deposited files are `mturk_replication.RData` and `base_categories.RData`. macOS and Windows do not care. Linux does, which is where most people who clone a replication archive today are running it.

With the YouGov file renamed, all three deposited scripts run to completion in a current R and produce their figures. The only warning is `geom_errorbarh()`, deprecated in ggplot2 4.0.0. Nothing in the archive writes a file, so running it leaves the deposit untouched, and re-verifying `original/` against the manifest after a full run confirms all 10 files unchanged.

2.2 Does the maintained rewrite reproduce the paper?

Yes for everything the paper prints, with exceptions in the observational paragraph on page 5 and in one sentence describing Figure 3.

Table 1: Reproduction verdict by component

Component	Verdict
Table 1 (24 cells plus both totals)	Reproduces exactly
Table 1 chi-squared statistic	Reproduces (21.2)
Table 1 chi-squared p-value	Reproduces; the archive's test is an unseeded simulation and 0.002 is inside its range
Text p. 5, 779 elections	Reproduces exactly
Text p. 5, 62 and 61 per cent	Reproduce, but the two labels are transposed in the sentence
Text p. 5, p = 0.791	Does not reproduce (0.852 here)
Text p. 5, 63 and 48 per cent	Not verifiable; candidate occupation is not in the recovered data
Table A.1 party identification panel and Ns	Reproduces exactly
Table A.1 remaining panels	Not verifiable; the deposit carries no other respondent demographics
Figures 3 to 8, B.1, B.2, C.3, C.4	Reproduce; all 729 estimates and standard errors agree with the archive to 4e-13
Text on Figure 3, 25 to 30 percentage points	Range is tight at both ends; the estimates run 22.7 to 32.0
Text on Figure 3, about 10 percentage points	Reproduces (9.1 to 11.7)
Discussion, correlation of 0.95	Reproduces (0.9494) on the archive's specification

Of the 50 recorded ground truth claims, 46 are verifiable and 41 of them match.

The p-value that does not reproduce. The paper reports that among the 779 elections in which the two candidates had different levels of political experience, the more experienced candidate won about 62 per cent of the time in partisan elections and 61 per cent in nonpartisan elections, and that "this difference is not statistically significant ($p = 0.791$)." The subset size reproduces exactly, and so do both percentages, though the sentence attaches them to the wrong ballot types: the data give 62.1 per cent nonpartisan and 61.3 per cent partisan. The p-value does not reproduce under any standard test of that comparison. A regression with HC2 errors gives 0.852, a chi-squared test gives 0.919, and Fisher's exact test, a logit and a t test all land near 0.85. No deposited or recovered script computes this quantity, so there is no code to inspect. The stated conclusion, that the difference is not significant, is unaffected either way: 0.791 and 0.85 lead to the same reading.

The chi-squared p-value is not a fixed number. The recovered script calls `chisq.test(simulate.p.value = TRUE)` and sets no seed, so its p-value is a Monte Carlo draw. Over 500 replications of that same call the p-value runs from 5×10^{-4} to 0.004, and 24 per cent of draws round to the published 0.002. The published value is a perfectly ordinary draw from the archive's own procedure, not a discrepancy. The asymptotic p-value, which is exact, is 7.44×10^{-4}.

The correlation of 0.95 depends on an inconsistency inside the archive. `yougov_replication.R` weights the YouGov main-effects models with the survey weights. `compare_samples_replication.R`, which produces the correlation, refits the same four models without them. The rewrite keeps the archive's unweighted specification, which is what the published 0.95 requires: weighting those models instead gives 0.9184, which rounds to 0.92.

---

3 Original Archive Reproducibility

Archive source: Harvard Dataverse, DOI 10.7910/DVN/WSUHI3, version 1.0, ten files.

Table 2: Original archive check (current R environment)

File	Status	Issue
mayors_source.R	Runs	Helper functions; sourced by every script
mturk_replication.R	Runs	load() path is mis-cased and would fail on a case-sensitive filesystem; geom_errorbarh() deprecated
yougov_replication.R	FAILS	load('yougov_replication.rdata'): the deposit contains yougov_replication.xlsx, an RData binary under the wrong extension
compare_samples_replication.R	FAILS	Same missing file name
observational_replication.R	ABSENT	Listed in the archive README; not deposited. Recovered from the authors
observational_mayors_replication.rdata	ABSENT	Listed in the archive README; not deposited. Recovered from the authors

observational_codebook.txt	ABSENT	Listed in the archive README; not deposited
CSV copies of the three datasets	ABSENT	Listed in the archive README; not deposited

The extension anomaly is visible at the Dataverse level, not just in the download. The dataset API reports `originalFileName` as `yougov_replication.xlsx` for that file, and Dataverse ingested it into a tabular representation named `yougov_replication.tab`. Whatever the upload looked like, the deposited bytes are an RData file and the name has never matched them. `download_original.R` writes the file under the deposited name and `maintained/helpers.R` loads it under that name, because renaming a deposited file inside a reproduction is how a defect stops being visible to the next reader.

What the archive computes but the appendix does not print. Each of the two conjoint scripts contains seven figure blocks. Four correspond to published figures. The remaining three per script build a valence-index analysis, a policy-index analysis and a satisficing analysis, and each script also assembles regression tables it labels D.3, D.5 and so on. The published online appendix has sections A, B and C, no section D, and no valence or policy figures. The paper's Discussion cites "Appendix C.2" for the policy-goal results and "Appendix C.3" for the satisficing results; the appendix as published has neither of those subsections, and its satisficing figures are numbered B.1 and B.2. The online appendix is also dated June 2016, carries a different subtitle from the article, and refers to the main-text conjoint figures as Figures 1 and 2 where the article numbers them 3 and 4. It is an earlier draft of the appendix, published alongside a later draft of the paper.

Additional patterns (warnings or fragility, not errors):

- `geom_errorbarh()`, deprecated in ggplot2 4.0.0.
- `position_dodgev()` from `ggstance`, reached through `coefplot`, which the scripts install from GitHub with the comment "it appears that we need version > 1.2.4.9000."
- `gather` / `spread` throughout.
- `rm(list = ls())` at the top of every script.
- The difference-panel coefficients are selected by hardcoded row index (`fit_3_df[19:33, ]`, `[22:39, ]`, `[19:35, ]`, `[22:41, ]`, four different windows), and their labels are then overwritten by assignment from another model's row names. Adding a level to any attribute silently mislabels the entire panel.
- `cl()` recomputes the cluster vector from the unfiltered data, so wherever the outcome has missing values the script has to pass `filter(..., !is.na(comp))` by hand. It does, for the competence figures. Nothing enforces it.

---

4 Errata

The rewrite corrects no analytical error, because none of the discrepancies above is one. The three published numbers that do not reproduce are a transposition of two labels in one sentence, a p-value with no surviving code behind it, and a range stated more tightly than the estimates support. All three are recorded in the ground truth with `match = 0` and described in the Summary; none affects a conclusion.

---

5 Ground Truth Verification

Table 3: Ground truth verification (50 rows)

table_figure	claim	value_script	value_paper	match	value_rewrite
Table 1	No previous political experience, nonpartisan N	163.0000	163.000	1	163.0000
Table 1	No previous political experience, nonpartisan %	21.0000	21.000	1	21.0000
Table 1	No previous political experience, partisan N	72.0000	72.000	1	72.0000
Table 1	No previous political experience, partisan %	30.0000	30.000	1	30.0000
Table 1	City legislator, nonpartisan N	216.0000	216.000	1	216.0000
Table 1	City legislator, nonpartisan %	28.0000	28.000	1	28.0000
Table 1	City legislator, partisan N	39.0000	39.000	1	39.0000
Table 1	City legislator, partisan %	16.0000	16.000	1	16.0000
Table 1	County legislator, nonpartisan N	13.0000	13.000	1	13.0000
Table 1	County legislator, nonpartisan %	2.0000	2.000	1	2.0000
Table 1	County legislator, partisan N	3.0000	3.000	1	3.0000
Table 1	County legislator, partisan %	1.0000	1.000	1	1.0000
Table 1	State legislator, nonpartisan N	37.0000	37.000	1	37.0000
Table 1	State legislator, nonpartisan %	5.0000	5.000	1	5.0000
Table 1	State legislator, partisan N	18.0000	18.000	1	18.0000
Table 1	State legislator, partisan %	8.0000	8.000	1	8.0000
Table 1	US legislator, nonpartisan N	5.0000	5.000	1	5.0000
Table 1	US legislator, nonpartisan %	1.0000	1.000	1	1.0000
Table 1	US legislator, partisan N	4.0000	4.000	1	4.0000
Table 1	US legislator, partisan %	2.0000	2.000	1	2.0000
Table 1	Mayor, nonpartisan N	338.0000	338.000	1	338.0000
Table 1	Mayor, nonpartisan %	44.0000	44.000	1	44.0000
Table 1	Mayor, partisan N	102.0000	102.000	1	102.0000
Table 1	Mayor, partisan %	43.0000	43.000	1	43.0000
Table 1	Total, nonpartisan N	772.0000	772.000	1	772.0000
Table 1	Total, nonpartisan %	100.0000	100.000	1	100.0000
Table 1	Total, partisan N	238.0000	238.000	1	238.0000
Table 1	Total, partisan %	100.0000	100.000	1	100.0000
Table 1	Chi-squared statistic	21.1961	21.200	1	21.1961
Table 1	Chi-squared p-value	0.0015	0.002	1	0.0015
Text, p. 5	Elections in which the candidates' experience differs	779.0000	779.000	1	779.0000
Text, p. 5	More experienced candidate wins, partisan (%)	61.2903	62.000	0	61.2903
Text, p. 5	More experienced candidate wins, nonpartisan (%)	62.0573	61.000	0	62.0573
Text, p. 5	p-value on the partisan/nonpartisan difference	0.8516	0.791	0	0.8516
Text, p. 5	Attorneys or business executives, partisan (%)	NA	63.000	NA	NA

Text, p. 5	Attorneys or business executives, nonpartisan (%)	NA	48.000	NA	NA
Table A.1	MTurk N	1204.0000	1204.000	1	1204.0000
Table A.1	YouGov N	1200.0000	1200.000	1	1200.0000
Table A.1	MTurk Democrat share	0.5810	0.581	1	0.5810
Table A.1	MTurk Independent share	0.1640	0.164	1	0.1640
Table A.1	MTurk Republican share	0.2540	0.254	1	0.2540
Table A.1	YouGov Democrat share (weighted)	0.3850	0.385	1	0.3850
Table A.1	YouGov Independent share (weighted)	0.2700	0.270	1	0.2700
Table A.1	YouGov Republican share (weighted)	0.3460	0.346	1	0.3460
Table A.1	Respondent race, gender, ideology, education and age panels	NA	NA	NA	NA
Discussion	Correlation of MTurk and YouGov estimates	0.9494	0.950	1	0.9494
Figure 3	Political experience, MTurk nonpartisan, smallest effect (pp)	22.6531	25.000	0	22.6531
Figure 3	Political experience, MTurk nonpartisan, largest effect (pp)	31.9673	30.000	0	31.9673
Figure 3	Political experience, nonpartisan minus partisan, mean (pp)	9.8941	10.000	1	9.8941
Figures 3 to 8, B.1, B.2, C.3, C.4	All plotted coefficients and standard errors	NA	NA	NA	NA

Summary: 41 of 46 verifiable claims match the published values; 5 do not. `ground_truth/build_ground_truth.` rebuilds this table from `maintained/output/` at the end of every run. The only numbers typed into that script are the published values themselves, which serve as comparison targets and are never inputs to a computation.

---

6 Maintained Rewrite

The rewrite lives in `maintained/`: a shared `helpers.R` and fourteen scripts, one per published table or figure plus two for in-text quantities.

Table 4: Maintained rewrite scripts

Script	Output
helpers.R	Packages, both datasets, the estimation and plotting helpers
table_1_observational_experience.R	output/table_1_observational_experience.csv, output/text_observational_chisq.csv
table_a1_party_identification.R	output/table_a1_party_identification.csv
figure_3_mturk_main_candidate_pref.R	output/figure_3_mturk_main_candidate_pref.{pdf,png,csv}
figure_4_yougov_main_candidate_pref.R	output/figure_4_yougov_main_candidate_pref.{pdf,png,csv}
figure_5_mturk_het_fx_candidate_pref.R	output/figure_5_mturk_het_fx_candidate_pref.{pdf,png,csv}
figure_6_yougov_het_fx_candidate_pref.R	output/figure_6_yougov_het_fx_candidate_pref.{pdf,png,csv}
figure_7_mturk_het_fx_competence.R	output/figure_7_mturk_het_fx_competence.{pdf,png,csv}
figure_8_yougov_het_fx_competence.R	output/figure_8_yougov_het_fx_competence.{pdf,png,csv}
figure_b1_mturk_satisficing.R	output/figure_b1_mturk_satisficing.{pdf,png,csv}
figure_b2_yougov_satisficing.R	output/figure_b2_yougov_satisficing.{pdf,png,csv}
figure_c3_mturk_main_competence.R	output/figure_c3_mturk_main_competence.{pdf,png,csv}

figure_c4_yougov_main_competence.R	output/figure_c4_yougov_main_competence.{pdf,png,csv}
text_observational_experience_advantage.R	output/text_observational_experience_advantage.csv
text_mturk_yougov_correlation.R	output/text_mturk_yougov_correlation.{csv,pdf,png}

Key substitutions:

Table 5: Deprecated patterns and replacements

Original	Rewrite
rm(list = ls())	removed
library() in each script	source(helpers.R); all packages in helpers.R
custom cl() over sandwich and lmtest	lm_robust(clusters = , se_type = 'stata'), identical to 1e-15
coefficient rows selected by index	filter(str_detect(term, ':nonpartisan$'))
labels reassigned from another model's rownames	labels derived from each model's own terms
position_dodgev() from ggstance via coefplot	position_dodge(width = 0.5)
geom_errorbarh(height = 0)	geom_linerange()
geom_segment() for confidence bars	geom_linerange()
gather / spread	pivot_longer / pivot_wider
magrittr pipe	native pipe
figures held only as in-memory R objects	written to output/ as PDF, PNG and CSV
load('yougov_replication.rdata')	load('yougov_replication.xlsx'), the deposited name

The standard error substitution. The archive's `cl()` function scales the CR0 meat by `(M / (M - 1)) * ((N - 1) / (N - K))`, which is what `estimatr::lm_robust(se_type = "stata")` computes. The two agree to 1e-15 on every model in the paper. An earlier version of this rewrite asked for `se_type = "CR1S"`, the name estimatr used for the same estimator until version 1.0.6 retired it; that name now raises an error, which is why every figure script here names the estimator "stata".

The weighting decisions are surfaced, not defaulted. The archive applies the YouGov survey weights to the main-effects figures (4 and C.4) and to the satisficing figure (B.2), but not to the heterogeneous-effects figures (6 and 8) and not to the four models behind the correlation in the Discussion. The rewrite reproduces each figure as the archive specifies it, and `election_type_panels()` takes `weighted` as a required argument with no default so the choice is visible at every call site. Weighting the heterogeneous-effects models would move individual estimates by up to 0.04 and the reported correlation from 0.95 to 0.92, which is a change to the analysis rather than a repair to it.

What the rewrite adds. The published appendix figures B.1 and B.2, which the archive computes and no earlier rewrite covered, and the one panel of Table A.1 the deposit can support. The in-text observational comparison on page 5 has no code anywhere in the archive or the recovered files; it is reconstructed here from the recovered data. Every figure now writes a CSV of the plotted estimates alongside the image, which is what makes a rerun diffable.

What the rewrite leaves alone. The confidence bars are drawn at plus or minus 1.96 standard errors, as the archive draws them, rather than at a t quantile on the cluster-adjusted

degrees of freedom. The valence-index and policy-index analyses the archive computes are not rewritten, since neither appears in the published paper or appendix. The unweighted YouGov specifications stay unweighted.

---

7 Figure Verification

Every plotted coefficient and standard error in the ten conjoint figures was compared against the archive's own `lm()` plus `cl()` output, term by term and panel by panel: 729 pairs, agreeing to within 4e-13. Two of the figures follow.

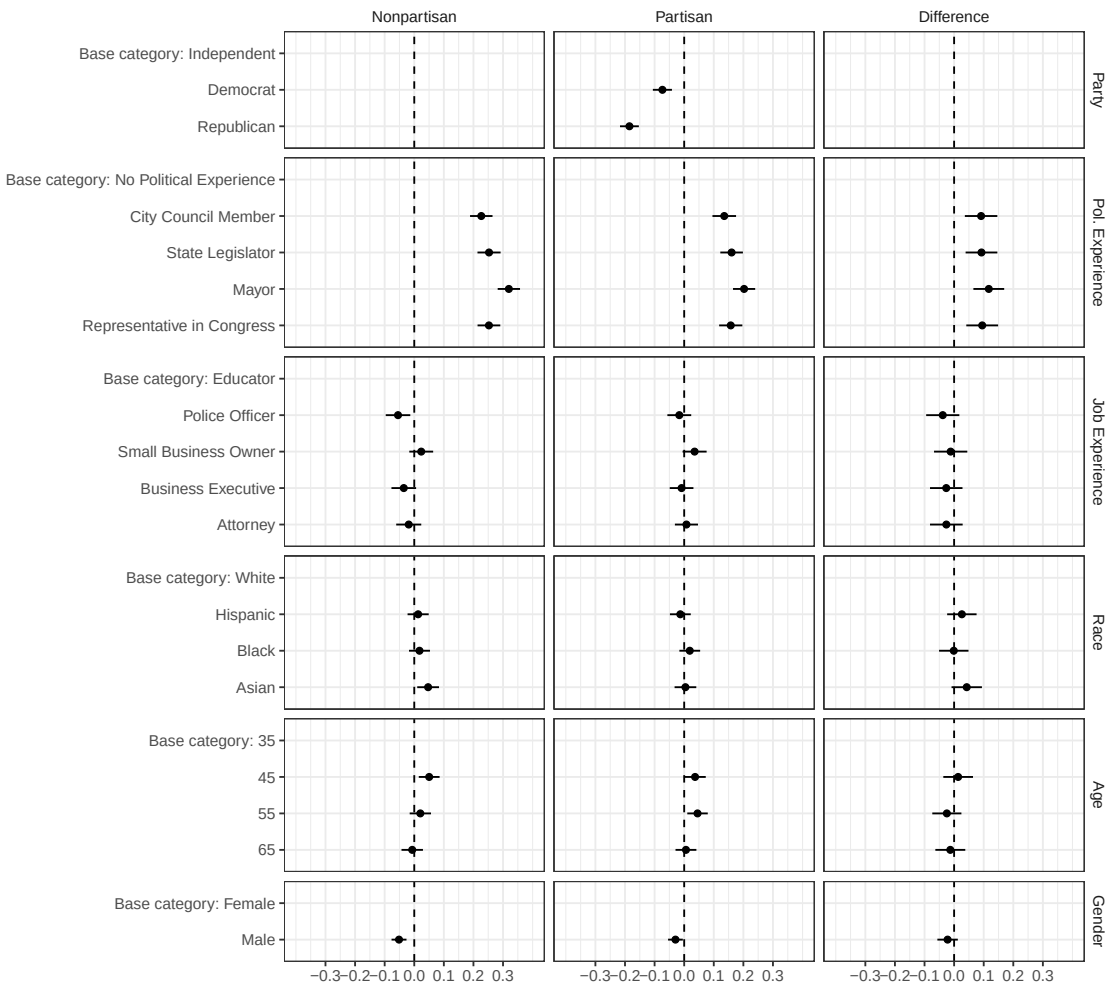


Figure 1: Figure 3 reproduction. MTurk main analysis, candidate preference. Columns are nonpartisan elections, partisan elections, and the difference between them; rows are attribute groups. Political experience carries visibly more weight when the party label is withheld.

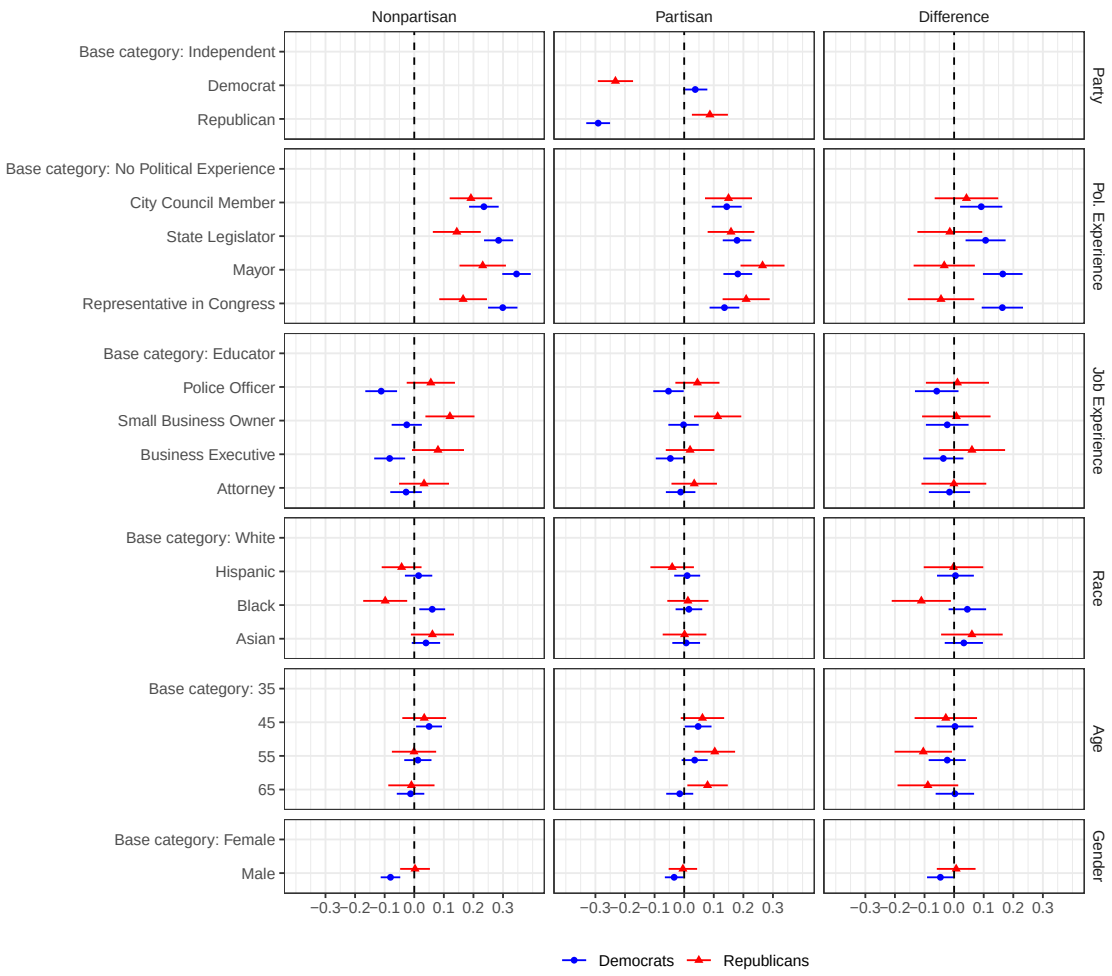


Figure 2: Figure 5 reproduction. MTurk heterogeneous effects on candidate preference, Democratic respondents in blue and Republican respondents in red.

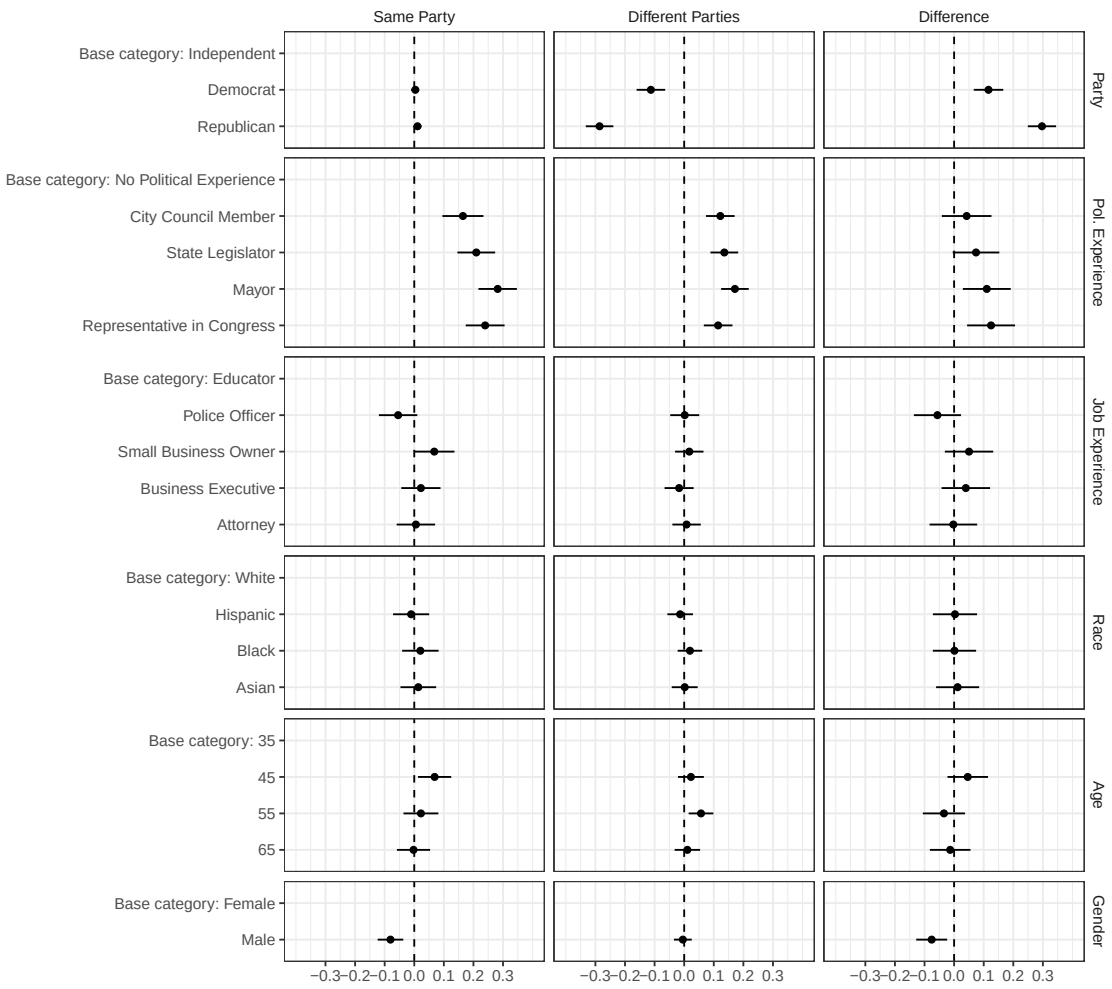


Figure 3: Appendix Figure B.1 reproduction, the satisficing check. Partisan elections only, split by whether the two candidates share a party. Both panels display six attributes, so the number of attributes is held fixed and only the informativeness of the party label varies.

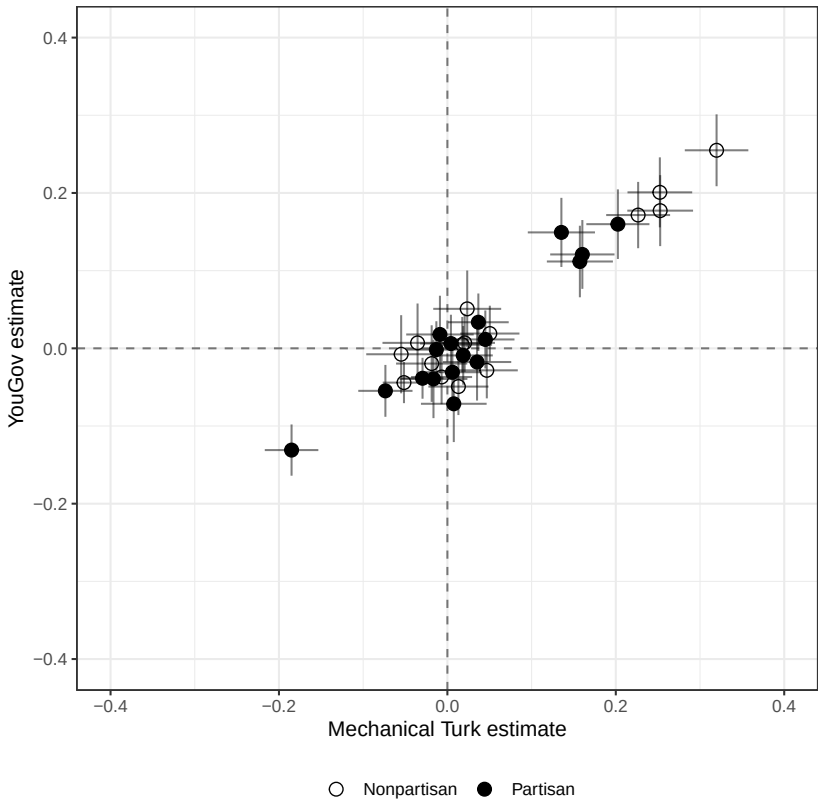


Figure 4: The Discussion's correlation of 0.95, plotted. Each point is one attribute level's effect on candidate preference, estimated on MTurk and on YouGov, with 95 per cent intervals on both axes.

---

8 Maintained Rewrite Verification

Table 6: Rewrite verification: 41 of 46 claims match published values

table_figure	claim	value_paper	value_rewrite	match_rewrite
Table 1	No previous political experience, nonpartisan N	163.000	163.0000	1
Table 1	No previous political experience, nonpartisan %	21.000	21.0000	1
Table 1	No previous political experience, partisan N	72.000	72.0000	1
Table 1	No previous political experience, partisan %	30.000	30.0000	1
Table 1	City legislator, nonpartisan N	216.000	216.0000	1
Table 1	City legislator, nonpartisan %	28.000	28.0000	1
Table 1	City legislator, partisan N	39.000	39.0000	1
Table 1	City legislator, partisan %	16.000	16.0000	1

Table 1	County legislator, nonpartisan N	13.000	13.0000	1
Table 1	County legislator, nonpartisan %	2.000	2.0000	1
Table 1	County legislator, partisan N	3.000	3.0000	1
Table 1	County legislator, partisan %	1.000	1.0000	1
Table 1	State legislator, nonpartisan N	37.000	37.0000	1
Table 1	State legislator, nonpartisan %	5.000	5.0000	1
Table 1	State legislator, partisan N	18.000	18.0000	1
Table 1	State legislator, partisan %	8.000	8.0000	1
Table 1	US legislator, nonpartisan N	5.000	5.0000	1
Table 1	US legislator, nonpartisan %	1.000	1.0000	1
Table 1	US legislator, partisan N	4.000	4.0000	1
Table 1	US legislator, partisan %	2.000	2.0000	1
Table 1	Mayor, nonpartisan N	338.000	338.0000	1
Table 1	Mayor, nonpartisan %	44.000	44.0000	1
Table 1	Mayor, partisan N	102.000	102.0000	1
Table 1	Mayor, partisan %	43.000	43.0000	1
Table 1	Total, nonpartisan N	772.000	772.0000	1
Table 1	Total, nonpartisan %	100.000	100.0000	1
Table 1	Total, partisan N	238.000	238.0000	1
Table 1	Total, partisan %	100.000	100.0000	1
Table 1	Chi-squared statistic	21.200	21.1961	1
Table 1	Chi-squared p-value	0.002	0.0015	1
Text, p. 5	Elections in which the candidates' experience differs	779.000	779.0000	1
Text, p. 5	More experienced candidate wins, partisan (%)	62.000	61.2903	0
Text, p. 5	More experienced candidate wins, nonpartisan (%)	61.000	62.0573	0
Text, p. 5	p-value on the partisan/nonpartisan difference	0.791	0.8516	0
Table A.1	MTurk N	1204.000	1204.0000	1
Table A.1	YouGov N	1200.000	1200.0000	1
Table A.1	MTurk Democrat share	0.581	0.5810	1
Table A.1	MTurk Independent share	0.164	0.1640	1
Table A.1	MTurk Republican share	0.254	0.2540	1
Table A.1	YouGov Democrat share (weighted)	0.385	0.3850	1
Table A.1	YouGov Independent share (weighted)	0.270	0.2700	1
Table A.1	YouGov Republican share (weighted)	0.346	0.3460	1
Discussion	Correlation of MTurk and YouGov estimates	0.950	0.9494	1
Figure 3	Political experience, MTurk nonpartisan, smallest effect (pp)	25.000	22.6531	0
Figure 3	Political experience, MTurk nonpartisan, largest effect (pp)	30.000	31.9673	0
Figure 3	Political experience, nonpartisan minus partisan, mean (pp)	10.000	9.8941	1

Two full runs of `run_all.R` produce byte-identical CSV and PNG output. Only the PDF figures differ between runs, because a PDF records the time it was written.

---

9 R Environment

Table 7: Key package versions

Package	Version
tidyverse	2.0.0
estimatr	1.0.6
knitr	1.51
kableExtra	1.4.0
here	1.0.2

R version: R version 4.6.0 (2026-04-24)