
uv* — Mewo 0.1.0

File View Run

```
// |\                     /|
// |  \                 /  |
// |    \             /    |
// |      \         /      |
// |        \     /        |
// |          \ /          |
// |                       |
// |                       |
// |                       |
// |   _______   _______   |
// |  /       \ /       \  |
// |  \_______/ \_______/  |
// |_______________________|

@fragment
fn main(@builtin(position) position: vec4f) -> @location(0) vec4f {
    return vec4f(position.xy / mw.resolution.xy, 0.0, 1.0);
}

```

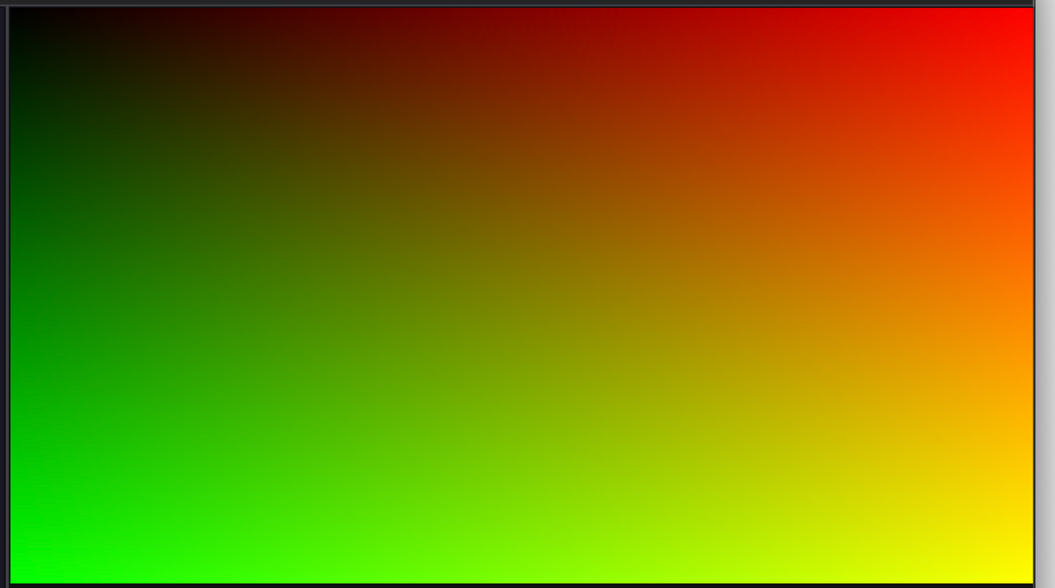

Pause 47.9 120 FPS Controls

▶ Run 0 diagnostics Compiled in 0.40 ms. Ln 18, Col 1


Project goals

- Run and edit shaders
- Single executable, native, cross platform
- Offline-first and local-first
- Published package you can download right now
- Predefined uniform variables
- Projects, saving and loading, serialization
- External media support (images and videos)
- Hot reloading
- Project website
- Device camera support


Project goals

- ~~Run and edit shaders~~ ✅
- ~~Single executable, native, cross platform~~ ✅
- ~~Offline-first and local-first~~ ✅
- ~~Published package you can download right now~~ ✅
- ~~Predefined uniform variables~~ ✅
- ~~Projects, saving and loading, serialization~~ ✅
- External media support (images and videos) ❌
- ~~Hot reloading~~ ✅
- Project website 🚧
- Device camera support ❌

What’s new since beta

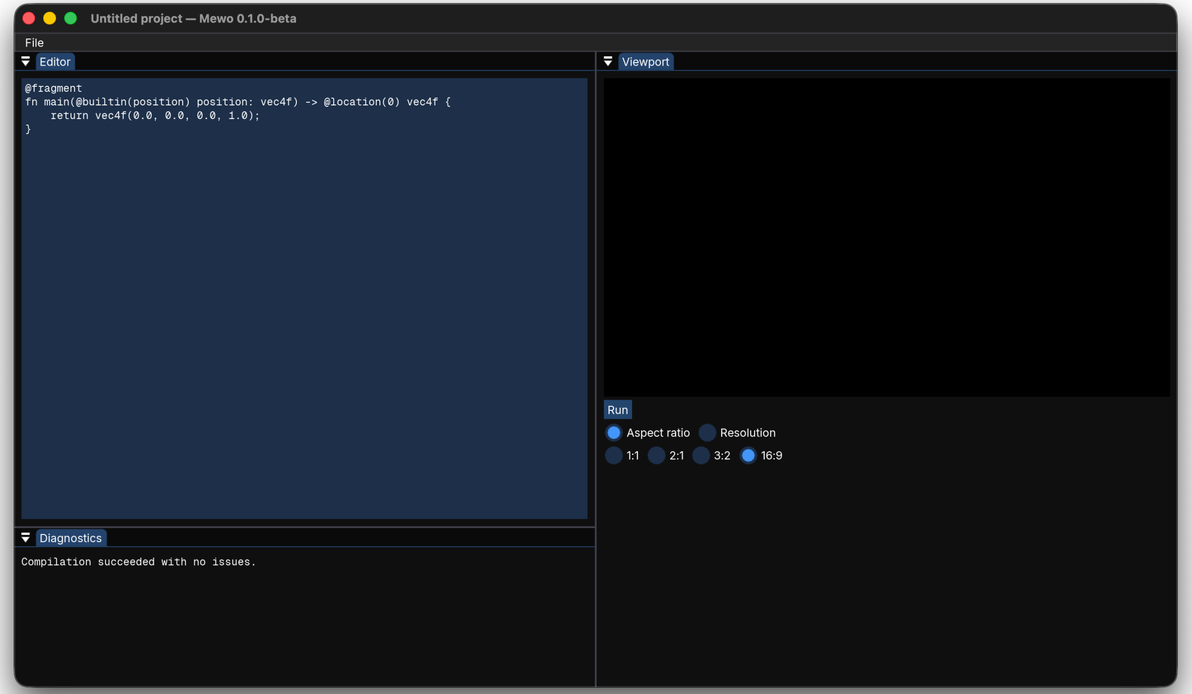


Beta (before)

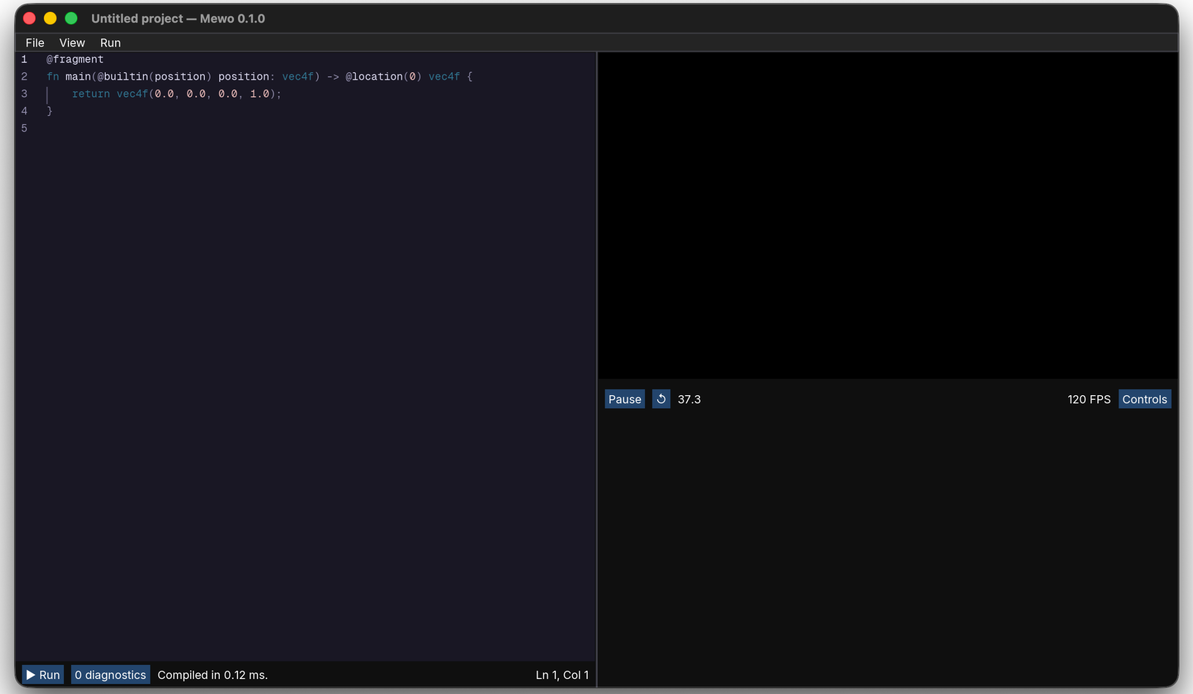

Now (after)

Window padding, tab bars, menu bar, etc.

What’s new since beta

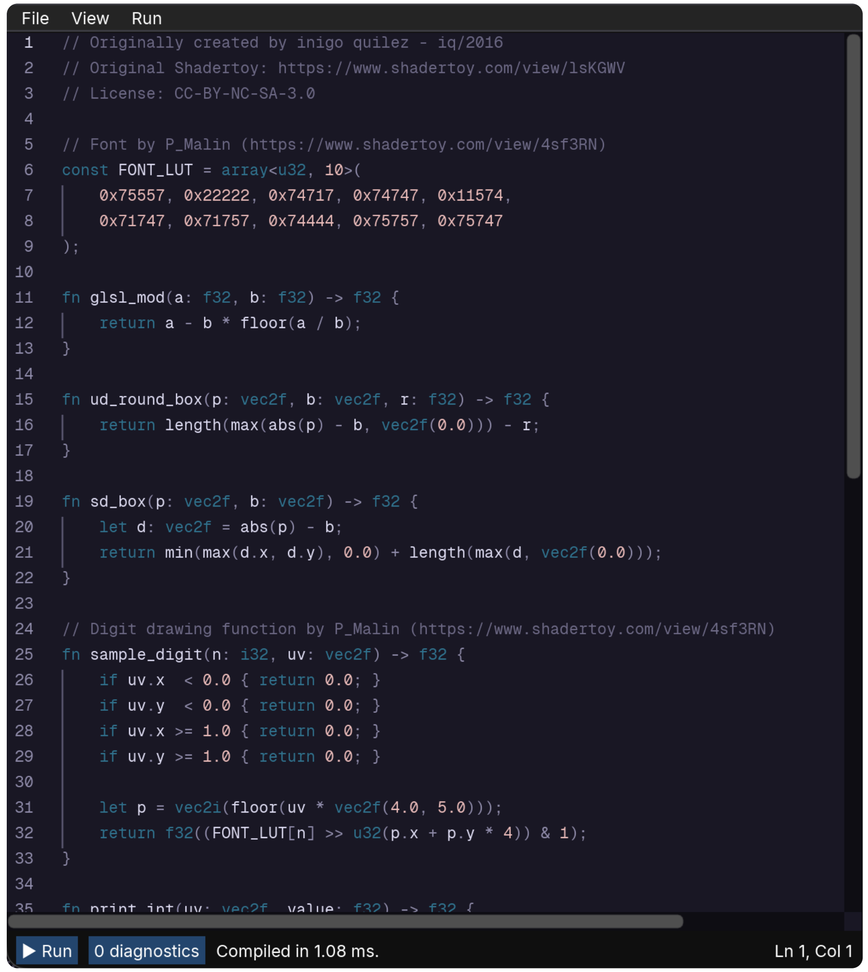

WGSL syntax highlighting

```
/// Auto-generated via re2c. Use https://re2c.org/playground, options: "-i -W -Werror"
TextEditor::Iterator get_wgsl_number(TextEditor::Iterator start, TextEditor::Iterator end) {
  TextEditor::Iterator i = start;
  TextEditor::Iterator marker;

  /*!re2c
    re2c:api = custom;
    re2c:api:style = free-form;
    re2c:define:YYCTYPE = ImWchar;
    re2c:define:YYPEEK = "i < end ? *i : 0";
    re2c:define:YYSKIP = "++i;";
    re2c:define:YYBACKUP = "marker = i;";
    re2c:define:YYRESTORE = "i = marker;";
    re2c:define:YYLESSTHAN = "i >= end";
    re2c:yyfill:enable = 0;

    digit      = [0-9];
    hexdigit   = [0-9a-fA-F];
    dec_exp    = [eE] [+-]? digit+;
    hex_exp    = [pP] [+-]? digit+;

    dec_int    = "0" | [1-9] digit*;
    dec_float  = digit+ "." digit* dec_exp? [fh]?
               | "." digit+ dec_exp? [fh]?
               | digit+ dec_exp [fh]?
               | digit+ [fh];

    hex_prefix = "0" [xX];
    hex_int    = hex_prefix hexdigit+ [iu]?;
    hex_float  = hex_prefix (
                   hexdigit+ "." hexdigit* hex_exp? [fh]?
                   | "." hexdigit+ hex_exp? [fh]?
                   | hexdigit+ hex_exp [fh]?
                 );


    wgsl_number = hex_float | hex_int | dec_float | dec_int [iu]?;

    wgsl_number { return i; }
    *           { return start; }
  */
}
```

Regular expressions


What’s new since beta

Hot reloading

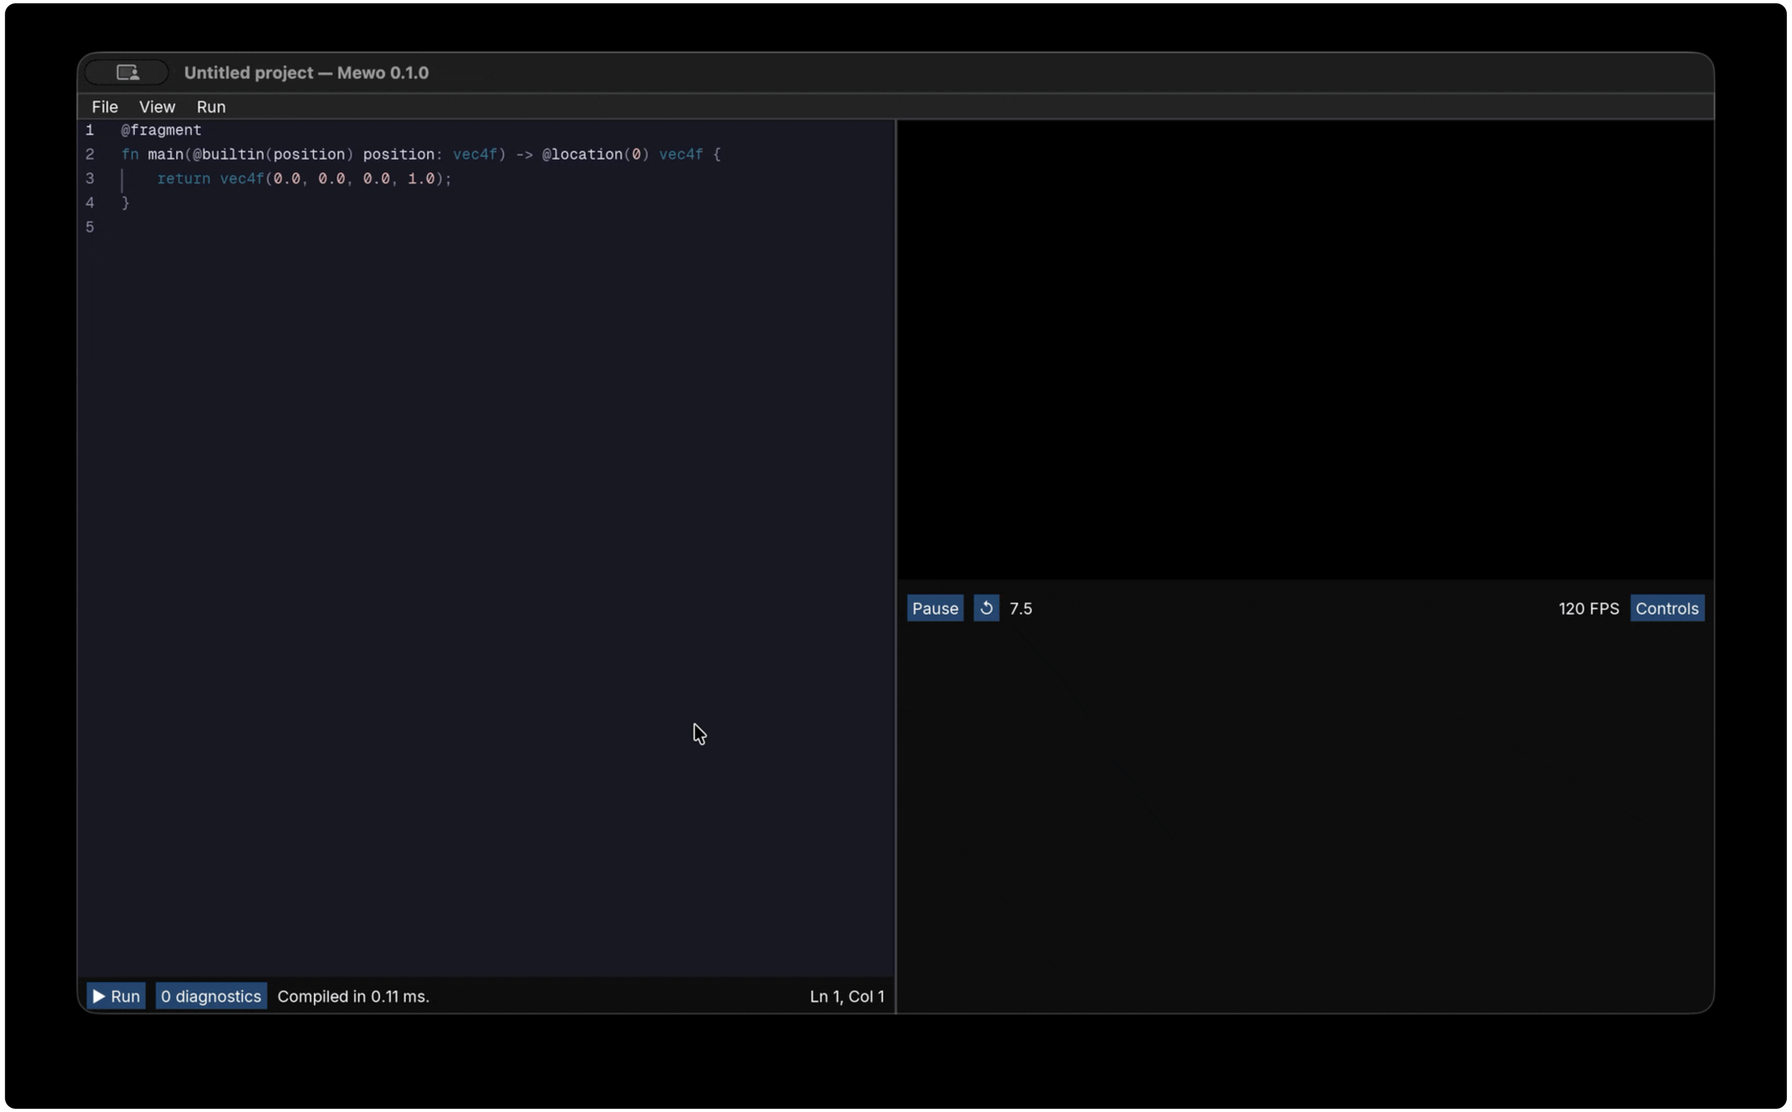

What’s new since beta


New shader uniforms

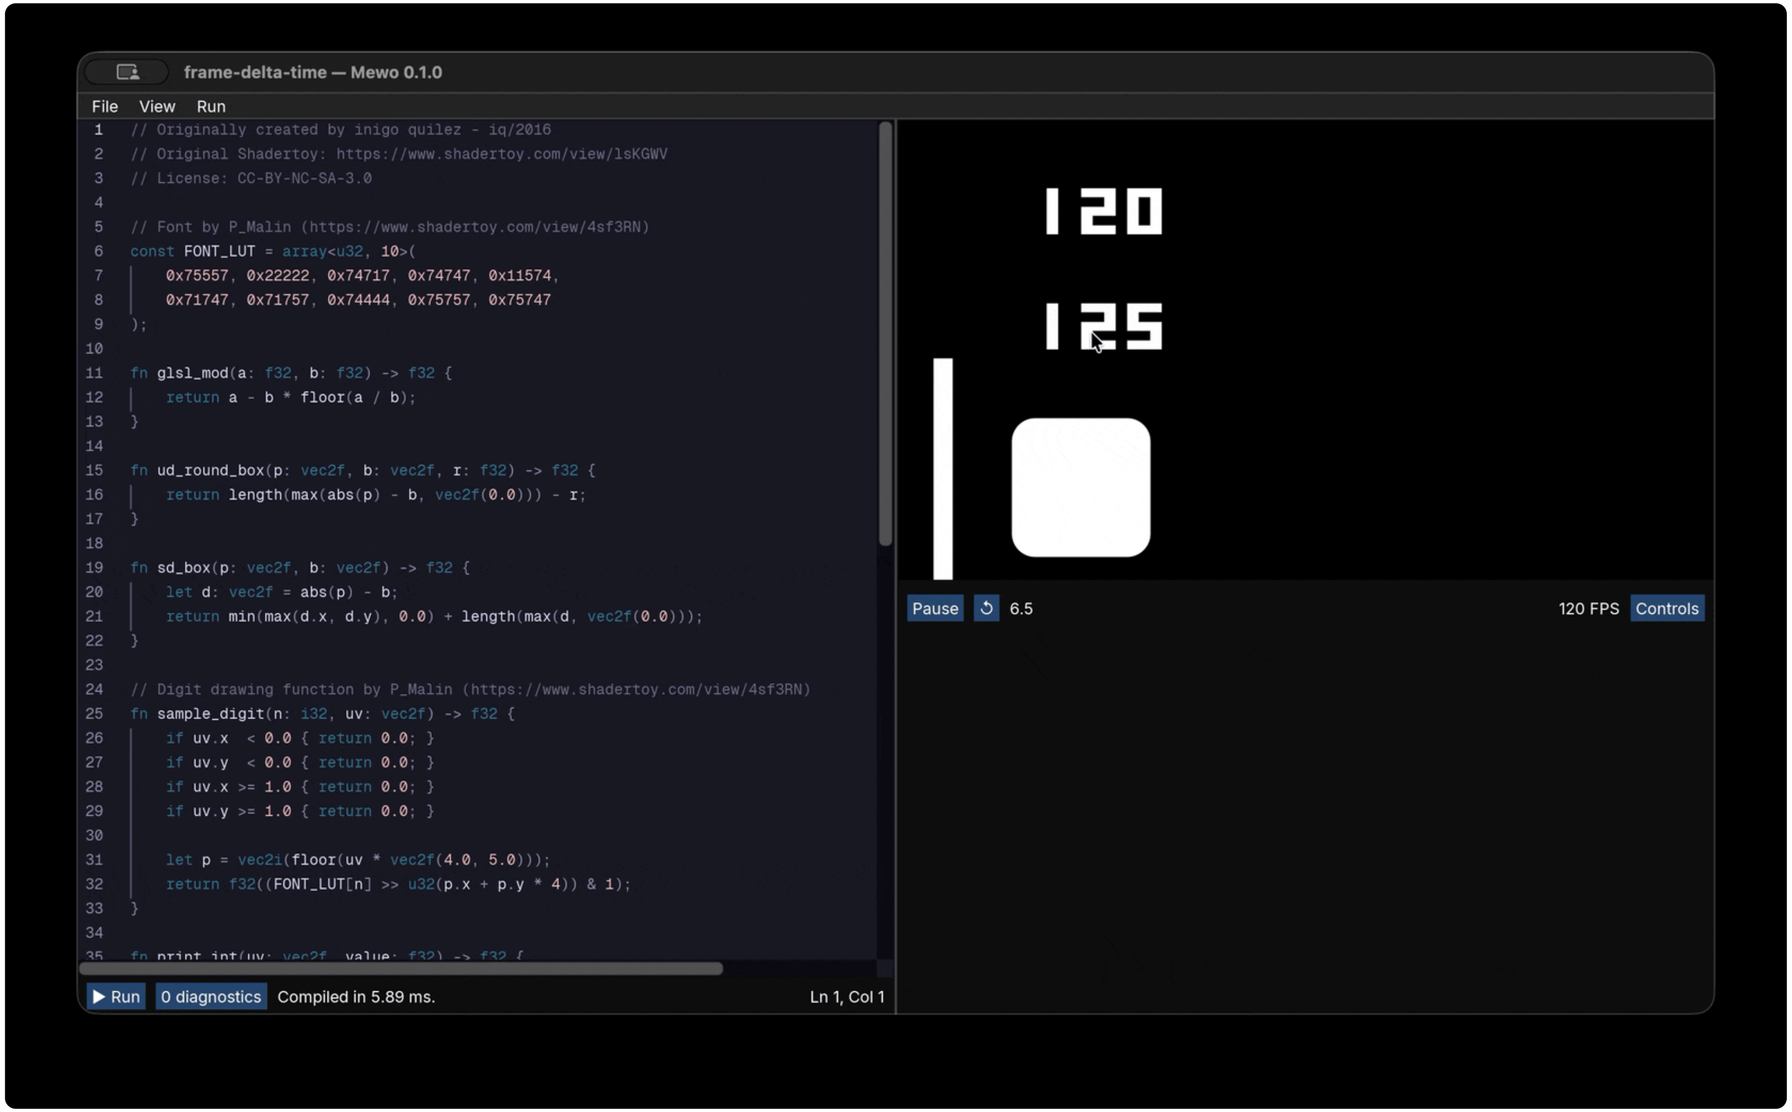

What's new since beta ...other small things




Keyboard shortcuts

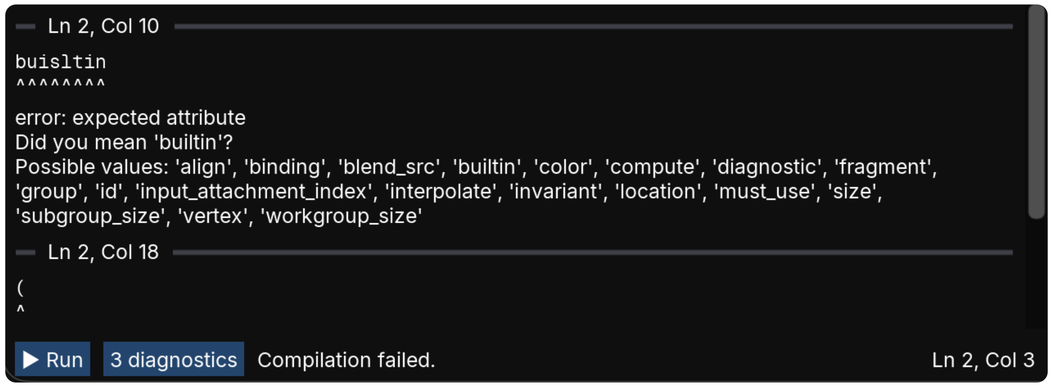

Prettier/better shader diagnostics



Editor status bar



Project dirty indicator (*)



Viewport playback info/controls



Viewport controls popup

Demo!

Future work

More shader uniforms

- Ability to define and manipulate your own
- Mouse position and control

Viewport timeline scrubbing

Output pixel inspector

Additional render passes

Everything I didn’t end up getting to

Frame capture/record

Linux/web support

Hi Dan