

## astroquery: An Astronomical Web-Querying Package in Python

ADAM GINSBURG,<sup>1</sup> BRIGITTA SIPOCZ,<sup>2</sup> BRETT M. MORRIS,<sup>3</sup> THOMAS P. ROBITAILLE,<sup>4</sup> LEO P. SINGER,<sup>5,6</sup>  
CHRISTOPH DEIL,<sup>7</sup> MADHURA PARIKH,<sup>8</sup> HENRIK NORMAN,<sup>9,10</sup> MAGNUS V. PERSSON,<sup>11</sup> PEY LIAN LIM,<sup>12</sup> JULIEN WOILLEZ,<sup>13</sup>  
IVAN VALTCHANOV,<sup>14</sup> ERIK J. TOLLERUD,<sup>12</sup> C. E. BRASSEUR,<sup>12</sup> JUAN-CARLOS SEGOVIA,<sup>10</sup> PHILIP S. COWPERTHWAIT,<sup>15</sup>  
JAMES GUILLOCHON,<sup>15</sup> MICHAEL MOMMERT,<sup>16</sup> MATTHEW W. CRAIG,<sup>17</sup> KELLY E. LOCKHART,<sup>15</sup> GIANNINA GUZMAN,<sup>18,19</sup>  
MIGUEL DE VAL-BORRO,<sup>19,20</sup> AND THE ASTROQUERY COLLABORATION, A SUBSET OF THE ASTROPY COLLABORATION

<sup>1</sup> Jansky fellow of the National Radio Astronomy Observatory, 1003 Lopezville Rd, Socorro, NM 87801 USA

2

<sup>3</sup> Astronomy Department, University of Washington, Seattle, WA 98195, USA

<sup>4</sup> Aperio Software Ltd., Headingley Enterprise and Arts Centre, Bennett Road, Leeds, LS6 3HN, United Kingdom

<sup>5</sup> Astroparticle Physics Laboratory, NASA Goddard Space Flight Center, Mail Code 661, Greenbelt, MD 20771, USA

<sup>6</sup> Joint Space-Science Institute, University of Maryland, College Park, MD 20742, USA

<sup>7</sup> Max-Planck-Institut für Kernphysik, Heidelberg, Germany

<sup>8</sup> Google Summer of Code

<sup>9</sup> Winter Way, Uppsala, Sweden

<sup>10</sup> ESAC Science Data Centre, European Space Agency, Madrid, Spain

<sup>11</sup> Department of Space, Earth and Environment, Chalmers University of Technology, Onsala Space Observatory, 439 92, Onsala, Sweden

<sup>12</sup> Space Telescope Science Institute, 3700 San Martin Dr, Baltimore, MD 21218, USA

<sup>13</sup> European Southern Observatory, Karl-Schwarzschild-Str. 2, 85748 Garching bei München, Germany

<sup>14</sup> European Space Astronomy Centre, European Space Agency, Madrid, Spain

<sup>15</sup> Harvard-Smithsonian Center for Astrophysics, 60 Garden St., Cambridge, MA 02138, USA

<sup>16</sup> Lowell Observatory, 1400 W Mars Hill Rd, Flagstaff, AZ 86001, USA

<sup>17</sup> Department of Physics and Astronomy, Minnesota State University Moorhead, 1104 7th Ave S., Moorhead, MN 56563, USA

<sup>18</sup> Department of Astrophysics and Planetary Science, Villanova University, 800 East Lancaster Avenue, Villanova, PA 19085, USA

<sup>19</sup> NASA Goddard Space Flight Center, Astrochemistry Laboratory, 8800 Greenbelt Road, Greenbelt, MD 20771, USA

<sup>20</sup> Department of Physics, Catholic University of America, Washington, DC 20064, USA

## ABSTRACT

**astroquery** is a collection of tools for requesting data from databases hosted on remote servers with interfaces exposed on the internet, including those with web pages but without formal application program interfaces (APIs). These tools are based on the Python **requests** package, which is used to make HTTP requests, and **astropy**, which provides most of the data parsing functionality. **astroquery** has received significant contributions from throughout the astronomical community, including several significant contributions from telescope archives. **astroquery** enables the creation of fully reproducible workflows from data acquisition through publication. This document describes the philosophy, basic structure, and development model of the **astroquery** package. The complete documentation for **astroquery** can be found at <http://astroquery.readthedocs.io/>.<sup>a)</sup>

## 1. INTRODUCTION

In the past few decades, large-scale surveys have played a huge role in advancing our understanding of the universe, and these surveys have produced enormous reservoirs of data that astronomers regularly access. However, tools for accessing these reservoirs are

heterogeneous and often only available via graphical user interfaces (GUIs) such as web sites.

One of the cornerstones of research is reproducibility. To be able to reproduce research, the data need to be available to everyone. Many scientific journals encourage or demand that the underlying data accompany the article or be uploaded to a hosting service. Data sharing is not only important for new results, but also to provide the ability to test and verify published results. While many different efforts to promote data sharing have made it more common, it is difficult to keep track of how and where to retrieve a given data set. A com-

Corresponding author: Adam Ginsburg  
[aginsbur@nrao.edu](mailto:aginsbur@nrao.edu); [adam.g.ginsburg@gmail.com](mailto:adam.g.ginsburg@gmail.com)

<sup>a)</sup> The repository associated with this paper is:  
<https://github.com/adamginsburg/astroquery-paper>

mon scripted interface to tie all these services together is a good way to make all the different data more accessible, and it provides authors with the ability to make the full analysis process they used – from data download to publication – repeatable.

Data sharing has taken on a variety of forms. The most prominent are the major observatory archives: MAST, NOAO, ESO, IPAC, CADK, CDS (hosting Vizier and SIMBAD), NRAO, CXC, HEASARC, and ESA are the main organizations hosting raw and processed data from ground and space based telescopes. These data archives also serve as the primary means for serving data to users when the data are taken in queue mode, i.e., when the data are taken while the observer is not on-site.

In addition to observatories and telescopes, individual surveys often share their full data sets. In some cases, these data sets are shared via the observatory that acquired them, for example, the all-sky data acquired with Planck, WMAP, and COBE. Other surveys, particularly ground-based surveys, serve their own data. Examples include SDSS, 2MASS, UKIDSS, and likely many more in the near future.

Individual teams and small groups will often share their data. These services do not follow any particular standard and can be widely varied in the type and amount of data shared. Sometimes these data are shared via the archive systems (e.g., IRSA at IPAC hosts many individual survey data sets), while others use their own web hosting systems (e.g., MAGPIS).

Finally, there are other data types relevant to astronomy that are not served by the typical astronomical databases. Examples include databases of molecular and atomic properties, such as those provided by Splatologue and NIST, or services that are computationally intensive or require constant updates, like Solar System ephemerides.

`astroquery` arose from a desire to access these databases from the command line in a scriptable fashion. Script-based data access provides astronomers with the ability to make reproducible analysis scripts in which the data are acquired and processed into scientifically relevant results with minimal overhead.

In this paper, we provide an overview of the `astroquery` package. Section 2 describes the basic layout of the software and the shared API concept underlying all modules. Section 3 describes the development model. Finally, Section 4 describes how `astroquery` is documented.

## 2. THE SOFTWARE

`astroquery` consists of a collection of modules that mostly share a similar interface, but are meant to be used independently. They are primarily based on a common framework that uses the Python `requests` package to perform HTTP requests to communicate with web services.

For new development, there is a `template` that lays out the basic framework of any new module. All modules have a single core `class` that has some number of associated `query_*` methods. The most common query methods are `query_region`, which usually provide a “cone search” functionality, i.e., they search for data within a circularly symmetric region projected on the sky.

An example using the SIMBAD interface is shown below (see <http://astroquery.readthedocs.io/en/latest/simbad/simbad.html>):

---

**Example 1.** Query SIMBAD for a region around M81

---

```
from astroquery.simbad import Simbad
result_table = Simbad.query_region("m81")
```

---

In this example, `Simbad` is an instance of the `astroquery.simbad.Simbad` class. The returned result, stored in the variable `result_table`, is an `astropy` table.

While there is a common suggested API described in the `template` module, individual packages are not *required* to support this API because, for some, it is not possible. For example, the atomic and molecular databases refer to physical data that is not related to positions on the sky and therefore their `astroquery` modules cannot include `query_region` methods. The same applies to Solar System object ephemerides queries. Differences in the API are discussed in the `astroquery` documentation (see Section 4).

### 2.1. Version Numbers

`astroquery` uses the same format as traditional semantic versioning, with versions indicated in the format MAJOR.MINOR.PATCH.devCOMMIT\_ID (for example, 0.3.9.dev4581).

Starting in mid-2018, `astroquery` switched from a manual release model to a continuous deployment model. Prior to this change, the MAJOR.MINOR.PATCH versions were each created manually by one of the maintainers, then pushed to package release services. After this change, each accepted pull request automatically triggered a new release via the python package index (<https://pypi.org/>).

`astroquery` patches are frequently made to accommodate upstream changes, i.e., changes made to the remote service, and as such are not guaranteed to be backward-compatible.

## 2.2. HTTP User-Agent

`astroquery` identifies itself to host services using the HTTP User-Agent header data. The format of the User-Agent string is `astroquery/{version}{requests_version}`, where `{version}` is a version number of the form described in §2.1 and `{requests_version}` is the corresponding version of the Python `requests` package. This information can be used by data hosting services to determine how many users are accessing their service via `astroquery` and to assist in debugging if improper queries are being submitted.

## 2.3. The API

The common API has a few features defined in the `template` module. Each service is expected to provide the following interfaces, assuming they are applicable:

- `query_region` - A function that accepts an `astropy SkyCoord` object representing a point on the sky plus a specification of the radius around which to search. The returned object is an `astropy Table`.
- `query_object` - A function that accepts the name of an object. This method relies on the service to resolve the object name. The returned object is an `astropy Table`.
- `get_images` - For services that provide image data, this function accepts an `astropy SkyCoord` and a radius to search for data that cover the specified target. The returned object should be a list of `astropy.io.fits.HDUList` objects.

Beyond these basic functions, there is a series of functions with the same names, but with the additional suffix `_async`. The `query.*_async` functions return a `requests.Response` object from the accessed website, providing developers with the ability to access the data in a stream or access only the response metadata (i.e., the `async` methods do not download the corresponding data, so they may be useful for collecting metadata for very large files). The `get_images_async` method returns `FileContainer` objects that similarly provide ‘lazy’ access to the data, but specifically for FITS files. Developers need only implement these `_async` functions because a wrapper tool exists to convert `_async` functions into their corresponding non-asynchronous versions.

Deviations from this standard API are documented in the `astroquery` documentation (see Section 4).

## 2.4. Layout of the base Query module and the QueryWithLogin module

For new module development, there are tools provide to handle various aspects of querying that are common

across all modules. The `BaseQuery` metaclass provides tools for caching requests and downloaded data, reducing the network load for repeated queries. It is responsible for setting the User-Agent (§2.2). Finally, it provides a framework for logging in to services that require user authentication.

## 2.5. Testing

`astroquery` testing is somewhat different from most other packages in the Python ecosystem. While the tests are based on the `astropy` package-template and use `pytest` to run and check the outputs, the `astroquery` tests are split into *remote* and *non-remote*. The remote tests exactly replicate what a user would enter at the command line, but they are dependent on the stability of the remote services. Historically, we have found that it is quite rare for all of the `astroquery`-supported services to be accessible simultaneously.

We therefore require that each module provide some tests that do not rely on having an internet connection. These tests rely on *monkeypatching*<sup>1</sup> to replace the remote requests, instead using locally available files to test the query mechanisms and the data parsers. Monkey-patching in the context of `pytest` results in code that is generally more difficult to understand than typical Python code, but a set of tests independent of the remote services is necessary.

The non-remote tests are run as part of the continuous integration for the project with each commit. The remote tests are run as part of a regularly-scheduled cron job. Running the remote tests infrequently also helps reduce the burden on the remote services.

## 2.6. Other utilities

There are several general-use utilities implemented as part of `astroquery`, such as a bulk FITS file downloader and renamer and a download progressbar. There is also a schema system implemented to allow user-side parameter validation. So far, at the time of writing, this tool is only implemented in the ESO and VizieR modules, but it could be expanded to other modules to reduce the number of doomed-to-fail queries sent through `astroquery`.

## 3. DEVELOPMENT HISTORY AND STATUS

Anyone can contribute to `astroquery`. The maintainers are committed to helping developers make new modules that meet the requirements of `astroquery`. This section describes how `astroquery` has been developed, but we welcome all sorts of new contributions, including

<sup>1</sup> Monkeypatching is the dynamic replacement of attributes at runtime, i.e., changing what functions do after they are imported.

new modules, upgrades to existing modules, and minor corrections to existing tools.

`astroquery` is an Astropy coordinated package (Tollerud 2018) and is a critical component of the Astropy Project ecosystem (Astropy Collaboration et al. 2013). It is a standalone project and will remain independent of the `astropy` core package<sup>2</sup>, but is coordinated by the Astropy Project to ensure sustainability and maintenance.

`astroquery` has received contributions from 77 people as of August 2018. While the primary maintenance burden is shouldered by two people at any given time (the first two authors), most individual modules have been implemented independently by interested contributors.

Some contributions have come as direct institutional support. The ESA GAIA and ESASky modules were provided by developers working for ESA. Meanwhile, the MAST and VO Cone Search query tools were added by developers at STSCI, with the latter moved over from `astropy.vo` (see Section 3.2).

`astroquery` also receives contributions from funded programs. For instance, the JPLHorizons module has been implemented as part of the `sbpy` project<sup>3</sup> with support from NASA PDART grant 80NSSC18K0987. Further Solar System-related services are planned to be added to `astroquery` through this support.

`astroquery` has received support from the Google Summer of Code program, with two students (co-authors Madhura Parikh and Simon Liedtke) from 2013–2017.

### 3.1. Versioning

Unlike the core `astropy` package, `astroquery` exists in an ‘always-unstable’ state. Because `astroquery` relies on remote services’ APIs to function, changes to those APIs may break `astroquery` without warning. For that reason, we sometimes have frequent or sudden version releases to accommodate remote changes.

Some services have been helpful about alerting the `astroquery` development team in advance when API changes are imminent. We are grateful for such advance warning and encourage other services to check in and file issues on `astroquery`’s issue tracker when significant API modifications are made.

<sup>2</sup> Many Astropy affiliated packages are developed with the intent of eventually including them in the core of `astropy`. In contrast, `astroquery` intends to remain a separate package indefinitely largely because of its need to rapidly adapt to changes in the remote services; `astropy` cannot make such rapid changes because users rely on its stability.

<sup>3</sup> <http://sbpy.org>

### 3.2. Relation to the VO

The Virtual Observatory (VO) has some goals similar to `astroquery`, though their approach and philosophy is different. Where VO services provide a single point of access for all VO-compatible services, `astroquery` provides a collection of access points that do not require a specific API from the hosting service. The general philosophy in `astroquery` is to replicate the web page interface provided by a given service as closely as possible. While this approach makes some versions of cross-archive searches more difficult, it keeps the barrier to entry for new users fairly low and limits the maintenance burden for developers.

However, there are developments in progress to allow more VO-like queries within `astroquery`, such as searching for databases by keywords. As more services implement VO-based access, some query modules may adopt VO as a backend, but these changes should be transparent to users (i.e., the `astroquery` interfaces will remain unchanged). The documentation may guide users on how to use the more sophisticated VO tools that underly these tools

Some general VO tools are available in `astroquery`. The `vo.conesearch` package, which originally resided in Astropy, is now part of `astroquery`. VO Cone Search has a `query_region` interface like the other `astroquery` services in addition to the existing interfaces ported over from `astropy`. As of `astropy` 3.0, `astropy.vo` no longer exists; therefore, `astroquery` is now the primary provider of this VO Cone Search service. From a typical user’s standpoint, switching over from `astropy.vo` should result in no difference except for updating their Python import statements (e.g., from `astroquery.vo.conesearch import conesearch` instead of `from astropy.vo.client import conesearch`).

## 4. DOCUMENTATION AND REFERENCES

### 4.1. Online documentation

The `astroquery` modules are documented online and can be accessed through readthedocs at <https://astroquery.readthedocs.io/en/latest/>. We include one detailed example of how to use `astroquery` in Appendix A, but interested users will find many more on the documentation page and in the example gallery (<https://astroquery.readthedocs.io/en/latest/gallery.html>).

### 4.2. Other Documents

Several authors have independently described how to use various `astroquery` modules, which is a helpful practice we encourage.

- <https://www.cosmosim.org/cms/news/cosmosim-package-for-astronomy/>: a worked example of downloading data from the cosmosim database, including logging in.
- <https://arxiv.org/abs/1408.7026>: a worked example of querying Vizier and SIMBAD to make a surface gravity - effective temperature plot for a star survey
- Guillochon & Cowperthwaite (2018): the definition of the Open Astronomy Catalog API and a description of the astroquery module built to use it.

## 5. SUMMARY

`astroquery` is a toolkit for accessing remotely hosted data through Python. It is part of the `astropy` affiliated package system. We have described its general layout and development model. We welcome any new contributions.

## REFERENCES

- Astropy Collaboration, Robitaille, T. P., Tollerud, E. J., et al. 2013, A&A, 558, A33, doi: [10.1051/0004-6361/201322068](https://doi.org/10.1051/0004-6361/201322068)
- Eisner, J. A., Bally, J. M., Ginsburg, A., & Sheehan, P. D. 2016, ApJ, 826, 16, doi: [10.3847/0004-637X/826/1/16](https://doi.org/10.3847/0004-637X/826/1/16)
- Guillochon, J., & Cowperthwaite, P. S. 2018, ArXiv e-prints. <https://arxiv.org/abs/1804.10847>
- Tollerud, E. 2018, Astropy Proposal for Enhancement 15: An Updated Model for the Affiliated Package Ecosystem (APE 15), doi: [10.5281/zenodo.1246834](https://doi.org/10.5281/zenodo.1246834). <https://doi.org/10.5281/zenodo.1246834>

## APPENDIX

### A. EXAMPLE

In this appendix, we show an example of `astroquery` in action, highlighting the ability to use multiple modules and interact with `astropy`'s table, coordinate, and unit tools. This example approximately reproduces Figure 1 of Eisner et al. (2016), but with a different background. It can also be found on `astroquery`'s gallery page (<http://astroquery.readthedocs.io/en/latest/gallery.html>). Another illustration of how to use `astroquery` tools in a finder chart making tool is `fcmaker`, which produces charts for ESO observations using `astroquery` (?).



```

from astropy import coordinates as coords, units as u, wcs
from astroquery.skyview import SkyView
from astroquery.vizier import Vizier
import matplotlib.pyplot as plt

center = coords.SkyCoord.from_name('Orion KL')

# Grab an image from SkyView of the Orion KL nebula region
imglist = SkyView.get_images(position=center, survey='2MASS-J')

# the returned value is a list of images, but there is only one
img = imglist[0]

# 'img' is now a fits.HDUList object; the 0th entry is the image
mywcs = wcs.WCS(img[0].header)

fig = plt.figure(1)
fig.clf() # just in case one was open before
# use astropy's wcsaxes tool to create an RA/Dec image
ax = fig.add_axes([0.15, 0.1, 0.8, 0.8], projection=mywcs)
ax.set_xlabel("RA")
ax.set_ylabel("Dec")

ax.imshow(img[0].data, cmap='gray_r', interpolation='none', origin='lower',
          norm=plt.matplotlib.colors.LogNorm())

# retrieve a specific table from Vizier to overplot
tablelist = Vizier.query_region(center, radius=5*u.arcmin, catalog='J/ApJ/826/16/table1')
# again, the result is a list of tables, so we'll get the first one
result = tablelist[0]


# convert the ra/dec entries in the table to astropy coordinates
tbl_crds = coords.SkyCoord(result['RAJ2000'], result['DEJ2000'],
                           unit=(u.hour, u.deg), frame='fk5')

# we want this table too:
tablelist2 = Vizier(row_limit=10000).query_region(center, radius=5*u.arcmin, catalog='J/ApJ/540/236')
result2 = tablelist2[0]
tbl_crds2 = coords.SkyCoord(result2['RAJ2000'], result2['DEJ2000'],
                            unit=(u.hour, u.deg), frame='fk5')

# overplot the data in the image
ax.plot(tbl_crds.ra, tbl_crds.dec, '*', transform=ax.get_transform('fk5'),
        mec='b', mfc='none')
ax.plot(tbl_crds2.ra, tbl_crds2.dec, 'o', transform=ax.get_transform('fk5'),
        mec='r', mfc='none')
# zoom in on the relevant region
ax.axis([100, 200, 100, 200])

plt.show()

```

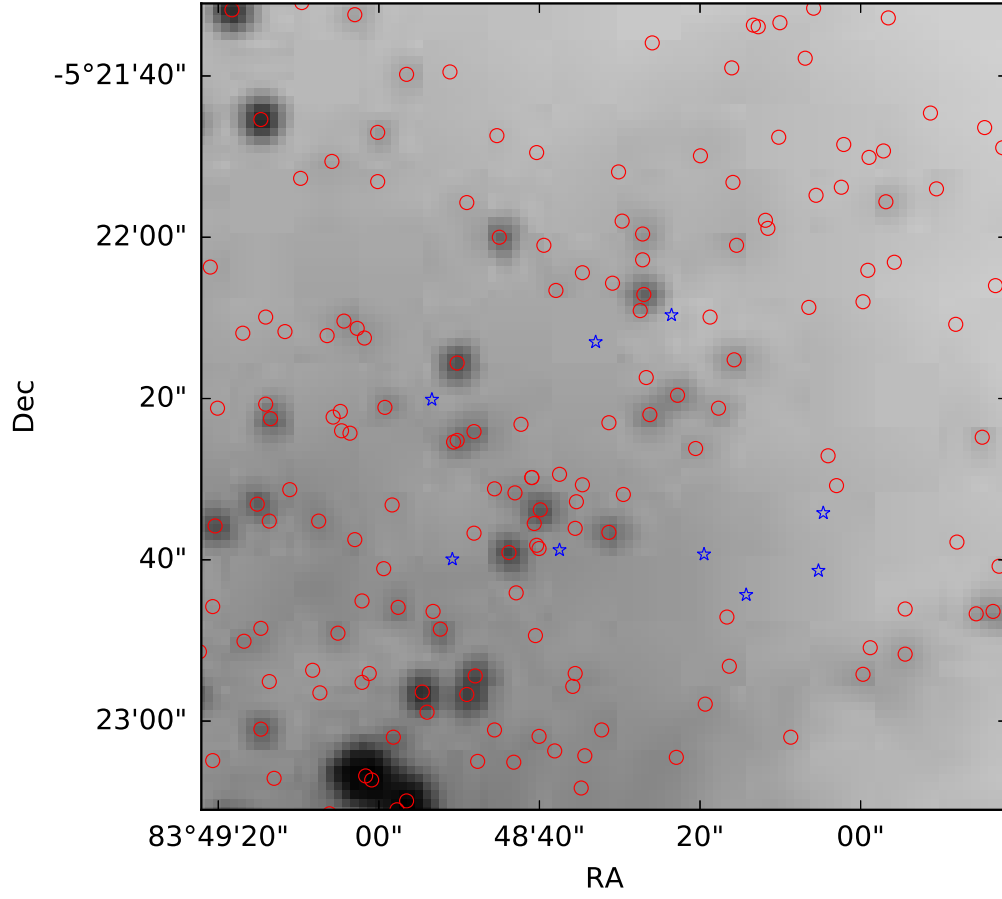

**Figure 1.** An example figure made using `astroquery`'s `skyview` and `vizier` modules with `astropy`'s `table`, `coordinates`, `units`, and `wcs` modules. The blue stars show sources from an older, less complete catalog and the red circles show sources from a more recent, more complete catalog.