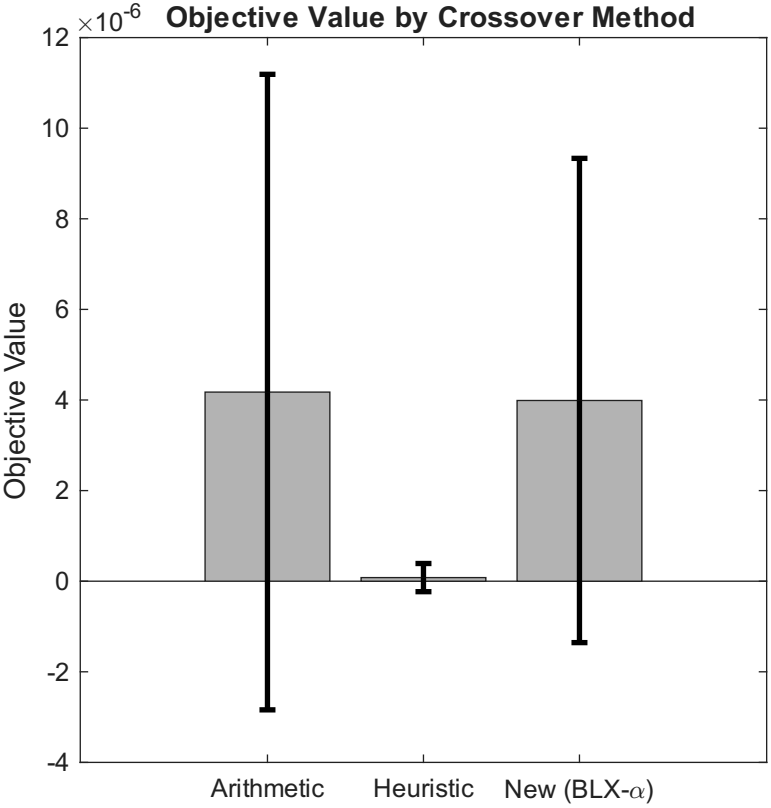
Objective Value by Crossover Method
×10^-6
Objective Value
12
10
8
6
4
2
0
-2
-4
Arithmetic
Heuristic
New (BLX-α)

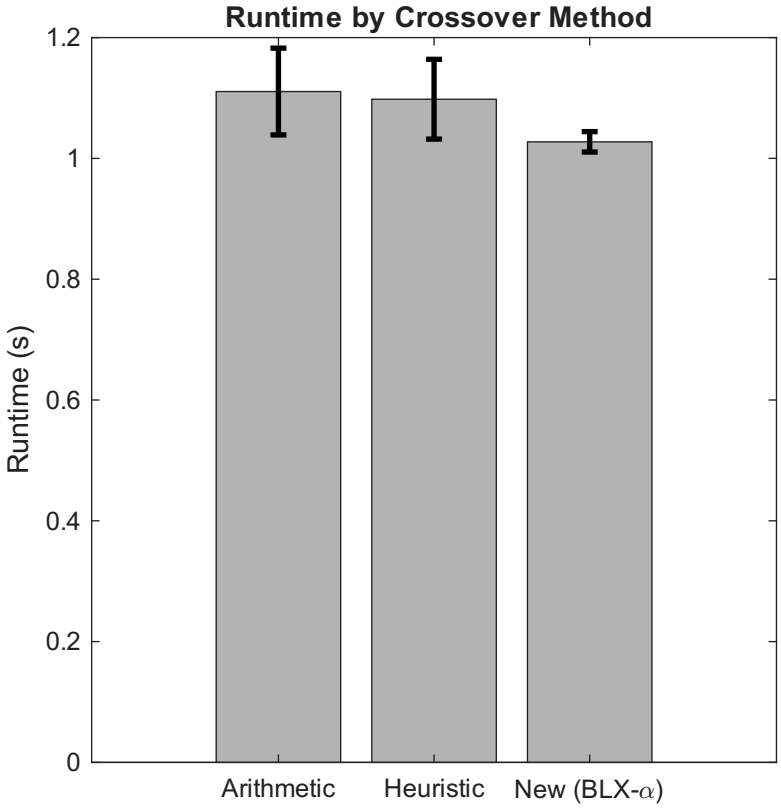
Runtime by Crossover Method
Runtime (s)
1.2
1
0.8
0.6
0.4
0.2
0
Arithmetic
Heuristic
New (BLX-α)