


Install once. Launch anytime.

Badge Blur runs locally after its first-time setup.

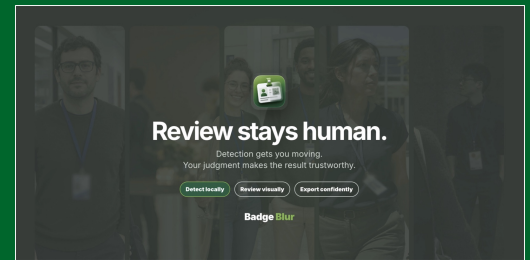

WATCH THE TUTORIAL | 1:43

01 FIRST INSTALL OR UPDATE

Open Terminal, copy both commands below, and press Return after each one. The second command installs, verifies, and launches Badge Blur.

```
/usr/bin/curl --fail --location --show-error \  
https://raw.githubusercontent.com/adammalin/Badge-Blur/main/scripts/bootstrap-mac-source-test.zsh \  
--output "$HOME/Downloads/badge-blur-install.zsh" \  
  
/bin/zsh "$HOME/Downloads/badge-blur-install.zsh" \  
"$HOME/Badge-Blur-source-test"
```

TO UPDATE LATER: quit Badge Blur, then run these same two commands again.

02 START BADGE BLUR AFTER IT IS INSTALLED

For later sessions, open Terminal and run:

```
cd "$HOME/Badge-Blur-source-test" \  
/bin/zsh scripts/start-mac-source-test.zsh
```

03 WHAT TO EXPECT

LOCAL FOLDER

~/Badge-Blur-source-test

The installer creates or safely updates this recognized folder.

FIRST SETUP

Internet required

Setup downloads verified runtime, packages, and model files.

DAILY USE

Local processing

Use Command-Q to close the app and its private local service.

REQUIREMENTS

Apple silicon · macOS 13 or later

On a managed Mac, follow your organization's approved software and support process.

<https://github.com/adammalin/Badge-Blur>

WATCH THE VIDEO TUTORIAL | 1:43