API Testing Report

Swagger Petstore (pet endpoints)

Manual API testing with the Swagger page on my phone

Prepared by	Aqsa Shoukat
Test dates	18 and 19 October 2026
Platform	Android phone, mobile browser
Tool	Swagger UI (the Try it out feature on the Petstore page)
API tested	petstore.swagger.io, Swagger Petstore version 1.0.7
Scope	Pet endpoints and 11 test cases
Result	10 passed and 1 failed
Evidence	Screenshots taken during testing

This report shows what I tested, what the server answered and the problem I found. It is based on my test session and the screenshots I saved.

1. What I tested

Swagger Petstore is a public practice API. I used the Swagger page on my phone to send requests to the pet endpoints. I tested adding a pet, finding it, updating it, deleting it and searching pets by status.

For each one I tried the normal request first. Then I tried wrong cases like an ID that does not exist, letters in an ID, a wrong status and deleting the same pet twice. I noted the status code and the response and saved screenshots as proof.

What was included

- POST /pet to add a pet
- GET /pet/{petId} to find a pet, with a real ID, an ID that does not exist and letters
- PUT /pet to update a pet
- DELETE /pet/{petId} to delete a pet, also twice
- GET /pet/findByStatus with the status available

What I did not cover

I did not test the store and user endpoints, the image upload, the form update (POST /pet/{petId}), the api_key, the status values pending and sold, or a wrong status in findByStatus. I also did not test performance, security, or other tools like Postman.

2. How I tested

I opened each request on the Swagger page, tapped Try it out, typed the data and tapped Execute. Then I looked at the status code and the response body and compared them with what I expected. I did not have a requirements document, so the expected results are my own judgement. I used the status codes listed on the Swagger page (like 400, 404 and 405) as a guide.

This is a public server that many people use. Other people can add and change pets at the same time, so the data can change while I test.

Environment: Swagger Petstore, Swagger UI on an Android phone browser, manual testing. **Test dates:** 18 and 19 October 2026.

3. Results at a glance

Method	Cases	Pass	Fail
GET	5	5	0
POST	3	2	1
PUT	1	1	0
DELETE	2	2	0
Total	**11**	**10**	**1**

Main things I noticed

- Adding, finding, updating and deleting a pet all worked and gave code 200.
- A pet that does not exist gave code 404 with the message Pet not found.
- The server accepted a wrong status (wrongvalue) and answered with code 200.
- Swagger itself stopped the requests with letters in the ID, so those two tests did not reach the server.
- The delete answer says type unknown and does not clearly say that the pet was deleted.

4. Defects found

ID	Issue I saw	Severity	Test case
BUG-01	POST /pet accepts a status that is not available, pending or sold and answers with code 200.	Medium	TC-API-08

I expected the status to be only available, pending or sold, because the Swagger page shows these values for the status. I did not have a written requirement, so the severity is my own judgement.

5. Other observations

These items are not in the defect list but they may be worth checking.

5.1 Swagger blocked the letters: In TC-API-04 and TC-API-07 Swagger showed the error Value must be an integer and did not send the request. So the server was never tested with letters in an ID. A tool like Postman can send it directly.

5.2 Empty answer on delete: The 404 for the second delete had no response body. The 404 from the GET request had the message Pet not found. A message would help the person who calls the API.

5.3 Delete answer is not clear: After a delete the response shows type unknown and a message with only the ID. It does not clearly say that the pet was deleted.

5.4 Shared data: The list from findByStatus has pets that other people added. The data on this server can change at any time.

5.5 Missing screenshot: For TC-API-10 I did not save a screenshot of the first delete. I only saved the second one.

6. Test case index

All 11 test cases are listed here. The steps and screenshots for each one are in section 8.

ID	Test case	Result	Defect
TC-API-01	POST: Add a new pet	Pass	None
TC-API-02	GET: Find the pet by ID	Pass	None
TC-API-03	GET: Find a pet with an ID that does not exist	Pass	None
TC-API-04	GET: Letters in the petId	Pass	None
TC-API-05	DELETE: Delete the pet	Pass	None
TC-API-06	GET: Find the pet after it was deleted	Pass	None

ID	Test case	Result	Defect
TC-API-07	POST: Letters in the id when adding a pet	Pass	None
TC-API-08	POST: Add a pet with a wrong status	Fail	BUG-01
TC-API-09	PUT: Update a pet	Pass	None
TC-API-10	DELETE: Delete the same pet twice	Pass	None
TC-API-11	GET: Find pets by status	Pass	None

7. Conclusion and what I would test next

The normal requests worked well. Adding, finding, updating and deleting a pet all gave the right code and the right data. The main problem I found is that the server accepts a wrong status value. I also noticed that the delete answers are short and not very clear.

If I continued testing I would:

- Use Postman to send letters in the ID straight to the server
- Test findByStatus with a wrong status and with pending and sold
- Test the store and user endpoints
- Test requests with missing fields, like a pet without a name
- Test the api_key and see what happens without it

This was a practice exercise on a public demo API. It is not a real system.


8. Detailed test cases with evidence

Every test case lists the steps, test data, expected result, actual result and the screenshots I used as proof. The time in brackets is the phone clock shown in the screenshot.


8.1 Pet endpoints

TC-API-01 POST: Add a new pet	PASS
Steps	1. Open POST /pet and tap Try it out 2. Type the pet details in the Request body 3. Tap Execute
Test data	id: 987654; name: TestDog; photoUrls: ["string"]; status: available
Expected	Status 200 and the same pet comes back in the response.
Actual	Code 200. The response body shows the same id 987654, name TestDog and status available.

Evidence

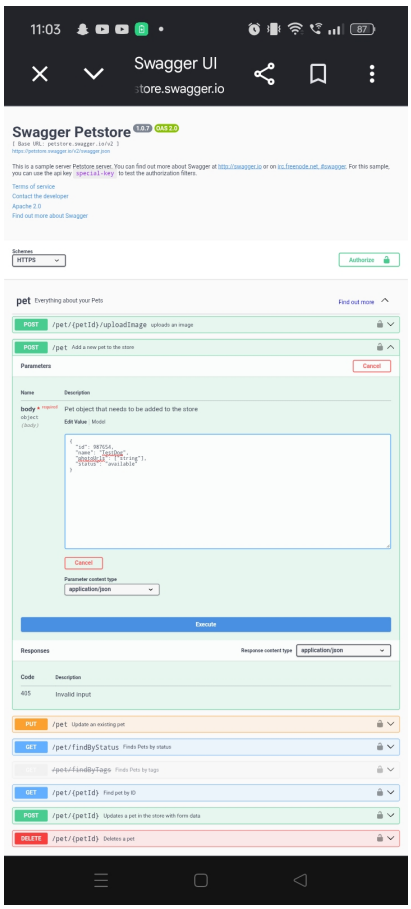


Request body (11:03)

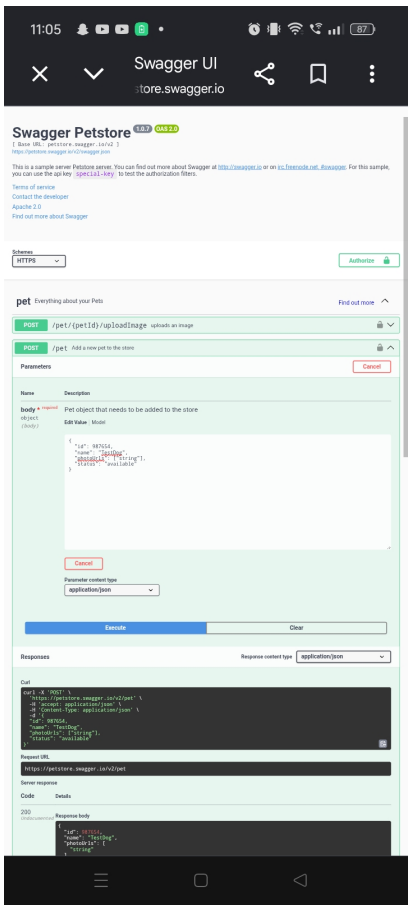

Response, code 200 (11:05)

TC-API-02 GET: Find the pet by ID	PASS
Steps	1. Open GET /pet/{petId} and tap Try it out 2. Type 987654 in petId 3. Tap Execute
Test data	petId: 987654
Expected	Status 200 and the pet that I added.
Actual	Code 200. The response shows id 987654, name TestDog and status available.


Evidence

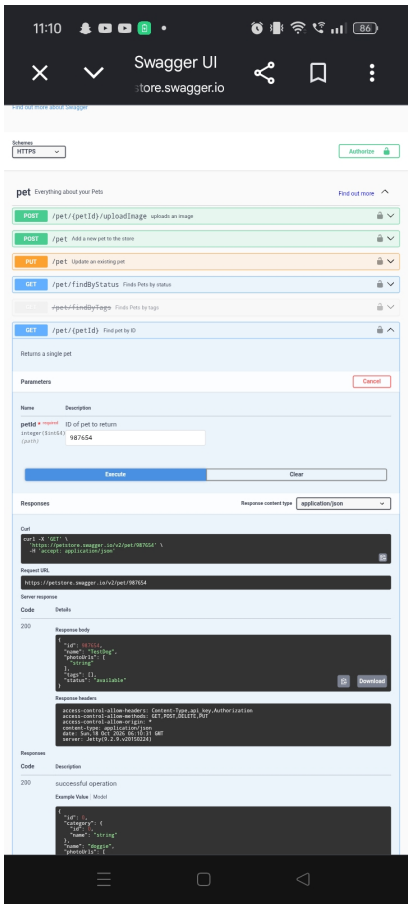

Response, code 200 (11:10)

TC-API-03 GET: Find a pet with an ID that does not exist	PASS
Steps	1. Open GET /pet/{petId} 2. Type 99999999 in petId 3. Tap Execute
Test data	petId: 99999999
Expected	Status 404 and a message that the pet was not found.
Actual	Code 404. The response body says "Pet not found".


Evidence

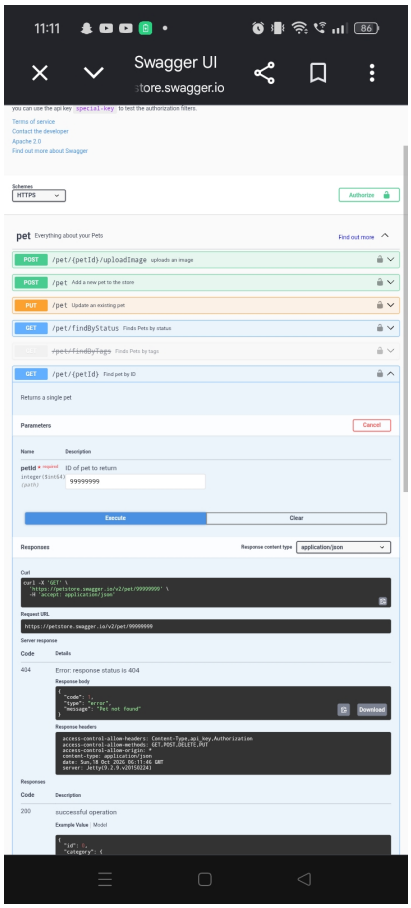

Response, code 404 (11:11)

TC-API-04 GET: Letters in the petId	PASS
Steps	1. Open GET /pet/{petId} 2. Type abc in petId 3. Tap Execute
Test data	petId: abc
Expected	The request is rejected with an error.
Actual	Swagger turned the field red and showed "Value must be an integer". The request was not sent to the server (see observation 5.1). The 404 result lower on the page is from the earlier test.


Evidence

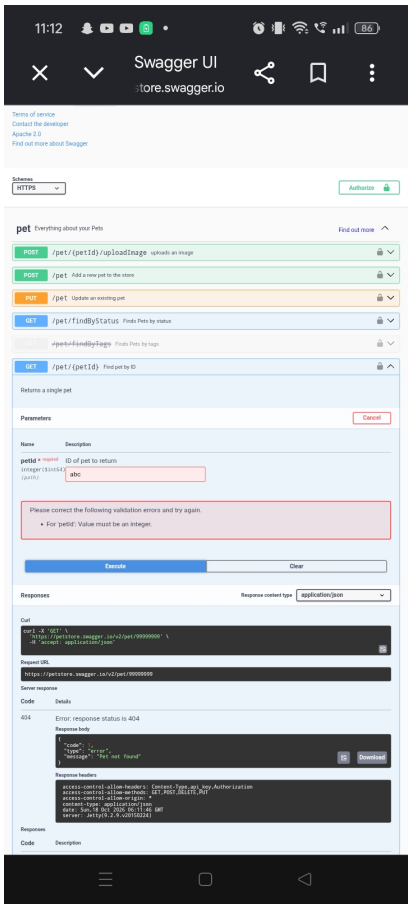

Swagger error (11:12)

TC-API-05 DELETE: Delete the pet	PASS
Steps	1. Open DELETE /pet/{petId} and tap Try it out 2. Type 987654 in petId and leave api_key empty 3. Tap Execute
Test data	petId: 987654
Expected	Status 200 and the pet is removed.
Actual	Code 200. The response body shows "type": "unknown" and "message": "987654" (see observation 5.3).


Evidence

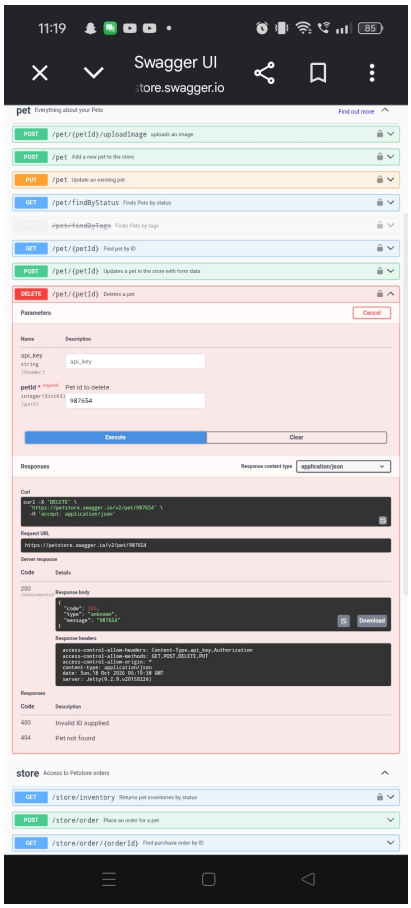

Response, code 200 (11:19)

TC-API-06 GET: Find the pet after it was deleted	PASS
Steps	1. Open GET /pet/{petId} 2. Type 987654 in petId 3. Tap Execute
Test data	petId: 987654
Expected	Status 404 because the pet was deleted.
Actual	Code 404. The response body says "Pet not found".


Evidence

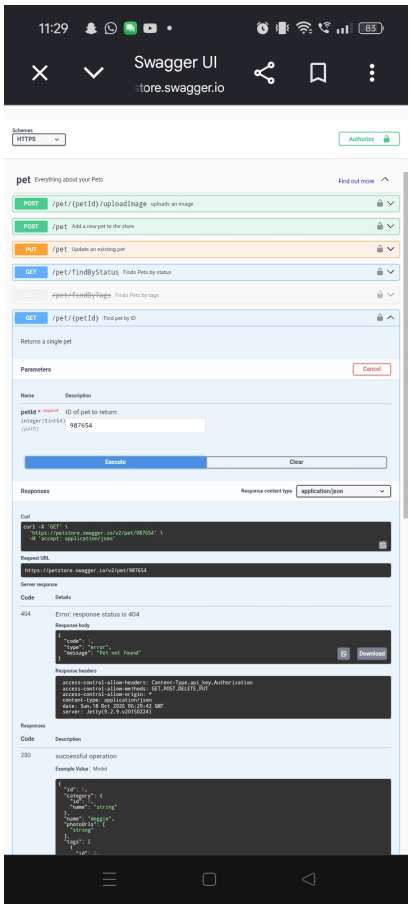

Response, code 404 (11:29)

TC-API-07 POST: Letters in the id when adding a pet	PASS
Steps	1. Open POST /pet and tap Try it out 2. Type abc as the id in the Request body 3. Tap Execute
Test data	id: abc; name: BadDog; status: available
Expected	The request is rejected with an error.
Actual	Swagger showed "Value must be an integer" for the id and did not send the request (see observation 5.1).


Evidence

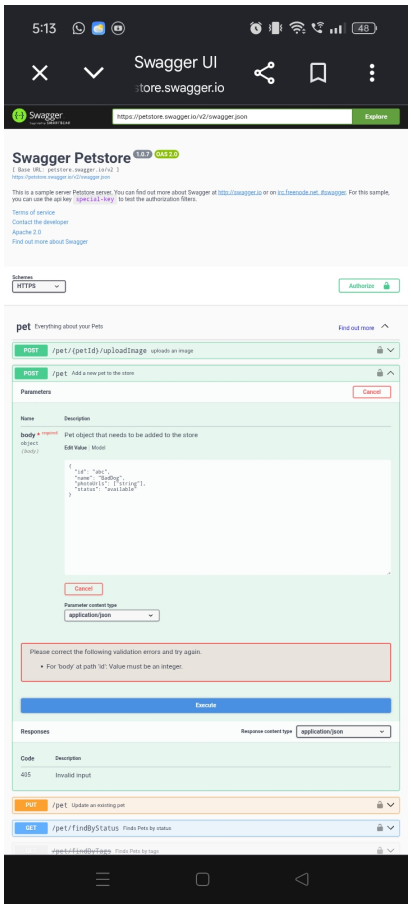

Swagger error (5:13)

TC-API-08 POST: Add a pet with a wrong status	FAIL
Steps	1. Open POST /pet and tap Try it out 2. Type status as wrongvalue in the Request body 3. Tap Execute
Test data	id: 987655; name: StatusTest; status: wrongvalue
Expected	The server rejects the status. It should only be available, pending or sold.
Actual	Code 200. The pet was created and the response shows "status": "wrongvalue".
Defect	BUG-01 - **Medium**


Evidence

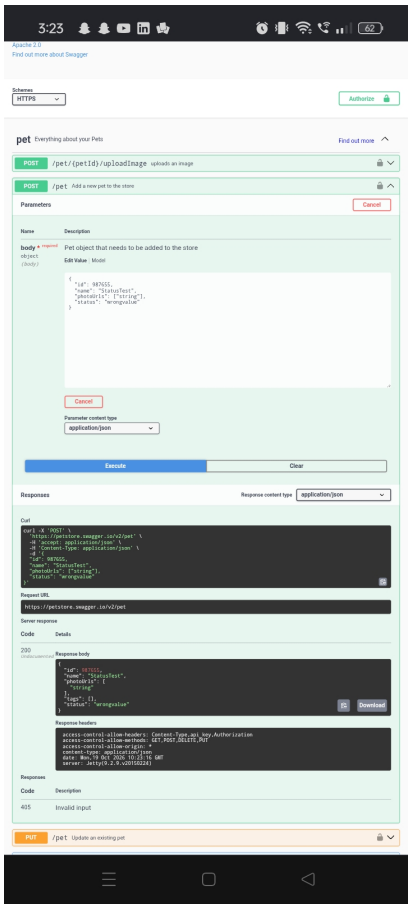

Request and response, code 200 (3:23)

TC-API-09 PUT: Update a pet	PASS
Steps	1. Open PUT /pet and tap Try it out 2. Type the new details for pet 987655 3. Tap Execute
Test data	id: 987655; name: UpdatedName; status: sold
Expected	Status 200 and the new name and status in the response.
Actual	Code 200. The response shows name UpdatedName and status sold.


Evidence

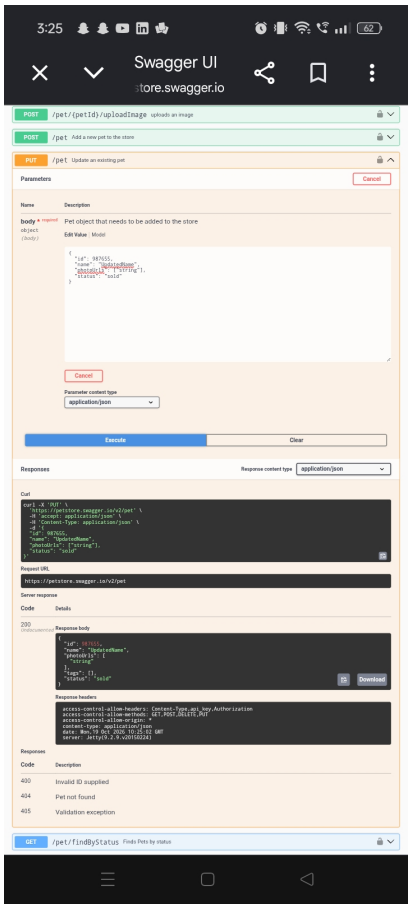

Request and response, code 200 (3:25)

TC-API-10 DELETE: Delete the same pet twice	PASS
Steps	1. Delete pet 987655 with DELETE /pet/{petId} 2. Tap Execute again with the same petId 3. Look at the second result
Test data	petId: 987655
Expected	The second delete returns 404 because the pet is already gone.
Actual	The second request returned code 404 and the response body was empty (see observation 5.2). I did not save a screenshot of the first delete.


Evidence

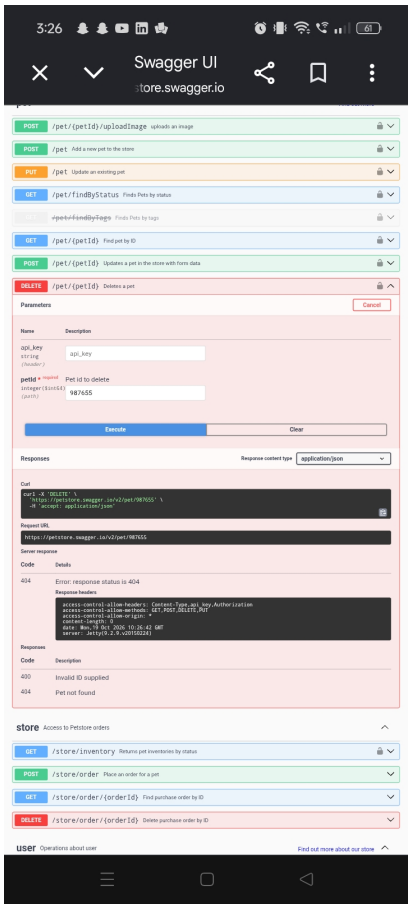

Second delete, code 404 (3:26)

TC-API-11 GET: Find pets by status	PASS
Steps	1. Open GET /pet/findByStatus and tap Try it out 2. Select available 3. Tap Execute
Test data	status: available
Expected	Status 200 and a list of pets with the status available.
Actual	Code 200. The response is a long list of pets. The ones I could see have the status available.

Evidence

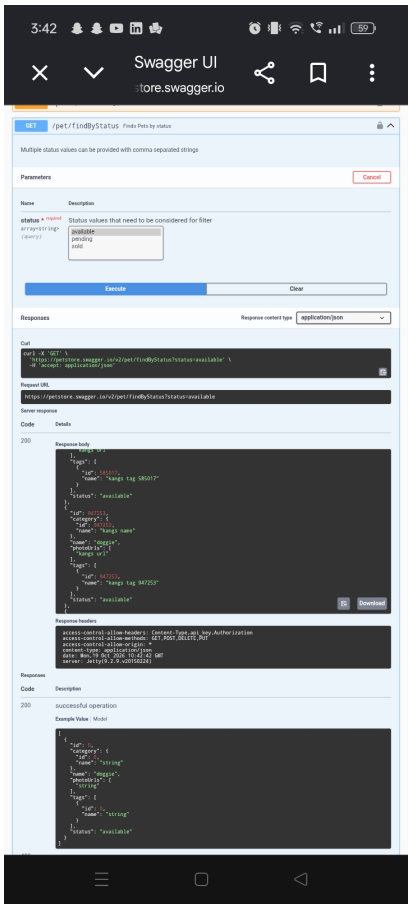

Request URL and response, code 200 (3:42)