




Use Contract test in JUnit 5

BetRepositoryMongoDb

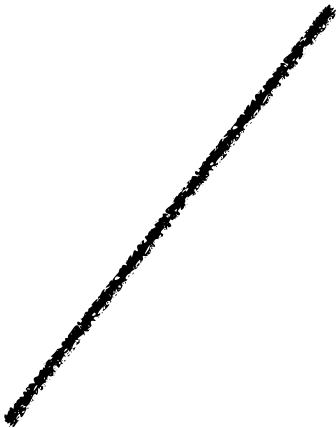

BetRepository MongoDb Test

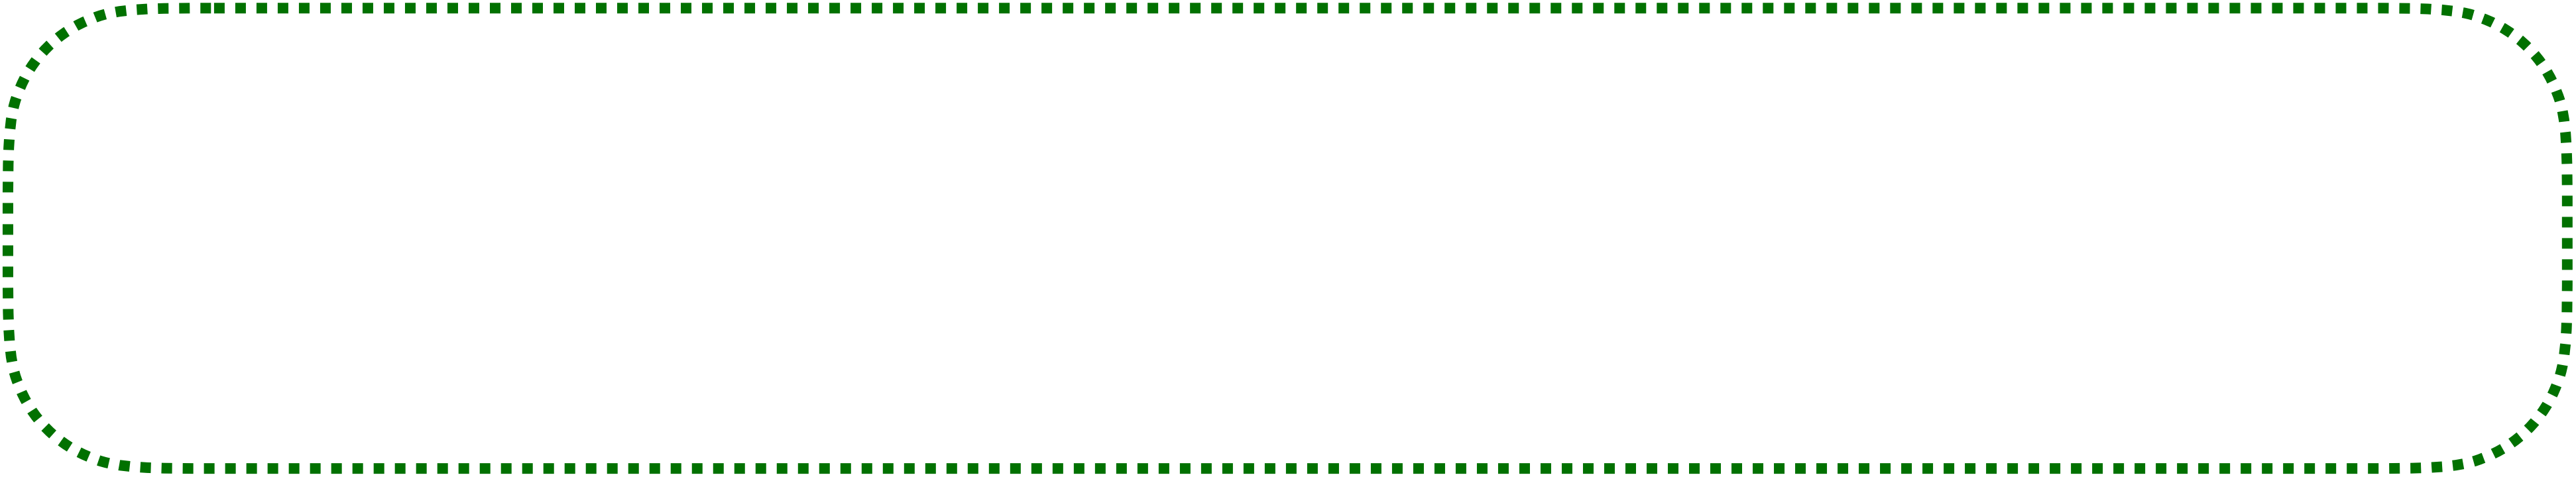





A blue cylinder with a white outline, representing a database. The text "MongoDB" is written in black on the front of the cylinder.


**Mongo
DB**



BetR Depository


BetRepositorySimulator


BetRepository Simulator Test

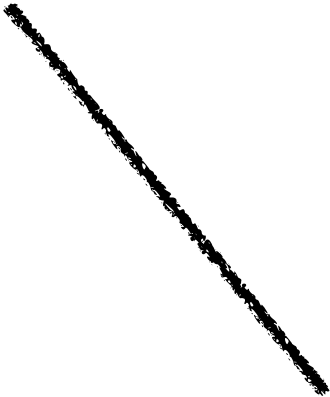


BetRepository

Contract

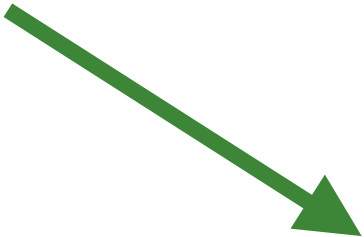

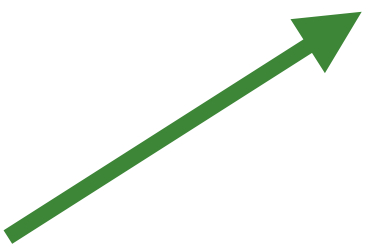

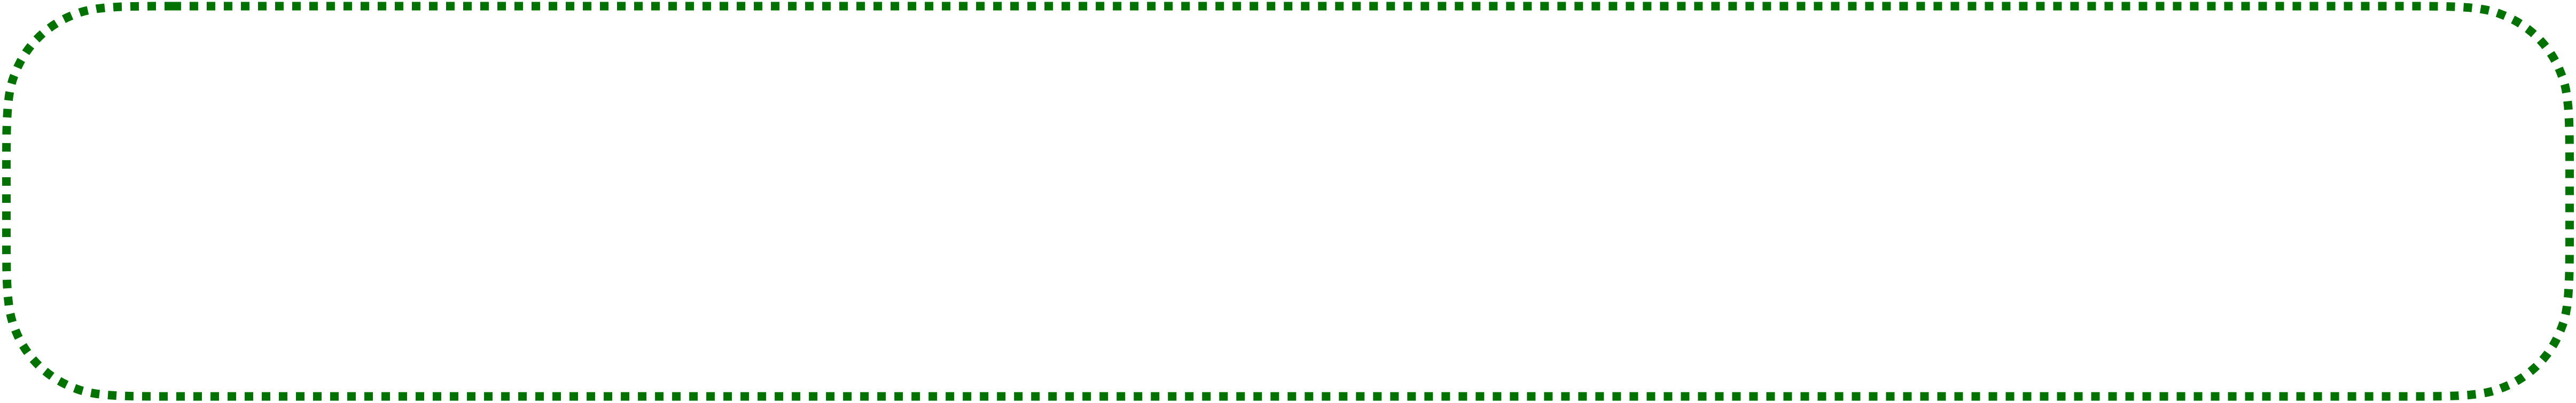

Inherit


Inherit

Setup only

Setup only

All tests are here ➡

Use Contract test to implement simulator JAVA WAY

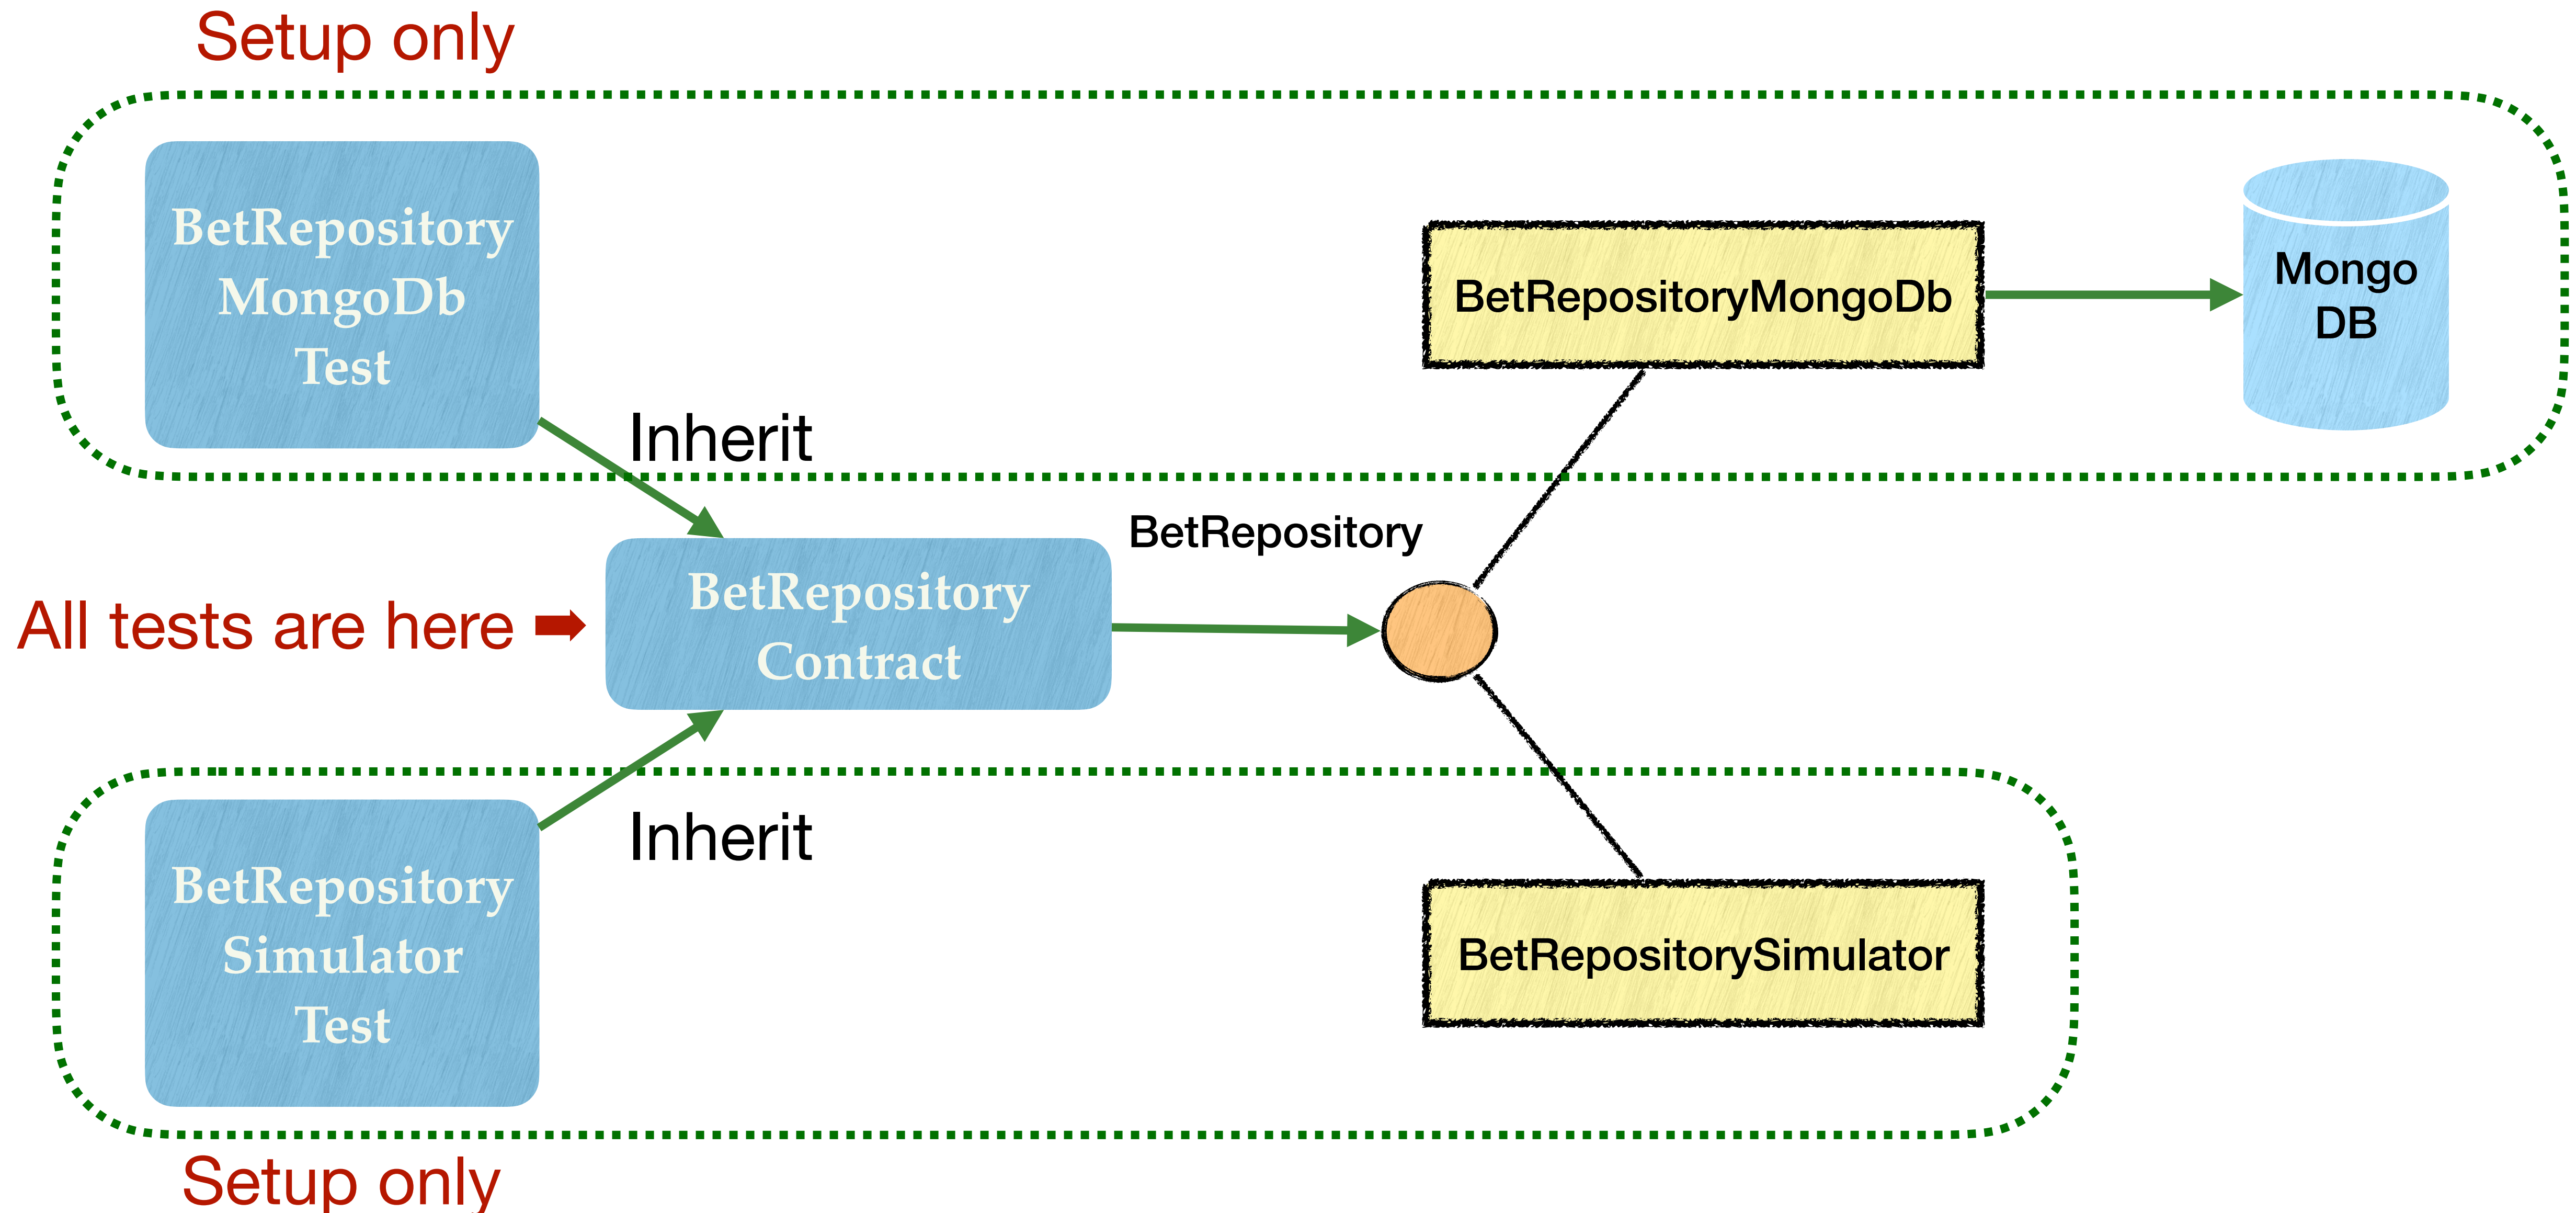

Use Contract test to implement simulator JS WAY

```
describe('BetRepositoryMongoDb', () => {  
  let mongoClient: MongoClient;  
  let repository: BetRepositoryMongoDb;  
  
  beforeEach(async () => {  
    ...  
    repository = new BetRepositoryMongoDb(db);  
  });  
  
  afterEach(() => {  
    mongoClient.close()  
  });  
  
  betRepositoryContract(() => repository)  
})
```

```
describe('BetRepositoryFake', () => {  
  let repository: BetRepositoryFake;  
  
  beforeEach(async () => {  
    repository = new BetRepositoryFake();  
  })  
  
  betRepositoryContract(() => repository)  
})
```

```
export function betRepositoryContract(getRepository: () => BetRepository) {  
  test('register a bet', async () => {  
    ...  
  });  
  
  test('retrieve only bets inside the time range', async () => {  
    ...  
  });  
}
```