


# Example: remote file system (OneDrive)

- Very slow, in particular for listing nested folders
- There were around 15 methods on it
- Having the fake made it very easy to implement a good caching system
- As a result it was easy to implement both a persistent and an ephemeral caching system

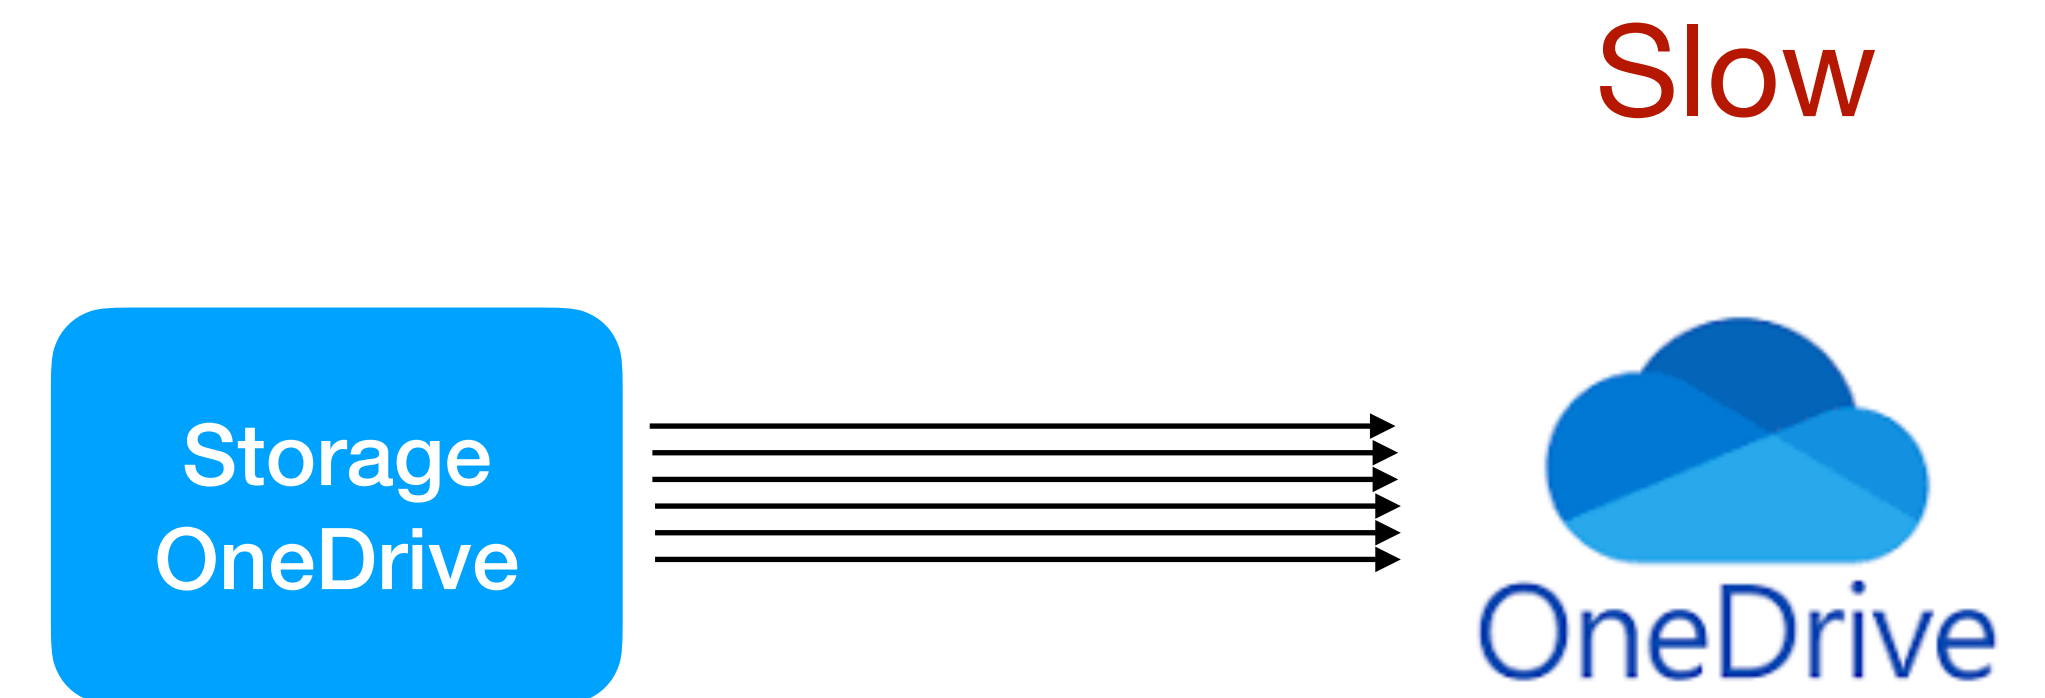

# Example: public company registry

- Getting info about companies
- Problem: not really. Read-only but stable
- Solution: keep the exact assertions
- In retrospect: They changed sometimes, but not often.

