




GPT-Based Mapping

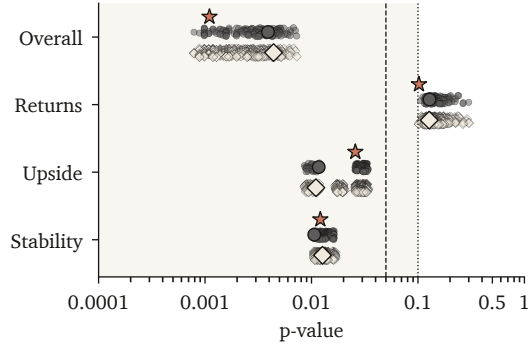

(a) Belief Accuracy (Figure 8)

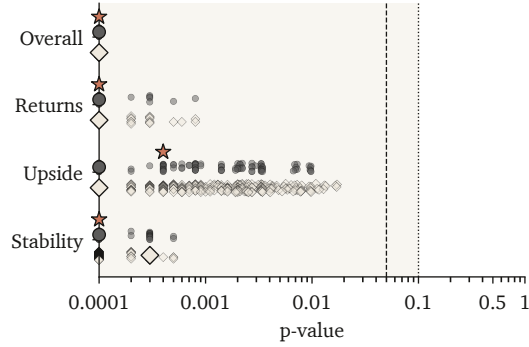


(b) Historical Delivery (Table 7)

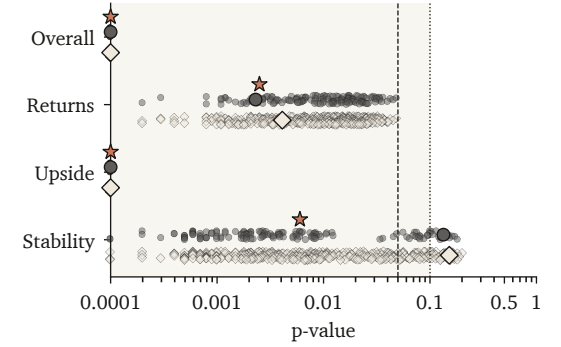


(c) Out-of-Sample Delivery (Table 8)


Claude-Based Mapping

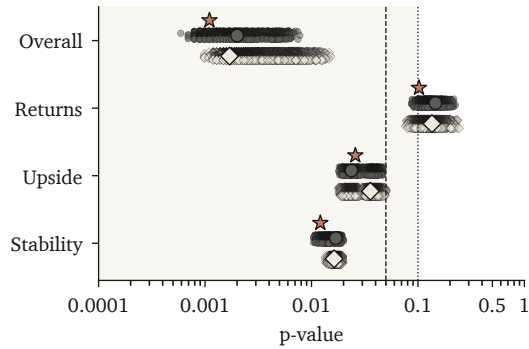

(d) Belief Accuracy (Figure 8)

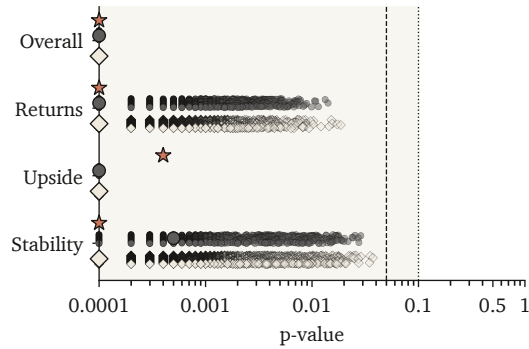

(e) Historical Delivery (Table 7)

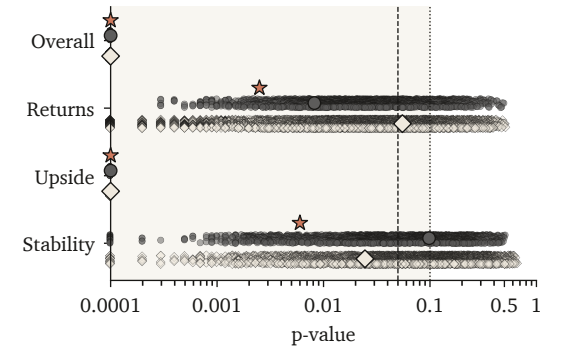

(f) Out-of-Sample Delivery (Table 8)

★ Our mapping ● Prompt A ◇ Prompt B

Figure E2: Statistical Significance of Belief Accuracy and Heuristic Delivery across Alternative Mappings.

This figure shows the p -values of the estimates in Figure E1. Panels (a) through (c) use GPT-6.1 Sol and Panels (d) through (f) use Claude Sonnet 5.5. As in the main paper, belief accuracy uses the two-sided wild-cluster bootstrap p -value by country, and delivery uses the one-sided p -value against equally sized random draws from the alternative heuristics. The horizontal axis is logarithmic, the shaded area marks p -values below 0.10, and the dashed and dotted lines mark 0.05 and 0.10. We show p -values below 0.0001, including zero, at 0.0001. Each small symbol is one possible distinct map, the large symbols are the consensus maps, and stars mark our mapping. Prompt A (dark circles) supplies no investor background, and Prompt B (light diamonds) adds the background of an investor who adopts the heuristic. Vertical offsets within each row only separate the symbols.