
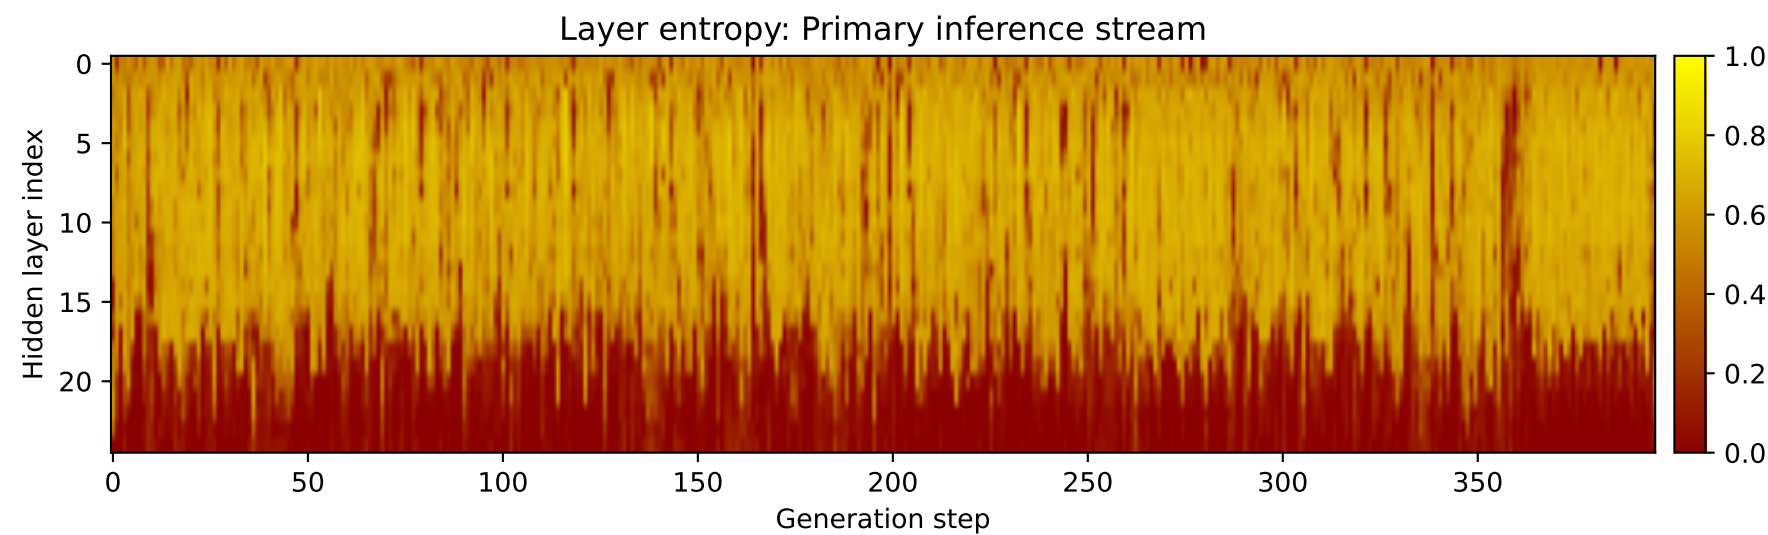
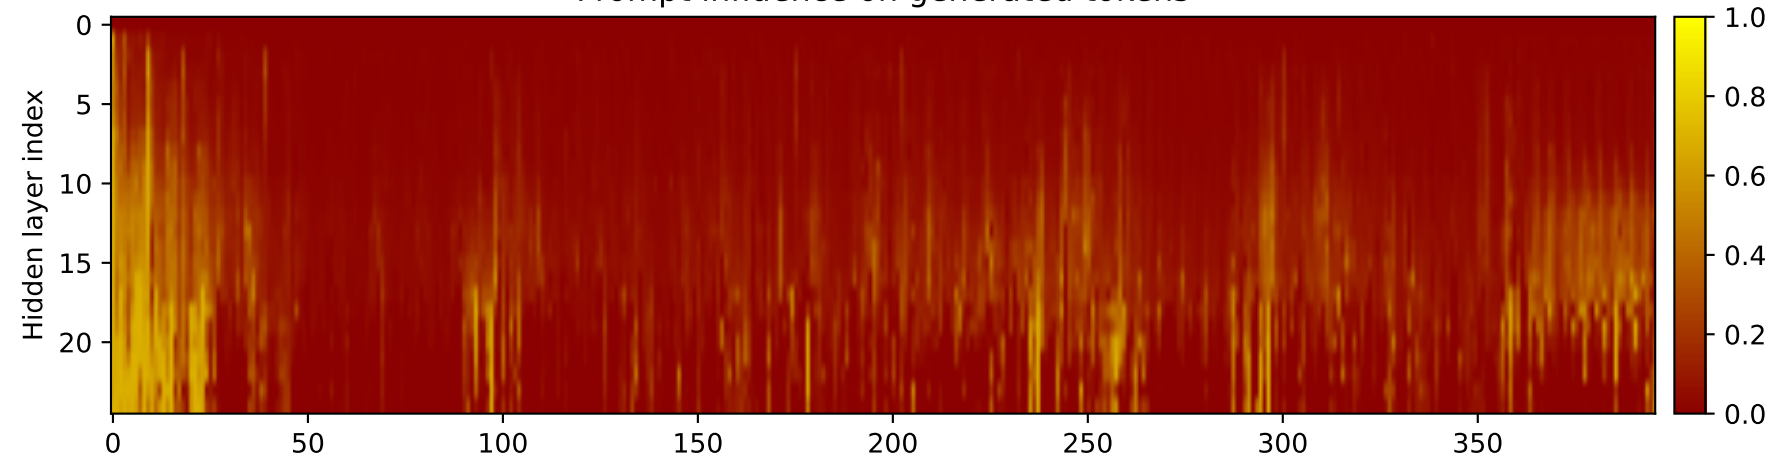


Prompt 1

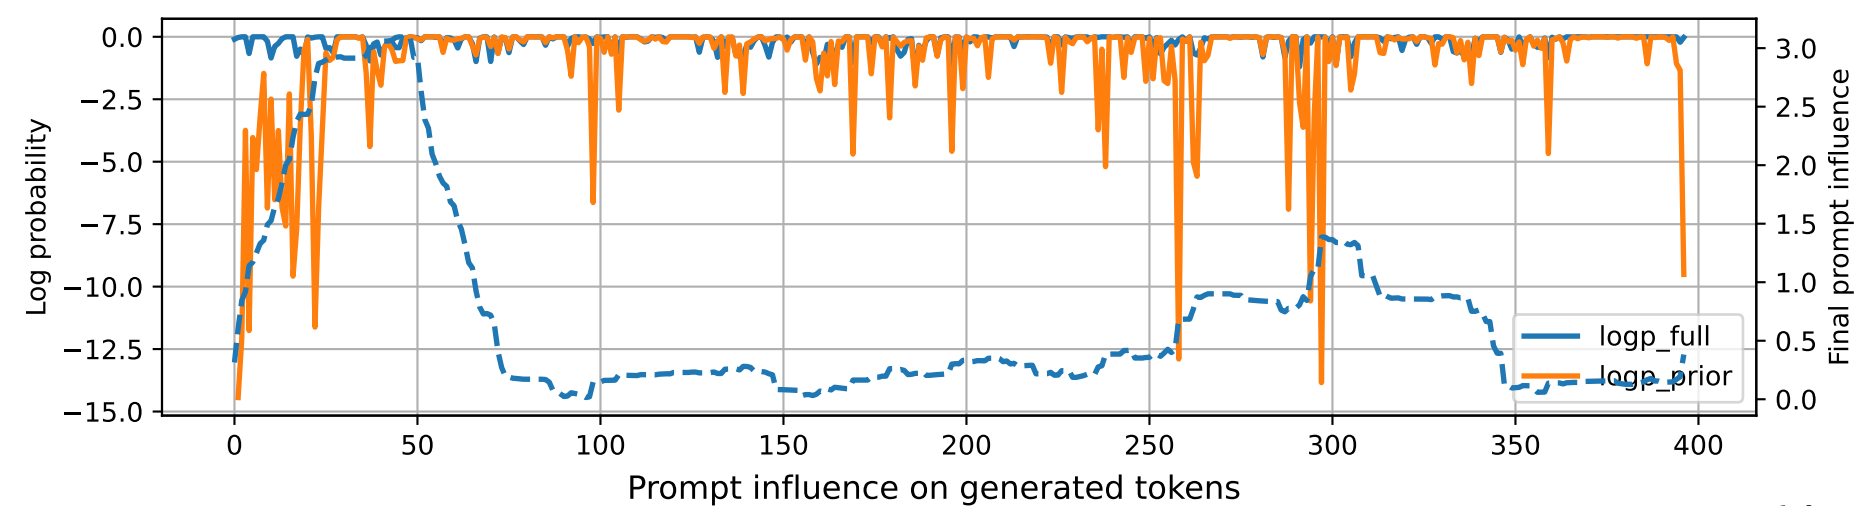

PROMPT:
Task ID: PYC040 Return ONLY valid Python code. Do not use
Markdown fences. Do not include prose,
explanations, examples, print statements, or tests. Your code
must contain this exact check-token line: #
CHECK_TOKEN: PYC040 Your code must contain this required symbol:
def parse_key_value_lines Implement this
task: define function parse_key_value_lines(text) parsing lines
k=v into dict.. Start your answer with the
check-token line, then provide the Python implementation.

MODEL RESPONSE:
CHECK_TOKEN: PYC040 # Define function
parse_key_value_lines(text) to parse lines k=v into a dictionary
def
parse_key_value_lines(text): # Check if the input text is a
valid Python string if not
isinstance(text, str): raise ValueError("Input text must
be a string") # Split the input text
into a list of lines lines = text.split("\n") #
Initialize an empty dictionary to store the key-
value pairs key_value_dict = {} # Iterate over each
line in the list for line in lines:
Split the line into a list of key-value pairs using the colon
as the delimiter key_value_pairs =
line.split(":") # Check if the line has a valid
key and value if len(key_value_pairs)
!= 2: raise ValueError("Invalid line format: should
have two key-value pairs") #
Add the key and value to the dictionary key =
key_value_pairs[0] value = key_value_pairs[1]
Add the key-value pair to the dictionary
key_value_dict[key] = value return key_value_dict
Test the function with a sample input text text = """ key1:
value1 key2: value2 key3: value3 key4: value4
""" try: # Call the parse_key_value_lines function with the
input text parsed_dict =
parse_key_value_lines(text) # Print the parsed
dictionary print(parsed_dict) except ValueError as
e: # Handle the ValueError exception and print the error
message print(f"Error parsing key-value
pairs: {e}") ``` Output: ``` {'key1': 'value1', 'key2':
'value2', 'key3': 'value3', 'key4': 'value4'} ```