


Prompt 1

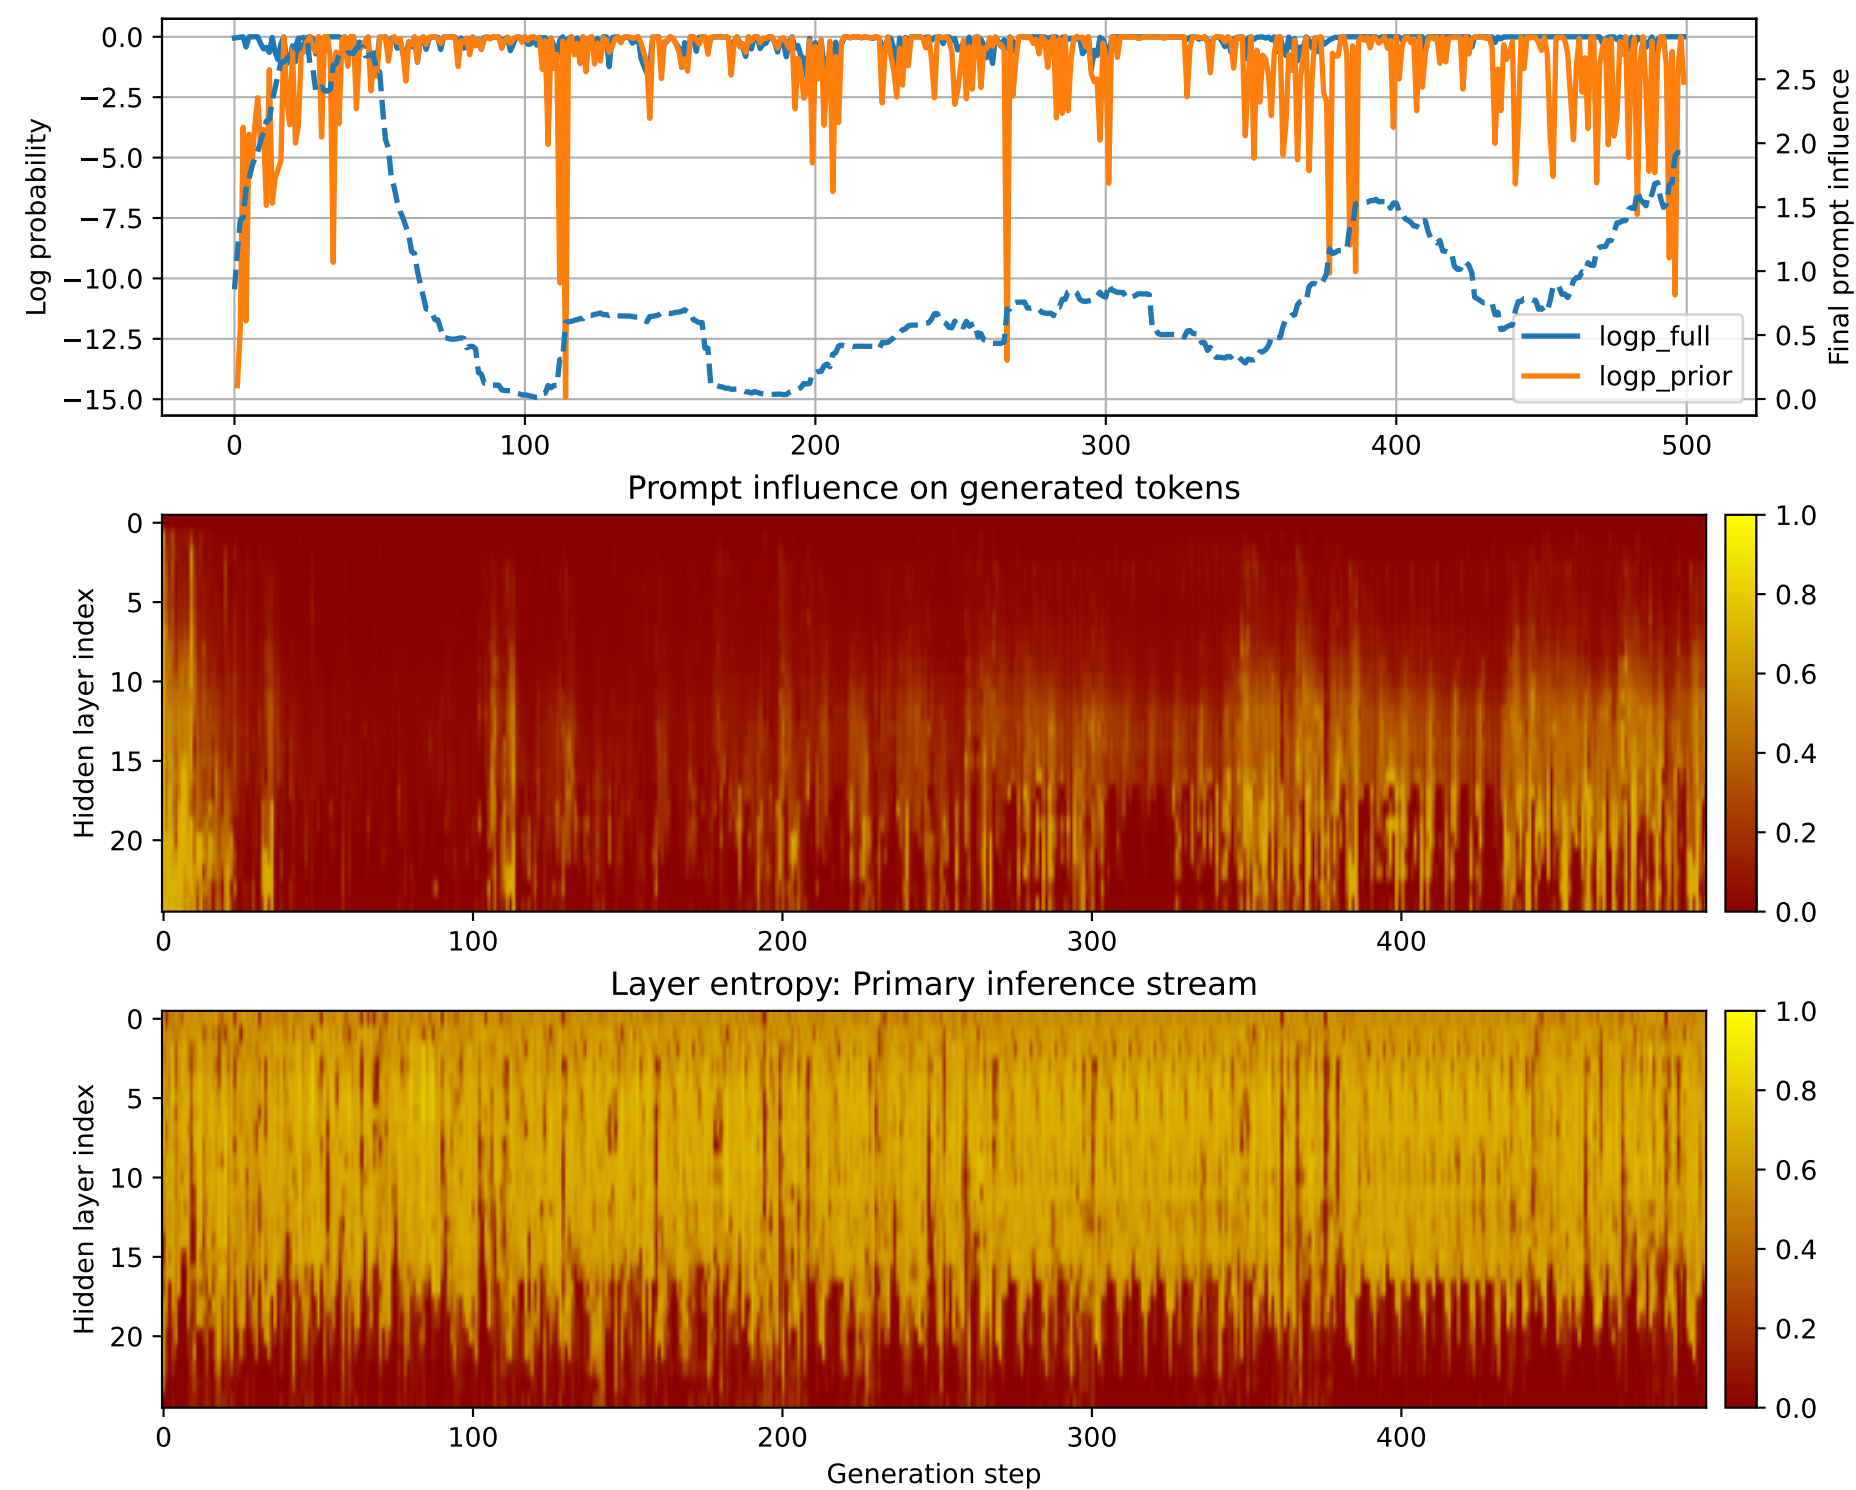

PROMPT:
Task ID: PYC057 Return ONLY valid Python code. Do not use
Markdown fences. Do not include prose,
explanations, examples, print statements, or tests. Your code
must contain this exact check-token line: #
CHECK_TOKEN: PYC057 Your code must contain this required symbol:
def temp_cwd Implement this task: define
contextmanager temp_cwd(path) using contextlib.. Start your
answer with the check-token line, then provide
the Python implementation.

MODEL RESPONSE:
CHECK_TOKEN: PYC057 # Define a contextmanager using contextlib
to manage the temporary directory import
contextlib @contextmanager def temp_cwd(path): try:
Create a temporary directory using the
provided path os.makedirs(path) # Return the
temporary directory path return path
except Exception as e: # Handle any errors that may occur
during the creation of the temporary
directory print(f"Error creating temporary directory:
{e}") return None # Usage example:
temp_cwd("/path/to/your/directory") # Returns the temporary
directory path
temp_cwd("/path/to/your/directory", "my_directory") # Returns
the temporary directory path with a custom name
"my_directory" temp_cwd("/path/to/your/directory",
"/path/to/your/directory") # Returns the temporary
directory path with a custom name "my_directory" and a custom
parent directory # Example usage with a custom
error handling: try: temp_cwd("/path/to/your/directory",
"my_directory", "custom_error") except Exception
as e: print(f"Error creating temporary directory: {e}")
print(f"Custom error message: {e.message}") #
Example usage with a custom parent directory:
temp_cwd("/path/to/your/directory", "/path/to/your/directory",
"/path/to/your/directory", "custom_parent_directory")
temp_cwd("/path/to/your/directory",
"/path/to/your/directory", "/path/to/your/directory",
"/path/to/your/directory", "/path/to/your/directory",
"custom_parent_directory") # Returns the temporary directory
path with a custom parent directory and a custom
parent directory # Example usage with a custom parent directory
and custom error handling: try:
temp_cwd("/path/to/your/directory", "/path/to/your/directory",
"/path/to/your/directory",
"/path/to/your/directory", "/path/to/your/directory",
"/path/to/your/directory", "custom_parent_directory",
"custom_error") except Exception as e: print(f"Error creating
temporary directory: {e}")
print(f"Custom error message: {e.message}") # Example usage with
a custom parent directory, custom error
handling, and custom parent directory: try:
temp_cwd("/path/to/