

EXPERIMENT – 04

Experiment No.	04
Date	_____
Title	Constructor Overloading – Employee Details Management

1. Objective / Aim

To develop a Java program that stores employee name, ID, designation, salary, and promotion status using constructor overloading.


2. System Requirements

Hardware	Computer/Laptop with keyboard and monitor
Software	JDK (Java Development Kit), Command Prompt or any Java IDE

3. Algorithm / Logic Description

1. Start the program.
2. Create an Employee class with name, ID, designation, salary, and promotion status.
3. Define multiple constructors with different parameter lists.
4. Create employee objects using different constructors.
5. Display each employee's details using display().
6. Stop the program.

4. UML Class Diagram

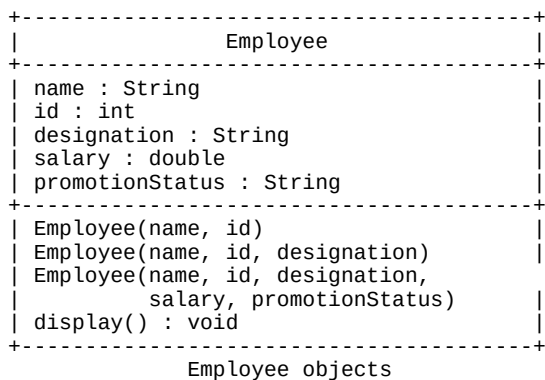

5. Source Code

```
class Employee {
    String name;
    int id;
    String designation;
    double salary;
    String promotionStatus;

    // Constructor 1
    Employee(String name, int id) {
        this.name = name;
        this.id = id;
        this.designation = "Trainee";
        this.salary = 20000;
        this.promotionStatus = "Not Promoted";
    }

    // Constructor 2
    Employee(String name, int id, String designation) {
        this.name = name;
```

```

        this.id = id;
        this.designation = designation;
        this.salary = 30000;
        this.promotionStatus = "Not Promoted";
    }

    // Constructor 3
    Employee(String name, int id, String designation,
             double salary, String promotionStatus) {
        this.name = name;
        this.id = id;
        this.designation = designation;
        this.salary = salary;
        this.promotionStatus = promotionStatus;
    }

    void display() {
        System.out.println("Name           : " + name);
        System.out.println("ID           : " + id);
        System.out.println("Designation   : " + designation);
        System.out.println("Salary       : " + salary);
        System.out.println("Promotion Status: " + promotionStatus);
        System.out.println();
    }
}

public class EmployeeDemo {
    public static void main(String[] args) {
        Employee e1 = new Employee("Ravi", 101);
        Employee e2 = new Employee("Sita", 102, "Manager");
        Employee e3 = new Employee("Kiran", 103, "Team Lead",
                                   60000, "Promoted");

        System.out.println("Employee 1 Details");
        e1.display();

        System.out.println("Employee 2 Details");
        e2.display();

        System.out.println("Employee 3 Details");
        e3.display();
    }
}

```

6. Compilation & Execution Commands

```

javac EmployeeDemo.java
java EmployeeDemo

```

7. Output Screen

Test Case 1 – Two-parameter constructor

```

Employee 1 Details
Name           : Ravi
ID            : 101
Designation    : Trainee
Salary        : 20000.0
Promotion Status: Not Promoted

```

Test Case 2 – Three-parameter constructor

```

Employee 2 Details
Name           : Sita
ID            : 102
Designation    : Manager
Salary        : 30000.0
Promotion Status: Not Promoted

```

Test Case 3 – Five-parameter constructor

```

Employee 3 Details
Name           : Kiran
ID            : 103
Designation    : Team Lead
Salary        : 60000.0
Promotion Status: Promoted

```

8. Result

Thus, the Java program to demonstrate constructor overloading for maintaining employee details such as name, ID, designation, salary, and promotion status was implemented and executed successfully. Different constructors initialized employee objects with different sets of values, and the employee details

were displayed successfully.