

CloudFlare

EC2 setup with Static Website(NOT NEEDED)

1. Create a new EC2 on AWS

aws

Search

[Alt+5]

United States (N. Virginia)

Account ID: 3111-4154-2113

Adrina Colaco

EC2 > Instances > Launch an instance

Launch an instance [Info](#)

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags [Info](#)

Name

CloudFlareTesting

[Add additional tags](#)

Application and OS Images (Amazon Machine Image) [Info](#)

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

Q Search our full catalog including 1000s of application and OS images

Recents

Quick Start

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

DevopsAppHosting

[Create new key pair](#)

No preference (Default subnet in any availability zone)

Auto-assign public IP [Info](#)

Enable

Additional charges apply when outside of free tier allowance

Firewall (security groups) [Info](#)

Helps you connect to your instance

0.0.0.0/0

☐ Allow HTTPS traffic from the internet

To set up an endpoint, for example when creating a web server

☐ Allow HTTP traffic from the internet

To set up an endpoint, for example when creating a web server

Configure storage [Info](#)

Advanced

1x 8 GIB gp3

Root volume, 3000 IOPS, Not encrypted

DNS Hostname

[Info](#)

☒ Enable IP name IPv4 (A record) DNS requests

☒ Enable resource-based IPv4 (A record) DNS requests

☐ Enable resource-based IPv6 (AAAA record) DNS requests

Instance auto-recovery

[Info](#)

Select

Shutdown behavior

[Info](#)

Stop

Stop - Hibernate behavior

[Info](#)

Select

Termination protection

[Info](#)

Select

Stop protection

[Info](#)

Select

Detailed CloudWatch monitoring

[Info](#)

Select

Credit specification

[Info](#)

Standard

☐ User data has already been base64 encoded

Summary

Number of instances

[Info](#)

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.9.2...[read more](#)

ami-0cae6d5fe6048ca2c

Virtual server type (instance type)

t2.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GIB

Cancel

Launch instance

[Preview code](#)

Summary

Number of instances

[Info](#)

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.9.2...[read more](#)

ami-0cae6d5fe6048ca2c

Virtual server type (instance type)

t2.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GIB

Cancel

Launch instance

[Preview code](#)

CloudShell

Feedback

Console Mobile App

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

Instances (1/1) Info

Find Instance by attribute or tag (case-sensitive)

All states

cloud

Clear filters

Last updated 6 minutes ago

Connect

Instance state

Actions

Launch instances

☒	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4 DNS
☒	CloudFlareTesting	i-0160baaa796c4f354	Running	t2.micro	2/2 checks passed	View alarms +	us-east-1b	ec2-98-88-76-240.c

2. SSH into the EC2

```

2025-11-17 11:10:26 /home/mobaxterm cd 'C:/MobaXterm_Portable_v25.0'
2025-11-17 11:10:31 /drives/c/MobaXterm Portable v25.0 ssh -i "DevopsAppHosting.pem" ec2-user@ec2-98-88-76-240
.compute-1.amazonaws.com
Warning: Permanently added 'ec2-98-88-76-240.compute-1.amazonaws.com' (ED25519) to the list of known hosts.
X11 forwarding request failed on channel 0
#
##### Amazon Linux 2023
#####|
###|
#/ https://aws.amazon.com/linux/amazon-linux-2023
V~' ~->
~m/~
[ec2-user@ip-172-31-16-167 ~]$
[ec2-user@ip-172-31-16-167 ~]$ pwd
/home/ec2-user
[ec2-user@ip-172-31-16-167 ~]$ cd/var/
-bash: cd/var/: No such file or directory
[ec2-user@ip-172-31-16-167 ~]$ ls
[ec2-user@ip-172-31-16-167 ~]$ cd /var/
[ec2-user@ip-172-31-16-167 var]$ ls
account cache empty games lib lock mail opt run tmp yp
adm db ftp kerberos local log nis preserve spool www
[ec2-user@ip-172-31-16-167 var]$ cd www/html/
[ec2-user@ip-172-31-16-167 html]$ ls
index.html
[ec2-user@ip-172-31-16-167 html]$ █

```

3. Install Web Server(HTTPD) if not already installed via UserData

```

[ec2-user@ip-172-31-16-167 ~]$ pwd
/home/ec2-user
[ec2-user@ip-172-31-16-167 ~]$ cd /var/
-bash: cd /var/: No such file or directory
[ec2-user@ip-172-31-16-167 ~]$ ls
[ec2-user@ip-172-31-16-167 ~]$ cd /var/
[ec2-user@ip-172-31-16-167 var]$ ls
account  cache  empty  games  lib      lock  mail  opt      run  tmp  yp
adm      db      ftp     kerberos  local  log   nis    preserve  spool  www
[ec2-user@ip-172-31-16-167 var]$ cd www/html/
[ec2-user@ip-172-31-16-167 html]$ ls
index.html
[ec2-user@ip-172-31-16-167 html]$ sudo systemctl status httpd
● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; enabled; preset: disabled)
   Active: active (running) since Mon 2025-11-17 05:32:25 UTC; 18min ago
     Docs: man:httpd.service(8)
  Main PID: 3563 (httpd)
    Status: "Total requests: 47; Idle/Busy workers 100/0;Requests/sec: 0.0423; Bytes served/sec: 29 B/sec"
    Tasks: 177 (limit: 1106)
   Memory: 13.8M
      CPU: 712ms
  CGroup: /system.slice/httpd.service
          └─3563 /usr/sbin/httpd -DFOREGROUND
            └─3674 /usr/sbin/httpd -DFOREGROUND
              └─3683 /usr/sbin/httpd -DFOREGROUND
                └─3684 /usr/sbin/httpd -DFOREGROUND
                  └─3685 /usr/sbin/httpd -DFOREGROUND

Nov 17 05:32:25 ip-172-31-16-167.ec2.internal systemd[1]: Starting httpd.service - The Apache HTTP Server...
Nov 17 05:32:25 ip-172-31-16-167.ec2.internal systemd[1]: Started httpd.service - The Apache HTTP Server.
Nov 17 05:32:25 ip-172-31-16-167.ec2.internal httpd[3563]: Server configured, listening on: port 80
[ec2-user@ip-172-31-16-167 html]$

```

4. Move the static website files into EC2

scp -i "DevopsAppHosting.pem" -r

"/drives/c/Users/alanm/Desktop/Adrina_c/Job/Certifications/AWS_ReStart/Projects/TheFamilyCrewCo/" ec2-user@ec2-98-88-76-240.compute-1.amazonaws.com:

```

2025-11-17 12:53.03 /drives/c/MobaXterm Portable v25.0 scp -i "DevopsAppHosting.pem" -r "/drives/c/Users/alanm
/Desktop/Adrina_c/Job/Certifications/AWS_ReStart/Projects/TheFamilyCrewCo/" ec2-user@ec2-98-88-76-240.compute-1.amazonaws.com:
~
ajax-loader.gif 100% 4178 15.3KB/s 00:00
normalize.css 100% 32KB 121.6KB/s 00:00
swiper-bundle.min.css 100% 13KB 51.1KB/s 00:00
vendor.css 100% 29KB 112.0KB/s 00:00
error.html 100% 133 0.5KB/s 00:00
arct-icon.png 100% 900 3.4KB/s 00:00
banner-image-1.jpg 100% 133KB 169.0KB/s 00:00
banner-image-2.jpg 100% 219KB 409.9KB/s 00:00
banner-image-3.jpg 100% 102KB 373.0KB/s 00:00
banner-image-4.jpg 100% 102KB 351.0KB/s 00:00
banner-image-5.jpg 100% 240KB 885.2KB/s 00:00
banner-image-6.jpg 100% 94KB 338.8KB/s 00:00
bg-newsletter.jpg 100% 88KB 315.4KB/s 00:00
cat-item1.jpg 100% 130KB 466.9KB/s 00:00
cat-item2.jpg 100% 141KB 499.8KB/s 00:00
cat-item3.jpg 100% 105KB 392.8KB/s 00:00
cat-large-item1.jpg 100% 130KB 431.1KB/s 00:00
cat-large-item2.jpg 100% 141KB 485.8KB/s 00:00
cat-large-item3.jpg 100% 105KB 369.8KB/s 00:00
cat-sm-item.jpg 100% 130KB 488.2KB/s 00:00
cat-sm-item2.jpg 100% 141KB 484.2KB/s 00:00
cat-sm-item3.jpg 100% 105KB 378.5KB/s 00:00
collection-banner.jpg 100% 94KB 338.3KB/s 00:00
dhl-logo.png 100% 702 2.7KB/s 00:00
insta-item1.jpg 100% 139KB 467.0KB/s 00:00
insta-item2.jpg 100% 133KB 475.1KB/s 00:00
insta-item3.jpg 100% 112KB 399.6KB/s 00:00
insta-item4.jpg 100% 175KB 601.0KB/s 00:00

insta-item5.jpg 100% 99KB 352.9KB/s 00:00
insta-item6.jpg 100% 158KB 541.9KB/s 00:00
light-logo.png 100% 25KB 94.3KB/s 00:00
logo.svg 100% 7144 26.8KB/s 00:00
logo1.png 100% 2077 7.8KB/s 00:00
logo2.png 100% 2297 8.7KB/s 00:00
logo3.png 100% 1515 5.6KB/s 00:00
logo4.png 100% 1800 6.8KB/s 00:00
logo5.png 100% 3528 13.3KB/s 00:00
main-logo.png 100% 22KB 84.8KB/s 00:00
main-logo1.png 100% 25KB 94.8KB/s 00:00
master-card.png 100% 856 3.2KB/s 00:00
newsletter-image.jpg 100% 124KB 417.8KB/s 00:00
pattern-bg.png 100% 35KB 129.5KB/s 00:00
paypal-card.png 100% 627 2.4KB/s 00:00
post-image1.jpg 100% 133KB 476.1KB/s 00:00
post-image2.jpg 100% 130KB 471.8KB/s 00:00
post-image3.jpg 100% 73KB 264.6KB/s 00:00
post-image4.jpg 100% 63KB 227.3KB/s 00:00
post-image5.jpg 100% 169KB 560.5KB/s 00:00
post-image6.jpg 100% 173KB 623.1KB/s 00:00
post-image7.jpg 100% 86KB 305.6KB/s 00:00
post-image8.jpg 100% 99KB 350.6KB/s 00:00
post-image9.jpg 100% 83KB 292.6KB/s 00:00
post-large-image1.jpg 100% 133KB 455.7KB/s 00:00
post-large-image2.jpg 100% 130KB 472.7KB/s 00:00
post-large-image3.jpg 100% 73KB 257.4KB/s 00:00
post-large-image4.jpg 100% 63KB 222.7KB/s 00:00
post-small-image1.jpg 100% 133KB 459.8KB/s 00:00
post-small-image2.jpg 100% 130KB 439.0KB/s 00:00
post-small-image3.jpg 100% 73KB 267.4KB/s 00:00
product-item-1.jpg 100% 71KB 248.6KB/s 00:00
product-item-10.jpg 100% 130KB 455.9KB/s 00:00

```



post-small-image3.jpg	100%	16KB	59.2KB/s	00:00
product-item-1.jpg	100%	53KB	193.7KB/s	00:00
product-item-10.jpg	100%	32KB	116.6KB/s	00:00
product-item-2.jpg	100%	49KB	179.2KB/s	00:00
product-item-3.jpg	100%	41KB	152.3KB/s	00:00
product-item-4.jpg	100%	23KB	86.8KB/s	00:00
product-item-5.jpg	100%	42KB	154.9KB/s	00:00
product-item-6.jpg	100%	46KB	167.3KB/s	00:00
product-item-7.jpg	100%	52KB	194.1KB/s	00:00
product-item-8.jpg	100%	45KB	122.7KB/s	00:00
product-item-9.jpg	100%	49KB	132.1KB/s	00:00
single-image-2.jpg	100%	121KB	420.9KB/s	00:00
text-pattern.png	100%	5503	20.8KB/s	00:00
video-image-2.jpg	100%	331KB	579.2KB/s	00:00
video-image.jpg	100%	103KB	351.7KB/s	00:00
visa-card.png	100%	654	2.5KB/s	00:00
wishlist-item1.jpg	100%	24KB	88.9KB/s	00:00
wishlist-item2.jpg	100%	24KB	89.9KB/s	00:00
wishlist-item3.jpg	100%	14KB	54.4KB/s	00:00
index.html	100%	70KB	260.9KB/s	00:00
jquery.min.js	100%	91KB	343.6KB/s	00:00
modernizr.js	100%	15KB	57.1KB/s	00:00
plugins.js	100%	61KB	229.5KB/s	00:00
script.min.js	100%	5153	19.6KB/s	00:00
SmoothScroll.js	100%	23KB	86.4KB/s	00:00
readme.txt	100%	67	0.3KB/s	00:00
style.css	100%	33KB	124.2KB/s	00:00

```
ssh -i "DevopsAppHosting.pem" ec2-user@ec2-98-88-76-240.compute-1.amazonaws.com
```

```
sudo find /var/www/html -type d -exec chmod 755 {} \;  
sudo find /var/www/html -type f -exec chmod 644 {} \;
```

```
[ec2-user@ip-172-31-16-167 ~]$ # make ec2-user owner (or set to apache/www-data depending on your distro)  
sudo chown -R ec2-user:ec2-user /var/www/html  
  
# give directories execute permission, files readable  
sudo find /var/www/html -type d -exec chmod 755 {} \;  
sudo find /var/www/html -type f -exec chmod 644 {} \;  
[ec2-user@ip-172-31-16-167 ~]$
```

6. Run Public IP in browser

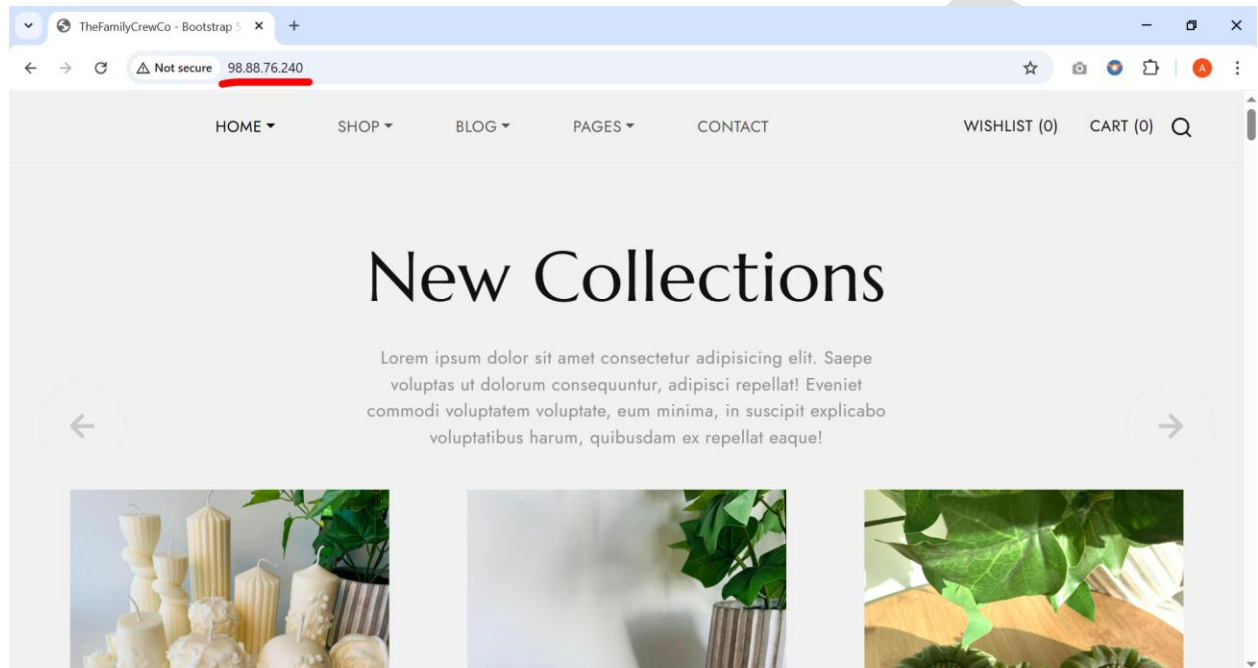

7. Validation

Website displaying properly on `http://<<PUBLIC_IP>>`

Setup Wordpress website on EC2(blog.ancestralrecipe.com)

1. Connect to instance using SSH
2. Update your system

```
sudo dnf update -y
```

```
[ec2-user@ip-172-31-16-167 ~]$ sudo dnf update -y  
Last metadata expiration check: 1 day, 0:10:11 ago on Mon Nov 17 05:32:20 2025.  
Dependencies resolved.  
Nothing to do.  
Complete!  
[ec2-user@ip-172-31-16-167 ~]$
```

3. Install Apache, PHP, and MariaDB

`sudo dnf install -y httpd wget php-fpm php-mysql php-json php php-devel`

```
[ec2-user@ip-172-31-16-167 ~]$ sudo dnf install -y httpd wget php-fpm php-mysql php-json php php-devel
Last metadata expiration check: 1 day, 0:12:19 ago on Mon Nov 17 05:32:20 2025.
Package httpd-2.4.65-1.amzn2023.0.2.x86_64 is already installed.
Package wget-1.21.3-1.amzn2023.0.4.x86_64 is already installed.
Dependencies resolved.
```

Package	Architecture	Version	Repository	Size
Installing:				
php8.4	x86_64	8.4.14-1.amzn2023.0.1	amazonlinux	16 k
php8.4-devel	x86_64	8.4.14-1.amzn2023.0.1	amazonlinux	786 k
php8.4-fpm	x86_64	8.4.14-1.amzn2023.0.1	amazonlinux	2.0 M
php8.4-mysqld	x86_64	8.4.14-1.amzn2023.0.1	amazonlinux	155 k
Installing dependencies:				
annobin-docs	noarch	12.69-1.amzn2023.0.1	amazonlinux	93 k
annobin-plugin-gcc	x86_64	12.69-1.amzn2023.0.1	amazonlinux	974 k
autoconf	noarch	2.69-36.amzn2023.0.3	amazonlinux	666 k
automake	noarch	1.16.5-9.amzn2023.0.3	amazonlinux	677 k
cmake-filesystem	x86_64	3.22.2-1.amzn2023.0.4	amazonlinux	16 k
cpp	x86_64	11.5.0-5.amzn2023.0.5	amazonlinux	11 M
emacs-filesystem	noarch	1:28.2-3.amzn2023.0.10	amazonlinux	9.1 k
gc	x86_64	8.0.4-5.amzn2023.0.2	amazonlinux	105 k
gcc	x86_64	11.5.0-5.amzn2023.0.5	amazonlinux	36 M
gcc-c++	x86_64	11.5.0-5.amzn2023.0.5	amazonlinux	15 M
gcc-plugin-annobin	x86_64	11.5.0-5.amzn2023.0.5	amazonlinux	38 k
glibc-devel	x86_64	2.34-231.amzn2023.0.1	amazonlinux	38 k
glibc-headers-x86	noarch	2.34-231.amzn2023.0.1	amazonlinux	444 k
guile22	x86_64	2.2.7-2.amzn2023.0.3	amazonlinux	6.4 M
kernel-headers	x86_64	1:6.1.158-178.288.amzn2023	amazonlinux	1.4 M
keyutils-libs-devel	x86_64	1.6.3-1.amzn2023.0.2	amazonlinux	55 k
krb5-devel	x86_64	1.21.3-6.amzn2023.0.1	amazonlinux	134 k
libcom_err-devel	x86_64	1.46.5-2.amzn2023.0.2	amazonlinux	17 k
libkadm5	x86_64	1.21.3-6.amzn2023.0.1	amazonlinux	79 k
krb5-devel	x86_64	1.21.3-6.amzn2023.0.1	amazonlinux	134 k
libcom_err-devel	x86_64	1.46.5-2.amzn2023.0.2	amazonlinux	17 k
libkadm5	x86_64	1.21.3-6.amzn2023.0.1	amazonlinux	79 k
libmpc	x86_64	1.2.1-2.amzn2023.0.2	amazonlinux	62 k
libselinux-devel	x86_64	3.4-5.amzn2023.0.2	amazonlinux	115 k
libsepol-devel	x86_64	3.4-3.amzn2023.0.3	amazonlinux	42 k
libsodium	x86_64	1.0.19-4.amzn2023	amazonlinux	176 k
libstdc++-devel	x86_64	11.5.0-5.amzn2023.0.5	amazonlinux	2.2 M
libtool	x86_64	2.4.7-1.amzn2023.0.3	amazonlinux	596 k
libtool-ltdl	x86_64	2.4.7-1.amzn2023.0.3	amazonlinux	38 k
libverto-devel	x86_64	0.3.2-1.amzn2023.0.2	amazonlinux	15 k
libxcrypt-devel	x86_64	4.4.33-7.amzn2023	amazonlinux	32 k
libxml2-devel	x86_64	2.10.4-1.amzn2023.0.13	amazonlinux	499 k
libxslt	x86_64	1.1.43-1.amzn2023.0.3	amazonlinux	183 k
m4	x86_64	1.4.19-2.amzn2023.0.2	amazonlinux	296 k
make	x86_64	1:4.3-5.amzn2023.0.2	amazonlinux	534 k
nginx-filesystem	noarch	1:1.28.0-1.amzn2023.0.2	amazonlinux	9.6 k
openssl-devel	x86_64	1:3.2.2-1.amzn2023.0.2	amazonlinux	3.2 M
pcr2-devel	x86_64	10.40-1.amzn2023.0.3	amazonlinux	473 k
pcr2-utf16	x86_64	10.40-1.amzn2023.0.3	amazonlinux	216 k
pcr2-utf32	x86_64	10.40-1.amzn2023.0.3	amazonlinux	205 k
perl-B	x86_64	1.80-477.amzn2023.0.7	amazonlinux	177 k
perl-Data-Dumper	x86_64	2.174-460.amzn2023.0.2	amazonlinux	55 k
perl-File-Compare	noarch	1.100.600-477.amzn2023.0.7	amazonlinux	13 k
perl-File-Copy	noarch	2.34-477.amzn2023.0.7	amazonlinux	20 k
perl-File-Find	noarch	1.37-477.amzn2023.0.7	amazonlinux	25 k
perl-Thread-Queue	noarch	3.14-458.amzn2023.0.2	amazonlinux	22 k
perl-threads	x86_64	1:2.25-458.amzn2023.0.3	amazonlinux	58 k
perl-threads-shared	x86_64	1.61-458.amzn2023.0.2	amazonlinux	44 k
php8.4-cli	x86_64	8.4.14-1.amzn2023.0.1	amazonlinux	3.8 M
php8.4-common	x86_64	8.4.14-1.amzn2023.0.1	amazonlinux	802 k
php8.4-pdo	x86_64	8.4.14-1.amzn2023.0.1	amazonlinux	99 k
php8.4-process	x86_64	8.4.14-1.amzn2023.0.1	amazonlinux	51 k

```

php8.4-xml                x86_64                8.4.14-1.amzn2023.0.1                amazonlinux                675 k
xz-devel                  x86_64                5.2.5-9.amzn2023.0.2                amazonlinux                53 k
zlib-devel                x86_64                1.2.11-33.amzn2023.0.5                amazonlinux                45 k
Installing weak dependencies:
php8.4-mbstring           x86_64                8.4.14-1.amzn2023.0.1                amazonlinux                540 k
php8.4-opcache            x86_64                8.4.14-1.amzn2023.0.1                amazonlinux                499 k
php8.4-sodium             x86_64                8.4.14-1.amzn2023.0.1                amazonlinux                47 k

Transaction Summary
=====
Install 59 Packages

Total download size: 91 M
Installed size: 305 M
Downloading Packages:
(1/59): annobin-docs-12.69-1.amzn2023.0.1.noarch.rpm                2.0 MB/s | 93 kB    00:00
(2/59): annobin-plugin-gcc-12.69-1.amzn2023.0.1.x86_64.rpm          17 MB/s | 974 kB    00:00
(3/59): autoconf-2.69-36.amzn2023.0.3.noarch.rpm                   10 MB/s | 666 kB    00:00
(4/59): cmake-filesystem-3.22.2-1.amzn2023.0.4.x86_64.rpm          685 kB/s | 16 kB    00:00
(5/59): automake-1.16.5-9.amzn2023.0.3.noarch.rpm                   13 MB/s | 677 kB    00:00
(6/59): emacs-filesystem-28.2-3.amzn2023.0.10.noarch.rpm            331 kB/s | 9.1 kB   00:00
(7/59): gc-8.0.4-5.amzn2023.0.2.x86_64.rpm                          2.5 MB/s | 105 kB   00:00
(8/59): cpp-11.5.0-5.amzn2023.0.5.x86_64.rpm                       31 MB/s | 11 MB     00:00
(9/59): gcc-plugin-annobin-11.5.0-5.amzn2023.0.5.x86_64.rpm         1.3 MB/s | 38 kB     00:00
(10/59): glibc-devel-2.34-231.amzn2023.0.1.x86_64.rpm              1.4 MB/s | 38 kB     00:00
(11/59): glibc-headers-x86-2.34-231.amzn2023.0.1.noarch.rpm         12 MB/s | 444 kB     00:00
(12/59): gcc-c++-11.5.0-5.amzn2023.0.5.x86_64.rpm                  31 MB/s | 15 MB     00:00
(13/59): kernel-headers-6.1.158-178.288.amzn2023.x86_64.rpm         24 MB/s | 1.4 MB     00:00
(14/59): keyutils-libs-devel-1.6.3-1.amzn2023.0.2.x86_64.rpm        2.6 MB/s | 55 kB     00:00
(15/59): guile22-2.2.7-2.amzn2023.0.3.x86_64.rpm                   27 MB/s | 6.4 MB     00:00
(16/59): krb5-devel-1.21.3-6.amzn2023.0.1.x86_64.rpm               1.9 MB/s | 134 kB     00:00
(17/59): libcom_err-devel-1.46.5-2.amzn2023.0.2.x86_64.rpm          632 kB/s | 17 kB     00:00
(18/59): libkadm5-1.21.3-6.amzn2023.0.1.x86_64.rpm                 2.9 MB/s | 79 kB     00:00

(19/59): libmpc-1.2.1-2.amzn2023.0.2.x86_64.rpm                    2.2 MB/s | 62 kB     00:00
(20/59): libsepol-devel-3.4-3.amzn2023.0.3.x86_64.rpm              1.9 MB/s | 42 kB     00:00
(21/59): libselinux-devel-3.4-5.amzn2023.0.2.x86_64.rpm            3.3 MB/s | 115 kB     00:00
(22/59): libsodium-1.0.19-4.amzn2023.x86_64.rpm                    5.6 MB/s | 176 kB     00:00
(23/59): gcc-11.5.0-5.amzn2023.0.5.x86_64.rpm                      39 MB/s | 36 MB     00:00
(24/59): libtool-2.4.7-1.amzn2023.0.3.x86_64.rpm                  3.2 MB/s | 596 kB     00:00
(25/59): libstdc++-devel-11.5.0-5.amzn2023.0.5.x86_64.rpm          10 MB/s | 2.2 MB     00:00
(26/59): libtool-ltdl-2.4.7-1.amzn2023.0.3.x86_64.rpm              1.3 MB/s | 38 kB     00:00
(27/59): libverto-devel-0.3.2-1.amzn2023.0.2.x86_64.rpm            703 kB/s | 15 kB     00:00
(28/59): libxcrypt-devel-4.4.33-7.amzn2023.x86_64.rpm              1.5 MB/s | 32 kB     00:00
(29/59): libxslt-1.1.43-1.amzn2023.0.3.x86_64.rpm                  5.9 MB/s | 183 kB     00:00
(30/59): libxml2-devel-2.10.4-1.amzn2023.0.13.x86_64.rpm           13 MB/s | 499 kB     00:00
(31/59): m4-1.4.19-2.amzn2023.0.2.x86_64.rpm                       11 MB/s | 296 kB     00:00
(32/59): nginx-filesystem-1.28.0-1.amzn2023.0.2.noarch.rpm          438 kB/s | 9.6 kB     00:00
(33/59): make-4.3-5.amzn2023.0.2.x86_64.rpm                        11 MB/s | 534 kB     00:00
(34/59): pcre2-devel-10.40-1.amzn2023.0.3.x86_64.rpm               14 MB/s | 473 kB     00:00
(35/59): openssl-devel-3.2.2-1.amzn2023.0.2.x86_64.rpm             43 MB/s | 3.2 MB     00:00
(36/59): pcre2-utf16-10.40-1.amzn2023.0.3.x86_64.rpm               4.8 MB/s | 216 kB     00:00
(37/59): pcre2-utf32-10.40-1.amzn2023.0.3.x86_64.rpm               6.3 MB/s | 205 kB     00:00
(38/59): perl-Data-Dumper-2.174-460.amzn2023.0.2.x86_64.rpm         2.6 MB/s | 55 kB     00:00
(39/59): perl-B-1.80-477.amzn2023.0.7.x86_64.rpm                   5.7 MB/s | 177 kB     00:00
(40/59): perl-File-Compare-1.100.600-477.amzn2023.0.7.noarch.rpm    645 kB/s | 13 kB     00:00
(41/59): perl-File-Copy-2.34-477.amzn2023.0.7.noarch.rpm            897 kB/s | 20 kB     00:00
(42/59): perl-File-Find-1.37-477.amzn2023.0.7.noarch.rpm           1.2 MB/s | 25 kB     00:00
(43/59): perl-Thread-Queue-3.14-458.amzn2023.0.2.noarch.rpm         1.2 MB/s | 22 kB     00:00
(44/59): perl-threads-2.25-458.amzn2023.0.3.x86_64.rpm             3.1 MB/s | 58 kB     00:00
(45/59): php8.4-8.4.14-1.amzn2023.0.1.x86_64.rpm                 819 kB/s | 16 kB     00:00
(46/59): perl-threads-shared-1.61-458.amzn2023.0.2.x86_64.rpm       1.8 MB/s | 44 kB     00:00
(47/59): php8.4-devel-8.4.14-1.amzn2023.0.1.x86_64.rpm            14 MB/s | 786 kB     00:00
(48/59): php8.4-common-8.4.14-1.amzn2023.0.1.x86_64.rpm           12 MB/s | 802 kB     00:00
(49/59): php8.4-cli-8.4.14-1.amzn2023.0.1.x86_64.rpm              36 MB/s | 3.8 MB     00:00
(50/59): php8.4-mbstring-8.4.14-1.amzn2023.0.1.x86_64.rpm         12 MB/s | 540 kB     00:00
(51/59): php8.4-fpm-8.4.14-1.amzn2023.0.1.x86_64.rpm              30 MB/s | 2.0 MB     00:00

```

```

(52/59): php8.4-mysqld-8.4.14-1.amzn2023.0.1.x86_64.rpm      5.2 MB/s | 155 kB    00:00
(53/59): php8.4-opcache-8.4.14-1.amzn2023.0.1.x86_64.rpm    15 MB/s | 499 kB    00:00
(54/59): php8.4-pdo-8.4.14-1.amzn2023.0.1.x86_64.rpm       4.5 MB/s | 99 kB     00:00
(55/59): php8.4-process-8.4.14-1.amzn2023.0.1.x86_64.rpm    2.3 MB/s | 51 kB     00:00
(56/59): xz-devel-5.2.5-9.amzn2023.0.2.x86_64.rpm           2.1 MB/s | 53 kB     00:00
(57/59): php8.4-xml-8.4.14-1.amzn2023.0.1.x86_64.rpm        17 MB/s | 675 kB     00:00
(58/59): php8.4-sodium-8.4.14-1.amzn2023.0.1.x86_64.rpm     870 kB/s | 47 kB     00:00
(59/59): zlib-devel-1.2.11-33.amzn2023.0.5.x86_64.rpm       2.1 MB/s | 45 kB     00:00
-----
Total                               61 MB/s | 91 MB     00:01
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing                :                               1/1
  Installing                : php8.4-common-8.4.14-1.amzn2023.0.1.x86_64      1/59
  Installing                : libmpc-1.2.1-2.amzn2023.0.2.x86_64              2/59
  Installing                : php8.4-cli-8.4.14-1.amzn2023.0.1.x86_64         3/59
  Installing                : php8.4-pdo-8.4.14-1.amzn2023.0.1.x86_64         4/59
  Installing                : zlib-devel-1.2.11-33.amzn2023.0.5.x86_64        5/59
  Installing                : perl-threads-1:2.25-458.amzn2023.0.3.x86_64     6/59
  Installing                : perl-threads-shared-1.61-458.amzn2023.0.2.x86_64 7/59
  Installing                : perl-Thread-Queue-3.14-458.amzn2023.0.2.noarch    8/59
  Installing                : cpp-11.5.0-5.amzn2023.0.5.x86_64               9/59
  Installing                : php8.4-mbstring-8.4.14-1.amzn2023.0.1.x86_64    10/59
  Installing                : php8.4-opcache-8.4.14-1.amzn2023.0.1.x86_64     11/59
  Installing                : php8.4-process-8.4.14-1.amzn2023.0.1.x86_64     12/59
  Installing                : perl-Data-Dumper-2.174-460.amzn2023.0.2.x86_64   13/59
  Installing                : perl-B-1.80-477.amzn2023.0.7.x86_64             14/59
  Installing                : xz-devel-5.2.5-9.amzn2023.0.2.x86_64            15/59
  Installing                : perl-File-Find-1.37-477.amzn2023.0.7.noarch       16/59
  Installing                : perl-File-Copy-2.34-477.amzn2023.0.7.noarch      17/59
  Installing                : perl-File-Compare-1.100.600-477.amzn2023.0.7.noarch 18/59
  Installing                : pcre2-utf32-10.40-1.amzn2023.0.3.x86_64          19/59
  Installing                : pcre2-utf16-10.40-1.amzn2023.0.3.x86_64          20/59
  Installing                : pcre2-devel-10.40-1.amzn2023.0.3.x86_64          21/59
  Installing                : openssl-devel-1:3.2.2-1.amzn2023.0.2.x86_64      22/59
  Running scriptlet: nginx-filesystem-1:1.28.0-1.amzn2023.0.2.noarch           23/59
  Installing                : nginx-filesystem-1:1.28.0-1.amzn2023.0.2.noarch  23/59
  Installing                : php8.4-fpm-8.4.14-1.amzn2023.0.1.x86_64          24/59
  Running scriptlet: php8.4-fpm-8.4.14-1.amzn2023.0.1.x86_64                  24/59
  Installing                : m4-1.4.19-2.amzn2023.0.2.x86_64                 25/59
  Installing                : libxslt-1.1.43-1.amzn2023.0.3.x86_64             26/59
  Installing                : php8.4-xml-8.4.14-1.amzn2023.0.1.x86_64          27/59
  Installing                : libverto-devel-0.3.2-1.amzn2023.0.2.x86_64       28/59
  Installing                : libtool-ltdl-2.4.7-1.amzn2023.0.3.x86_64         29/59
  Installing                : libstdc++-devel-11.5.0-5.amzn2023.0.5.x86_64     30/59
  Installing                : libsodium-1.0.19-4.amzn2023.x86_64              31/59
  Installing                : php8.4-sodium-8.4.14-1.amzn2023.0.1.x86_64       32/59
  Installing                : libsepol-devel-3.4-3.amzn2023.0.3.x86_64        33/59
  Installing                : libselinux-devel-3.4-5.amzn2023.0.2.x86_64       34/59
  Installing                : libkadm5-1.21.3-6.amzn2023.0.1.x86_64            35/59
  Installing                : libcom_err-devel-1.46.5-2.amzn2023.0.2.x86_64    36/59
  Installing                : keyutils-libs-devel-1.6.3-1.amzn2023.0.2.x86_64  37/59
  Installing                : krb5-devel-1.21.3-6.amzn2023.0.1.x86_64          38/59
  Installing                : kernel-headers-1:6.1.158-178.288.amzn2023.x86_64 39/59
  Installing                : glibc-headers-x86-2.34-231.amzn2023.0.1.noarch     40/59
  Installing                : libxcrypt-devel-4.4.33-7.amzn2023.x86_64         41/59
  Installing                : glibc-devel-2.34-231.amzn2023.0.1.x86_64         42/59
  Installing                : gc-8.0.4-5.amzn2023.0.2.x86_64                  43/59
  Installing                : guile22-2.2.7-2.amzn2023.0.3.x86_64              44/59
  Installing                : make-1:4.3-5.amzn2023.0.2.x86_64                45/59
  Installing                : gcc-11.5.0-5.amzn2023.0.5.x86_64                46/59
  Running scriptlet: gcc-11.5.0-5.amzn2023.0.5.x86_64                      46/59
  Installing                : gcc-c++-11.5.0-5.amzn2023.0.5.x86_64            47/59

```


Installing	: autoconf-2.69-36.amzn2023.0.3.noarch	49/59
Installing	: automake-1.16.5-9.amzn2023.0.3.noarch	50/59
Installing	: libtool-2.4.7-1.amzn2023.0.3.x86_64	51/59
Installing	: cmake-filesystem-3.22.2-1.amzn2023.0.4.x86_64	52/59
Installing	: libxml2-devel-2.10.4-1.amzn2023.0.13.x86_64	53/59
Installing	: annobin-docs-12.69-1.amzn2023.0.1.noarch	54/59
Installing	: annobin-plugin-gcc-12.69-1.amzn2023.0.1.x86_64	55/59
Running scriptlet:	: annobin-plugin-gcc-12.69-1.amzn2023.0.1.x86_64	55/59
Installing	: php8.4-devel-8.4.14-1.amzn2023.0.1.x86_64	56/59
Installing	: gcc-plugin-annobin-11.5.0-5.amzn2023.0.5.x86_64	57/59
Installing	: php8.4-8.4.14-1.amzn2023.0.1.x86_64	58/59
Installing	: php8.4-mysqldb-8.4.14-1.amzn2023.0.1.x86_64	59/59
Running scriptlet:	: php8.4-mysqldb-8.4.14-1.amzn2023.0.1.x86_64	59/59
Verifying	: annobin-docs-12.69-1.amzn2023.0.1.noarch	1/59
Verifying	: annobin-plugin-gcc-12.69-1.amzn2023.0.1.x86_64	2/59
Verifying	: autoconf-2.69-36.amzn2023.0.3.noarch	3/59
Verifying	: automake-1.16.5-9.amzn2023.0.3.noarch	4/59
Verifying	: cmake-filesystem-3.22.2-1.amzn2023.0.4.x86_64	5/59
Verifying	: cpp-11.5.0-5.amzn2023.0.5.x86_64	6/59
Verifying	: emacs-filesystem-1:28.2-3.amzn2023.0.10.noarch	7/59
Verifying	: gc-8.0.4-5.amzn2023.0.2.x86_64	8/59
Verifying	: gcc-11.5.0-5.amzn2023.0.5.x86_64	9/59
Verifying	: gcc-c++-11.5.0-5.amzn2023.0.5.x86_64	10/59
Verifying	: gcc-plugin-annobin-11.5.0-5.amzn2023.0.5.x86_64	11/59
Verifying	: glibc-devel-2.34-231.amzn2023.0.1.x86_64	12/59
Verifying	: glibc-headers-x86-2.34-231.amzn2023.0.1.noarch	13/59
Verifying	: guile22-2.2.7-2.amzn2023.0.3.x86_64	14/59
Verifying	: kernel-headers-1:6.1.158-178.288.amzn2023.x86_64	15/59
Verifying	: keyutils-libs-devel-1.6.3-1.amzn2023.0.2.x86_64	16/59
Verifying	: krb5-devel-1.21.3-6.amzn2023.0.1.x86_64	17/59
Verifying	: libcom_err-devel-1.46.5-2.amzn2023.0.2.x86_64	18/59
Verifying	: libkadm5-1.21.3-6.amzn2023.0.1.x86_64	19/59
Verifying	: libmpc-1.2.1-2.amzn2023.0.2.x86_64	20/59

Installing	: autoconf-2.69-36.amzn2023.0.3.noarch	49/59
Installing	: automake-1.16.5-9.amzn2023.0.3.noarch	50/59
Installing	: libtool-2.4.7-1.amzn2023.0.3.x86_64	51/59
Installing	: cmake-filesystem-3.22.2-1.amzn2023.0.4.x86_64	52/59
Installing	: libxml2-devel-2.10.4-1.amzn2023.0.13.x86_64	53/59
Installing	: annobin-docs-12.69-1.amzn2023.0.1.noarch	54/59
Installing	: annobin-plugin-gcc-12.69-1.amzn2023.0.1.x86_64	55/59
Running scriptlet:	: annobin-plugin-gcc-12.69-1.amzn2023.0.1.x86_64	55/59
Installing	: php8.4-devel-8.4.14-1.amzn2023.0.1.x86_64	56/59
Installing	: gcc-plugin-annobin-11.5.0-5.amzn2023.0.5.x86_64	57/59
Installing	: php8.4-8.4.14-1.amzn2023.0.1.x86_64	58/59
Installing	: php8.4-mysqldb-8.4.14-1.amzn2023.0.1.x86_64	59/59
Running scriptlet:	: php8.4-mysqldb-8.4.14-1.amzn2023.0.1.x86_64	59/59
Verifying	: annobin-docs-12.69-1.amzn2023.0.1.noarch	1/59
Verifying	: annobin-plugin-gcc-12.69-1.amzn2023.0.1.x86_64	2/59
Verifying	: autoconf-2.69-36.amzn2023.0.3.noarch	3/59
Verifying	: automake-1.16.5-9.amzn2023.0.3.noarch	4/59
Verifying	: cmake-filesystem-3.22.2-1.amzn2023.0.4.x86_64	5/59
Verifying	: cpp-11.5.0-5.amzn2023.0.5.x86_64	6/59
Verifying	: emacs-filesystem-1:28.2-3.amzn2023.0.10.noarch	7/59
Verifying	: gc-8.0.4-5.amzn2023.0.2.x86_64	8/59
Verifying	: gcc-11.5.0-5.amzn2023.0.5.x86_64	9/59
Verifying	: gcc-c++-11.5.0-5.amzn2023.0.5.x86_64	10/59
Verifying	: gcc-plugin-annobin-11.5.0-5.amzn2023.0.5.x86_64	11/59
Verifying	: glibc-devel-2.34-231.amzn2023.0.1.x86_64	12/59
Verifying	: glibc-headers-x86-2.34-231.amzn2023.0.1.noarch	13/59
Verifying	: guile22-2.2.7-2.amzn2023.0.3.x86_64	14/59
Verifying	: kernel-headers-1:6.1.158-178.288.amzn2023.x86_64	15/59
Verifying	: keyutils-libs-devel-1.6.3-1.amzn2023.0.2.x86_64	16/59
Verifying	: krb5-devel-1.21.3-6.amzn2023.0.1.x86_64	17/59
Verifying	: libcom_err-devel-1.46.5-2.amzn2023.0.2.x86_64	18/59
Verifying	: libkadm5-1.21.3-6.amzn2023.0.1.x86_64	19/59
Verifying	: libmpc-1.2.1-2.amzn2023.0.2.x86_64	20/59

```
Verifying      : xz-devel-5.2.5-9.amzn2023.0.2.x86_64      58/59
Verifying      : zlib-devel-1.2.11-33.amzn2023.0.5.x86_64  59/59

Installed:
annobin-docs-12.69-1.amzn2023.0.1.noarch
autoconf-2.69-36.amzn2023.0.3.noarch
cmake-filesystem-3.22.2-1.amzn2023.0.4.x86_64
emacs-filesystem-1:28.2-3.amzn2023.0.10.noarch
gcc-11.5.0-5.amzn2023.0.5.x86_64
gcc-plugin-annobin-11.5.0-5.amzn2023.0.5.x86_64
glibc-headers-x86-2.34-231.amzn2023.0.1.noarch
kernel-headers-1:6.1.158-178.288.amzn2023.x86_64
krb5-devel-1.21.3-6.amzn2023.0.1.x86_64
libkadm5-1.21.3-6.amzn2023.0.1.x86_64
libselinux-devel-3.4-5.amzn2023.0.2.x86_64
libsodium-1.0.19-4.amzn2023.x86_64
libtool-2.4.7-1.amzn2023.0.3.x86_64
libverto-devel-0.3.2-1.amzn2023.0.2.x86_64
libxml2-devel-2.10.4-1.amzn2023.0.13.x86_64
m4-1.4.19-2.amzn2023.0.2.x86_64
nginx-filesystem-1:1.28.0-1.amzn2023.0.2.noarch
pcre2-devel-10.40-1.amzn2023.0.3.x86_64
pcre2-utf32-10.40-1.amzn2023.0.3.x86_64
perl-Data-Dumper-2.174-460.amzn2023.0.2.x86_64
perl-File-Copy-2.34-477.amzn2023.0.7.noarch
perl-Thread-Queue-3.14-458.amzn2023.0.2.noarch
perl-threads-shared-1.61-458.amzn2023.0.2.x86_64
php8.4-cli-8.4.14-1.amzn2023.0.1.x86_64
php8.4-devel-8.4.14-1.amzn2023.0.1.x86_64
php8.4-mbstring-8.4.14-1.amzn2023.0.1.x86_64
php8.4-opcache-8.4.14-1.amzn2023.0.1.x86_64
php8.4-process-8.4.14-1.amzn2023.0.1.x86_64
php8.4-xml-8.4.14-1.amzn2023.0.1.x86_64
annobin-plugin-gcc-12.69-1.amzn2023.0.1.x86_64
automake-1.16.5-9.amzn2023.0.3.noarch
cpp-11.5.0-5.amzn2023.0.5.x86_64
gc-8.0.4-5.amzn2023.0.2.x86_64
gcc-c++-11.5.0-5.amzn2023.0.5.x86_64
glibc-devel-2.34-231.amzn2023.0.1.x86_64
guile22-2.2.7-2.amzn2023.0.3.x86_64
keyutils-libs-devel-1.6.3-1.amzn2023.0.2.x86_64
libcom_err-devel-1.46.5-2.amzn2023.0.2.x86_64
libmpc-1.2.1-2.amzn2023.0.2.x86_64
libsepol-devel-3.4-3.amzn2023.0.3.x86_64
libstdc++-devel-11.5.0-5.amzn2023.0.5.x86_64
libtool-ltdl-2.4.7-1.amzn2023.0.3.x86_64
libxcrypt-devel-4.4.33-7.amzn2023.x86_64
libxslt-1.1.43-1.amzn2023.0.3.x86_64
make-1:4.3-5.amzn2023.0.2.x86_64
openssl-devel-1:3.2.2-1.amzn2023.0.2.x86_64
pcre2-utf16-10.40-1.amzn2023.0.3.x86_64
perl-B-1.80-477.amzn2023.0.7.x86_64
perl-File-Compare-1.100.600-477.amzn2023.0.7.noarch
perl-File-Find-1.37-477.amzn2023.0.7.noarch
perl-threads-1:2.25-458.amzn2023.0.3.x86_64
php8.4-8.4.14-1.amzn2023.0.1.x86_64
php8.4-common-8.4.14-1.amzn2023.0.1.x86_64
php8.4-fpm-8.4.14-1.amzn2023.0.1.x86_64
php8.4-mysqld-8.4.14-1.amzn2023.0.1.x86_64
php8.4-pdo-8.4.14-1.amzn2023.0.1.x86_64
php8.4-sodium-8.4.14-1.amzn2023.0.1.x86_64
xz-devel-5.2.5-9.amzn2023.0.2.x86_64

annobin-docs-12.69-1.amzn2023.0.1.noarch
autoconf-2.69-36.amzn2023.0.3.noarch
cmake-filesystem-3.22.2-1.amzn2023.0.4.x86_64
emacs-filesystem-1:28.2-3.amzn2023.0.10.noarch
gcc-11.5.0-5.amzn2023.0.5.x86_64
gcc-plugin-annobin-11.5.0-5.amzn2023.0.5.x86_64
glibc-headers-x86-2.34-231.amzn2023.0.1.noarch
kernel-headers-1:6.1.158-178.288.amzn2023.x86_64
krb5-devel-1.21.3-6.amzn2023.0.1.x86_64
libkadm5-1.21.3-6.amzn2023.0.1.x86_64
libselinux-devel-3.4-5.amzn2023.0.2.x86_64
libsodium-1.0.19-4.amzn2023.x86_64
libtool-2.4.7-1.amzn2023.0.3.x86_64
libverto-devel-0.3.2-1.amzn2023.0.2.x86_64
libxml2-devel-2.10.4-1.amzn2023.0.13.x86_64
m4-1.4.19-2.amzn2023.0.2.x86_64
nginx-filesystem-1:1.28.0-1.amzn2023.0.2.noarch
pcre2-devel-10.40-1.amzn2023.0.3.x86_64
pcre2-utf32-10.40-1.amzn2023.0.3.x86_64
perl-Data-Dumper-2.174-460.amzn2023.0.2.x86_64
perl-File-Copy-2.34-477.amzn2023.0.7.noarch
perl-Thread-Queue-3.14-458.amzn2023.0.2.noarch
perl-threads-shared-1.61-458.amzn2023.0.2.x86_64
php8.4-cli-8.4.14-1.amzn2023.0.1.x86_64
php8.4-devel-8.4.14-1.amzn2023.0.1.x86_64
php8.4-mbstring-8.4.14-1.amzn2023.0.1.x86_64
php8.4-opcache-8.4.14-1.amzn2023.0.1.x86_64
php8.4-process-8.4.14-1.amzn2023.0.1.x86_64
php8.4-xml-8.4.14-1.amzn2023.0.1.x86_64
zlib-devel-1.2.11-33.amzn2023.0.5.x86_64
annobin-plugin-gcc-12.69-1.amzn2023.0.1.x86_64
automake-1.16.5-9.amzn2023.0.3.noarch
cpp-11.5.0-5.amzn2023.0.5.x86_64
gc-8.0.4-5.amzn2023.0.2.x86_64
gcc-c++-11.5.0-5.amzn2023.0.5.x86_64
glibc-devel-2.34-231.amzn2023.0.1.x86_64
guile22-2.2.7-2.amzn2023.0.3.x86_64
keyutils-libs-devel-1.6.3-1.amzn2023.0.2.x86_64
libcom_err-devel-1.46.5-2.amzn2023.0.2.x86_64
libmpc-1.2.1-2.amzn2023.0.2.x86_64
libsepol-devel-3.4-3.amzn2023.0.3.x86_64
libstdc++-devel-11.5.0-5.amzn2023.0.5.x86_64
libtool-ltdl-2.4.7-1.amzn2023.0.3.x86_64
libxcrypt-devel-4.4.33-7.amzn2023.x86_64
libxslt-1.1.43-1.amzn2023.0.3.x86_64
make-1:4.3-5.amzn2023.0.2.x86_64
openssl-devel-1:3.2.2-1.amzn2023.0.2.x86_64
pcre2-utf16-10.40-1.amzn2023.0.3.x86_64
perl-B-1.80-477.amzn2023.0.7.x86_64
perl-File-Compare-1.100.600-477.amzn2023.0.7.noarch
perl-File-Find-1.37-477.amzn2023.0.7.noarch
perl-threads-1:2.25-458.amzn2023.0.3.x86_64
php8.4-8.4.14-1.amzn2023.0.1.x86_64
php8.4-common-8.4.14-1.amzn2023.0.1.x86_64
php8.4-fpm-8.4.14-1.amzn2023.0.1.x86_64
php8.4-mysqld-8.4.14-1.amzn2023.0.1.x86_64
php8.4-pdo-8.4.14-1.amzn2023.0.1.x86_64
php8.4-sodium-8.4.14-1.amzn2023.0.1.x86_64
xz-devel-5.2.5-9.amzn2023.0.2.x86_64

Complete!
[ec2-user@ip-172-31-16-167 ~]$
```

4. Installation of MariaDB

sudo dnf install -y mariadb105-server

Transaction Summary

```
Total download size: 19 M
Installed size: 116 M
```

(2/19): mariadb-connector-c-3.3.10-1.amzn2023.0.1.x86_64.rpm	4.3 MB/s	211 kB	00:00
(3/19): mariadb105-10.5.29-1.amzn2023.0.1.x86_64.rpm	19 MB/s	1.5 MB	00:00

Total 44 MB/s | 19 MB 00:00

```
Running transaction test
Transaction test succeeded.
Running transaction
```

```
Installing : mariadb105-common-3:10.5.29-1.amzn2023.0.1.x86_64 2/19
Installing : mariadb-connector-c-3.3.10-1.amzn2023.0.1.x86_64 3/19
```

```
Installing      : perl-Math-BigRat-0.2624-500.amzn2023.0.2.noarch 6/19
Installing      : perl-Math-BigInt-1:1.9998.39-2.amzn2023.0.2.noarch 7/19
```

```
Installing      : perl-FileHandle-2.03-477.amzn2023.0.7.noarch 10/19
Installing      : perl-DBI-1.643-7.amzn2023.0.3.x86_64 11/19
```

```

Installing : mysql-selinux-1.0.4-2.amzn2023.0.3.noarch 13/19
Running scriptlet: mysql-selinux-1.0.4-2.amzn2023.0.3.noarch 13/19
libxmanagement: direct install info: Overriding mysql module at lower priority 100 with module at priority 200

```

```
Installing : mariadb105-backup-3:10.5.29-1.amzn2023.0.1.x86_64 15/19
Installing : mariadb105-cracklib-password-check-3:10.5.29-1.amzn2023.0.1.x86_64 16/19
```

```
Installing      : mariadb105-server-3:10.5.29-1.amzn2023.0.1.x86_64 18/19
Running scriptlet: mariadb105-server-3:10.5.29-1.amzn2023.0.1.x86_64 18/19
```

```
Running scriptlet: mariadb105-server-utils-3:10.5.29-1.amzn2023.0.1.x86_64 19/19
Verifying      : mariadb-connector-c-3.3.10-1.amzn2023.0.1.x86_64 1/19
```

```
Verifying : mariadb105-backup-3:10.5.29-1.amzn2023.0.1.x86_64 4/19
Verifying : mariadb105-common-3:10.5.29-1.amzn2023.0.1.x86_64 5/19
Verifying : mariadb105-cscklib-password-check-3:10.5.29-1.amzn2023.0.1.x86_64 6/19
```

```
Verifying : mariadb105-server-3:10.5.29-1.amzn2023.0.1.x86_64 9/19
Verifying : mariadb105-server-utils-3:10.5.29-1.amzn2023.0.1.x86_64 10/19
```

```
Verifying      : perl-DBI-1.643-7.amzn2023.0.3.x86_64 13/19
Verifying      : perl-FileHandle-2.03-477.amzn2023.0.7.noarch 14/19
```

Verifying	: perl-Math-Complex-1.59-477.amzn2023.0.7.noarch	17/19
Verifying	: perl-Sys-Hostname-1.23-477.amzn2023.0.7.x86_64	18/19

```

mariadb-connector-c-3.3.10-1.amzn2023.0.1.x86_64
mariadb105-backup-2:10.5.29-1.amzn2023.0.1.x86_64
mariadb105-common-2:10.5.29-1.amzn2023.0.1.x86_64
mariadb-connector-c-config-3.3.10-1.amzn2023.0.1.noarch
mariadb105-cracklib-password-check-2:10.5.29-1.amzn2023.0.1.x86_64
mariadb105-3:10.5.29-1.amzn2023.0.1.x86_64

```

```
perl-Math-BigInt-2.0.2.noarch perl-FileHandle-2.03-477.amzn2023.0.7.noarch perl-Sys-Hostname-1.23-477.amzn2023.0.7.x86_64
```

```
Complete!
[ec2-user@ip-172-31-16-167 ~]$
```

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

dnf info mariadb105

```
[ec2-user@ip-172-31-16-167 ~]$ dnf info mariadb105
Amazon Linux 2023 repository
Amazon Linux 2023 Kernel Livepatch repository
Installed Packages
Name      : mariadb105
Epoch    : 3
Version   : 10.5.29
Release   : 1.amzn2023.0.1
Architecture : x86_64
Size      : 19 M
Source    : mariadb105-10.5.29-1.amzn2023.0.1.src.rpm
Repository : @System
From repo : amazonlinux
Summary    : A very fast and robust SQL database server
URL        : http://mariadb.org
License    : GPLv2 and LGPLv2
Description: MariaDB is a community developed fork from MySQL - a multi-user, multi-threaded
           : SQL database server. It is a client/server implementation consisting of
           : a server daemon (mariadb) and many different client programs and libraries.
           : The base package contains the standard MariaDB/MySQL client programs and
           : utilities.

62 MB/s | 49 MB | 00:00
270 kB/s | 29 kB | 00:00

[ec2-user@ip-172-31-16-167 ~]$
```

i-0160baaa796c4f354 (CloudFlareTesting)
PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

5. Start and configure Apache

sudo systemctl start httpd && sudo systemctl enable httpd
sudo systemctl is-enabled httpd

```
[ec2-user@ip-172-31-16-167 ~]$ sudo systemctl is-enabled httpd
enabled
[ec2-user@ip-172-31-16-167 ~]$
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

sudo usermod -a -G apache ec2-user

```
[ec2-user@ip-172-31-16-167 ~]$ sudo usermod -a -G apache ec2-user
[ec2-user@ip-172-31-16-167 ~]$
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

Exit

```
[ec2-user@ip-172-31-16-167 ~]$ exit
logout
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

groups

```
[ec2-user@ip-172-31-16-167 ~]$ groups
ec2-user adm wheel apache systemd-journal
[ec2-user@ip-172-31-16-167 ~]$
```

6. Configure Permission

sudo chown -R ec2-user:apache /var/www

sudo chmod 2775 /var/www && find /var/www -type d -exec sudo chmod 2775 {} \;

find /var/www -type f -exec sudo chmod 0664 {} \;

```
[ec2-user@ip-172-31-16-167 ~]$ sudo chown -R ec2-user:apache /var/www
sudo chmod 2775 /var/www && find /var/www -type d -exec sudo chmod 2775 {} \;
find /var/www -type f -exec sudo chmod 0664 {} \;
[ec2-user@ip-172-31-16-167 ~]$ ls -l /var/www/
total 0
drwxrwsr-x. 2 ec2-user apache  6 Oct 14 20:54 cgi-bin
drwxrwsr-x. 7 ec2-user apache 157 Nov 17 08:06 html
[ec2-user@ip-172-31-16-167 ~]$
```

Testing PHP installation

echo "<?php phpinfo(); ?>" > /var/www/html/phpinfo.php



```
[ec2-user@ip-172-31-16-167 ~]$ echo "<?php phpinfo(); ?>" > /var/www/html/phpinfo.php
[ec2-user@ip-172-31-16-167 ~]$ cd /var/www/html/
```

```
[ec2-user@ip-172-31-16-167 html]$ ls
phpinfo.php
[ec2-user@ip-172-31-16-167 html]$ cat phpinfo.php
<?php phpinfo(); ?>
[ec2-user@ip-172-31-16-167 html]$
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

After verifying it works by accessing <http://your-ec2-public-dns/phpinfo.php>, remove the file:

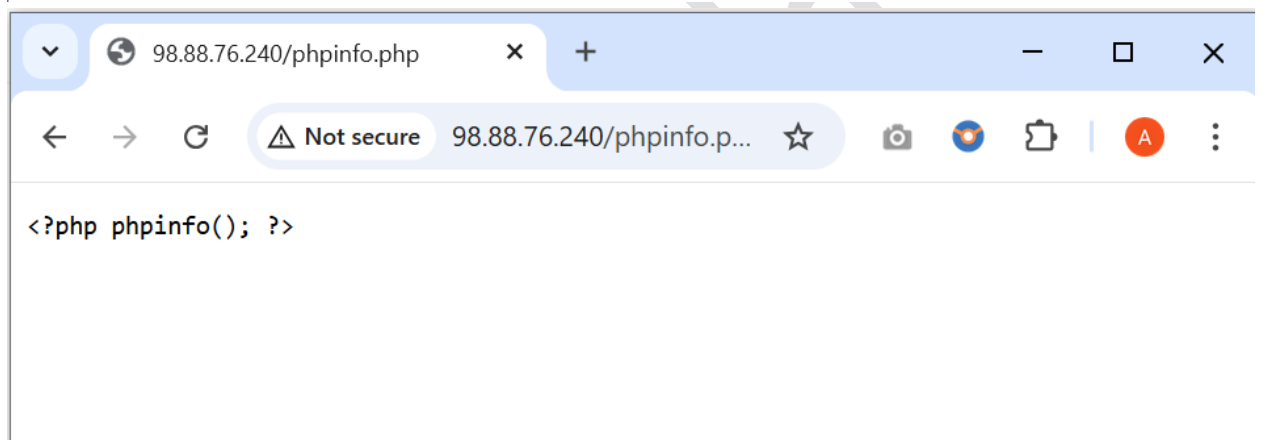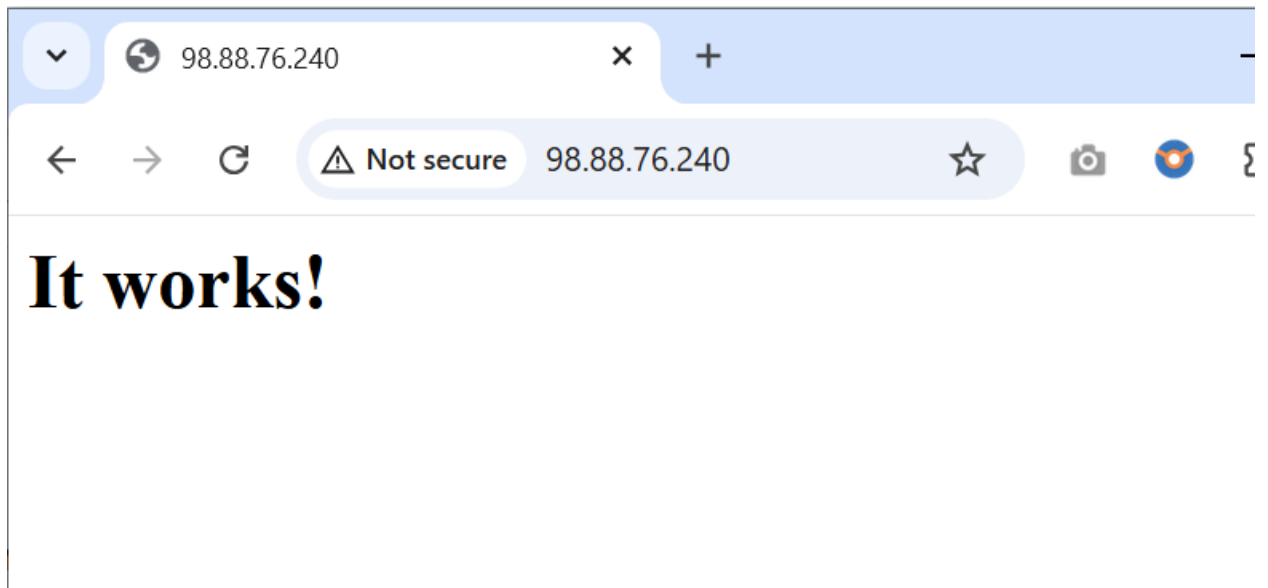


```
rm /var/www/html/phpinfo.php
```

```
[ec2-user@ip-172-31-16-167 html]$ rm /var/www/html/phpinfo.php
[ec2-user@ip-172-31-16-167 html]$ ls
[ec2-user@ip-172-31-16-167 html]$
```


i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

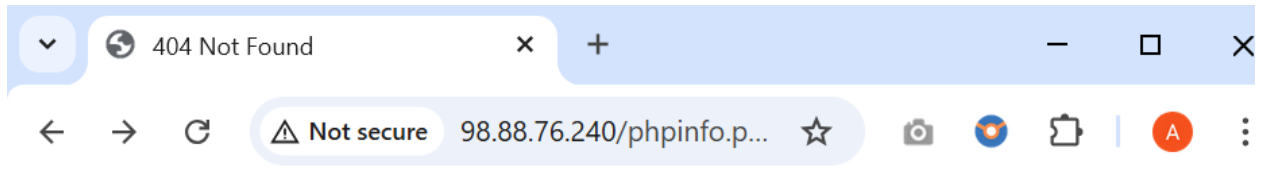

Not Found

The requested URL was not found on this server.

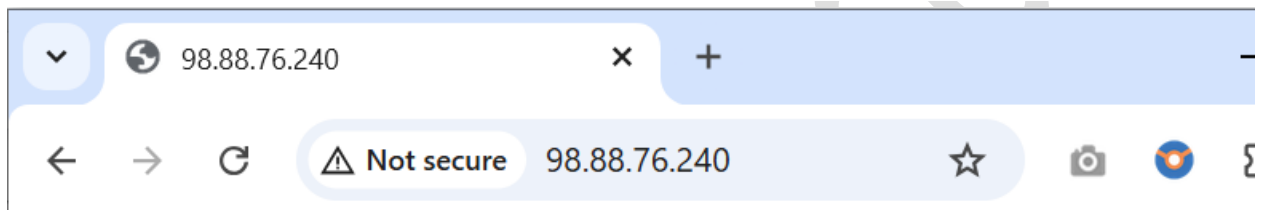

It works!

7. Install and start MariaDB
`sudo systemctl start mariadb`
`sudo mysql_secure_installation`

```

AWS [Search] [Alt+S] United States (N. Virginia) Account ID: 3111-4154-2113 Adrina Colaco

[ec2-user@ip-172-31-16-167 ~]$ sudo systemctl start mariadb
sudo mysql_secure_installation

NOTE: RUNNING ALL PARTS OF THIS SCRIPT IS RECOMMENDED FOR ALL MariaDB
SERVERS IN PRODUCTION USE! PLEASE READ EACH STEP CAREFULLY!

In order to log into MariaDB to secure it, we'll need the current
password for the root user. If you've just installed MariaDB, and
haven't set the root password yet, you should just press enter here.

Enter current password for root (enter for none):
OK, successfully used password, moving on...

Setting the root password or using the unix_socket ensures that nobody
can log into the MariaDB root user without the proper authorisation.

You already have your root account protected, so you can safely answer 'n'.

Switch to unix_socket authentication [Y/n] Y
Enabled successfully!
Reloading privilege tables..
... Success!

You already have your root account protected, so you can safely answer 'n'.

Change the root password? [Y/n] n
... skipping.

By default, a MariaDB installation has an anonymous user, allowing anyone
to log into MariaDB without having to have a user account created for
them. This is intended only for testing, and to make the installation
go a bit smoother. You should remove them before moving into a
production environment.

Remove anonymous users? [Y/n] Y
... Success!

Normally, root should only be allowed to connect from 'localhost'. This
ensures that someone cannot guess at the root password from the network.

Disallow root login remotely? [Y/n] Y
... Success!

By default, MariaDB comes with a database named 'test' that anyone can
access. This is also intended only for testing, and should be removed
before moving into a production environment.

Remove test database and access to it? [Y/n] n
... skipping.

Reloading the privilege tables will ensure that all changes made so far
will take effect immediately.

Reload privilege tables now? [Y/n] Y
... Success!

Cleaning up...

All done! If you've completed all of the above steps, your MariaDB
installation should now be secure.

Thanks for using MariaDB!
[ec2-user@ip-172-31-16-167 ~]$

i-0160baaa796c4f354 (CloudFlareTesting)
PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

CloudShell Feedback Console Mobile App © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences
```

8. Install WordPress

wget https://wordpress.org/latest.tar.gz

tar -xzf latest.tar.gz

```

[ec2-user@ip-172-31-16-167 ~]$ wget https://wordpress.org/latest.tar.gz
tar -xzf latest.tar.gz
--2025-11-18 09:06:01-- https://wordpress.org/latest.tar.gz
Resolving wordpress.org (wordpress.org)... 198.143.164.252, 2607:f978:5:8002::c68f:a4fc
Connecting to wordpress.org (wordpress.org)|198.143.164.252|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 26928488 (26M) [application/octet-stream]
Saving to: 'latest.tar.gz'

latest.tar.gz      100%[=====>] 25.68M 32.1MB/s in 0.8s

2025-11-18 09:06:02 (32.1 MB/s) - 'latest.tar.gz' saved [26928488/26928488]

[ec2-user@ip-172-31-16-167 ~]$

i-0160baaa796c4f354 (CloudFlareTesting)
PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167
```

Start both Apache and MariaDB if not already running:

sudo systemctl start mariadb httpd

```

AWS [Alt+S] United States (N. Virginia) Account ID: 3111-4154-2113 Adrina Colaco
[ec2-user@ip-172-31-16-167 ~]$ sudo systemctl start mariadb httpd
[ec2-user@ip-172-31-16-167 ~]$ sudo systemctl status mariadb
● mariadb.service - MariaDB 10.5 database server
   Loaded: loaded (/usr/lib/systemd/system/mariadb.service; disabled; preset: disabled)
   Active: active (running) since Tue 2025-11-18 09:03:35 UTC; 3min 23s ago
     Docs: man:mariadb(8)
           https://mariadb.com/kb/en/library/systemd/
   Process: 108983 ExecStartPre=/usr/libexec/mariadb-check-socket (code=exited, status=0/SUCCESS)
   Process: 109005 ExecStartPre=/usr/libexec/mariadb-prepare-db-dir mariadb.service (code=exited, status=0/SUCCESS)
   Process: 109099 ExecStartPost=/usr/libexec/mariadb-check-upgrade (code=exited, status=0/SUCCESS)
   Main PID: 109087 (mariadbd)
   Status: "Taking your SQL requests now..."
     Tasks: 9 (limit: 1106)
    Memory: 66.7M
       CPU: 465ms
   CGroup: /system.slice/mariadb.service
           └─109087 /usr/libexec/mariadbd --basedir=/usr

Nov 18 09:03:35 ip-172-31-16-167.ec2.internal mariadb-prepare-db-dir[109044]: The second is mysql@localhost, it has no password either, but
Nov 18 09:03:35 ip-172-31-16-167.ec2.internal mariadb-prepare-db-dir[109044]: you need to be the system 'mysql' user to connect.
Nov 18 09:03:35 ip-172-31-16-167.ec2.internal mariadb-prepare-db-dir[109044]: After connecting you can set the password, if you would need to be
Nov 18 09:03:35 ip-172-31-16-167.ec2.internal mariadb-prepare-db-dir[109044]: able to connect as any of these users with a password and without sudo
Nov 18 09:03:35 ip-172-31-16-167.ec2.internal mariadb-prepare-db-dir[109044]: See the MariaDB Knowledgebase at https://mariadb.com/kb
Nov 18 09:03:35 ip-172-31-16-167.ec2.internal mariadb-prepare-db-dir[109044]: Please report any problems at https://mariadb.org/jira
Nov 18 09:03:35 ip-172-31-16-167.ec2.internal mariadb-prepare-db-dir[109044]: The latest information about MariaDB is available at https://mariadb.org/.
Nov 18 09:03:35 ip-172-31-16-167.ec2.internal mariadb-prepare-db-dir[109044]: Consider joining MariaDB's strong and vibrant community:
Nov 18 09:03:35 ip-172-31-16-167.ec2.internal mariadb-prepare-db-dir[109044]: https://mariadb.org/get-involved/
Nov 18 09:03:35 ip-172-31-16-167.ec2.internal systemd[1]: Started mariadb.service - MariaDB 10.5 database server.
[ec2-user@ip-172-31-16-167 ~]$ sudo systemctl status httpd
● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; enabled; preset: disabled)
   Drop-In: /usr/lib/systemd/system/httpd.service.d
           └─php-fpm.conf
   Active: active (running) since Mon 2025-11-17 05:32:25 UTC; 1 day 3h ago
     Docs: man:httd.service(8)
   Main PID: 3563 (httpd)
   Status: "Total requests: 949; Idle/Busy workers 100/0;Requests/sec: 0.00956; Bytes served/sec: 169 B/sec"
     Tasks: 230 (limit: 1106)
    Memory: 21.3M
       CPU: 1min 5.155s
   CGroup: /system.slice/httpd.service
           └─3563 /usr/sbin/httpd -DFOREGROUND
             └─3674 /usr/sbin/httpd -DFOREGROUND
               └─3683 /usr/sbin/httpd -DFOREGROUND
                 └─3684 /usr/sbin/httpd -DFOREGROUND
                   └─3685 /usr/sbin/httpd -DFOREGROUND
                     └─35347 /usr/sbin/httpd -DFOREGROUND

Nov 17 05:32:25 ip-172-31-16-167.ec2.internal systemd[1]: Starting httpd.service - The Apache HTTP Server...
Nov 17 05:32:25 ip-172-31-16-167.ec2.internal systemd[1]: Started httpd.service - The Apache HTTP Server.
Nov 17 05:32:25 ip-172-31-16-167.ec2.internal httpd[3563]: Server configured, listening on: port 80
[ec2-user@ip-172-31-16-167 ~]$

i-0160baaa796c4f354 (CloudFlareTesting)
PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

CloudShell Feedback Console Mobile App © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences
```

9. Create a Database for WordPress

mysql -u root -p

```
[ec2-user@ip-172-31-16-167 ~]$ mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 16
Server version: 10.5.29-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]>
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

CREATE USER 'wordpress-user'@'localhost' IDENTIFIED BY 'your_strong_password';


```
MariaDB [(none)]> CREATE USER 'wordpress-user'@'localhost' IDENTIFIED BY 'your_strong_password';
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]>
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

CREATE DATABASE `wordpress-db`;

```
MariaDB [(none)]> CREATE DATABASE `wordpress-db`;
Query OK, 1 row affected (0.000 sec)

MariaDB [(none)]> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| wordpress-db |
+-----+
4 rows in set (0.000 sec)

MariaDB [(none)]>
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

GRANT ALL PRIVILEGES ON `wordpress-db`.* TO "wordpress-user"@"localhost";

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON `wordpress-db`.* TO "wordpress-user"@"localhost";
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]>
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

FLUSH PRIVILEGES;

```
MariaDB [(none)]> FLUSH PRIVILEGES;  
Query OK, 0 rows affected (0.000 sec)  
  
MariaDB [(none)]> 
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

Exit mysql client

EXIT

```
MariaDB [(none)]> exit  
Bye  
[ec2-user@ip-172-31-16-167 ~]$ 
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

10. Configure WordPress

cp wordpress/wp-config-sample.php wordpress/wp-config.php

nano wordpress/wp-config.php

```
[ec2-user@ip-172-31-16-167 ~]$ cp wordpress/wp-config-sample.php wordpress/wp-config.php  
nano wordpress/wp-config.php  
[ec2-user@ip-172-31-16-167 ~]$ 
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

```
define('DB_NAME', 'wordpress-db');  
define('DB_USER', 'wordpress-user');  
define('DB_PASSWORD', 'your_strong_password');
```

```
GNU nano 8.3                               wordpress/wp-config.php
/**
 * The base configuration for WordPress
 *
 * The wp-config.php creation script uses this file during the installation.
 * You don't have to use the website, you can copy this file to "wp-config.php"
 * and fill in the values.
 *
 * This file contains the following configurations:
 *
 * * Database settings
 * * Secret keys
 * * Database table prefix
 * * ABSPATH
 *
 * @link https://developer.wordpress.org/advanced-administration/wordpress/wp-config/
 *
 * @package WordPress
 */

// ** Database settings - You can get this info from your web host ** //
/** The name of the database for WordPress */
define( 'DB_NAME', 'wordpress-db' );

/** Database username */
define( 'DB_USER', 'wordpress-user' );

/** Database password */
define( 'DB_PASSWORD', 'your_strong_password' );

^G Help      ^C Write Out  ^F Where Is   ^K Cut        ^T Execute    ^C Location   M-U Undo
^X Exit      ^R Read File  ^N Replace    ^U Paste      ^U Justify    ^/ Go To Line  M-E Redo
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

11. Deploy WordPress

`cp -r wordpress/* /var/www/html/`

```
[ec2-user@ip-172-31-16-167 ~]$ cp -r wordpress/* /var/www/html/
[ec2-user@ip-172-31-16-167 ~]$
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

12. Configure Apache

Before finalizing the installation, you may need to adjust the Apache configuration:

`sudo nano /etc/httpd/conf/httpd.conf`

```
[ec2-user@ip-172-31-16-167 ~]$ sudo nano /etc/httpd/conf/httpd.conf
[ec2-user@ip-172-31-16-167 ~]$
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

Find the section that starts with `<Directory "/var/www/html">`.

Change the AllowOverride None line in the above section to read AllowOverride All.

```
GNU nano 8.3 /etc/httpd/conf/httpd.conf
# Allow open access:
# Require all granted
</Directory>

# Further relax access to the default document root:
<Directory "/var/www/html">
#
# Possible values for the Options directive are "None", "All",
# or any combination of:
#   Indexes Includes FollowSymLinks SymLinksifOwnerMatch ExecCGI MultiViews
#
# Note that "MultiViews" must be named *explicitly* --- "Options All"
# doesn't give it to you.
#
# The Options directive is both complicated and important. Please see
# http://httpd.apache.org/docs/2.4/mod/core.html#options
# for more information.
Options Indexes FollowSymLinks


#
# AllowOverride controls what directives may be placed in .htaccess files.
# It can be "All", "None", or any combination of the keywords:
#   AllowOverride FileInfo AuthConfig Limit
#
AllowOverride All
#
#
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

13. Finalize installation

sudo systemctl restart httpd

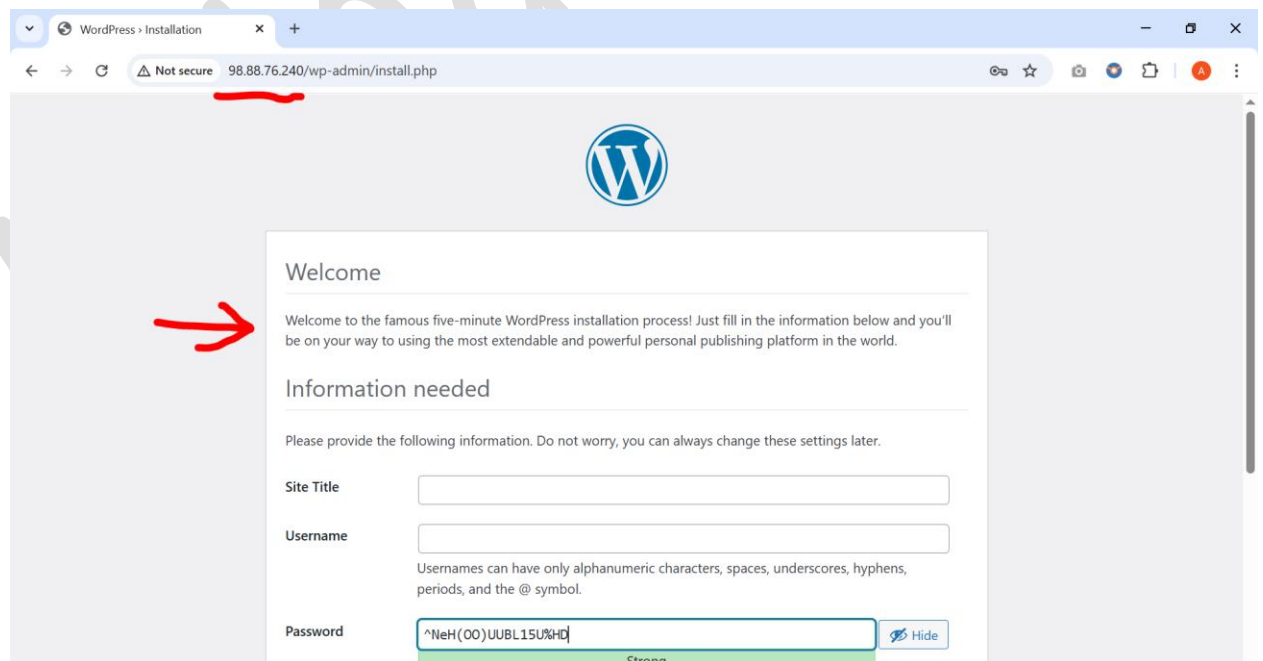



Welcome

Welcome to the famous five-minute WordPress installation process! Just fill in the information below and you'll be on your way to using the most extendable and powerful personal publishing platform in the world.

Information needed

Please provide the following information. Do not worry, you can always change these settings later.

Site Title	Ancestral Recipes
Username	adcola13 Usernames can have only alphanumeric characters, spaces, underscores, hyphens, periods, and the @ symbol.
Password	 Medium Important: You will need this password to log in. Please store it in a secure location. Show
Your Email	adcola13@gmail.com Double-check your email address before continuing.
Search engine visibility	☐ Discourage search engines from indexing this site It is up to search engines to honor this request.
Install WordPress	



Web server is down

Error code 521

Visit cloudflare.com for more information.
2025-11-18 12:52:15 UTC



You
Browser
Working



Marseille
Cloudflare
Working



ancestralrecipe.com
Host
Error


What happened?

The web server is not returning a connection. As a result, the web page is not displaying.

What can I do?

If you are a visitor of this website:
Please try again in a few minutes.

If you are the owner of this website:
Contact your hosting provider letting them know your web server is not responding. [Additional troubleshooting information.](#)

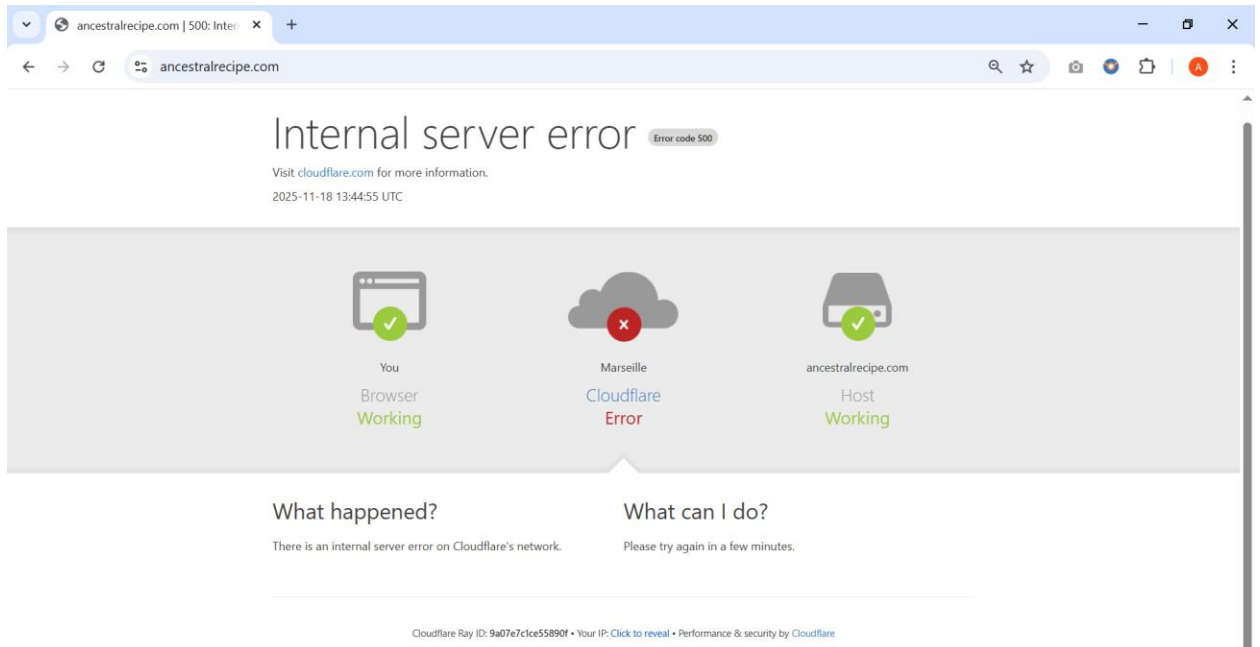


14. Point your domain to EC2
Continue to next section

SSL certificate generation for EC2 (Blog subdomain)

SSL — recommended: Cloudflare Origin Certificate + Full (strict)

1. In Cloudflare dashboard → SSL/TLS → Origin Server → Create Certificate.

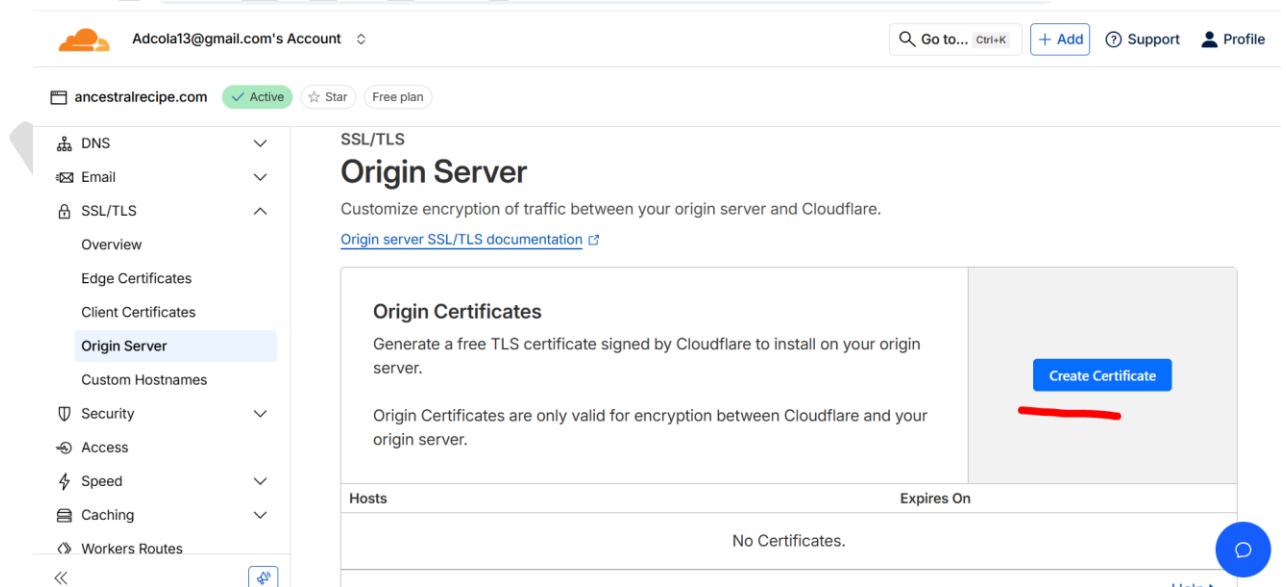

SSL/TLS

Origin Server

Customize encryption of traffic between your origin server and Cloudflare.

[Origin server SSL/TLS documentation](#)

[← Back](#)

Origin Certificate Installation

Follow the steps below to install a certificate on your origin server.

The first step in generating a certificate for your origin is creating a private key and a Certificate Signing Request (CSR). You can provide your own CSR or we can generate a key and CSR using your web browser.

☒ Generate private key and CSR with Cloudflare

Private key type

RSA (2048)

☐ Use my private key and CSR

List the hostnames (including wildcards) on your origin that the certificate should protect. By default your origin certificate covers the apex of your domain (**example.com**) and a wildcard (***.example.com**). If there are others you wish to add, e.g., those not covered by the wildcard such as **one.two.example.com**, you can add them below.

Hostnames

*ancestralrecipe.com

ancestralrecipe.com

Choose how long before your certificate expires. By default your certificate will be valid for fifteen (15) years. If you'd like to decrease how long your certificate will be valid make a selection below.

Certificate Validity

15 years

Cancel

Create

[Support](#) | [Contact Status](#) | [Contact](#) | [Terms of Use](#) | [Report Account Issues](#) | [Privacy Policy](#) | [Cookie Preferences](#) | © 2025 Cloudflare, Inc.

- Choose certificate type (RSA or ECDSA), validity (e.g., 15 years), hostnames: example.com and *.example.com (if you want wildcard).
- Cloudflare gives you a certificate (PEM) and a private key. Save both.

SSL/TLS

Origin Server

Customize encryption of traffic between your origin server and Cloudflare.

[Origin server SSL/TLS documentation](#)

Origin Certificate Installation

Save the certificate and private key below to your client. To save, **Click to copy** and paste the contents into different files on your client, e.g. example.com.pem and example.com.key

Key Format ⓘ

PEM

Origin Certificate ⓘ

```
-----BEGIN CERTIFICATE-----
MIIEsjCCA5ggAwIBAgIUncEF/5oKmnSe/uEmKPjEiAa6YbcwDQYJKoZIhvcNAQEL
BQAwYsxcZAJBgNVBAYTA1VTMRkwFwYDVQQRExBDbG91ZEEsYXJ1LCBjb20uMTQw
MgYDVQQLEytDbG91ZEEsYXJ1IE9yaWdpbiBTU0wgQ2VydGlnaWNhdGUGQXV0aG9y
aXR5MRlWFAyDVQHEw1TYW4gRnJhbmNpc2NVMRMwEQYDVQIEwpcDYWxpZm9ybmlh
MB4XDTI1MTY5MTA5MzZmMmF0XDTQwMTE5NzA5MzZmMmF0WjYjZ2MBCGAlUEChMQQ2xv
-----END CERTIFICATE-----
```

Click to copy

Private Key ⓘ

Copy the contents of your private key below to your web server and set file permissions such that only your http server can access it. Additionally, you can optionally encrypt this file and provide a password to decrypt it during your origin web server startup. The private key data will not be stored at Cloudflare and will no longer be accessible once the creation is complete. Please make sure you have a local copy of this key.

```
-----BEGIN PRIVATE KEY-----
MIIEvgIBADANBgkqhkiG9w0BAQEFAASCBAKgggSkAgEAAoIBAQC5eENXKUAbf8d
cuYPIaNgHtgqxYdyBpvdvNO0QZLbkk+GS7waVTNKJsXcaokAFqPd7O+bkw0PXA
/MB4gBxkFEVKhjAYuFDJEoFOEGZP658CSJNFqpylkS4/ag6n8XKEW7avab9fxq1
MC5et4A2GWRZvmBvKv+7aOi5WuEauOLFIX6kMC9gpVHVUfryvdL/ohHeGvOYvGXd
ka5TPvGeL2DnFK16JRbejv/GDXyZcIH1K8o3egnU6yJrc32SbXS5hFkn03z+pDR2
-----END PRIVATE KEY-----
```

Click to copy

Web Server for Installation

For installation instructions specific to your type of origin web server, visit our support guide on [managing Origin CA certificates](#).

OK

2. On your EC2 instance, save them:

```
sudo mkdir -p /etc/ssl/cloudflare
```

```
sudo nano /etc/ssl/cloudflare/origin.crt # paste cert
```

```
sudo nano /etc/ssl/cloudflare/origin.key # paste key
```

```
sudo chmod 600 /etc/ssl/cloudflare/origin.key
```

```
[ec2-user@ip-172-31-16-167 ~]$ sudo mkdir -p /etc/ssl/cloudflare
[ec2-user@ip-172-31-16-167 ~]$ sudo nano /etc/ssl/cloudflare/origin.crt
[ec2-user@ip-172-31-16-167 ~]$ sudo nano /etc/ssl/cloudflare/origin.key
[ec2-user@ip-172-31-16-167 ~]$ sudo chmod 600 /etc/ssl/cloudflare/origin.key
[ec2-user@ip-172-31-16-167 ~]$
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

3. Configure Apache to use the certificate (create SSL vhost):

```
sudo yum install -y mod_ssl
```

```
aws [Search] [Alt+S] United States (N. Virginia) Account ID: 3111-4154-2113 Adrina Colaco
```

```
[ec2-user@ip-172-31-16-167 ~]$ sudo yum install -y mod_ssl
Last metadata expiration check: 1 day, 14:04:48 ago on Wed Nov 19 19:48:10 2025.
Dependencies resolved.

```

Package	Architecture	Version	Repository	Size
Installing: mod_ssl	x86_64	1:2.4.65-1.amzn2023.0.2	amazonlinux	111 k
Installing dependencies: sscg	x86_64	3.0.3-76.amzn2023	amazonlinux	45 k

```
Transaction Summary
Install 2 Packages

Total download size: 156 k
Installed sizes: 379 k
Downloading Packages:
(1/2): sscg-3.0.3-76.amzn2023.x86_64.rpm 1.0 MB/s | 45 kB 00:00
(2/2): mod_ssl-1:2.4.65-1.amzn2023.0.2.x86_64.rpm 1.7 MB/s | 111 kB 00:00
Total 1.7 MB/s | 156 kB 00:00
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing      : sscg-3.0.3-76.amzn2023.x86_64 1/1
  Installing     : mod_ssl-1:2.4.65-1.amzn2023.0.2.x86_64 1/2
  Installing     : mod_ssl-1:2.4.65-1.amzn2023.0.2.x86_64 2/2
  Running scriptlet: mod_ssl-1:2.4.65-1.amzn2023.0.2.x86_64 2/2
  Verifying      : mod_ssl-1:2.4.65-1.amzn2023.0.2.x86_64 1/2
  Verifying      : sscg-3.0.3-76.amzn2023.x86_64 2/2

WARNING:
A newer release of "Amazon Linux" is available.

Available Versions:
Version 2023.9.20251117:
Run the following command to upgrade to 2023.9.20251117:

dnf upgrade --releasever=2023.9.20251117

Release notes:
https://docs.aws.amazon.com/linux/al2023/release-notes/relnotes-2023.9.20251117.html

Installed:
  mod_ssl-1:2.4.65-1.amzn2023.0.2.x86_64 sscg-3.0.3-76.amzn2023.x86_64

Complete!
[ec2-user@ip-172-31-16-167 ~]$
```

i-0160baaa796c4f354 (CloudFlareTesting)
PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

CloudShell Feedback Console Mobile App © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

```
sudo tee /etc/httpd/conf.d/yourdomain-ssl.conf > /dev/null <<'EOF'
```

```
<VirtualHost *:443>
```

```
    ServerName example.com
```

```
    ServerAlias www.example.com
```

```
    DocumentRoot /var/www/html
```

```
    SSLEngine on
```

```
    SSLCertificateFile /etc/ssl/cloudflare/origin.crt
```

```
    SSLCertificateKeyFile /etc/ssl/cloudflare/origin.key
```

```
<Directory /var/www/html>
```

```
    AllowOverride All
```

```
    Require all granted
```

```
</Directory>
```

```
ErrorLog /var/log/httpd/yourdomain-ssl-error.log
```

```
CustomLog /var/log/httpd/yourdomain-ssl-access.log combined
```

```
</VirtualHost>
```

```
EOF
```

```
[ec2-user@ip-172-31-16-167 ~]$ sudo tee /etc/httpd/conf.d/ancestralrecipe-ssl.conf > /dev/null <<'EOF'
<VirtualHost *:443>
    ServerName ancestralrecipe.com
    ServerAlias www.ancestralrecipe.com
    DocumentRoot /var/www/html

    SSLEngine on
    SSLCertificateFile /etc/ssl/cloudflare/origin.crt
    SSLCertificateKeyFile /etc/ssl/cloudflare/origin.key

    <Directory /var/www/html>
        AllowOverride All
        Require all granted
    </Directory>
    ErrorLog /var/log/httpd/ancestralrecipe-ssl-error.log
    CustomLog /var/log/httpd/ancestralrecipe-ssl-access.log combined
</VirtualHost>
EOF
[ec2-user@ip-172-31-16-167 ~]$
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

sudo systemctl restart httpd

```
[ec2-user@ip-172-31-16-167 ~]$ sudo systemctl restart httpd
[ec2-user@ip-172-31-16-167 ~]$
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

-
4. In Cloudflare dashboard → SSL/TLS → set SSL mode to **Full (strict)**. This requires a valid origin cert (Cloudflare origin cert works).

ancestralrecipe.com Active Star Free plan

Recents New

- Overview
ancestralrecipe.com > SSL/TLS
- Origin Server
ancestralrecipe.com > SSL/TLS
- Records
ancestralrecipe.com > DNS
- Client Certificates
ancestralrecipe.com > SSL/TLS
- Overview
ancestralrecipe.com > Caching
- AI Crawl Control
- Log Explorer
- Analytics & logs
- DNS
- Email
- SSL/TLS
- Overview
- Edge Certificates
- Client Certificates
- Origin Server
- Custom Hostnames
- Security
- Access
- Speed
- Caching
- Workers Routes
- Rules
- Error Pages New
- Network
- Traffic
- Scrape Shield
- Web3

Configure encryption mode

Select the SSL/TLS encryption mode that works best for your needs.
[Encryption modes documentation](#)

Select encryption mode

Automatic SSL/TLS (default)
Cloudflare checks if your traffic needs a more secure encryption mode and updates your setting automatically.
[Select](#)

Custom SSL/TLS
Select the encryption mode that Cloudflare uses to connect to your origin server
[Selected](#)

Full (Strict)
☒ Enable encryption end-to-end and enforce validation on origin certificates. Use Cloudflare's Origin CA to generate certificates for your origin.

Full
☐ Enable encryption end-to-end. Use this mode when your origin server supports SSL certification but does not use a valid, publicly trusted certificate.

Flexible
☐ Enable encryption only between your visitors and Cloudflare. This will avoid browser security warnings, but all connections between Cloudflare and your origin are made through HTTP.

Off (not secure)
☐ No encryption applied. Turning off SSL disables HTTPS and causes browsers to show a warning that your website is not secure.

[Cancel](#) [Save](#)

The diagram illustrates the traffic flow and encryption process. It shows a 'Browser' icon on the left, followed by an arrow pointing to a 'Cloudflare' icon (a cloud with a shield). From the Cloudflare icon, another arrow points to an 'Origin Server' icon (a server rack). The arrows indicate the path of data transmission, and the Cloudflare icon represents the point where encryption is managed.

5. Cloudflare settings you should set

- **SSL/TLS: Full (strict).**

The screenshot shows the Cloudflare dashboard for the domain 'ancestralrecipe.com'. The left sidebar lists various settings, with 'SSL/TLS' selected. The main panel is titled 'Configure encryption mode' and shows the 'Full (strict)' option selected under the 'Custom SSL/TLS' section. A red arrow points to the 'Full (strict)' radio button. To the right, a diagram illustrates the traffic flow: Browser → Cloudflare → Origin Server.

- **Always Use HTTPS: ON (redirect HTTP to HTTPS).**

The screenshot shows the 'Always Use HTTPS' setting in the Cloudflare dashboard. The toggle switch is turned ON, and the text indicates that all requests with the 'http' scheme will be redirected to 'https'. A red arrow points to the toggle switch.

- **Automatic HTTPS Rewrites: ON.**

The screenshot shows the 'Automatic HTTPS Rewrites' setting in the Cloudflare dashboard. The toggle switch is turned ON, and the text indicates that this helps fix mixed content by changing 'http' to 'https' for all resources or links on the website. A red arrow points to the toggle switch.


- **Caching:** Default caching is OK. You can cache static assets aggressively and set page rules for wp-admin/* and login paths to bypass cache.
- **Page Rules:** e.g.
 - example.com/wp-admin* → Cache Level: Bypass
 - example.com/wp-login.php → Cache Level: Bypass
- **Security:** enable Web Application Firewall (WAF) if on paid plan.

- **Rate limiting, Bot Fight Mode** as needed.


Important: If you ever need to troubleshoot origin (bypass Cloudflare), set DNS record to **DNS-only** (gray cloud).

6. TESTING

blog.ancestralrecipe.com using HTTPS and pointing to the wordpress blog on EC2

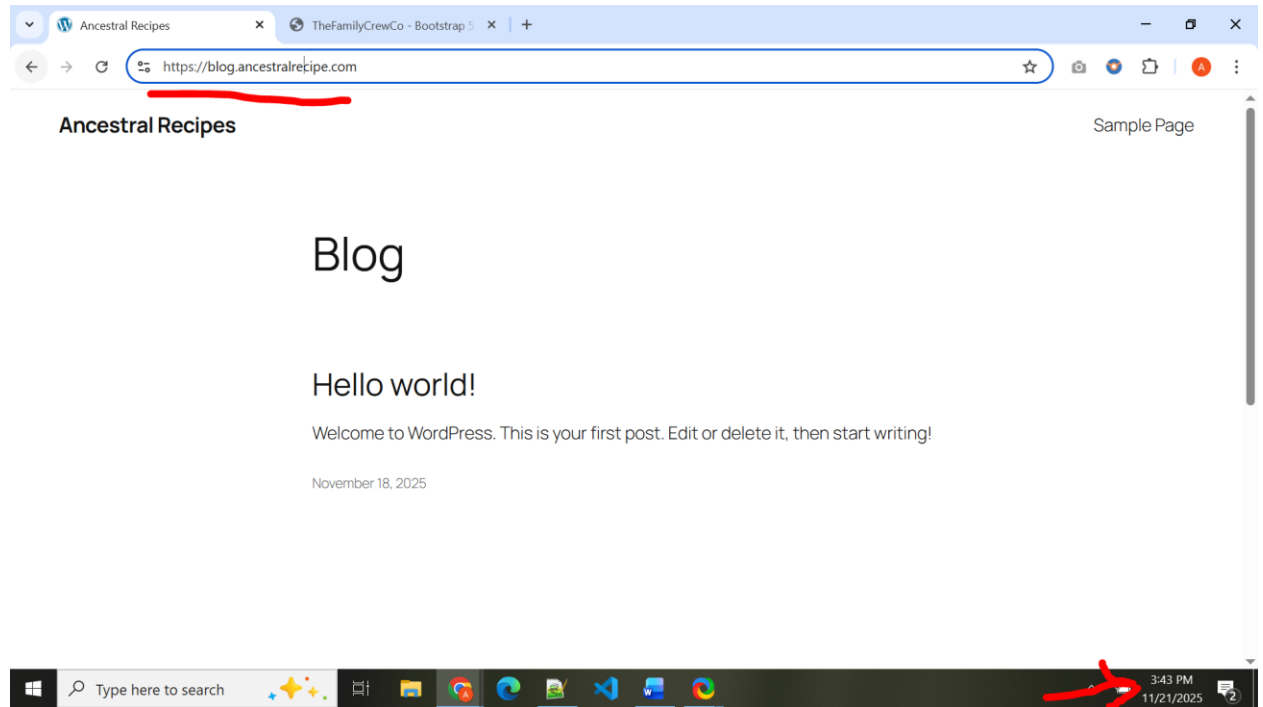

ancestralrecipe.com using HTTPS and pointing to CloudFront endpoint

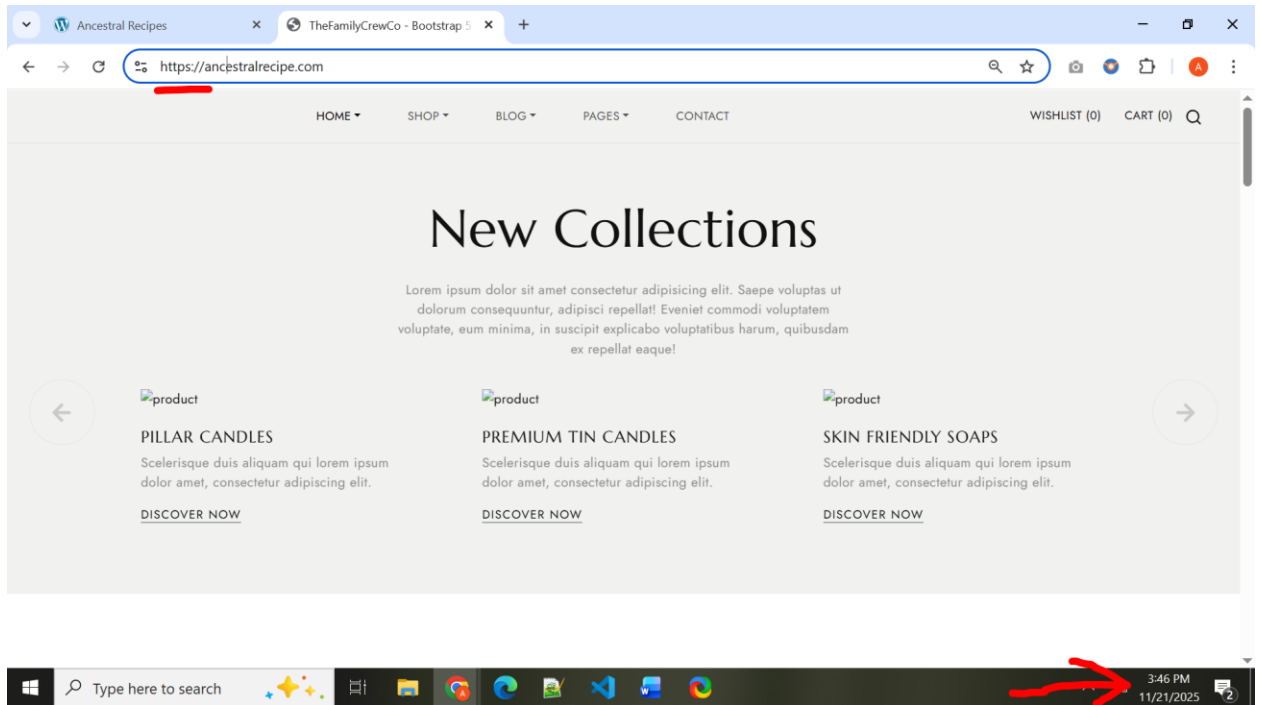

Creation of S3 Bucket for root
domain(ancestralrecipe.com)

Adriana Colaco

1. Create the bucket: NAME should be same as the website name for eg. Ancestralrecipe.com in this case.

Adrina Colaco

Search

[Alt+S]

United States (N. Virginia)

Account ID: 3111-4154-2113

Adriana Colaco

Amazon S3

Buckets

Create bucket

Create bucket

Info

Buckets are containers for data stored in S3.

General configuration

AWS Region

US East (N. Virginia) us-east-1

Bucket type

Info

☒ General purpose

Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ Directory

Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name

Info

ancestralrecipe.com

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

Choose bucket

Format: s3://bucket/prefix

☒ ancestralrecipeadriana

Creation date: November 20, 2025, 09:16:49 (UTC+05:30)

To remove the copied bucket settings, and restore the following configuration to the defaults settings, choose Restore defaults.

Restore defaults

Object Ownership

Info

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☒ ACLs disabled (recommended)

All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☐ ACLs enabled

Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership

Bucket owner enforced

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Turning off block all public access might result in this bucket and the objects within becoming public

AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☐ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☒ Disable

☐ Enable

Tags - optional (0)

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

No tags associated with this bucket.

Add new tag

You can add up to 50 tags.

Default encryption

Info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type

Info

Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the [Amazon S3 pricing page](#).

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)

☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)

☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable

☒ Enable

Advanced settings

Object Lock

Store objects using a write-once-read-many (WORM) model to help you prevent objects from being deleted or overwritten for a fixed amount of time or indefinitely. Object Lock works only in versioned buckets. [Learn more](#)

☒ Disable

☐ Enable

Permanently allows objects in this bucket to be locked. Additional Object Lock configuration is required in bucket details after bucket creation to protect objects in this bucket from being deleted or overwritten.

Object Lock works only in versioned buckets. Enabling Object Lock automatically enables Versioning.

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket


CloudShell

Feedback

Console Mobile App

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

2. Disable “Block Public Access”

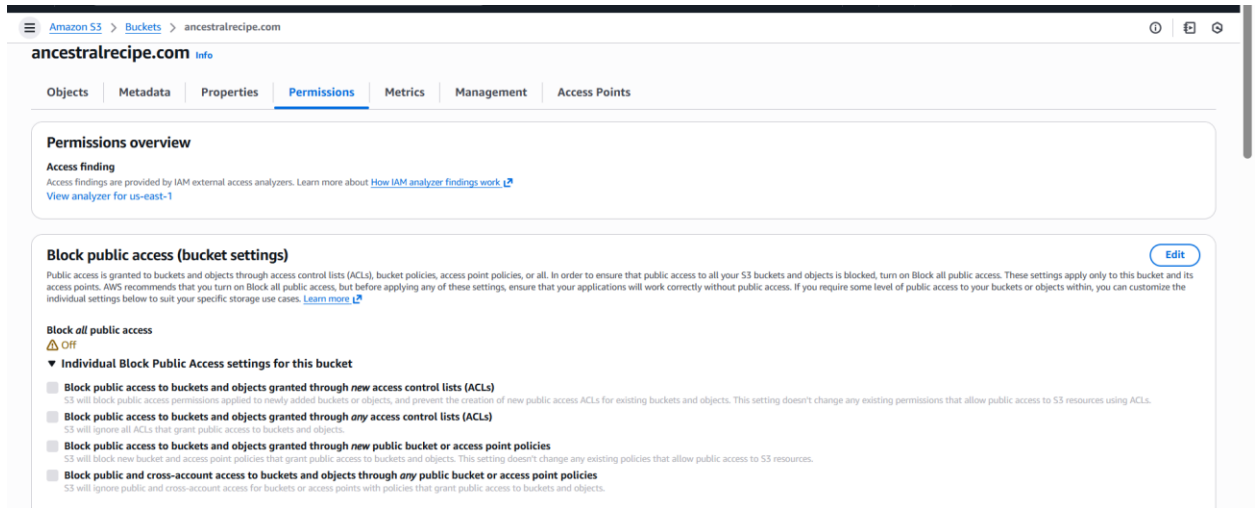

Permissions overview

Access finding
Access findings are provided by IAM external access analyzers. Learn more about [How IAM analyzer findings work](#).
[View analyzer for us-east-1](#)

Block public access (bucket settings) [Edit](#)


Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

Block all public access
Off

▼ **Individual Block Public Access settings for this bucket**

- ☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
- ☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.
- ☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
- ☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

3. Add website files and folders to the bucket

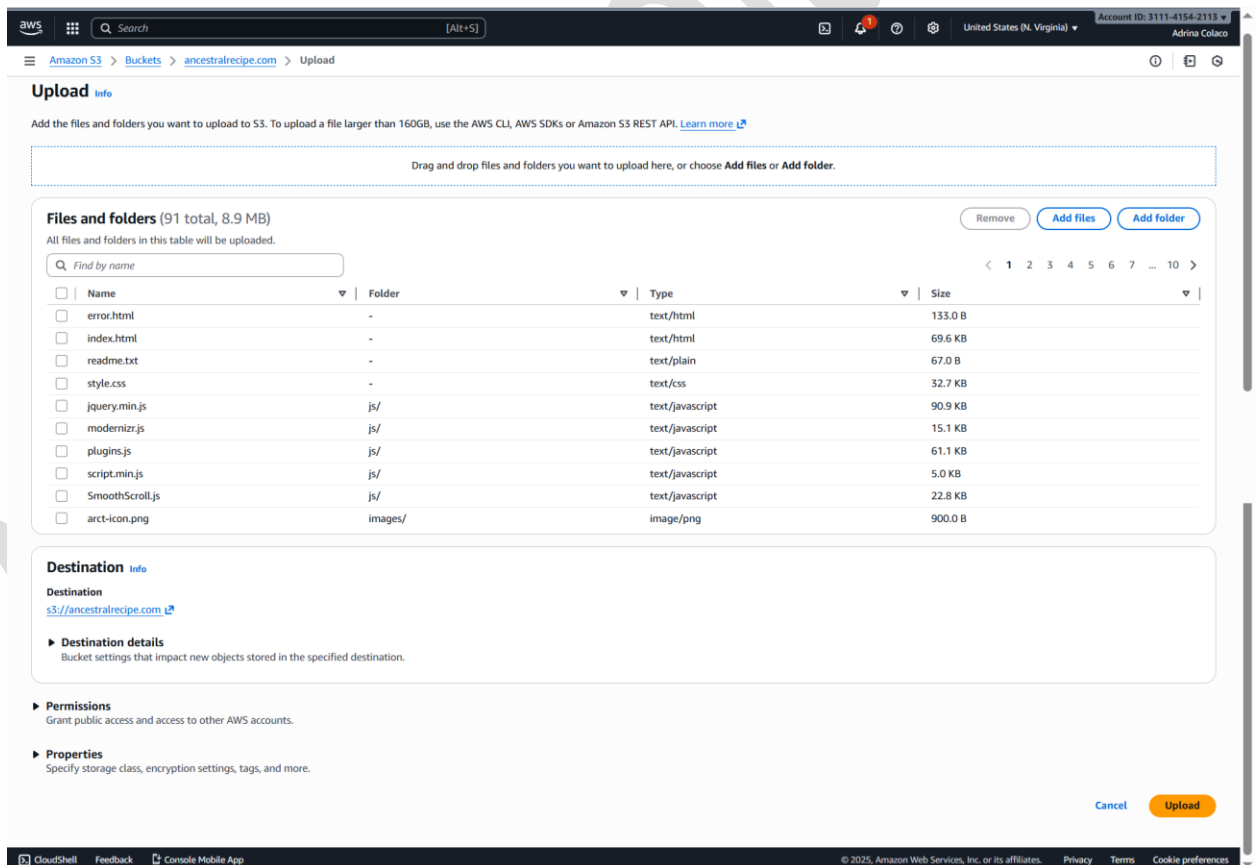

Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose [Add files](#) or [Add folder](#).

Files and folders (91 total, 8.9 MB) [Remove](#) [Add files](#) [Add folder](#)

All files and folders in this table will be uploaded.

Find by name

☐	Name	Folder	Type	Size
☐	error.html	-	text/html	133.0 B
☐	index.html	-	text/html	69.6 KB
☐	readme.txt	-	text/plain	67.0 B
☐	style.css	-	text/css	32.7 KB
☐	jquery.min.js	js/	text/javascript	90.9 KB
☐	modernizr.js	js/	text/javascript	15.1 KB
☐	plugins.js	js/	text/javascript	61.1 KB
☐	script.min.js	js/	text/javascript	5.0 KB
☐	SmoothScroll.js	js/	text/javascript	22.8 KB
☐	arct-icon.png	images/	image/png	900.0 B

Destination [Info](#)

Destination
[s3://ancestralrecipe.com](#)

► **Destination details**
Bucket settings that impact new objects stored in the specified destination.

► **Permissions**
Grant public access and access to other AWS accounts.

► **Properties**
Specify storage class, encryption settings, tags, and more.

[Cancel](#) [Upload](#)

CloudShell Feedback Console Mobile App © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Upload succeeded
For more information, see the Files and folders table.

×

Files and folders

Configuration

Files and folders (91 total, 8.9 MB)

< 1 2 3 4 5 6 7 ... 10 >

Name	Folder	Type	Size	Status	Error
error.html	-	text/html	133.0 B	✓ Succeeded	-
index.html	-	text/html	69.6 KB	✓ Succeeded	-
readme.txt	-	text/plain	67.0 B	✓ Succeeded	-
style.css	-	text/css	32.7 KB	✓ Succeeded	-
jquery.min.js	js/	text/javascript	90.9 KB	✓ Succeeded	-
modernizr.js	js/	text/javascript	15.1 KB	✓ Succeeded	-
plugins.js	js/	text/javascript	61.1 KB	✓ Succeeded	-
script.min.js	js/	text/javascript	5.0 KB	✓ Succeeded	-
SmoothScroll.js	js/	text/javascript	22.8 KB	✓ Succeeded	-
arct-icon.png	images/	image/png	900.0 B	✓ Succeeded	-

4. Change permissions to update bucket policy.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "PublicReadGetObject",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::your-bucket-name/*"
    }
  ]
}
```

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

arn:aws:s3::ancestralrecipe.com

```
1▼ {
2    "Version": "2012-10-17",
3▼    "Statement": [
4▼        {
5            "Sid": "PublicReadGetObject",
6            "Effect": "Allow",
7            "Principal": "*",
8            "Action": "s3:GetObject",
9            "Resource": "arn:aws:s3:::ancestralrecipe.com/*"
10        }
11    ]
12 }
13
```

Policy with Cloudflare IP Restriction (Optional, for enhanced security):

Code

```
{
  "Version": "2012-10-17",
  "Id": "CloudflareAccessPolicy",
  "Statement": [
    {
      "Sid": "AllowCloudflareAccess",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::your-bucket-name/*",
      "Condition": {
        "IpAddress": {
          "aws:SourceIp": [
            "Cloudflare-IP-Range-1",
            "Cloudflare-IP-Range-2",
            "Cloudflare-IP-Range-3"
          ]
        }
      }
    }
  ]
}
```

```

    "Cloudflare-IP-Range-2",
    // ... add all Cloudflare IP ranges here
  ]
}
}
}
]
}

```

Important Considerations:

- **Cloudflare IP Ranges:**

Cloudflare's IP ranges are subject to change. If you implement the restricted policy, you must regularly update the `aws:SourceIp` condition with the latest Cloudflare IP addresses to ensure continuous website availability.

- **Static Website Hosting:**

Ensure that static website hosting is enabled for your S3 bucket in the bucket properties, and specify the index document (e.g., `index.html`) and optionally an error document.

- **Cloudflare DNS Configuration:**

In your Cloudflare DNS settings, create a CNAME record pointing your domain or subdomain to the S3 static website endpoint URL.

- **SSL/TLS:**

For HTTPS, configure SSL/TLS settings in Cloudflare. Using "Flexible SSL" is often compatible with S3 static website endpoints, which do not inherently support HTTPS. If you require "Full" or "Strict" SSL, consider using AWS CloudFront in conjunction with S3.

5. Enable static website

Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

Edit

We recommend using **AWS Amplify Hosting** for static website hosting. Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. [Learn more about Amplify Hosting](#) or [View your existing Amplify apps](#)

Create Amplify app

S3 static website hosting

Enabled

Hosting type


Bucket hosting

Bucket website endpoint

When you configure your bucket as a static website, the website is available at the AWS Region-specific website endpoint of the bucket. [Learn more](#)

<http://ancestralrecipe.com.s3-website-us-east-1.amazonaws.com>


6. Check if endpoint works

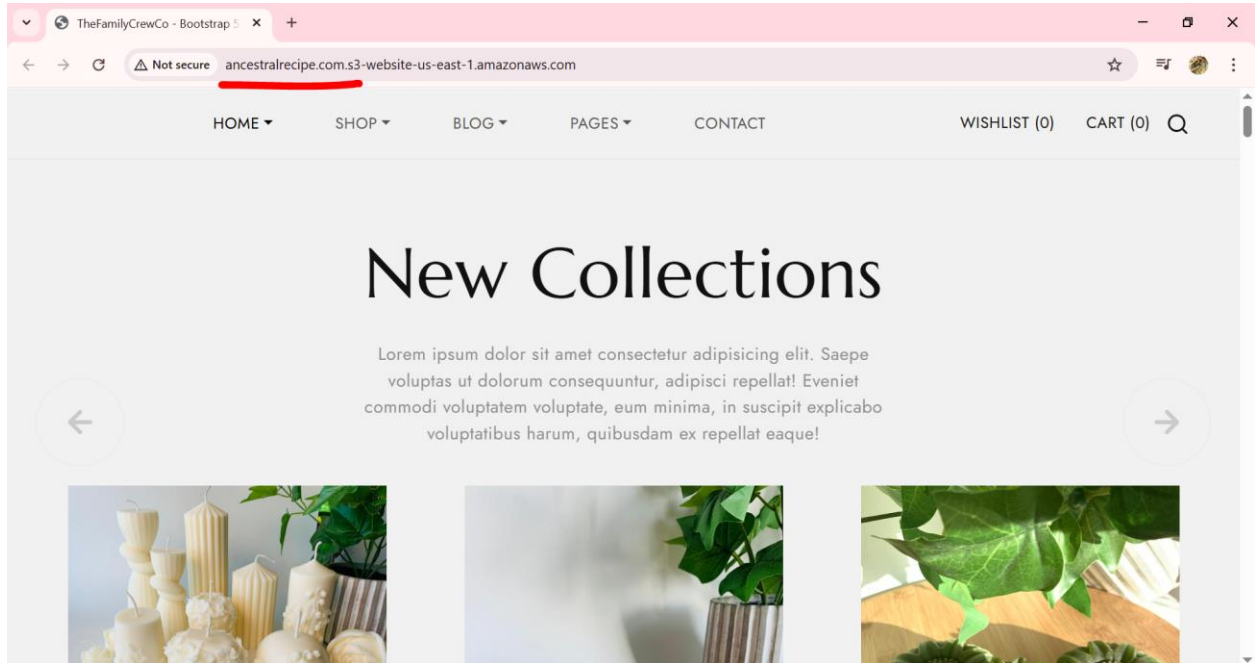

7. You will need a CNAME record for the root domain or subdomain pointing to the S3 endpoint. Setup in next section.

CloudFront Setup for S3 bucket

1. Create cloudfront distribution

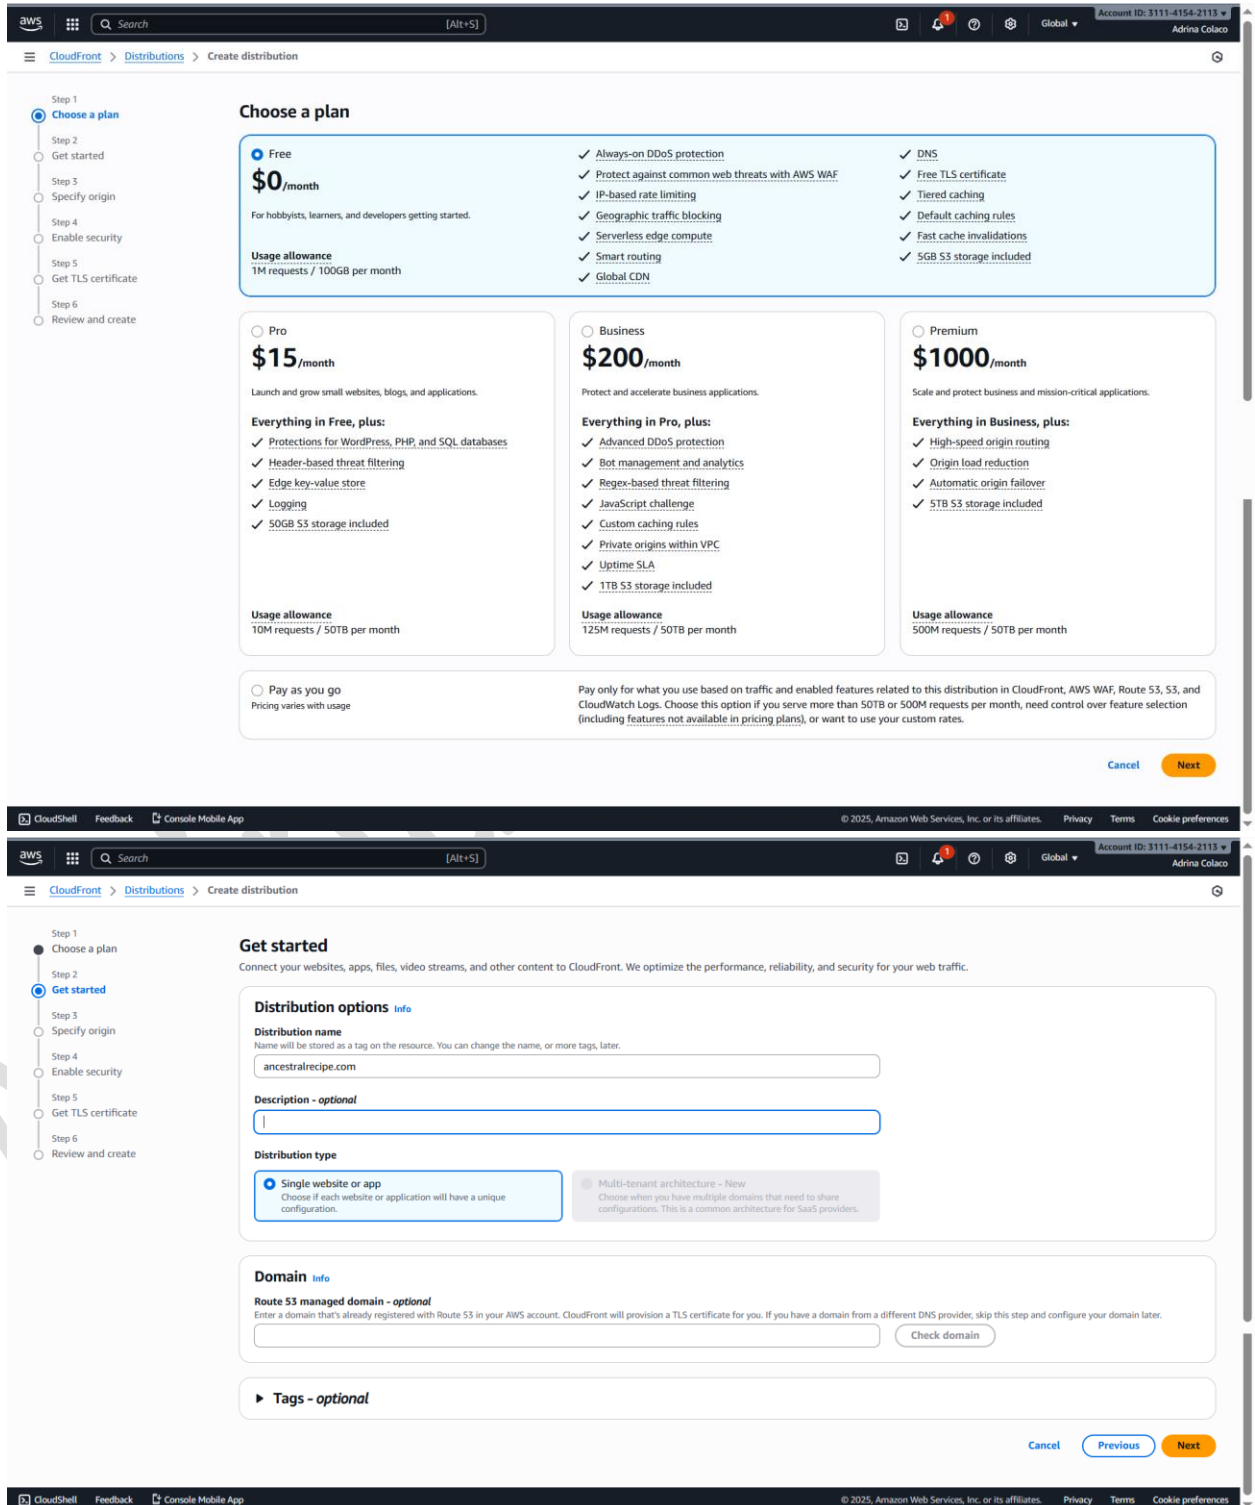

The screenshot displays the AWS CloudFront console interface for creating a new distribution. The top navigation bar shows the AWS logo, a search bar, and the user's account information (Account ID: 3111-4154-2113, Adrina Colaco). The breadcrumb trail indicates the path: CloudFront > Distributions > Create distribution.

Step 1: Choose a plan

The 'Choose a plan' section offers four options:

- Free (\$0/month)**: For hobbyists, learners, and developers getting started. Includes: Always-on DDoS protection, Protect against common web threats with AWS WAF, IP-based rate limiting, Geographic traffic blocking, Serverless edge compute, Smart routing, Global CDN, DNS, Free TLS certificate, Tiered caching, Default caching rules, Fast cache invalidations, and 5GB S3 storage included. Usage allowance: 1M requests / 100GB per month.
- Pro (\$15/month)**: Launch and grow small websites, blogs, and applications. Includes: Protections for WordPress, PHP, and SQL databases, Header-based threat filtering, Edge key-value store, Logging, and 50GB S3 storage included. Usage allowance: 10M requests / 50TB per month.
- Business (\$200/month)**: Protect and accelerate business applications. Includes: Advanced DDoS protection, Bot management and analytics, Regex-based threat filtering, JavaScript challenge, Custom caching rules, Private origins within VPC, Uptime SLA, and 1TB S3 storage included. Usage allowance: 125M requests / 50TB per month.
- Premium (\$1000/month)**: Scale and protect business and mission-critical applications. Includes: High-speed origin routing, Origin load reduction, Automatic origin failover, and 5TB S3 storage included. Usage allowance: 500M requests / 50TB per month.

A 'Pay as you go' option is also available, with pricing that varies with usage.

Step 2: Get started

The 'Get started' section provides instructions on connecting websites, apps, files, video streams, and other content to CloudFront. It includes the following fields and options:

- Distribution options**:
 - Distribution name**: Name will be stored as a tag on the resource. You can change the name, or more tags, later. (Input: ancestralrecipe.com)
 - Description - optional**: (Empty text box)
 - Distribution type**:
 - Single website or app** (Selected): Choose if each website or application will have a unique configuration.
 - Multi-tenant architecture - New**: Choose when you have multiple domains that need to share configurations. This is a common architecture for SaaS providers.
- Domain**:
 - Route 53 managed domain - optional**: Enter a domain that's already registered with Route 53 in your AWS account. CloudFront will provision a TLS certificate for you. If you have a domain from a different DNS provider, skip this step and configure your domain later. (Input:)
 - Check domain**: Button
- Tags - optional**: (Empty text box)

Navigation buttons at the bottom include 'Cancel', 'Previous', and 'Next'.

2. Select Origin Domain: Choose your S3 bucket from the dropdown list as the "Origin domain."

Step 1: Choose a plan
Step 2: Get started
Step 3: Specify origin
Step 4: Enable security
Step 5: Review and create

Specify origin

Origin type
Your origin is where your content (such as a website or app) lives. CloudFront works with AWS-based origins and origins hosted on other cloud providers.

Origin type

- ☒ **Amazon S3**
Deliver static assets like files and images, statically generated websites or single page applications (SPA).
- ☐ **Elastic Load Balancer**
Deliver applications hosted behind ELB such as dynamic websites, web services, and APIs.
- ☐ **API Gateway**
Deliver API endpoints for REST APIs hosted on API Gateway.
- ☐ **Elemental MediaPackage**
Deliver end-to-end live events or video on demand (VOD).
- ☐ **VPC origin**
Deliver applications and content hosted within private VPCs, such as EC2 instances and Application Load Balancers.
- ☐ **Other**
Refer to any AWS or non-AWS origin through its publicly resolvable URL.

Origin
S3 origin
Choose an AWS origin, or enter your origin's domain name. [Learn more](#)

[Browse S3](#)

Origin path - optional
The directory path within your origin where your content is stored. [Learn more](#)

Settings [Info](#)
CloudFront provides default origin and cache settings based on what origin you selected. [View default settings for S3](#)

Origin settings
Origin settings control how CloudFront connects to the specified origin.

☒ Use recommended origin settings ☐ Customize origin settings

Cache settings
Cache settings determine when CloudFront serves cached content and when it fetches new content from the origin.

☒ Use recommended cache settings tailored to serving S3 content ☐ Customize cache settings

[Cancel](#) [Previous](#) [Next](#)

CloudShell Feedback Console Mobile App © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 1

Step 2

Step 3

Step 4

Step 5

Choose a plan

Get started

Specify origin

Enable security

Review and create

Origin type

Your origin is where your content (such as a website or app) lives. CloudFront works with AWS-based origins and origins hosted on other cloud providers.

Amazon S3

Deliver static assets like files and images, statically generated websites or single page applications (SPA).

Elastic Load Balancer

Deliver applications hosted behind ELB such as dynamic websites, web services, and APIs.

API Gateway

Deliver API endpoints for REST APIs hosted on API Gateway.

Elemental MediaPackage

Deliver end-to-end live events or video on demand (VOD).

VPC origin

Deliver applications and content hosted within private VPCs, such as EC2 instances and Application Load Balancers.

Other

Refer to any AWS or non-AWS origin through its publicly resolvable URL.

Origin

S3 origin

Choose an AWS origin, or enter your origin's domain name. [Learn more](#)

ancestralrecipe.com.s3-website-us-east-1.amazonaws.com

Browse S3

Origin path - optional

The directory path within your origin where your content is stored. [Learn more](#)

/path

Settings

CloudFront provides default origin and cache settings based on what origin you selected. [View default settings for S3](#)

Origin settings

Origin settings control how CloudFront connects to the specified origin.

Use recommended origin settings

Customize origin settings

Cache settings

Cache settings determine when CloudFront serves cached content and when it fetches new content from the origin.

Use recommended cache settings tailored to serving S3 content

Customize cache settings

Cancel

Previous

Next

CloudShell

Feedback

Console Mobile App

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

Step 1

Step 2

Step 3

Step 4

Step 5

Choose a plan

Get started

Specify origin

Enable security

Review and create

Review and create

General configuration

Distribution name

ancestralrecipe.com

Description

-

Billing

Free (\$0/month)

Today's pro-rated charge (estimate)

\$0

Origin

S3 origin

ancestralrecipe.com.s3-website-us-east-1.amazonaws.com

Origin path

-

Enable Origin Shield

No

Connection attempts

3

Connection timeout

10

Cache settings

CloudFront will apply default cache settings tailored to serving content from a S3 origin. You can customize settings after you create your distribution.

Security

Security protections

Enabled

Use monitor mode

No

Usage and transfer limits will be prorated for your first month. Subject to [usage and transfer limits](#)

Cancel

Previous

Create distribution

CloudShell

Feedback

Console Mobile App

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

CloudFront > Distributions > E2XRRM6DIPR96

Successfully created new distribution.

ancestralrecipe.com

Free plan

View metrics

Details

Distribution domain name

d1bbs8xfczu1k.cloudfront.net

Billing

Free plan (\$0/month)

Manage plan

ARN

arn:aws:cloudfront:311141542113:distribution/E2XRRM6DIPR96

Last modified

Deploying

General

Security

Origins

Behaviors

Error pages

Invalidations

Logging

Tags

Settings

Name

ancestralrecipe.com

Description

-

Price class

Use all edge locations (best performance)

Supported HTTP versions

HTTP/2, HTTP/1.1, HTTP/1.0

Alternate domain names

Add domain

Standard logging

Available with the Pro plan

Default root object

-

Edit

CloudShell

Feedback

Console Mobile App

© 2025, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

CloudFront > Distributions > E2XRRM6DIPR96

ancestralrecipe.com

Free plan

View metrics

Details

Distribution domain name

d1bbs8xfczu1k.cloudfront.net

Billing

Free plan (\$0/month)

Manage plan

ARN

arn:aws:cloudfront:311141542113:distribution/E2XRRM6DIPR96

Last modified

November 20, 2025 at 5:50:27 AM UTC

General

Security

Origins

Behaviors

Error pages

Invalidations

Logging

Tags

Settings

Name

ancestralrecipe.com

Description

-

Price class

Use all edge locations (best performance)

Supported HTTP versions

HTTP/2, HTTP/1.1, HTTP/1.0

Alternate domain names

Add domain

Standard logging

Available with the Pro plan

Default root object

-

Edit

Add additional domain names

CloudFront > Distributions > E2XRRM6DIPR96 > Add domain

Step 1

Configure domains

Step 2

Get TLS certificate

Step 3

Review changes

Configure domains

Choose the domains that will be served by this distribution.

Domains

Domains to serve

CloudFront will serve the following domains. They must all be under the same root domain.

ancestralrecipe.com

Remove

www.ancestralrecipe.com

Remove

Add another domain

Cancel

Next

Step 1

Configure domains

Step 2

Get TLS certificate

Step 3

Review changes

Get TLS certificate

TLS certificate

Transport layer security (TLS) encrypts communication to and from your domain. You must have a TLS certificate with AWS Certificate Manager (ACM) to use CloudFront.

We couldn't find an ACM certificate in the us-east-1 Region that covers the domains you specified. To continue, create a new certificate.

CloudFront can automatically create a certificate for the following domains:

- ancestralrecipe.com
- www.ancestralrecipe.com

Create a wildcard certificate
This certificate will be valid for *.ancestralrecipe.com

Create certificate

Create certificate in ACM

Creating certificate

- Provisioned certificate in AWS Certificate Manager
- Waiting for Certificate Manager to validate the certificate

Domain update required
Before we can validate your certificate, you must update domain records with your DNS provider. When you're done, choose **Validate certificate**.

Domain	Record type	Name	Value	Status
ancestralrecipe.com	CNAME	_a1adc685d711a906bd96...	_f64e220ce2562cc9062e3...	Not validated

Changes in CloudFlare at this point

Add filter

Search

Add record

Type	Name	Content	Proxy status	TTL	Actions
CNAME	_a1adc685d7...	_f64e220ce2562...	DNS only	Auto	Edit

Type

Name (required)

Target (required)

Proxy status

CNAME

_a1adc685d711a906bd9659

_f64e220ce2562cc9062e37c

Use @ for root

E.g. www.example.com

Auto

DNS only

Record Attributes

Documentation

The information provided here will not impact DNS record resolution and is only meant for your reference

Go back to AWS.

CloudFront > Distributions > E2XB8M6DIPR96 > Add domain

Step 1: Configure domains
Step 2: **Get TLS certificate**
Step 3: Review changes

Get TLS certificate

TLS certificate [Info](#) [Refresh certificates](#)

Transport layer security (TLS) encrypts communication to and from your domain. You must have a TLS certificate with AWS Certificate Manager (ACM) to use CloudFront.

✓ A certificate for **ancestralrecipe.com** was created successfully. [View in ACM](#)

Available certificates [Info](#)
These certificates cover the domains that will be served by this distribution.

- ancestralrecipe.com** (52267e90-8393-4621-9abd-8ac6ce36f910)
Created by CloudFront
- Create a new certificate

Certificate details [View in AWS Certificate Manager](#)

ARN arn:aws:acm:us-east-1:311141542113:certificate/52267e90-8393-4621-9abd-8ac6ce36f910	Covered domains ancestralrecipe.com	Source Amazon
---	---	-------------------------

[Cancel](#) [Previous](#) [Next](#)

AWS Certificate Manager > Certificates

AWS Certificate Manager (ACM)

- List certificates
- Request certificate
- Import certificate
- AWS Private CA

Certificates (3)

[More actions](#) [Manage expiry events](#) [Import](#) [Request](#)

☐	Certificate ID	Domain name	Type	Status	In use	Renewal eligibility
☐	52267e90-8393-4621-9abd-8ac6ce36f910	ancestralrecipe.com	Amazon Issued	Issued	Yes	Eligible

CloudFront

Distributions

E2XRRM6DIPR96

Add domain

Step 1

Configure domains

Step 2

Get TLS certificate

Step 3

Review changes

Review changes

Domain

Domains to serve

ancestralrecipe.com

Edit

TLS certificate

ARN

arn:aws:acm-us-east-1:311141542113:certificate/52267e90-8393-4621-9abd-8ac6ce36f910

Covered domains

ancestralrecipe.com

Source

Amazon

Edit

Cancel

Previous

Add domains

CloudFront

Distributions

E2XRRM6DIPR96

Distribution updated successfully

ancestralrecipe.com

Free plan

View metrics

Details

Distribution domain name

d1bb5e8xfczu1k.cloudfront.net

Billing

Free plan (\$0/month)

Manage plan

ARN

arn:aws:cloudfront:311141542113:distribution/E2XRRM6DIPR96

Last modified

Deploying

General

Security

Origins

Behaviors

Error pages

Invalidations

Logging

Tags

Settings

Name

ancestralrecipe.com

Description

-

Price class

Use all edge locations (best performance)

Supported HTTP versions

HTTP/2, HTTP/1.1, HTTP/1.0

Alternate domain names

ancestralrecipe.com

Route domains to CloudFront

Custom SSL certificate

ancestralrecipe.com

Security policy

TLSv1.2_2021

Standard logging

Available with the Pro plan

Default root object

-

Edit

CloudShell

Feedback

Console Mobile App

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Admin

Make the SSL option change in CloudFlare

Adcola13@gmail.com's Account

ancestralrecipe.com Active Star Free plan

Overview
Recents New
Overview
Records
Client Certificates
Overview
AI Crawl Control
Log Explorer
Analytics & logs
DNS
Email
SSL/TLS
Overview
Edge Certificates
Client Certificates
Origin Server
Custom Hostnames
Security
Access
Speed
Caching
Workers Routes
Rules
Error Pages New
Network
Traffic
Scrape Shield
Web3

Configure encryption mode

Select the SSL/TLS encryption mode that works best for your needs.
[Encryption modes documentation](#)

Select encryption mode

Automatic SSL/TLS (default)
Cloudflare checks if your traffic needs a more secure encryption mode and updates your setting automatically.
[Select](#)

Custom SSL/TLS
Select the encryption mode that Cloudflare uses to connect to your origin server
[Selected](#)

Full (Strict)
☐ Enable encryption end-to-end and enforce validation on origin certificates. Use Cloudflare's Origin CA to generate certificates for your origin.

Full
☒ Enable encryption end-to-end. Use this mode when your origin server supports SSL certification but does not use a valid, publicly trusted certificate.

Flexible
☐ Enable encryption only between your visitors and Cloudflare. This will avoid browser security warnings, but all connections between Cloudflare and your origin are made through HTTP.

Off (not secure)
☐ No encryption applied. Turning off SSL disables HTTPS and causes browsers to show a warning that your website is not secure.

[Cancel](#) [Save](#)



Verify the Cloudflare change by running the website in browser.

TheFamilyCrewCo - Bootstrap

https://ahcestralrecipe.com

HOME SHOP BLOG PAGES CONTACT WISHLIST (0) CART (0)


New Collections

Lorem ipsum dolor sit amet consectetur adipisicing elit. Saepe voluptas ut dolorum consequuntur, adipisci repellat! Eveniet commodi voluptatem voluptate, eum minima, in suscipit explicabo voluptatibus harum, quibusdam ex repellat eaque!



3. Configure S3 Bucket Access (Recommended):

1. **Use Origin Access Control (OAC):** This is the recommended method for restricting access to your S3 bucket so that only CloudFront can retrieve content. Choose "Yes, use OAC" and either select an existing OAC or create a new one. CloudFront will automatically update your S3 bucket policy to grant necessary permissions to the OAC.
2. **(Legacy) Use Origin Access Identity (OAI):** While still functional, OAI is the preferred and more secure method. If you choose OAI, you will need to create or select an OAI and manually update your S3 bucket policy to allow read access for the OAI.
3. **Configure Cache Behavior Settings:** Define how CloudFront caches content, including TTLs (Time to Live) and whether to forward specific headers or query strings.
4. **Default Root Object (Optional):** If serving a static website, specify the default root object (e.g., `index.html`) that CloudFront will return when a user requests the root URL of your distribution.
5. **Review and Create:** Review your settings and create the distribution.
6. Test the cloudfront domain name in browser once it is ready

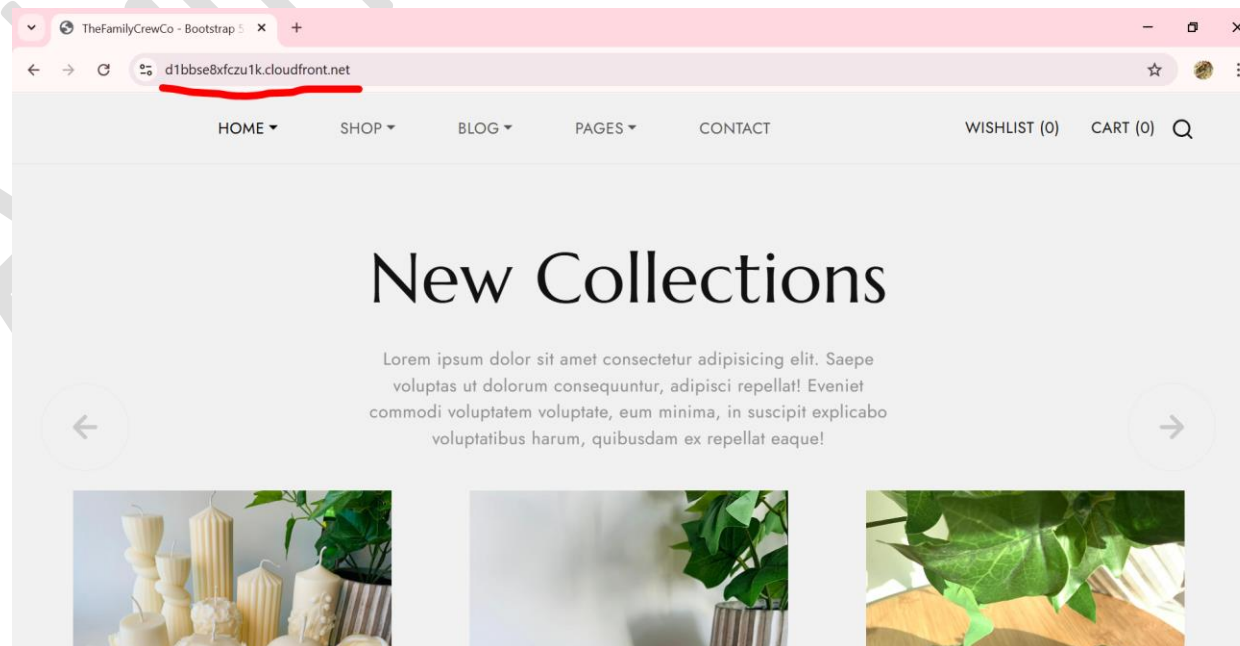


7. Configure this detail in cname DNS record in CloudFlare. Use the root domain or subdomain to point to CloudFront endpoint.

CloudFlare Setup

1. Add Your Domain to Cloudflare

Go to Cloudflare dashboard

Click **Add a Site**

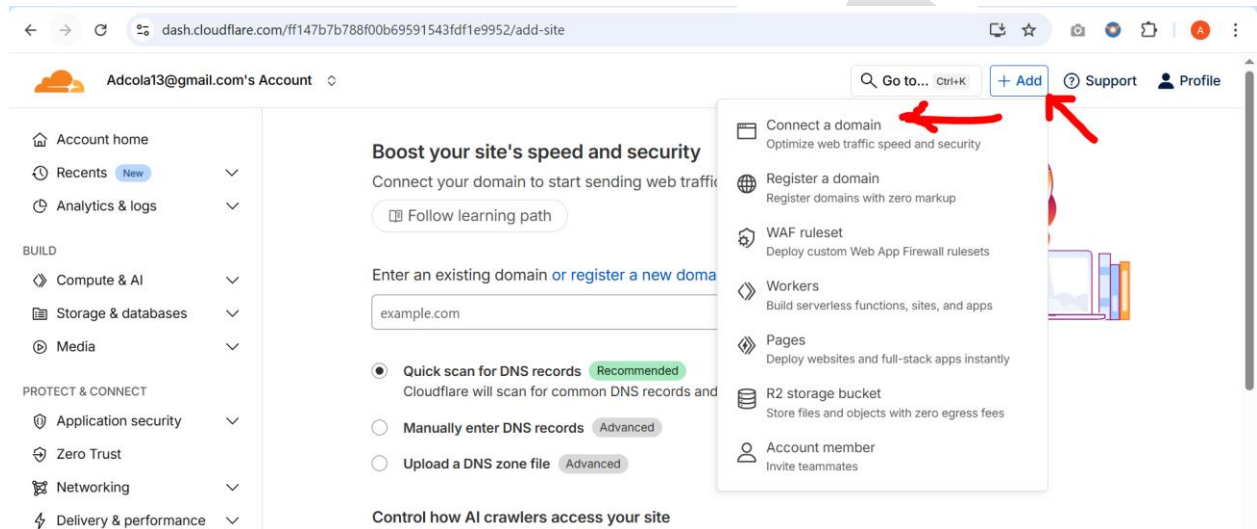

Enter your domain (example: mydomain.com)

Boost your site's speed and security

Connect your domain to start sending web traffic through Cloudflare.

 Follow learning path

Enter an existing domain [or register a new domain](#)

ancestralrecipe.com



- ☒ **Quick scan for DNS records** Recommended
Cloudflare will scan for common DNS records and import them for you.
- ☐ **Manually enter DNS records** Advanced
- ☐ **Upload a DNS zone file** Advanced

Control how AI crawlers access your site

Prevent AI crawlers from scraping content for training without your permission.

Block AI training bots

Block on all pages

AI training bots will not be able to scrape any content on your site

Block only on hostnames with ads

AI training bots will be blocked on subdomains that show ads, but allowed otherwise

Do not block (allow crawlers)

AI training bots will be allowed to scrape content

Instruct AI bot traffic with robots.txt



Continue

[Support](#) | [System Status](#) | [Careers](#) | [Terms of Use](#) | [Report Security Issues](#) | [Privacy Policy](#)  [Cookie Preferences](#)

Update your nameservers to activate CloudFlare

Choose a plan → *Free plan is enough*

Overview

Last step: Update your nameservers to activate Cloudflare

This is the last step to allow Cloudflare to speed up and protect your web traffic.

[Review Cloudflare fundamentals](#) ↗

1. Log into your DNS provider (most likely your registrar)

→ Your registrar is [GoDaddy](#) ↗

If you purchased your domain through a reseller (e.g., Squarespace) or use a separate DNS provider, log into that account instead.

2. Make sure DNSSEC is off

Find and turn off the DNS security (DNSSEC) setting if it is on. You can re-enable it later through Cloudflare.

[Provider-specific instructions](#)

3. Replace your current nameservers with Cloudflare nameservers

This is unlikely to cause downtime, but you may skip this and check your [DNS records](#) first.

A. Find the nameservers section

B. Add both of your assigned Cloudflare nameservers:

 `jeremy.ns.cloudflare.com` [Click to copy](#)

 `kenia.ns.cloudflare.com` [Click to copy](#)

C. Delete your other nameservers:

✗ `ns61.domaincontrol.com`

✗ `ns62.domaincontrol.com`

D. Save your changes

[Provider-specific instructions](#)

Need help? Follow our [set-up documentation](#) ↗ or [visit our support portal](#).



① Registrars take up to 24 hours to process nameserver changes (quicker in most cases). We will email you when `ancestralrecipe.com` is active on Cloudflare.

While in this [pending state](#) ↗, Cloudflare will respond to DNS queries on your assigned nameservers.

Once activated, SSL/TLS, DDoS protection, caching, and other automatic optimizations will go live for proxied DNS records, along with any custom settings you pre-configure.

Cloudflare will periodically check for nameserver updates.

[Check nameservers now](#)

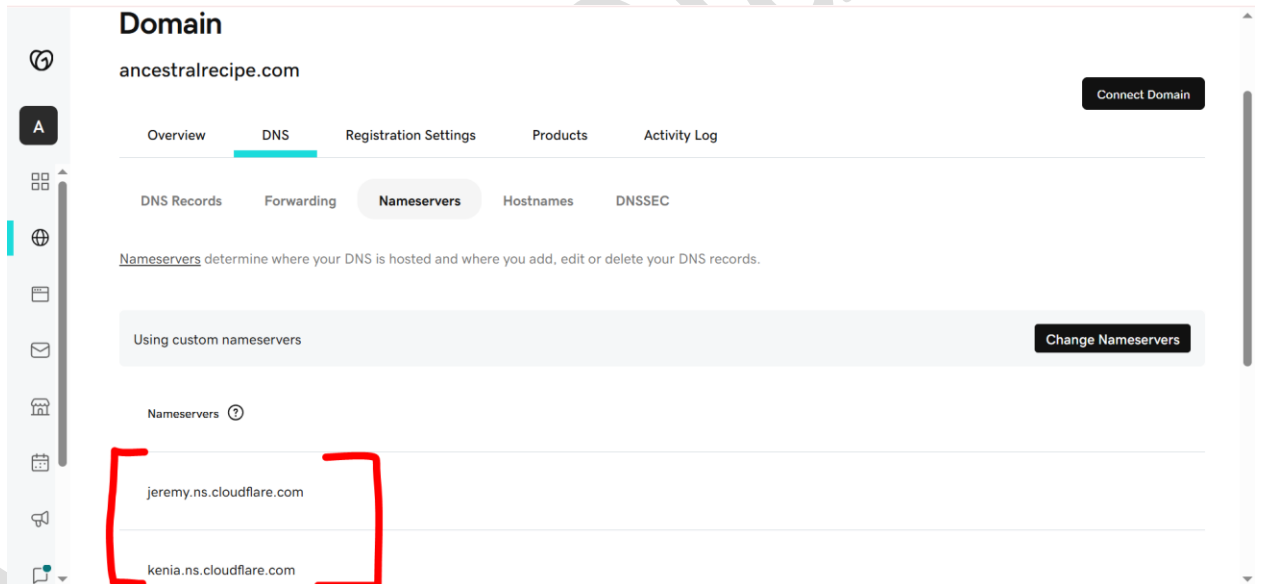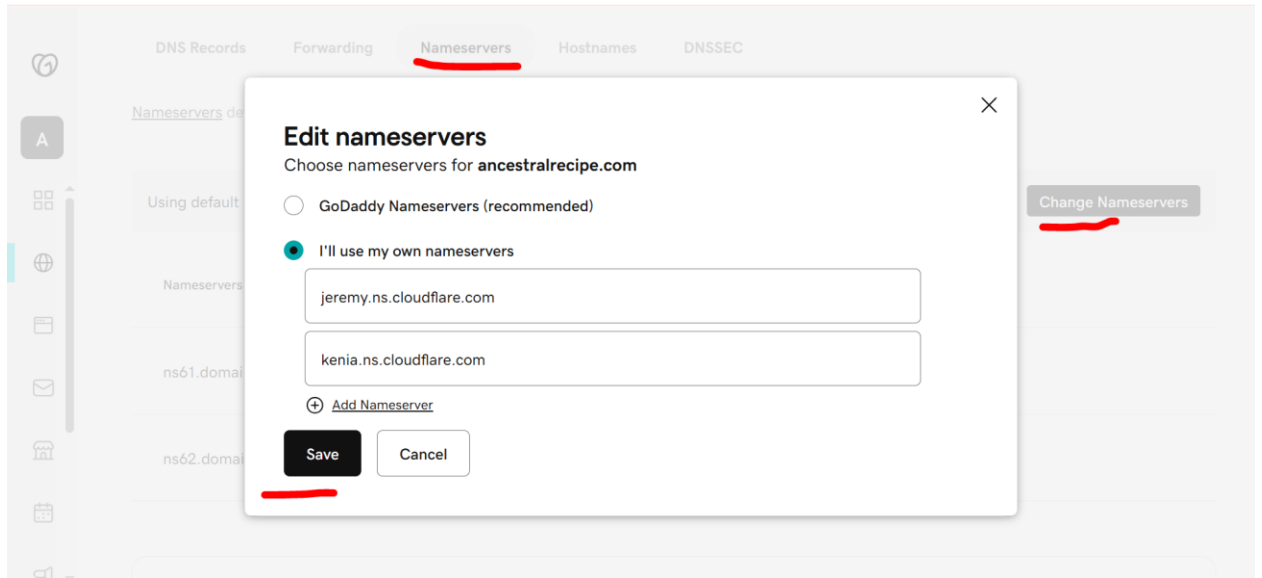



ancestralrecipe.com

Invalid nameservers

Star

Free plan

Overview

Recents New

AI Crawl Control

Log Explorer

Analytics & logs

DNS

Email

SSL/TLS

Security

Access

Speed

Caching

Registrars take up to 24 hours to process nameserver changes (quicker in most cases). We will email you when ancestralrecipe.com is active on Cloudflare.

While in this [pending state](#), Cloudflare will respond to DNS queries on your assigned nameservers.

Once activated, SSL/TLS, DDoS protection, caching, and other automatic optimizations will go live for proxied DNS records, along with any custom settings you pre-configure.

Cloudflare will periodically check for nameserver updates.

[Check nameservers now](#)

Registrars take up to 24 hours to process nameserver changes (quicker in most cases). We will email you when ancestralrecipe.com is active on Cloudflare.

While in this [pending state](#), Cloudflare will respond to DNS queries on your assigned nameservers.

Once activated, SSL/TLS, DDoS protection, caching, and other automatic optimizations will go live for proxied DNS records, along with any custom settings you pre-configure.

Cloudflare is now checking the nameservers for ancestralrecipe.com. Please wait a few hours for an update.



ancestralrecipe.com

✓ Active

☆ Star

Free plan

Overview

Recents New ✓

AI Crawl Control

Log Explorer ✓

Analytics & logs ✓

DNS ✓

Email ✓

SSL/TLS ✓

Overview

ancestralrecipe.com

Monitor security and performance for ancestralrecipe.com. Configure products and services from the menu.

[Review Cloudflare fundamentals](#)

✓ **Great news! Cloudflare is now protecting your site**

Data about your site's usage will be here once available.

Cloudflare will **scan your Route53 DNS records**

Review all records (A, CNAME, MX, TXT, NS, etc.)

👉 **Important: Cloudflare will import your DNS records but verify them manually.**

2. Create/Correct the A Record for the EC2 Server

You need an **A record** pointing to your EC2 public IP or Load Balancer IP.

If your EC2 has a public IP:

Type: A

Name: @

Value: <your EC2 public IP>

TTL: Auto

Proxy status: Proxied (orange cloud) → recommended

If you're using a domain like www:

Type: CNAME

Name: www

Target: @

Proxy: Proxied

S3 Bucket: Create the correct CNAME record for the S3 bucket endpoint

Type	Name	Content	Proxy status	TTL	Actions
A	blog	98.88.76.240	Proxied	Auto	Edit
CNAME	ancestralreci...	ancestralrecipead...	Proxied	Auto	Edit

Type: CNAME

Name (required): ancestralrecipe.com
Use @ for root

Target (required): ancestralrecipe.com.s3-website-us-east-1
E.g. www.example.com

Proxy status: ☒ Proxied

TTL: Auto

Record Attributes [Documentation](#)

The information provided here will not impact DNS record resolution and is only meant for your reference.

Comment: Root website routing to S3 bucket

CloudFront:

Type	Name	Content	Proxy status	TTL	Actions
A	blog	98.88.76.240	Proxied	Auto	Edit
CNAME	ancestralreci...	ancestralrecipe.c...	Proxied	Auto	Edit

Type: CNAME

Name (required): ancestralrecipe.com
Use @ for root

Target (required): d1bbse8xfczu1k.cloudfront.net
E.g. www.example.com

Proxy status: ☒ Proxied

TTL: Auto

Record Attributes [Documentation](#)

The information provided here will not impact DNS record resolution and is only meant for your reference.

Comment: Root website routing to CloudFront endpoint

EC2 Instance :

DNS

Records

Configure DNS records and review [proxy status](#) of your hostnames.

[DNS documentation](#)

Recommended steps to complete zone set-up

Hide

✓ Add an MX record for your **root domain** so that mail can reach **@ancestralrecipe.com** addresses or [set up restrictive SPF, DKIM, and DMARC records](#) to prevent email spoofing. [New Alert](#)

DNS management for **ancestralrecipe.com**

Review, add, and edit DNS records. Edits will go into effect once saved.

DNS Setup:Full ⓘ [Import and Export](#) ⌵ [Dashboard Display Settings](#)

Search DNS Records

▼ Add filter

Q

Search

+ Add record

☐	Type ⓘ	▲ Name ⓘ	Content ⓘ	Proxy status ⓘ	TTL ⓘ	Actions
☐	A	ancestralrecipe.com	3.33.251.168	☁️ Proxied	Auto	Edit ▶
☐	A	ancestralrecipe.com	15.197.225.128	☁️ Proxied	Auto	Edit ▶
☐	CNAME	_domainconnect	_domainconnect.gd.dom...	☁️ Proxied	Auto	Edit ▶
☐	CNAME	www	ancestralrecipe.com	☁️ Proxied	Auto	Edit ▶
☐	NS	ancestralrecipe.com	ns62.domaincontrol.com	DNS only	Auto	Edit ▶
☐	NS	ancestralrecipe.com	ns61.domaincontrol.com	DNS only	Auto	Edit ▶

Cloudflare Nameservers

Every DNS zone on Cloudflare is assigned a set of Cloudflare-branded nameservers.

Type	Value
NS	jeremy.ns.cloudflare.com
NS	kenia.ns.cloudflare.com

Admin



DNS management for **ancestralrecipe.com**

DNS Setup:Full ⓘ
[Import and Export](#)
[Dashboard Display Settings](#)

Review, add, and edit DNS records. Edits will go into effect once saved.

Search DNS Records

Add filter

Search

Add record

☐	Type ⓘ	Name ⓘ	Content ⓘ	Proxy status ⓘ	TTL ⓘ	Actions
☐	A	ancestralrecipe.com	3.33.251.168	Proxied	Auto	Edit
Type Name (required) IPv4 address (required) Proxy status TTL A ancestralrecipe.com 98.88.76.240 Proxied Auto Use @ for root						
Record Attributes Documentation The information provided here will not impact DNS record resolution and is only meant for your reference. Comment Enter your comment here (up to 100 characters). Delete Cancel Save						
☐	CNAME	_domainconnect	_domainconnect.gd.dom...	Proxied	Auto	Edit
☐	CNAME	www	ancestralrecipe.com	Proxied	Auto	Edit
☐	NS	ancestralrecipe.com	ns62.domaincontrol.com	DNS only	Auto	Edit
☐	NS	ancestralrecipe.com	ns61.domaincontrol.com	DNS only	Auto	Edit

Cloudflare Nameservers

Every DNS zone on Cloudflare is assigned a set of Cloudflare-branded nameservers.

Type	Value
NS	jeremy.ns.cloudflare.com
NS	kenia.ns.cloudflare.com

3. Update Nameservers in Route53 **(Required for Pravin Sir)**

Cloudflare will give you **two nameservers**, like:

linda.ns.cloudflare.com

mark.ns.cloudflare.com

You must replace your current Route53 nameservers with these.

Steps:

Open **AWS Route53**

Go to **Hosted Zones**

Select your domain

Replace the existing 4 AWS NS records with the **2 Cloudflare NS names**

After saving, DNS propagation takes:

🕒 **0–48 hours** (usually 15 minutes)

Route53 will no longer manage DNS after propagation.

4. Wait for Cloudflare DNS to Activate

Cloudflare will show:

"Pending Nameserver Update" → NOT active yet

"Active" → DNS now controlled by Cloudflare

You can test using:

nslookup mydomain.com

```
[ec2-user@ip-172-31-16-167 ~]$ nslookup ancestralrecipe.com
Server:          172.31.0.2
Address:         172.31.0.2#53

Non-authoritative answer:
Name:   ancestralrecipe.com
Address: 104.21.90.182
Name:   ancestralrecipe.com
Address: 172.67.203.208
Name:   ancestralrecipe.com
Address: 2606:4700:3035::ac43:cbd0
Name:   ancestralrecipe.com
Address: 2606:4700:3031::6815:5ab6

[ec2-user@ip-172-31-16-167 ~]$
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

✓ 2. Why does my domain show Cloudflare IPs?

yaml

Copy code

Addresses:

```
2606:4700:3031::6815:5ab6 ← Cloudflare IPv6
2606:4700:3035::ac43:cbd0 ← Cloudflare IPv6
104.21.90.182 ← Cloudflare IPv4
172.67.203.208 ← Cloudflare IPv4
```

These are **Cloudflare proxy IPs**, not your EC2 server.

This means:

- ✓ Your DNS is now managed by Cloudflare
- ✓ Cloudflare proxy is ON (orange cloud)
- ✓ Your EC2 origin IP is successfully hidden

This is exactly what should happen when Cloudflare is active.

If Cloudflare nameservers show up → It's active.



Adcola13@gmail.com's Account

Go

ancestralrecipe.com

✓ Active

☆ Star

Free plan

Overview

Recents New

AI Crawl Control

Log Explorer

Analytics & logs

DNS

Email

SSL/TLS

Overview

ancestralrecipe.com

Monitor security and performance for ancestralrecipe.com. Configure products and services from the menu.

[Review Cloudflare fundamentals](#)

✓ **Great news! Cloudflare is now protecting your site**

Data about your site's usage will be here once available.

5. Enable HTTPS SSL/TLS

Go to:

Cloudflare → SSL/TLS → Overview

Choose:

Flexible ✗ (Do not use)

Full ✓ (Recommended)

Full (Strict) ✓✓ (Best & secure)

👉 For **Full (Strict)** you need an SSL certificate on EC2 (Let's Encrypt or ACM on load balancer).

The image shows two screenshots of the Cloudflare dashboard for the domain `ancestralrecipe.com`.

Top Screenshot: Configure encryption mode

- Left sidebar:** A list of navigation items including Overview, Recents, Client Certificates, Records, Overview, AI Crawl Control, Log Explorer, Analytics & logs, DNS, Email, SSL/TLS, Edge Certificates, Client Certificates, Origin Server, Custom Hostnames, Security, Access, Speed, Caching, Workers Routes, Rules, Error Pages, Network, Traffic, Scrape Shield, and Web3. A red arrow points to the **Caching** item.
- Main content area:**
 - Configure encryption mode:** Select the SSL/TLS encryption mode that works best for your needs. [Encryption modes documentation](#)
 - Select encryption mode:**
 - Automatic SSL/TLS (default):** Cloudflare checks if your traffic needs a more secure encryption mode and updates your setting automatically. [Select](#)
 - Custom SSL/TLS:** Select the encryption mode that Cloudflare uses to connect to your origin server. [Selected](#)
 - Full (Strict):** Enable encryption end-to-end and enforce validation on origin certificates. Use Cloudflare's Origin CA to generate certificates for your origin.
 - Full:** Enable encryption end-to-end. Use this mode when your origin server supports SSL certification but does not use a valid, publicly trusted certificate.
 - Flexible:** Enable encryption only between your visitors and Cloudflare. This will avoid browser security warnings, but all connections between Cloudflare and your origin are made through HTTP.
 - Off (not secure):** No encryption applied. Turning off SSL disables HTTPS and causes browsers to show a warning that your website is not secure.
- Diagram:** A flow diagram showing Browser → Cloudflare → Origin Server.

Bottom Screenshot: SSL/TLS Overview

- Left sidebar:** Similar to the top screenshot, but with a red arrow pointing to the **SSL/TLS** item.
- Main content area:**
 - SSL/TLS Overview:** Choose how Cloudflare encrypts traffic between your visitors and Cloudflare, and between Cloudflare and your origin server, to prevent data theft and other tampering. [SSL/TLS documentation](#)
 - Advanced Certificate Manager:** Unlock more control and flexibility for your Certificates and SSL/TLS settings. [Activate](#)
 - SSL/TLS encryption:** Current encryption mode: **Full**. Automatic mode disabled 34 minutes ago.
 - Diagram:** A flow diagram showing Browser → Cloudflare → Origin Server.
 - Buttons:** [Configure](#) and a blue circular button with a white 'D' icon.

Overview

Recents New

Overview

ancestralrecipe.com > SSL/TLS

ancestralrecipe.com

Domains

Records

ancestralrecipe.com > DNS

Settings

ancestralrecipe.com > Security

Security rules

ancestralrecipe.com > Security

AI Crawl Control

Log Explorer

Analytics & logs

DNS

Email

SSL/TLS

Overview

Edge Certificates

Client Certificates

Advanced Certificate Manager

Select your plan

☒ Universal SSL (current plan) \$0.00 / month

Basic certificate

- Dedicated to your domain
- Only protects ancestralrecipe.com and *ancestralrecipe.com
- Common name of ssl123456.cloudflaressl.com

☐ Advanced Certificate Manager \$10.00 / month

Advanced Certificate Manager allows for more control and flexibility for your certificates and SSL/TLS settings.

- Create additional certificates
- Common name of ancestralrecipe.com
- Configurable certificate validity
- Configurable SANs
- Custom Cipher Suite settings
- Custom Trust Store

Next

[Cancel](#)

SSL/TLS

Client Certificates

Create client certificates using Cloudflare public key infrastructure (PKI).

[Client certificates documentation](#)[← Back](#)

Create client certificate

Private Key and Certificate Signing Request (CSR)

To generate a Client Certificate, you need a private key and CSR. Cloudflare can generate a key and CSR using your web browser, or you can use your own.

☒ Generate private key and CSR with Cloudflare

Private key type

RSA (2048)

☐ Use my private key and CSR

Select a Certificate Authority (CA) to sign the client certificate

Certificate Authority

Cloudflare Managed CA

Select a validity period for your certificate

Certificate Validity

10 Years

Cancel

Create

SSL/TLS

Edge Certificates

Customize your edge certificates, which encrypt traffic between your visitors and Cloudflare.

[Edge certificates documentation](#)

Advanced Certificate Manager

Unlock more control and flexibility for your Certificates and SSL/TLS settings

Activate

Edge Certificates

Manage and purchase SSL certificates that will be served to your web visitors.

Your plan includes a shared Cloudflare Universal SSL certificate. To get a dedicated certificate with custom hostnames [place a certificate order](#).

Your plan does not allow you to upload any SSL certificates, but you may [order an auto-renewing certificate](#) or [upgrade](#) to the Business plan to enable this feature.

Order Advanced Certificate

Upload Custom SSL Certificate

Hosts	Type	Status	Expires on
*ancestralrecipe.com, ancestralrecipe.com	Universal	Active	2026-02-15 (Managed) ▶
*ancestralrecipe.com, ancestralrecipe.com	Backup	Backup issued	2026-02-15 (Managed) ▶

1 to 2 of 2 certificates

API [▶](#) Help [▶](#)

Advanced Certificate Manager

Advanced Certificate Manager gives you more control and flexibility for your certificates and TLS settings. Benefits include:

- Customize the hostnames on the certificate
- Full TLS certificate coverage through Total TLS
- Cipher suite selection
- Per hostname TLS settings
- and more!

Purchase ACM

Total TLS

Cloudflare will issue individual certificates for every proxied hostname. Once enabled, all hostnames in your domain will be covered by a TLS certificate.

[To enable Total TLS, purchase Advanced Certificate Manager.](#)

Select a Certificate Authority

Select [▶](#)

☐

API [▶](#)

Cipher suites

Customize the [cipher suites](#) used in the SSL/TLS handshake that establishes a secure connection between clients and the Cloudflare network.

Activate Advanced Certificate Manager [▶](#) to configure Cipher Suites.

Configure

API [▶](#) Help [▶](#)

Always Use HTTPS

Redirect all requests with scheme "http" to "https". This applies to all http requests to the zone.

This setting was last changed a few seconds ago

☒

API [▶](#) Help [▶](#)

HTTP Strict Transport Security (HSTS)

Enforce web security policy for your website.

Enable HSTS

API [▶](#) Help [▶](#)

Minimum TLS Version

Only allow HTTPS connections from visitors that support the selected TLS protocol version or newer.

TLS 1.0 (default) [▶](#)

API [▶](#) Help [▶](#)

Opportunistic Encryption

Opportunistic Encryption allows browsers to benefit from the improved performance of HTTP/2 by letting them know that your site is available over an encrypted connection. Browsers will continue to show "http" in the address bar, not "https".

[Create a Configuration Rule to customize these settings by hostname.](#)

☒

API [▶](#) Help [▶](#)

TLS 1.3

Enable the latest version of the TLS protocol for improved security and performance.

☒

API [▶](#) Help [▶](#)

Automatic HTTPS Rewrites

Automatic HTTPS Rewrites helps fix mixed content by changing "http" to "https" for all resources or links on your web site that can be served with HTTPS.

[Create a Configuration Rule to customize these settings by hostname.](#)

☒

API [▶](#) Help [▶](#)

Certificate Transparency Monitoring [Help](#)

Receive an email when a Certificate Authority issues a certificate for your domain.

☐

Help [▶](#)

Disable Universal SSL

Disabling Universal SSL removes any currently active Universal SSL certificates for your zone from the edge and prevents any future Universal SSL certificates from being ordered. If there are no dedicated certificates or custom certificates uploaded for the domain, visitors will be unable to access the domain over HTTPS.

Disable Universal SSL

Help [▶](#)

6. Enable Caching & CDN

Cloudflare → **Caching**

Enable:

"Caching Level: Standard"

"Browser Cache TTL: 1 hour or more"

"Always Online" (optional)

"Auto Minify (JS/CSS/HTML)" (optional)

This will improve website speed dramatically.

ancestralrecipe.com Active Star Free plan

Caching Overview

Review your website or application cache performance. Only includes data on end-user traffic to your [Cloudflare-proxied hostnames](#). Subrequests from Cloudflare Workers are not included.

[Cache documentation](#)

Save money on reduced egress when you store assets in Cache Reserve

Cache Reserve is a large data store that acts as the ultimate top tier cache. Sitting between our edge data center and your origin server, it stores data with guaranteed SLAs for how long your content remains in cache.

[Enable Cache Reserve](#)

Cache Analytics

Cache Analytics is available on our paid plans - Pro, Business, and Enterprise.

- Go beyond "cached" and "uncached" stats: see if resources are missing cache, expired, or are never eligible for cache in the first place.

1
Review Products

2
Complete Purchase

3
Confirmation

Your Order

See the products you've selected for purchase below.

Adcola13@gmail.com's Account



Cache Reserve

- ✓ \$0.36 per 1,000,000 read operations
- ✓ \$4.50 per 1,000,000 write operations
- ✓ \$0.015 per 1 GB-month

\$0 / mo

✕ Remove

Total Due Now:

\$0.00*

Due Monthly:

\$0.00 + Usage

* Plus applicable taxes and fees

[Proceed to Payment Details](#)



rofile



Enter Payment Details

Select your payment method, input your details and complete purchase.

Payment method

- or use -

PayPal

Adcola13@gmail.com's Account

All transactions are secure and encrypted.



Cache Reserve

\$0 / mo

- ✓ \$0.36 per 1,000,000 read operations
- ✓ \$4.50 per 1,000,000 write operations
- ✓ \$0.015 per 1 GB-month

Card details

Card number

1234 1234 1234 1234



Expiration date

MM / YY

Security code

CVC



Country

India

By providing your card information, you allow Cloudflare, Inc. to charge your card for future payments in accordance with their terms.

Billing address

First name

Last name

Address line 1

Address line 2 (optional)

City

State/province (optional)

Country

Select...

Zip/postal code

Account Type

Personal

Company (optional)

VAT/GST (optional)

Total Due Now:

\$0.00*

Due Monthly:

\$0.00 + Usage

* Plus applicable taxes and fees

By clicking "Complete Purchase", you agree to our [Terms](#) and [Privacy Policy](#). Your subscription automatically renews and will be billed to your payment method on file, until canceled. You may cancel anytime in [Billing Subscriptions](#), at least a day before each renewal date. For Services subject to usage based billing, you will be charged based on your use of the Services during the period specified by Cloudflare.

Save Payment Information →

7. Enable Security Features **(WAF NOT NEEDED)**

Cloudflare → **Security** → **WAF**

Turn ON "Bot Fight Mode" (optional)

Turn ON "DDoS Protection" (default)

Allow IPs only from Cloudflare (optional rule for EC2 protection)

ancestralrecipe.com

Active

Star

Free plan

Email

SSL/TLS

Security

Overview

Analytics

Web assets

Security rules

Settings

Access

Speed

Caching

Workers Routes

Rules

Error Pages

Network

Security

Settings

Settings and tools used to customize and enhance Cloudflare's detections and your domain's security posture.

[Settings documentation](#)

Filter by:

Web application exploits

DDoS attacks

Bot traffic

API abuse

Client side abuse

Domain settings

Search

Web assets and endpoints

Rule templates

Detection tools

New application security dashboard



To return to the previous version of application security dashboard, set the 'New application security dashboard' toggle to off. The previous dashboard experience is only available for a limited time.

[Learn more about the new experience](#)[Feedback](#)

Your Setup Now Looks Like This

User → Cloudflare (DNS + CDN + WAF) → EC2 server

Route53 is no longer part of DNS.

Want to Verify Migration Success?

Here's how:

Test A:

dig mydomain.com

→ Should show Cloudflare IPs (not EC2 IP directly).

```
[ec2-user@ip-172-31-16-167 ~]$ dig ancestralrecipe.com

; <<>> DiG 9.18.33 <<>> ancestralrecipe.com
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 49545
;; flags: qr rd ra; QUERY: 1, ANSWER: 2, AUTHORITY: 0, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 4096
;; QUESTION SECTION:
;ancestralrecipe.com.          IN      A

;; ANSWER SECTION:
ancestralrecipe.com.  300     IN      A      104.21.90.182
ancestralrecipe.com.  300     IN      A      172.67.203.208

;; Query time: 19 msec
;; SERVER: 172.31.0.2#53(172.31.0.2) (UDP)
;; WHEN: Mon Nov 17 14:27:01 UTC 2025
;; MSG SIZE rcvd: 80

[ec2-user@ip-172-31-16-167 ~]$
```

i-0160baaa796c4f354 (CloudFlareTesting)

PublicIPs: 98.88.76.240 PrivateIPs: 172.31.16.167

✅ 1. The A records returned are Cloudflare's proxy IPs

css

Copy code

```
ancestralrecipe.com. 300 IN A 104.21.90.182
ancestralrecipe.com. 300 IN A 172.67.203.208
```

These are Cloudflare **edge network IPs**, not your EC2 IP.

This means:


- ✅ Your domain is successfully proxied through Cloudflare
- ✅ Cloudflare is protecting your EC2 server
- ✅ Your EC2 public IP is hidden (good security)

Cloudflare always returns **their IP addresses** when the orange cloud proxy is ON.


Test B:

Open website in browser

→ Should load through Cloudflare (faster).

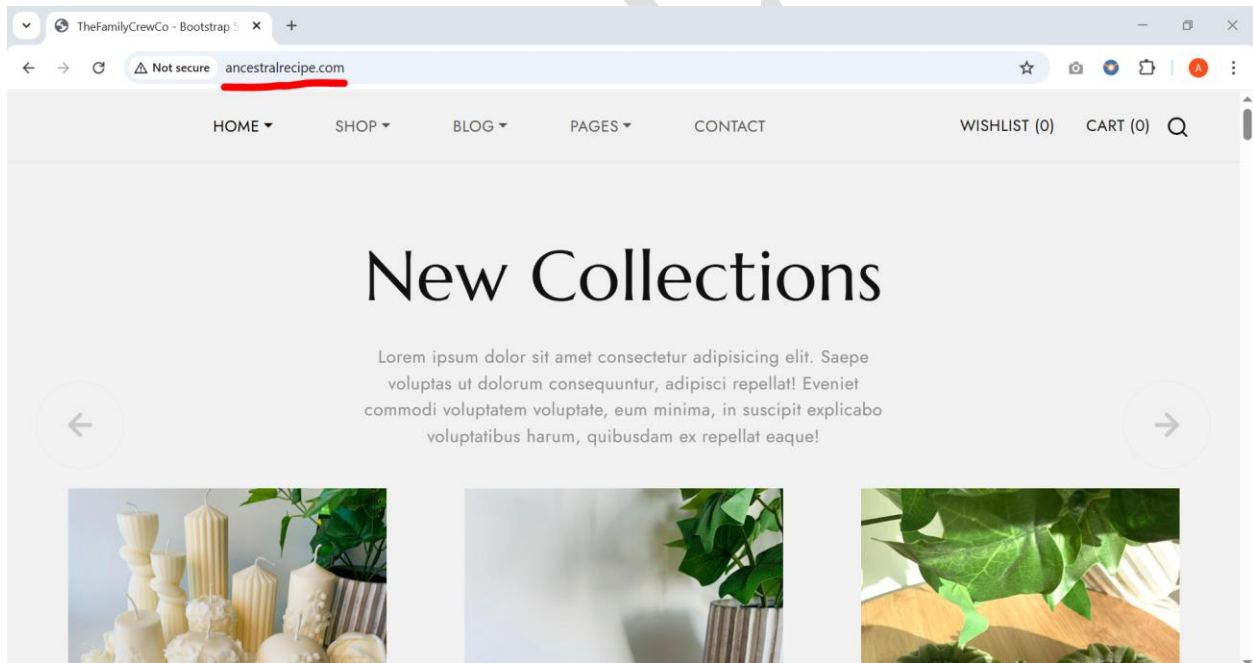

Wordpress website in browser

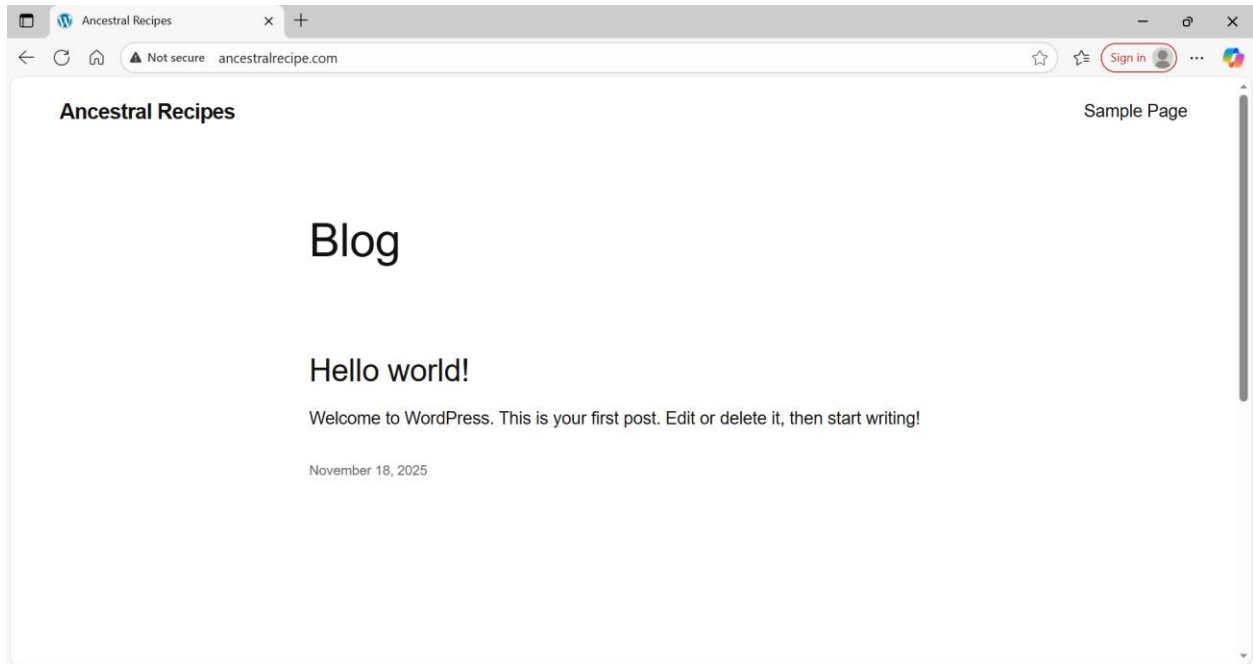

Curl results showing wordpress website

Adriana Colaco



Load Balancing in CloudFlare (NOT NEEDED)

✅ STEP 1 — Go to Load Balancing in Cloudflare

1. Log in to your Cloudflare dashboard
 2. Select your domain
 3. In the left sidebar, go to:
Traffic → Load Balancing
 4. Click: **Create Load Balancer**
-

✅ STEP 2 — Create “Origin Pools” (Your Servers)

An **Origin Pool** is a group of backend servers (your EC2 instances).

Cloudflare requires at least **one pool**, but usually you create **multiple pools**:

Example:

- Pool 1 → EC2 instance in Mumbai
- Pool 2 → EC2 instance in Singapore
- Pool 3 → EC2 instance in N. Virginia

Steps:

1. Click **Create a Pool**
2. Name the pool:
e.g., **mumbai-ec2-pool**
3. Add your EC2 public IP addresses as origins
Example:
4. Name: mumbai-origin-1
5. Address: 3.110.54.29
6. Set **Origin Health Checks** (HTTP/HTTPS URL)
Example:

7. <https://ancestralrecipe.com/health>
8. Save the pool.

👉 **Repeat this** for each load-balanced location.

✅ **STEP 3 — Create a Load Balancer**

Now connect pools together.

1. Go to **Load Balancing → Create Load Balancer**
2. Choose:
Hostname:
3. ancestralrecipe.com
4. Add your pools in priority order.

Example setup:

Pool	Purpose	Priority
mumbai-ec2-pool	Primary	1
singapore-ec2-pool	Backup	2
virginia-ec2-pool	Second backup	3

Cloudflare will:

- Send traffic to priority 1
 - Failover to next pool if unhealthy
-

✅ **STEP 4 — Choose Load Balancing Method**

Cloudflare supports:

1 **Failover-based routing (most common)**

- Primary server gets all traffic
- Backup used only if primary fails

2 Weighted load balancing

Example:

Pool A — 70%

Pool B — 30%

3 Geo-routing

Send users to nearest region.

Choose the one you want.

✓ STEP 5 — Configure Health Checks

Set the URL Cloudflare calls to detect if your server is healthy.

Example:

/health

/status

/api/heartbeat

This must return HTTP 200 OK when healthy.

✓ STEP 6 — Enable Session Affinity (Optional)

Use this if your backend needs **sticky sessions** (e.g., login-based apps).

Enable:

Session Affinity: On

Duration: 30 minutes (default)

✓ STEP 7 — Save

Cloudflare will automatically create a DNS “Load Balancer” record.

This replaces your A record with a new LB entry.

Example:

[illegible]