

# Serverless Vector Tiles on AWS

Mark Varley <[mark@addresscloud.com](mailto:mark@addresscloud.com)>

## Steps


1. Host a simple webpage on AWS (Hello S3!)
2. Host the webpage from our own domain (Hello Route 53!)
3. Create a free HTTPS cert for our domain (Hello ACM!)
4. Publish our simple webpage to a CDN with SSL support (Hello CloudFront!)
5. Add a map (Hello Vector Tiles!)
6. Publish ready-made OSM tiles to S3/CloudFront
7. Publish our own geo data to S3/CloudFront

## Pre-Requisites

- An AWS account
- A domain name that can be used for the exercise (this will need to be re-pointed so make sure it is not being used for anything else!). namecheap.com have domains starting at \$0.48 per year but make sure you switch off auto-renew!
- Patience – there is a lot of AWS config to make this work and no sign of a map until Step 5 but this will be worth it, trust me

## **1. Host a simple webpage on AWS (Hello S3!)**

First we need to create our bucket, log on to the AWS console and select S3 (make sure you are in the correct region – check the top hand corner of the screen). Click Create Bucket. We need to give the bucket the same name as our domain name, we will prefix ours with www. as we are going to create some more subdomains later, ours will be [www.myvectortiles.xyz](http://www.myvectortiles.xyz)

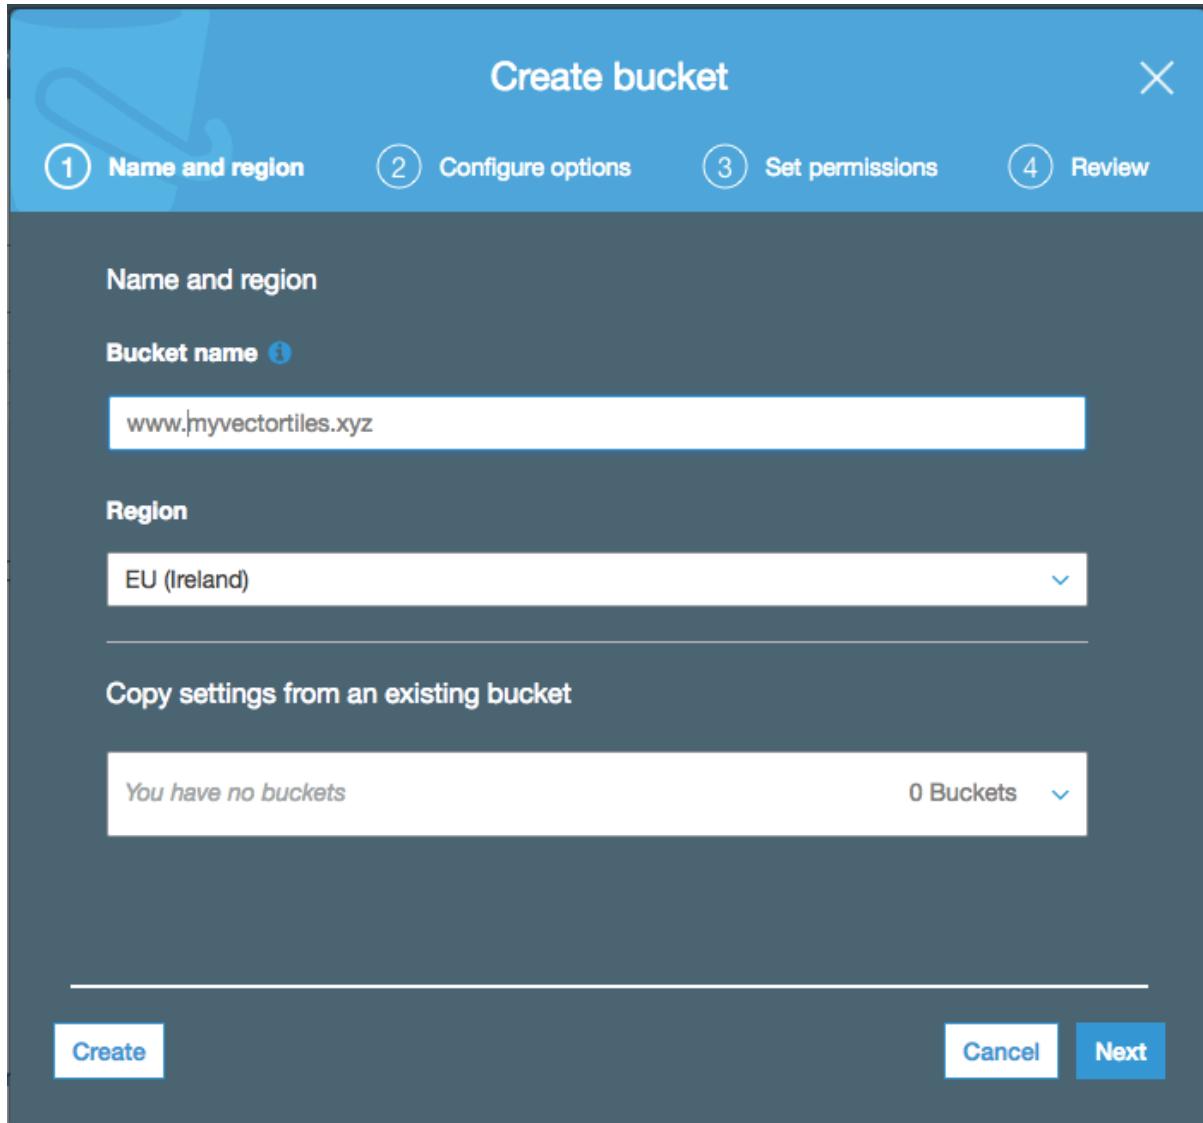

Accept all default options and then click Create.

We now need to tell Amazon that we want to serve a webpage out of our bucket. Click on the newly created bucket, click Properties and then click Static Website Hosting and configure as below.

## Static website hosting



Endpoint : <http://www.myvectortiles.xyz.s3-website-eu-west-1.amazonaws.com>



Use this bucket to host a website [Learn more](#)

Index document [i](#)

index.html

Error document [i](#)

error.html

Redirection rules (optional) [i](#)

|



Redirect requests [Learn more](#)




Disable website hosting

[Cancel](#)

[Save](#)

We now need to upload some content to our bucket. You can create your own index.html and error.htm files or use the simple examples in the repo at  
[https://github.com/addresscloud/serverless-tiles/tree/master/01\\_HelloS3](https://github.com/addresscloud/serverless-tiles/tree/master/01_HelloS3)

Upload the files to the bucket:

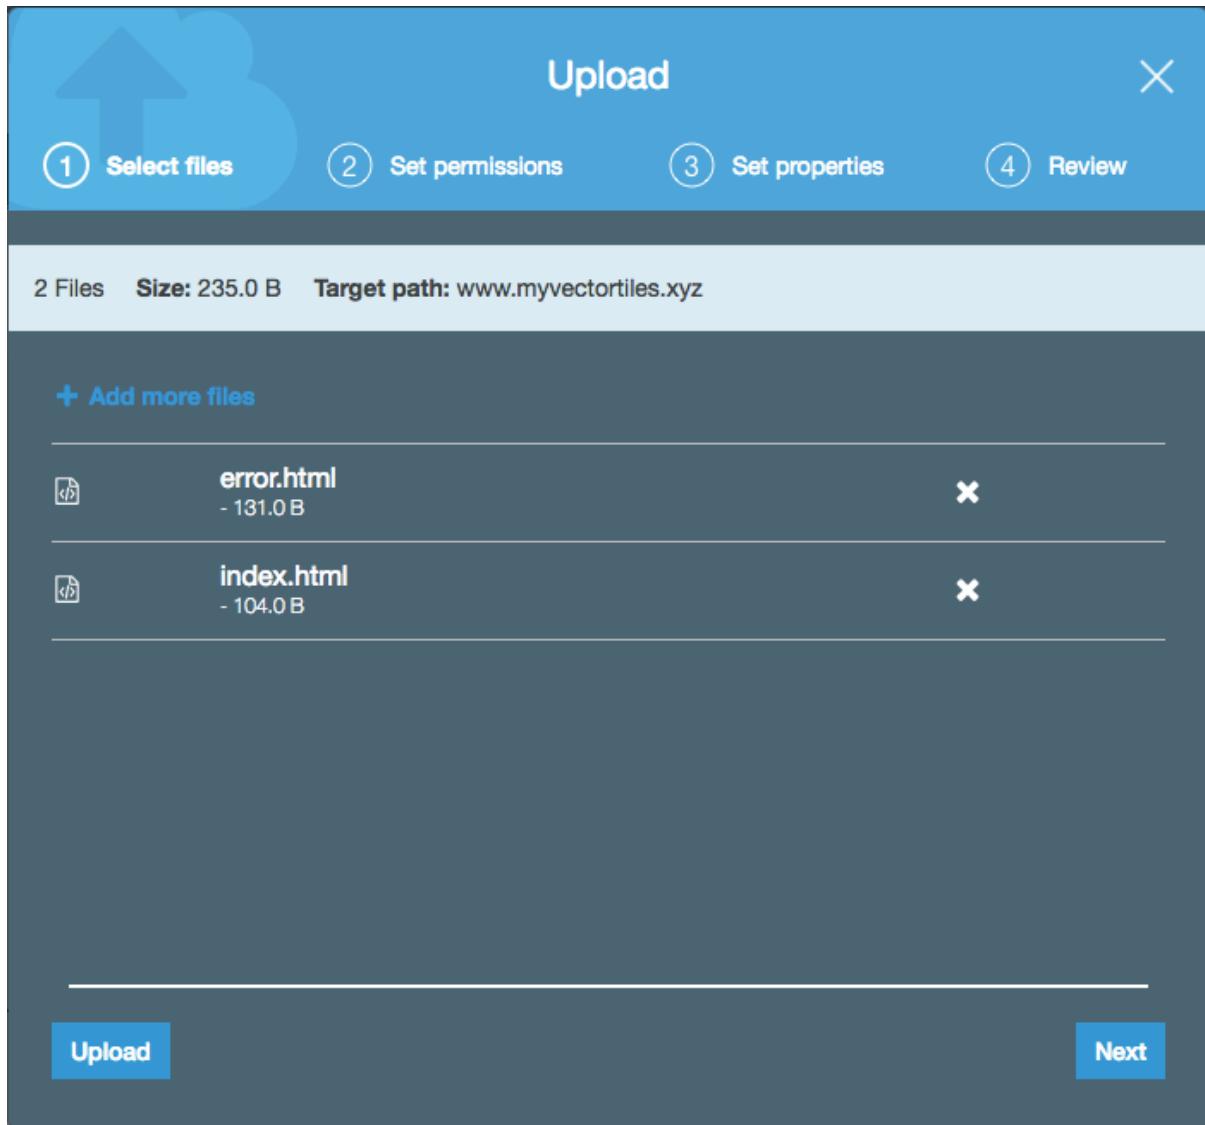

Finally we need to open up our bucket to the outside world. We will set a public read access policy, it is advisable to refine this using AWS best practices for production use cases. Click on the bucket again, select permissions and configure a Bucket Policy as per the one below which can be found at [https://github.com/addresscloud/serverless-tiles/blob/master/01\\_HelloS3/Policy.txt](https://github.com/addresscloud/serverless-tiles/blob/master/01_HelloS3/Policy.txt) - be sure to amend to your own domain name

S3 Bucket Overview

This bucket has public access

Bucket policy editor ARN: arn:aws:s3:::www.myvectortiles.xyz

```
1 {
2     "Version": "2012-10-17",
3     "Statement": [
4         {
5             "Sid": "PublicReadGetObject",
6             "Effect": "Allow",
7             "Principal": "*",
8             "Action": [
9                 "s3:GetObject"
10            ],
11             "Resource": [
12                 "arn:aws:s3:::www.myvectortiles.xyz/*"
13            ]
14        }
15    ]
16 }
```

Delete Cancel Save

We should now have our publicly facing masterpiece of a website up and running. To test it go to [http://www.YOUR\\_DOMAIN\\_NAME.s3-website.YOUR\\_REGION.amazonaws.com/](http://www.YOUR_DOMAIN_NAME.s3-website.YOUR_REGION.amazonaws.com/), ours is <http://www.myvectortiles.xyz.s3-website.eu-west-1.amazonaws.com/>

← → C ⌂ Not Secure | www.myvectortiles.xyz.s3-website.eu-west-1.amazonaws.com

Hello S3

Wow! We can party like it's 1994

## 2. Host the webpage from our own domain (Hello Route 53!)

OK, we have a website which the world can see but we want to use our own domain. There are a number of options here but the most elegant makes use of Amazon's excellent Route 53 service. To use Route 53 we need to tell Amazon about our domain, let's do that now. Navigate to the Route 53 page in the Amazon console, if you are a new user you might see a fancy splash screen. We are going to be managing DNS so select that option



You should now see a screen with a bunch of options on the left, select Hosted Zones and then Create Hosted Zone and give it the name of your domain (without the www bit):

A screenshot of the "Create Hosted Zone" form. The title bar says "Create Hosted Zone". The instructions explain that a hosted zone is a container for domain routing information. The form fields are: "Domain Name" (input: myvectortiles.xyz), "Comment" (input: myvectortiles.xyz), and "Type" (dropdown: Public Hosted Zone). A note below the type dropdown states: "A public hosted zone determines how traffic is routed on the Internet." At the bottom is a blue "Create" button.

Amazon creates us a new “zone” domain and generates some nameserver entries for us. You will need to copy and paste these and follow the guidelines from whoever you bought your domain from to update the nameservers.

Be very careful here, if you are using that domain for anything else it will stop working once you update the domain servers! Once you have made that change it will take some time (in some cases several hours) for the changes to propagate (be sent to name servers around the world). If you are looking for a way to pass several hours I highly recommend the AWS Service Terms which are not only a riveting read but should take you the best part of 3 hours <https://aws.amazon.com/service-terms/>



Estimated reading time: 187 minutes, 30 seconds. Contains 37502 words

We now need to associate the S3 bucket we created earlier with our Route 53 domain name. To do this we will create a Record Set in our Hosted Zone. Click Create Record Set and enter www as our Name, leave Type as “A” and click Yes next to Alias. This will use a special AWS routing to associate the subdomain with an AWS service, click in the Alias Target box and you should see a list of Target options, one of these should be the S3 website we created earlier.

**Create Record Set**

**Name:** www .myvectortiles.xyz.

**Type:** A – IPv4 address

**Alias:**  Yes  No

**Alias Target:** s3-website-eu-west-1.amazonaws.com

**Alias Hosted Zone ID:** Z1BKCTXD74EZPE

You can also type the domain name for the resource. Examples:  
- CloudFront distribution domain name: d111111abcdef8.cloudfront.net  
- Elastic Beanstalk environment CNAME: example.elasticbeanstalk.com  
- ELB load balancer DNS name: example-1.us-east-1.elb.amazonaws.com  
- S3 website endpoint: s3-website.us-east-2.amazonaws.com  
- Resource record set in this hosted zone: www.example.com

[Learn More](#)

**Routing Policy:** Simple

Route 53 responds to queries based only on the values in this record. [Learn More](#)

**Evaluate Target Health:**  Yes  No

**Create**

If, by this point your changes have propagated you should be able to navigate to your domain name (don't forget the www) and see your webpage:



## Hello S3

Magic! But what if we forgot to type www?



Ah, not so good. We need to re-direct calls to our root domain to our www subdomain, easy! We go back to S3 and create a new bucket, this time as our domain name without the www.

A screenshot of the AWS S3 buckets list. It shows two buckets: "myvectortiles.xyz" and "www.myvectortiles.xyz". Both buckets have a small icon next to them.

We click on this new bucket and select Properties, then under Static Website Hosting setup to redirect requests to the other bucket:

A screenshot of the "Static website hosting" configuration dialog for the "www.myvectortiles.xyz" bucket. The dialog has a blue header with the title "Static website hosting" and a close button "X".

- Endpoint : <http://myvectortiles.xyz.s3-website-eu-west-1.amazonaws.com>
- Use this bucket to host a website [Learn more](#)
- Redirect requests [Learn more](#)


Target bucket or domain

Protocol

Disable website hosting

[Cancel](#) [Save](#)

We need to make the bucket public as we did before, we can use the same policy but be sure to delete the www. from the policy record:

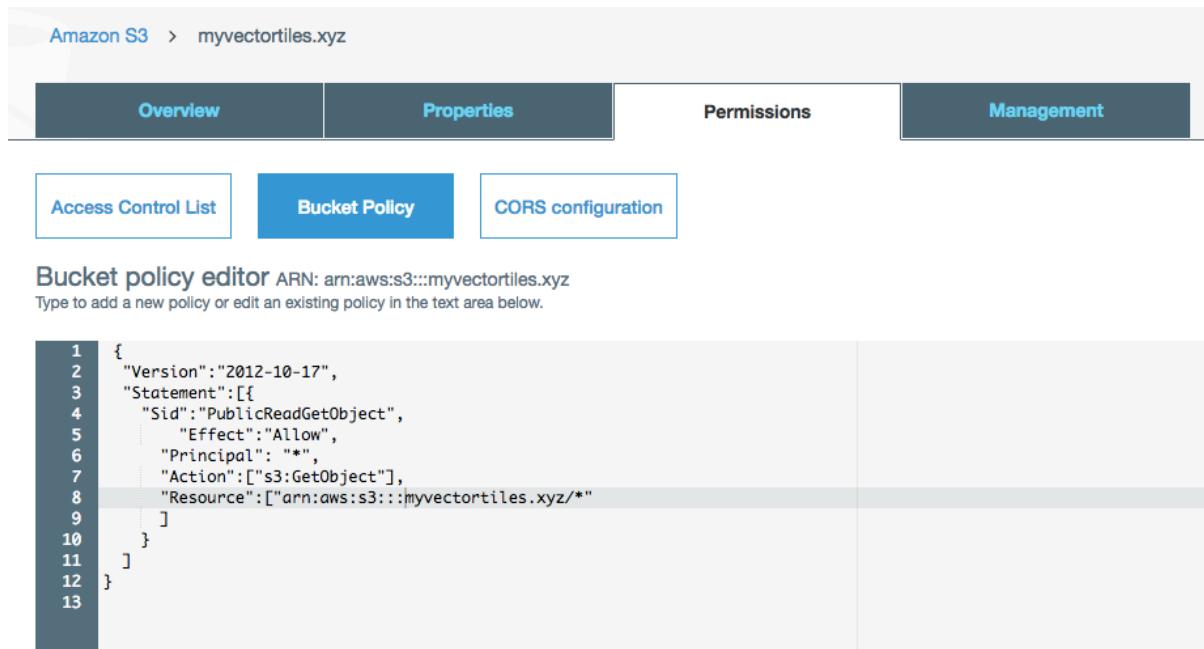

The screenshot shows the AWS S3 console for a bucket named "myvectortiles.xyz". The "Bucket Policy" tab is selected. The policy content is a JSON document:

```
1 {
2     "Version": "2012-10-17",
3     "Statement": [
4         {
5             "Sid": "PublicReadGetObject",
6             "Effect": "Allow",
7             "Principal": "*",
8             "Action": ["s3:GetObject"],
9             "Resource": ["arn:aws:s3:::myvectortiles.xyz/*"]
10        }
11    ]
12}
13
```

Finally we need to tell Route 53 to go to that domain when someone makes a request to the root domain so we create new Record Set with details as follows (we leave the Name blank) (Note: you may need to refresh the Route 53 screen to pickup the S3 website you just created):

### Create Record Set

**Name:** myvectortiles.xyz.

**Type:** A – IPv4 address

**Alias:**  Yes  No

**Alias Target:** i3-website-eu-west-1.amazonaws.com

**Alias Hosted Zone ID:** Z1BKCTXD74EZPE

You can also type the domain name for the resource. Examples:

- CloudFront distribution domain name: d111111abcdef8.cloudfront.net
- Elastic Beanstalk environment CNAME: example.elasticbeanstalk.com
- ELB load balancer DNS name: example-1.us-east-1.elb.amazonaws.com
- S3 website endpoint: s3-website.us-east-2.amazonaws.com
- Resource record set in this hosted zone: www.example.com

[Learn More](#)

**Routing Policy:** Simple

Route 53 responds to queries based only on the values in this record. [Learn More](#)

**Evaluate Target Health:**  Yes  No

**Create**

Now when we hit our root domain e.g. <http://myvectortiles.xyz/> it should redirect us to <http://www.myvectortiles.xyz/> - it may take an hour or so for this rule to start working as DNS information is cached so be patient if it doesn't work straight away.

### 3. Create a free HTTPS cert for our domain (Hello ACM!)

We have our website, hosted on our own domain but it's not secure. We all know HTTPS certs cost a fortune, especially wildcard root certs that we can use for any subdomain on our fancy domain name, right? Wrong! AWS changed all that when they launched Amazon Certificate Manager (ACM) a couple of years back. Now all we need to do is request a cert, click a few buttons and let AWS do the rest, they even handle renewals for us. All this will cost you absolutely nothing.

Go to the AWS Console, **make sure your region is set to US East regardless of what region your normally use!** Now select Certificate Manager then, Provision Certificates. Select "**Request a public certificate**" then continue. Enter the domain name as \*.YOUR\_DOMAIN so for us \*.myvectortiles.xyz. We also need to add another domain name, the reason for this will be explained further on. We add \*.tiles.myvectortiles.xyz.

Click next and leave DNS validation as the default. Click Review then Confirm and Request and then Continue:

Review

---

Domain name

The names you want to secure with an SSL/TLS certificate.

Domain name \*.myvectortiles.xyz  
Additional name \*.tiles.myvectortiles.xyz

Validation method

The method AWS uses to validate your certificate request.

Validation method DNS

---

[Cancel](#) [Previous](#) [Confirm and request](#)

We now need to setup our DNS to tell AWS that we own this Domain. Click the expand arrow and there is a load of information about CNAME records, we can skip this and just click the big blue Create record in Route 53 button and we should be all set.

**Request in progress**

A certificate request with a status of Pending validation has been created. Further action is needed to complete the validation and approval of the certificate.

## Validation



Create a CNAME record in the DNS configuration for each of the domains listed below. You must complete this step before AWS Certificate Manager (ACM) can issue your certificate, but you can skip this step for now by clicking **Continue**. To return to this step later, open the certificate request in the ACM Console.

Domain	Validation status
*.myvectortiles.xyz	Pending validation

Add the following CNAME record to the DNS configuration for your domain. The procedure for adding CNAME records depends on your DNS service Provider. [Learn more.](#)

Name	Type	Value
[REDACTED]	CNAME	[REDACTED]

**Note:** Changing the DNS configuration allows ACM to issue certificates for this domain name for as long as the DNS record exists. You can revoke permission at any time by removing the record. [Learn more.](#)

[Create record in Route 53](#)   **Amazon Route 53 DNS Customers** ACM can update your DNS configuration for you. [Learn more.](#)

### Create record in Route 53

Below is your DNS record for domain validation. Click **Create** below to create the records in your Route 53 hosted zone

Hosted zone myvectortiles.xyz.

Name	Type	Value
_eefff639d10d9a23dfc184ed58c4d339.myvectortiles.xyz.	CNAME	_a284bf766cc810c2a912e27afcc17cd6.tljzshvwok.acm-validations.aws.

[Cancel](#) [Create](#)

Awesome. We are in business!


**Success**

The DNS record was written to your Route 53 hosted zone. It may take up to 30 minutes for the changes to propagate, and for AWS to validate the domain.

Repeat this process for \*.tiles.myvectortiles.xyz. Once the certificate is issued we will see the status below:

Viewing 1 to 1 of 1 certificates							
	Name	Domain name	Additional names	Status	Type	In use?	Renewal eligibility
<input type="checkbox"/>	▶	*.myvectortiles.xyz	*.tiles.myvectortiles.xyz	Issued	Amazon Issued	No	Ineligible

Now before we get let's go back from Virginia to where we were, in our case Dublin:

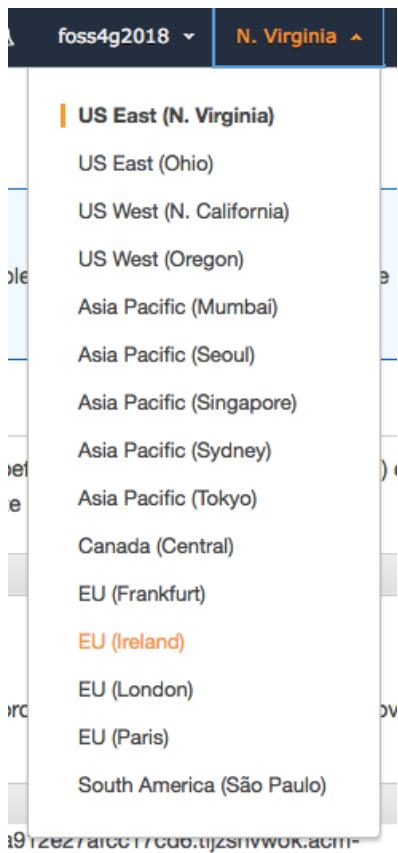

#### **4. Publish our simple webpage to a CDN with SSL support (Hello CloudFront!)**

So we have a website, hosted out of an AWS bucket (in our case in Dublin) on our own domain. If someone hits our root domain AWS knows to redirect to www. We have an SSL cert but we've not used it yet. Also, we have users all over the world who want to see our content but at the moment all calls go to our home region Dublin. So we want speed and we want security and we don't want to pay much / anything for it. Enter Cloudfront!

CloudFront is a Content Delivery Network (CDN) which takes content from our S3 buckets and publishes it to "Edge" locations (local caches) around the world. When a request goes to [www.myvectortiles.xyz](http://www.myvectortiles.xyz) we want to serve the content from the nearest cache rather than going to our home region to get it. So if our user was on Bondi Beach we would want to serve them from Sydney and not Dublin. We also want SSL, CloudFront takes care of that too.

Let's go back to the AWS console and select CloudFront as our service. Notice that the region says Global as CloudFront like Route 53 is a global service. We click Create Distribution to get started. We aren't streaming media so we click Get Started under Web. We can complete the config as follows (make sure you use your own domain!).

We click in Origin Domain Name and it should give us our list of buckets, we want to use the www bucket where we have our files. We also want to Redirect any non-secure HTTP calls to HTTPS:

#### **Create Distribution**

##### **Origin Settings**

Origin Domain Name	www.myvectortiles.xyz.s3.amazonaws.c	i
Origin Path		i
Origin ID	S3-www.myvectortiles.xyz	i
Restrict Bucket Access	<input type="radio"/> Yes <input checked="" type="radio"/> No	i
Origin Custom Headers	Header Name <input type="text"/>	Value <input type="text"/> i +

##### **Default Cache Behavior Settings**

Path Pattern	Default (*)	i
Viewer Protocol Policy	<input type="radio"/> HTTP and HTTPS <input checked="" type="radio"/> Redirect HTTP to HTTPS <input type="radio"/> HTTPS Only	i
Allowed HTTP Methods	<input checked="" type="radio"/> GET, HEAD <input type="radio"/> GET, HEAD, OPTIONS <input type="radio"/> GET, HEAD, OPTIONS, PUT, POST, PATCH, DELETE	i

We want to compress objects automatically as this will come in handy once we start serving up big javascript files. Under Price Class we can choose to only host our content in part of the world to save money but we have a small application with a global user base so will leave as-is.

We want to use our Domain Name so we enter it as a CNAME.

We finally want to use that cert we created earlier so we select Custom SSL Certificate and then select it from the list:

The screenshot shows the AWS CloudFront Distribution Settings page. At the top, there's a section for "Compress Objects Automatically" with radio buttons for "Yes" (selected) and "No". Below that is a "Learn More" link and an information icon. The next section is "Lambda Function Associations" with a dropdown menu for "Event Type". To its right is a "Lambda Function ARN" input field with an information icon and a plus sign icon. The main configuration area is titled "Distribution Settings". It includes fields for "Price Class" (set to "Use All Edge Locations (Best Performance)"), "AWS WAF Web ACL" (set to "None"), and "Alternate Domain Names (CNAMEs)" (containing "www.myvectortiles.xyz"). The "SSL Certificate" section shows "Default CloudFront Certificate (\*.cloudfront.net)" as the selected option, with a note about HTTPS support. Below this, "Custom SSL Certificate (example.com)" is selected, with a note about using an alternate domain name and a specific certificate stored in AWS Certificate Manager (ACM). The "Alternate Domain Names" field at the bottom contains ".myvectortiles.xyz (0f7f926b-2f6f-4c0e-...)" with an information icon.

We want our default object to be our index page but we can leave everything else as defaults.

TLScv1.2\_2018

See the [list of protocols and ciphers](#) that CloudFront uses for each security policy.

Supported HTTP Versions	<input checked="" type="radio"/> HTTP/2, HTTP/1.1, HTTP/1.0 <input type="radio"/> HTTP/1.1, HTTP/1.0	<a href="#">i</a>
Default Root Object	<input type="text" value="index.html"/>	<a href="#">i</a>
Logging	<input type="radio"/> On <input checked="" type="radio"/> Off	<a href="#">i</a>
Bucket for Logs	<input type="text"/>	<a href="#">i</a>
Log Prefix	<input type="text"/>	<a href="#">i</a>
Cookie Logging	<input type="radio"/> On <input checked="" type="radio"/> Off	<a href="#">i</a>
Enable IPv6	<input checked="" type="checkbox"/>	<a href="#">i</a>
Learn more		
Comment	<input type="text"/>	<a href="#">i</a>
Distribution State	<input checked="" type="radio"/> Enabled <input type="radio"/> Disabled	<a href="#">i</a>

[Cancel](#) [Back](#) [Create Distribution](#)

We can now go ahead and create our bucket, it will take 10-15 minutes to push out all that amazing content around the world!

In the meantime we can configure Route 53 to point out www subdomain to our CloudFront endpoint rather than our S3 bucket. This is quite straightforward, go back to Route 53, refresh the page, and click on the www. myvectortiles.xyz Record Set. Click on the Alias Target box and scroll down the list and we should see a new entry for our CloudFront distribution:

**Edit Record Set**

**Name:** www.myvectortiles.xyz.

**Type:** A – IPv4 address

**Alias:**  Yes  No

**Alias Target:**

You can also type

- CloudFront distributions
- Elastic Beanstalk environments
- ELB load balancers
- S3 website endpoints
- Resource records

[Learn More](#)

**Routing Policy:**

Route 53 responds to this request by using the following routing policy:

myvectortiles.xyz.

**Evaluate Target Health:**  Yes  No

**Save Record Set**


We select this and save the record set.

Let's see how our CloudFront distribution is getting on. Once it is ready we should see the Status update from In Progress to Deployed.

### CloudFront Distributions

CloudFront Distributions								
<a href="#">Create Distribution</a>		<a href="#">Distribution Settings</a>		<a href="#">Delete</a>	<a href="#">Enable</a>	<a href="#">Disable</a>	<a href="#">Actions</a>	
Viewing :		Any Delivery Method	Any State	Viewing 1 to 1 of 1 Items				
Delivery Method	ID	Domain Name	Comment	Origin	CNAMEs	Status	State	Last Modified
<input type="checkbox"/> Web	E10HDIQCS3SU8	d5hk6raar07h.cloudfront.net	-	www.myvectortiles.s3.amazonaws.com	www.myvectortiles	Deployed	Enabled	2018-08-13 17:51 UTC


Let's go back and check our URL, hmm our DNS has not updated yet. We will give it some time and try again:



Hello S3

Magic, we have SSL! If we try <http://myvectortiles.xyz/> or <http://www.myvectortiles.xyz/> we see the same thing, our CloudFront is working.

Let's check the cert:

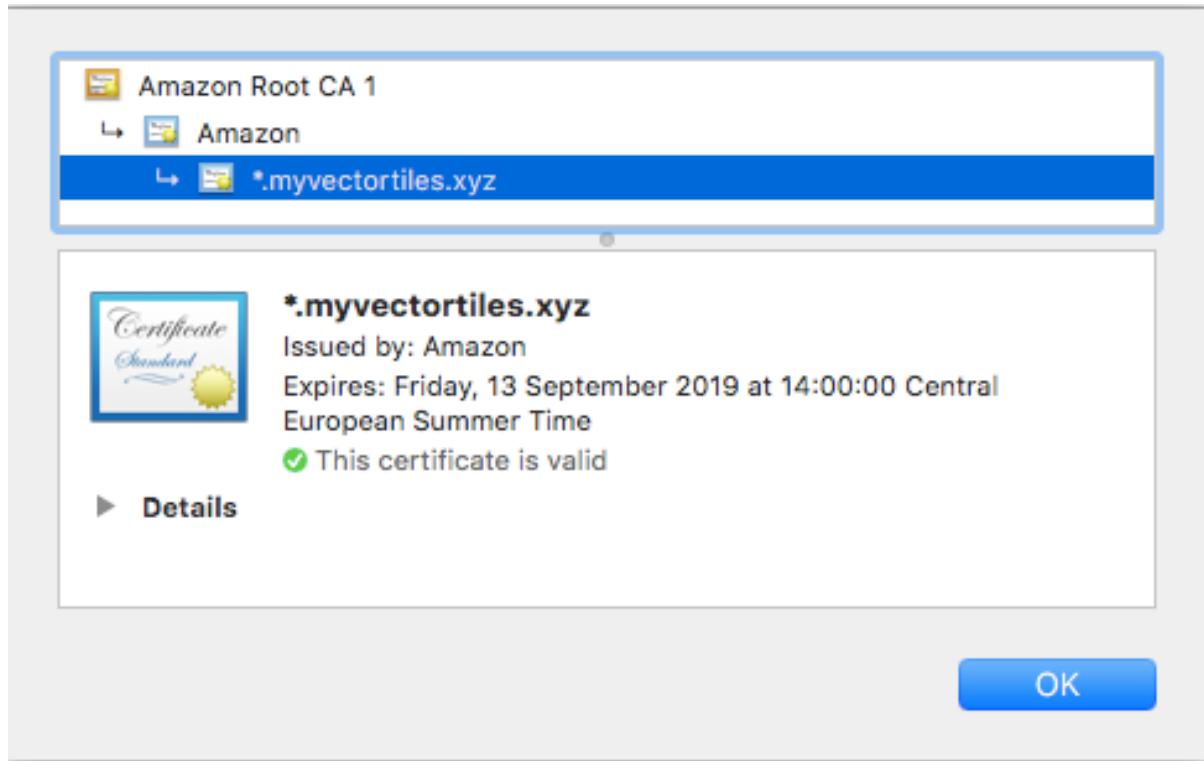

All good, Amazon has come through with a fully trusted HTTPS root certificate and it cost us nothing


## 5. Add a map (Hello Vector Tiles!)

Finally a map, what we came here for. OK with the AWS homework out of the way let's deploy our first map. This is a vector tiles tutorial so we need a client that is capable of rendering them. Mapbox popularised the use of vector tiles which had been around for some time when they published and open sourced their vector tile specification

<https://www.mapbox.com/vector-tiles/specification/> naturally they have excellent support with their Mapbox GL JS <https://github.com/mapbox/mapbox-gl-js> library (they also have native mobile versions). We could also use OpenLayers or a Leaflet plugin but the Mapbox library is excellent and has a very active community and we can use it commercially so it is a great fit.

Let's update our Hello S3 page with a map, we will follow the Mapbox quickstart at <https://www.mapbox.com/mapbox-gl-js/api/>. The new code can be copied from [https://github.com/addresscloud/serverless-tiles/blob/master/05\\_HelloVectorTiles/index.html](https://github.com/addresscloud/serverless-tiles/blob/master/05_HelloVectorTiles/index.html). We upload it to our S3 bucket replacing our original page.

We have a map!

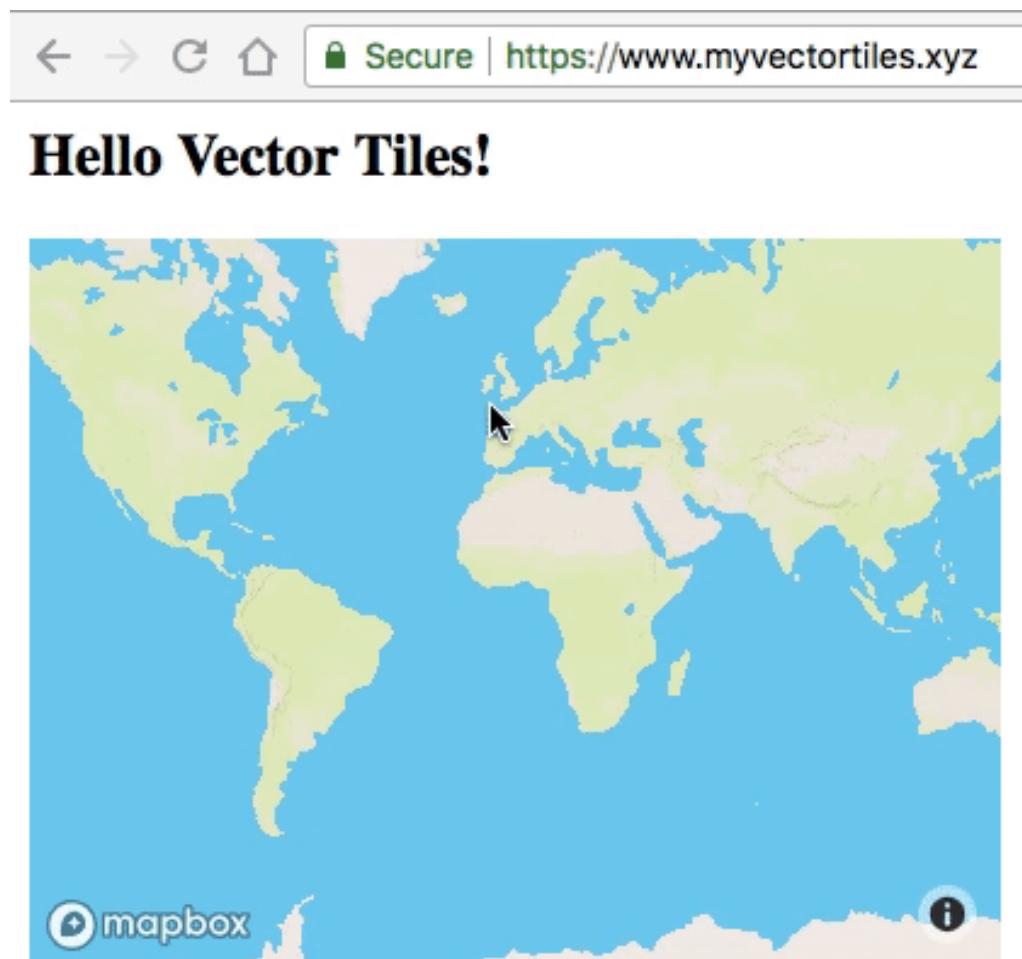

Not just any map but a map based on vector tiles, which means:

- It should be quicker to render
- We can style the tiles client side to support multiple customer requirements
- We can do lots of clever client side tricks such as 3D rendering
- We can “over-zoom” tiles to support more zoom levels and zoom in and out without having to re-query the server at every zoom level
- Our tiles are smaller and will take less space on our server and we only have to serve one set of tiles which can be used for multiple client side use cases

So what is actually happening here? Let's look at the Network Traffic:

Name
www.myvectortiles.xyz
mapbox-gl.js
mapbox-gl.css
data:image/webp;bas...
8d5a7a3f-a122-472f-81ce-9931d7ad0cee
8d5a7a3f-a122-472f-81ce-9931d7ad0cee
streets-v9?access_token=pk.eyJ1IjoiYWRkcm... mapbox.mapbox-terrain-v2,mapbox.mapbox-...
sprite.json?access_token=pk.eyJ1IjoiYWRk... sprite.png?access_token=pk.eyJ1IjoiYWRkcm... data:image/svg+xml;...
data:image/svg+xml;... 0.vector.pbf?access_token=pk.eyJ1IjoiYW... bb1243aa-7577-4785-805c-402851d108d4 0.vector.pbf?access_token=pk.eyJ1IjoiYW... 0.vector.pbf?access_token=pk.eyJ1IjoiYW... 1.vector.pbf?access_token=pk.eyJ1IjoiYW... 1.vector.pbf?access_token=pk.eyJ1IjoiYW... 0-255.pbf?access_token=pk.eyJ1IjoiYWRkcm... 0-255.pbf?access_token=pk.eyJ1IjoiYWRkcm...

1. We download our own client side code, which references Mapbox JS and CSS in the header, and a Mapbox style ()
2. We download the Mapbox client JS library and accompanying CSS
3. We download Style JSON file, this tells the client what to render, how to render it and where to find it, it must follow the Mapbox Style Specification:  
<https://www.mapbox.com/mapbox-gl-js/style-spec/>
4. We download the data source files for each source specified in the Style JSON file above, the data source files must conform to the TileJSON spec  
<https://github.com/mapbox/tilejson-spec>
5. The client then downloads any supporting images and tiles associated with the current style and viewport
6. As we pan and zoom around our map more tiles are pulled down but not for every zoom level, just where we need new data. If we look at a typical request we can see the  
<https://a.tiles..../1/0/0.vector.pbf> traditional Z/X/Y directory structure is being used
7. If we look at a few requests we notice that the subdomain flips between a and b e.g.  
<https://a.tiles..../1/0/0.vector.pbf>, <https://b.tiles..../1/0/1.vector.pbf> this is common technique to squeeze extra performance out of a service to get around browser parallel call limits

So, our requirements are as follows:

- We need to host some pbf (binary) files using a known directory structure
- We need to host some JSON config files (style.json and a tileset.json file)
- We need to support HTTPS
- We need to support multiple subdomains to optimise performance

Well, we already know that CloudFront can cope with all of these requirements so let's get started!

## **6. Publish ready-made OSM tiles to S3/CloudFront**

To prove our concept we will start with a ready made set of vector tiles. OpenMapTiles.org provides a fantastic resource of pre-packaged OpenStreetMap vector tiles and sample styles. There is a free-tier for non commercial use such as ours however for commercial use there is a very reasonable fee. We are going to download the OpenStreetMap tiles for the city of Dar Es Salaam.

The screenshot shows the OpenMapTiles.com homepage with a navigation bar featuring a logo, the site name, and links for "Search", "Package", and "Hosting". Below the header, a breadcrumb navigation path is displayed: "Downloads > Africa > Tanzania > Dar Es Salaam".



### **Dar Es Salaam Vector and raster map tiles**

Bounds [38.894, -7.12, 39.661, -6.502](#)

[OpenStreetMap](#) | [Contour lines](#) | [Hillshade](#) | [Satellite](#)

We choose evaluation and educational purposes, we get a link to download the file once we have signed in. Note that a commercial license for this data is only 10 USD, a very fair and affordable price you will agree!

The map tiles for

- commercial product or company web
- production use by an institution
- open-source or open-data project website
- non-commercial personal project
- evaluation and education purpose

From: 2018-08-06 / Version: v3.8.0  
Format: MBTiles (PBF)  
[Terms of use](#)

All regions with updates from 512 USD

[Production package](#)

Weekly updates for all regions and planet  
OpenStreetMap + Contour Lines + Hillshading

From: 2017-07-03 / Version: v3.6.1  
Size: 23.47 MB / Format: MBTiles (PBF)  
[Terms of use](#)

Allowed use in an evaluation and education purpose.

[Free download](#)

wget -c https://openmaptiles.os.zhdk.cloud.switch.ch/v3.6.1/extracts/africa/0YY0UtmezK7Qn0Ztl66GazXDHIAZxLuLf/2017-07-03\_tanzania\_dar-es-salaam.mbtiles  
MD5 d466018fe815343737be5b40bd6c392f

Download link is valid for one hour.

We download the file using the supplied wget command (on a mac you can install wget using homebrew (<https://brew.sh/>) with `brew install wget`)

```

vectil — bash — 105x22

[Marks-MacBook-Air:vectil markvarley$ wget -c https://openmaptiles.os.zhdk.cloud.switch.ch/v3.6.1/extracts/africa/0YY0UtmezK7Qn0Ztl66GazXDHIAZxLuLf/2017-07-03_tanzania_dar-es-salaam.mbtiles
--2018-08-14 13:18:05-- https://openmaptiles.os.zhdk.cloud.switch.ch/v3.6.1/extracts/africa/0YY0UtmezK7Qn0Ztl66GazXDHIAZxLuLf/2017-07-03_tanzania_dar-es-salaam.mbtiles
Resolving openmaptiles.os.zhdk.cloud.switch.ch (openmaptiles.os.zhdk.cloud.switch.ch)... 86.119.32.13
Connecting to openmaptiles.os.zhdk.cloud.switch.ch (openmaptiles.os.zhdk.cloud.switch.ch)|86.119.32.13|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 24608768 (23M) [application/octet-stream]
Saving to: '2017-07-03_tanzania_dar-es-salaam.mbtiles'

2017-07-03_tanzania_dar-es 100%[=====] 23.47M 3.23MB/s in 8.4s
2018-08-14 13:18:20 (2.79 MB/s) - '2017-07-03_tanzania_dar-es-salaam.mbtiles' saved [24608768/24608768]

[Marks-MacBook-Air:vectil markvarley$ ls
2017-07-03_tanzania_dar-es-salaam.mbtiles
Marks-MacBook-Air:vectil markvarley$ ]

```

We have a single .mbtiles file but we needed a directory structure. No problem, Mapbox provide a useful tool to help with this. Head over to the repo <https://github.com/mapbox/mbutil>, follow the instructions there to clone and install the tool (it uses Python so you will need Python installed). Once installed we check to make sure it works with mb-util -h. We should be in business. Now we can export our mbtiles file to a directory using the following command:

```
mb-util 2017-07-03_tanzania_dar-es-salaam.mbtiles tzadar --image_format=pbf
```


```
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2720 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2721 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2722 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2723 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2724 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2725 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2726 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2727 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2728 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2729 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2730 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2731 / 2731 tiles exported
Marks-MacBook-Air:vectil markvarley$
```

We get lots of encouraging progress messages. Let's see what we have just created:

```
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2726 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2727 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2728 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2729 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2730 / 2731 tiles exported
DEBUG:mbutil.util:flipping
INFO:mbutil.util:2731 / 2731 tiles exported
(Marks-MacBook-Air:vectil markvarley$ ls
2017-07-03_tanzania_dar-es-salaam.mbtiles      tzadar
mbutil
(Marks-MacBook-Air:vectil markvarley$ cd tzadar
(Marks-MacBook-Air:tzadar markvarley$ ls
0           11          14          4           7           metadata.json
1           12          2           5           8
10          13          3           6           9
(Marks-MacBook-Air:tzadar markvarley$ cd 0
(Marks-MacBook-Air:0 markvarley$ cd 0
(Marks-MacBook-Air:0 markvarley$ ls
0.pbf
Marks-MacBook-Air:0 markvarley$
```

This looks very promising, we have a directory structure that looks like what we need, if we drill through the 3 tiers we found a pbf file as expected. It looks like we are in business.

We need to create a new S3 bucket to host our tiles. This is going to be a CloudFront website so we follow the same process as before:

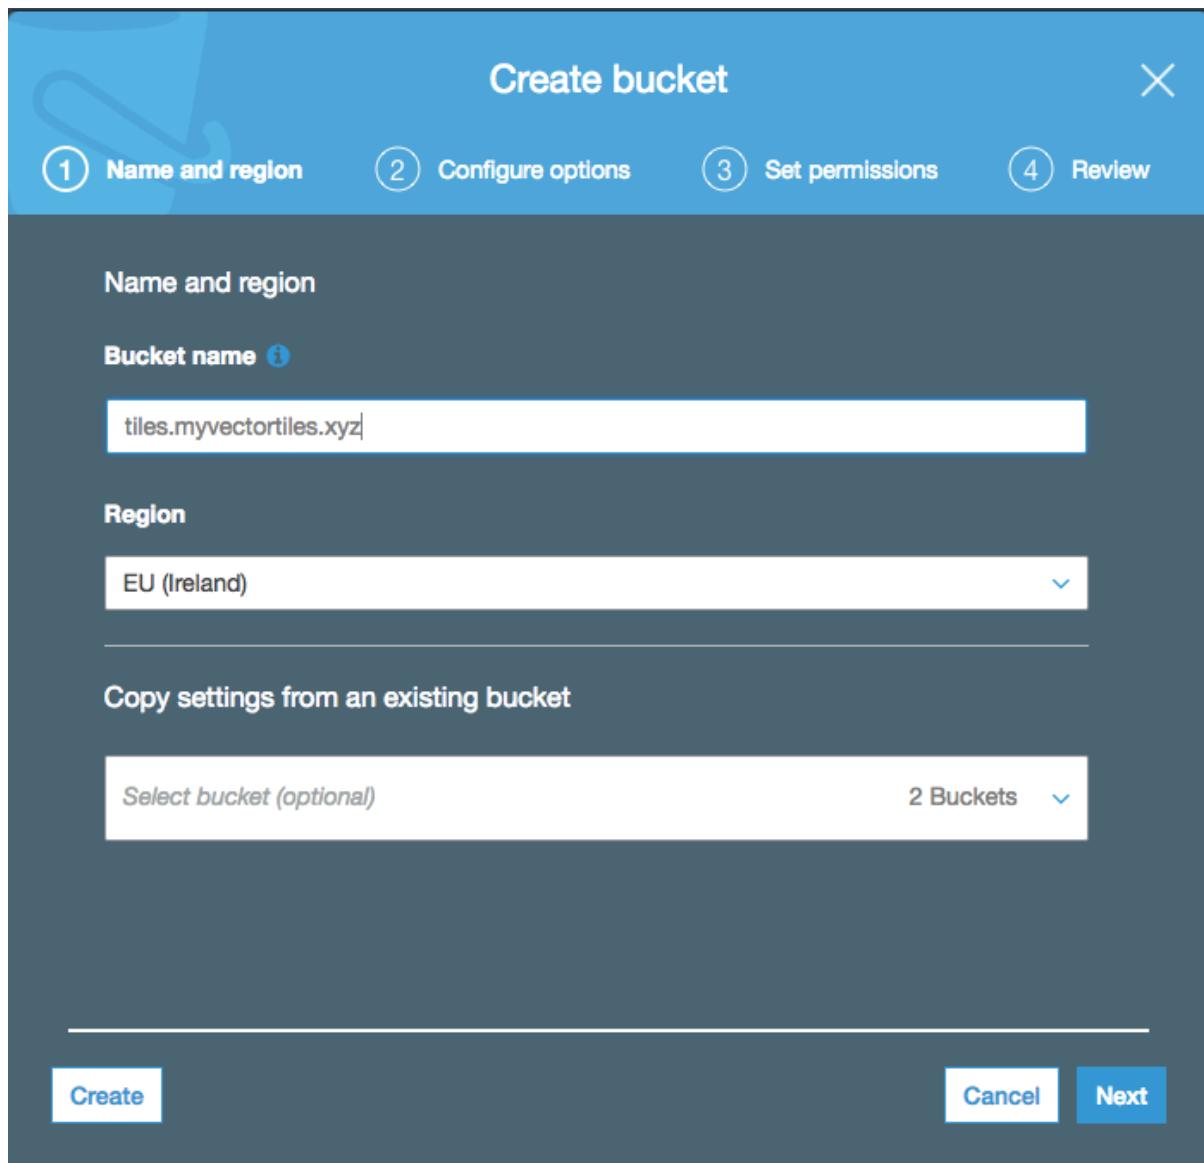

As before we also need to configure public access:

Amazon S3 > tiles.myvectortiles.xyz

Overview	Properties	Permissions	Management
Access Control List	Bucket Policy	CORS configuration	

**Bucket policy editor ARN:** arn:aws:s3:::tiles.myvectortiles.xyz  
Type to add a new policy or edit an existing policy in the text area below.

```
1 {
2     "Version": "2012-10-17",
3     "Statement": [
4         {
5             "Sid": "PublicReadGetObject",
6             "Effect": "Allow",
7             "Principal": "*",
8             "Action": ["s3:GetObject"],
9             "Resource": ["arn:aws:s3:::tiles.myvectortiles.xyz/*"]
10            }
11        ]
12    }
13 }
```

We also need to setup CORS configuration, this is to allow us to make requests for files from within our mapping application. The config file can be found at [https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/06\\_OSMVectorTilesAWS/CORS.txt](https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/06_OSMVectorTilesAWS/CORS.txt) :

Overview	Properties	Permissions Public	Management
Access Control List	Bucket Policy	CORS configuration	

**CORS configuration editor ARN:** arn:aws:s3:::tiles.myvectortiles.xyz  
Add a new cors configuration or edit an existing one in the text area below.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <CORSConfiguration xmlns="http://s3.amazonaws.com/doc/2006-03-01/">
3 <CORSRule>
4     <AllowedOrigin>*</AllowedOrigin>
5     <AllowedMethod>GET</AllowedMethod>
6     <MaxAgeSeconds>3000</MaxAgeSeconds>
7     <AllowedHeader>Authorization</AllowedHeader>
8 </CORSRule>
9 </CORSConfiguration>
```

Now we need to tell Amazon that this is going to be a website:

# Static website hosting

Endpoint : <http://tiles.myvectortiles.xyz.s3-website-eu-west-1.amazonaws.com>

Use this bucket to host a website [Learn more](#)

Index document [i](#)

index.html

Error document [i](#)

error.html

Redirection rules (optional) [i](#)

Redirect requests [Learn more](#)

Disable website hosting


[Cancel](#) [Save](#)

Let's go ahead and upload this directory to our new bucket in S3. We have a lot of files and a complex directory structure to upload so rather than using the console we will use the AWS command line interface. Instructions for installing and configuring the interface can be found here <https://aws.amazon.com/cli/>. You will also need to create an amazon user for your account using the Identity and Access Management (IAM) with permissions to write to S3. Instructions for doing this are here [https://docs.aws.amazon.com/IAM/latest/UserGuide/id\\_users\\_create.html](https://docs.aws.amazon.com/IAM/latest/UserGuide/id_users_create.html)

Before we upload the files let's think back to what we said earlier, the format for the vector tiles is .pbf (Protocol Buffers) which are compressed binary files. We need to tell Amazon that our files are already compressed so it does not try and compress them again and we also need to let it know the file type. We can do all that with a single command:


```
aws s3 cp tzadar s3://tiles.myvectortiles.xyz/tzadar/ --recursive --content-type application/x-protobuf --content-encoding 'gzip'
```

Depending on the size of the area you are uploading and your bandwidth this may take some time. One option to speed this up is to launch a micro EC2 instance on Amazon, in the region where your S3 bucket is, remote into via the command line and run the upload from there but since this is a serverless tutorial that would cheating!

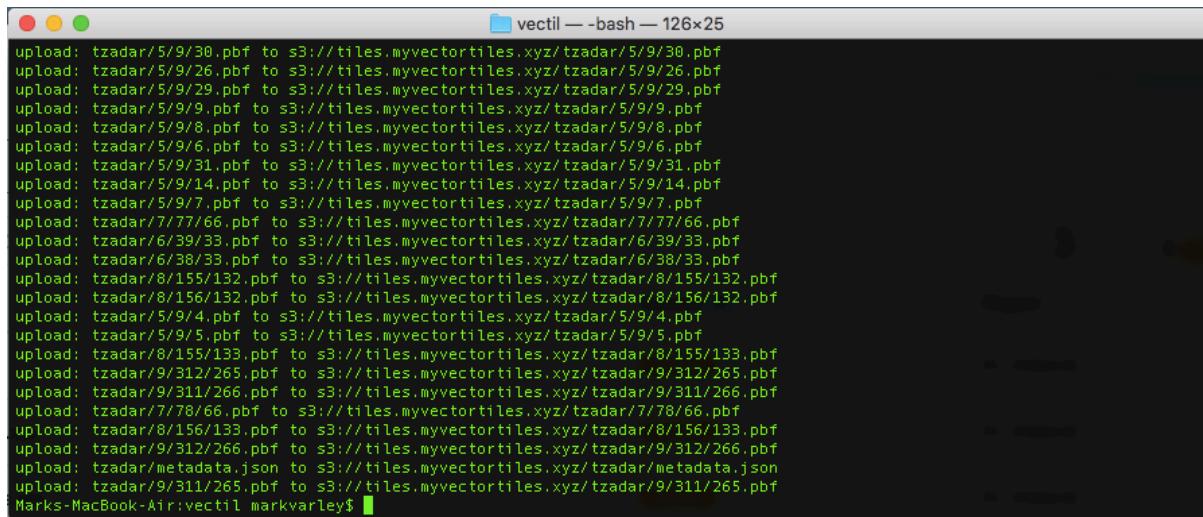

```
upload: tzadar/5/9/30.pbf to s3://tiles.myvectortiles.xyz/tzadar/5/9/30.pbf
upload: tzadar/5/9/26.pbf to s3://tiles.myvectortiles.xyz/tzadar/5/9/26.pbf
upload: tzadar/5/9/29.pbf to s3://tiles.myvectortiles.xyz/tzadar/5/9/29.pbf
upload: tzadar/5/9/9.pbf to s3://tiles.myvectortiles.xyz/tzadar/5/9/9.pbf
upload: tzadar/5/9/8.pbf to s3://tiles.myvectortiles.xyz/tzadar/5/9/8.pbf
upload: tzadar/5/9/6.pbf to s3://tiles.myvectortiles.xyz/tzadar/5/9/6.pbf
upload: tzadar/5/9/31.pbf to s3://tiles.myvectortiles.xyz/tzadar/5/9/31.pbf
upload: tzadar/5/9/14.pbf to s3://tiles.myvectortiles.xyz/tzadar/5/9/14.pbf
upload: tzadar/5/9/7.pbf to s3://tiles.myvectortiles.xyz/tzadar/5/9/7.pbf
upload: tzadar/7/77/66.pbf to s3://tiles.myvectortiles.xyz/tzadar/7/77/66.pbf
upload: tzadar/6/39/33.pbf to s3://tiles.myvectortiles.xyz/tzadar/6/39/33.pbf
upload: tzadar/6/38/33.pbf to s3://tiles.myvectortiles.xyz/tzadar/6/38/33.pbf
upload: tzadar/8/155/132.pbf to s3://tiles.myvectortiles.xyz/tzadar/8/155/132.pbf
upload: tzadar/8/156/132.pbf to s3://tiles.myvectortiles.xyz/tzadar/8/156/132.pbf
upload: tzadar/5/9/4.pbf to s3://tiles.myvectortiles.xyz/tzadar/5/9/4.pbf
upload: tzadar/5/9/5.pbf to s3://tiles.myvectortiles.xyz/tzadar/5/9/5.pbf
upload: tzadar/8/155/133.pbf to s3://tiles.myvectortiles.xyz/tzadar/8/155/133.pbf
upload: tzadar/9/312/265.pbf to s3://tiles.myvectortiles.xyz/tzadar/9/312/265.pbf
upload: tzadar/9/311/266.pbf to s3://tiles.myvectortiles.xyz/tzadar/9/311/266.pbf
upload: tzadar/7/78/66.pbf to s3://tiles.myvectortiles.xyz/tzadar/7/78/66.pbf
upload: tzadar/8/156/133.pbf to s3://tiles.myvectortiles.xyz/tzadar/8/156/133.pbf
upload: tzadar/9/312/266.pbf to s3://tiles.myvectortiles.xyz/tzadar/9/312/266.pbf
upload: tzadar/metadata.json to s3://tiles.myvectortiles.xyz/tzadar/metadata.json
upload: tzadar/9/311/265.pbf to s3://tiles.myvectortiles.xyz/tzadar/9/311/265.pbf
Marks-MacBook-Air:vectil markvarley$
```

With our upload complete we can head back to the AWS console and check everything looks OK:

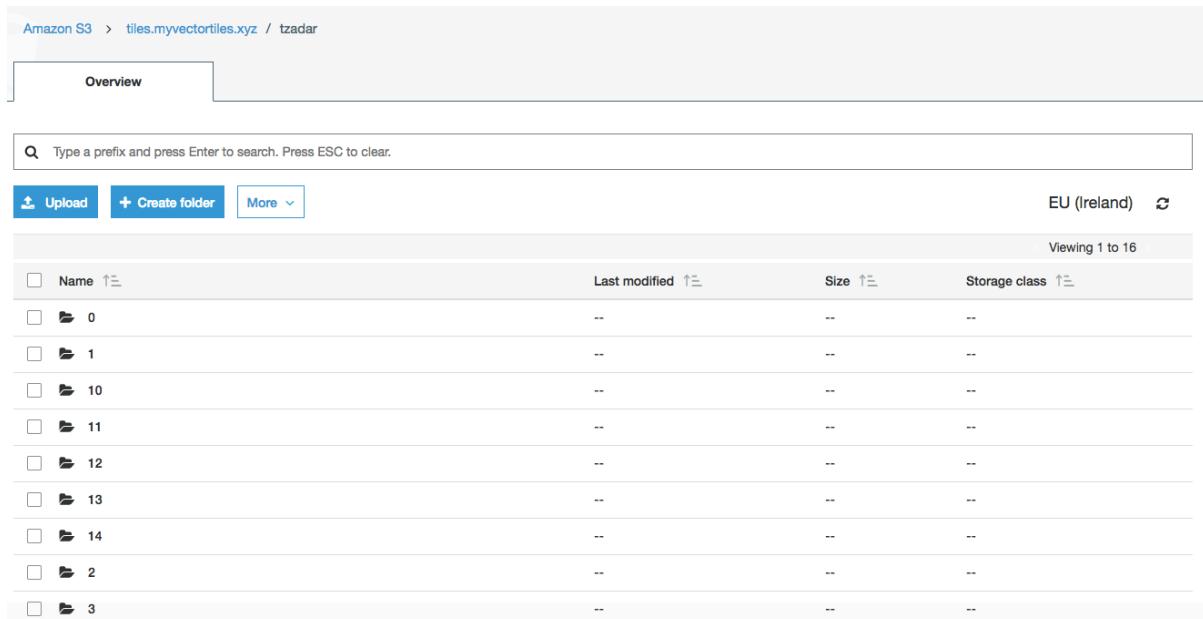

Name	Last modified	Size	Storage class
0	--	--	--
1	--	--	--
10	--	--	--
11	--	--	--
12	--	--	--
13	--	--	--
14	--	--	--
2	--	--	--
3	--	--	--

Our directories have been created and if we navigate into them we can see pbf files. Let's check the format information is correct:

All looking good.

So let's revisit our requirements:

- We need to host some pbf (binary) files using a known directory structure
- We need to host some JSON config files (style.json and a tileset.json file)
- We need to support HTTPS
- We need to support multiple subdomains to optimise performance

So what about the config. If we look in the root of our directory we see a metadata.json file.

Key	Value
Content-Encoding	gzip
Content-Type	application/x-protobuf

It would be great if this corresponds to the TileJSON spec that Mapbox GL JS is expecting. Let's open it and take a look. We can't open it or download it, why?! Remember we told Amazon earlier that we were uploading pbf files so we need to delete the Content-Encoding and update the Content-Type:

The screenshot shows the AWS Lambda function configuration interface. The top navigation bar includes tabs for 'Overview', 'Properties', 'Permissions', and 'Select from'. The 'Storage class' section contains a description and a 'Learn more' link. The 'Encryption' section contains a description and a 'Learn more' link. The 'Metadata' tab is active, showing a table with one row: Content-Type set to application/json. There are 'Add Metadata', 'Delete', and 'Edit' buttons above the table. A 'Cancel' and 'Save' button are at the bottom right.

Key	Value
Content-Type	application/json

**Storage class**  
Use the most appropriate storage class based on frequency of access.  
[Learn more](#)

**Encryption**  
Use encryption to protect your data while in-transit and at rest.  
[Learn more](#)

**Metadata**

Key	Value
Content-Type	application/json

[Add Metadata](#) [Delete](#) [Edit](#)

[Cancel](#) [Save](#)

With the Metadata updated and saved we can download the file:

If we look at a simple Mapbox TileJSON file we see that the specs don't match:

```
2     "attribution": "INSERT ATTRIBUTION HERE",
3     "basename": "OUR_FILENAME.mbtiles",
4     "bounds": [],
5     "center": [],
6     "description": "Extract from https://openmaptiles.org",
7     "format": "pbf",
8     "id": "ID_OF_TILESET",
9     "maxzoom": "MAX_ZOOM",
10    "minzoom": "MIN_ZOOM",
11    "name": "NAME_OF_TILESET",
12    "scheme": "xyz",
13    "tiles": ["https://a.tiles.OUR_SERVER/OUR_TILE_DIR/{z}/{x}/{y}.pbf", "https://b.tiles.OUR_SERVER/OUR_TILE_DIR/{z}/{x}/
14    "vector_layers": [],
15    "version": "2.0.0"
```

However, with a little bit of copying, pasting and cleanup we can get what we need. We need to replace those \" for valid values. We can then copy everything between the square

brackets after vector\_layers in the json section. For the bounds and center we can copy directly and just amend to the TileJSON format (an array of numeric values in square brackets) and then we can set our tiles sources to be the endpoint we are going to host from. We will end up with a file like this

[https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/06\\_OSMVectorTilesAWS/tile.json](https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/06_OSMVectorTilesAWS/tile.json)

We can upload this file to our S3 bucket via the console into the tzadar folder at the root. It should look like this:

The screenshot shows the Amazon S3 console interface. A file named 'tile.json' is selected in the 'tzadar' folder. The 'Metadata' tab is active, displaying a table with one row: 'Content-Type' with the value 'application/json'. There are 'Add Metadata', 'Delete', 'Edit', and 'Cancel/Save' buttons at the top of the metadata panel.

Key	Value
Content-Type	application/json

Amazon has detected and set the correct content type.


Now we need some style! Remember that with vector tiles the styles are applied on the fly and can be swapped client side. OpenMapTiles provides some great styles

<https://openmaptiles.org/styles/> that can be further customised if required, Maputnik is a great tool for this <https://maputnik.github.io/>. We will use the OSM Bright style: <https://github.com/openmaptiles/osm-bright-gl-style> to get started. Let's clone the repo and have a look at the style.json file.

We need to update the URLs to point to our tile.json file that we just created. A sample style file is here: [https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/06\\_OSMVectorTilesAWS/bright.json](https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/06_OSMVectorTilesAWS/bright.json)

We can will upload this to our bucket [www.myvectortiles.xyz](http://www.myvectortiles.xyz) along with our client side code. We can set the Cache-Control header with max-age=3600, this will help ensure that the config file is refreshed at least once an hour. Note that every time we upload this file we will need to remember to set this header. Or we can do this with the S3 CLI with:

```
aws s3 cp bright.json s3://www.myvectortiles.xyz/bright.json --cache-control max-age=3600
```

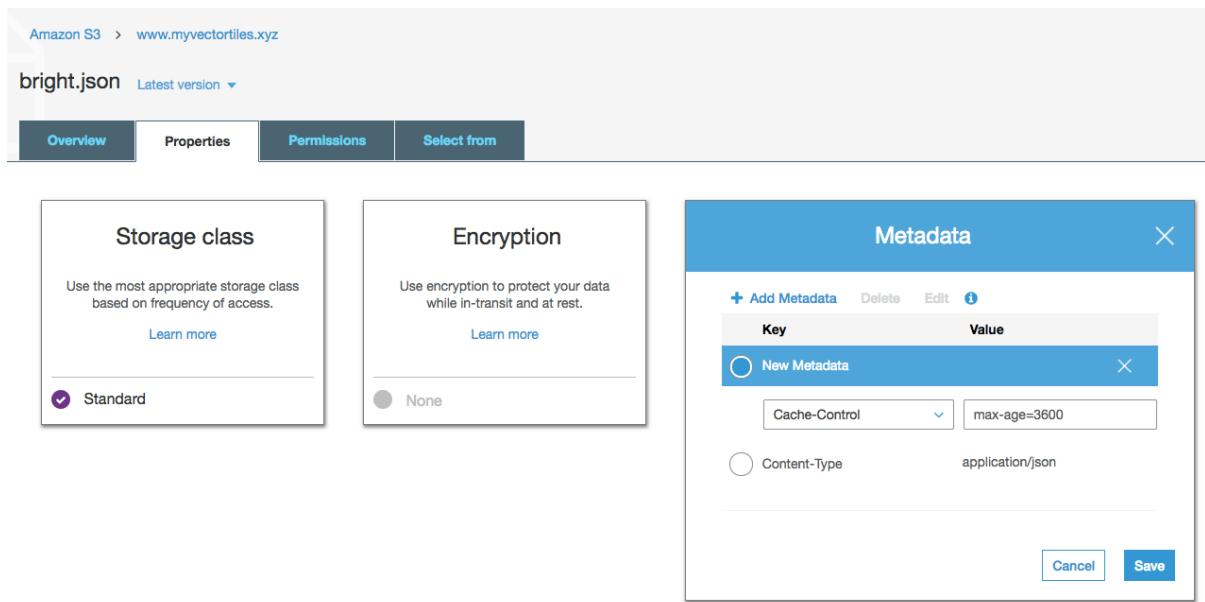

Notice in our style file we also have a requirement to serve some fonts. We can either register for a key with <https://openmaptiles.org/> or create our own and host out of our bucket. We will do the latter, the steps are as follows:

- Clone the repo at <https://github.com/openmaptiles/fonts>
- Install the package (nodejs is required as a dependency)
- Generate the fonts
- Upload to our S3 bucket

We will do those now:

A screenshot of a macOS terminal window. The title bar says "vectil — bash — 126x25". The command "git clone https://github.com/openmaptiles/fonts.git" is entered and executed. The output shows the cloning process: "Cloning into 'fonts'...", "remote: Counting objects: 8691, done.", "remote: Compressing objects: 100% (11/11), done.", "remote: Total 8691 (delta 1), reused 0 (delta 0), pack-reused 8680", "Receiving objects: 100% (8691/8691), 149.23 MiB | 1.01 MiB/s, done.", "Resolving deltas: 100% (105/105), done.", "Checking out files: 100% (111/111), done.". After the clone is complete, the user runs "npm install".

Don't worry if you see some errors and warnings when installing. Once installed we can generate the font files we need and upload them to S3:

```
node ./generate.js
```

```

fonts — bash — 126x25
Total size 406746 B
[Roboto Medium Italic]
Size histo [kB]: 77|71|4|34|126|10|||56|1|14|5|5|||2|||2
Total size 425267 B
[Roboto Regular]
Size histo [kB]: 72|65|4|32|118|9|||52|1|13|5|5|||2|||2
Total size 396396 B
[Roboto Thin]
Size histo [kB]: 68|61|4|30|112|9|||49|1|12|5|5|||2|||2
Total size 375047 B
[Roboto Thin Italic]
Size histo [kB]: 72|65|4|31|118|9|||52|1|12|4|5|||2|||2
Total size 396392 B
Total size 120909915 B
Marks-MacBook-Air:fonts markvarley$
```

aws s3 cp \_output s3://tiles.myvectortiles.xyz/fonts/ --recursive --content-type application/x-protobuf

Note: we do not use the content-encoding header this time as the fonts are not compressed.

Now we should need to setup our CloudFront distribution to host all this. The process is as before but with a few small differences. We start by Creating a new CloudFront distribution and point it at our S3 bucket and set HTTP to redirect to HTTPS:

**Create Distribution**

**Origin Settings**

Origin Domain Name	tiles.myvectortiles.xyz.s3.amazonaws.com	<a href="#">?</a>	
Origin Path		<a href="#">?</a>	
Origin ID	S3-tiles.myvectortiles.xyz	<a href="#">?</a>	
Restrict Bucket Access	<input type="radio"/> Yes <input checked="" type="radio"/> No	<a href="#">?</a>	
Origin Custom Headers	Header Name	Value	<a href="#">?</a>
			<a href="#">+</a>

**Default Cache Behavior Settings**

Path Pattern	Default (*)	<a href="#">?</a>
Viewer Protocol Policy	<input type="radio"/> HTTP and HTTPS <input checked="" type="radio"/> Redirect HTTP to HTTPS <input type="radio"/> HTTPS Only	<a href="#">?</a>
Allowed HTTP Methods	<input checked="" type="radio"/> GET, HEAD <input type="radio"/> GET, HEAD, OPTIONS <input type="radio"/> GET, HEAD, OPTIONS, PUT, POST, PATCH, DELETE	<a href="#">?</a>
Field-level Encryption Config	<a href="#">▼</a>	<a href="#">?</a>

We need to set the Allowed HTTP Methods to GET, HEAD, OPTIONS. We also need to adjust the caching options to Whitelist and then select Accept as a header to whitelist. This will ensure that we don't run into any CORS ([https://en.wikipedia.org/wiki/Cross-origin\\_resource\\_sharing](https://en.wikipedia.org/wiki/Cross-origin_resource_sharing)) errors later on.

**Allowed HTTP Methods**

- GET, HEAD
- GET, HEAD, OPTIONS
- GET, HEAD, OPTIONS, PUT, POST, PATCH, DELETE

**Field-level Encryption Config**

**Cached HTTP Methods**

- GET, HEAD (Cached by default)
- OPTIONS

**Cache Based on Selected Request Headers**

Whitelist 

[Learn More](#)

**Whitelist Headers**


Filter headers or enter a custom header 

Add Custom >> 

1 header(s) whitelisted

Accept
--------

Add >> 

<< Remove 

Avoid Whitelisting headers with an S3 origin, unless you need to implement cross-origin resource sharing (CORS) or personalize content using Lambda@Edge in origin-facing events.

**Object Caching**

- Use Origin Cache Headers
- Customize

[Learn More](#)

We don't want to compress content this time as our pbf files are already compressed. For our CNAME records we need 3: tiles.myvectortiles.xyz, a.tiles.myvectortiles.xyz, b.tiles.myvectortiles.xyz this is to allow us to serve content on the regular tiles. subdomain or use a and b aliases to improve performance on the client. We select our custom certificate as before:

**Compress Objects Automatically**

- Yes
- No

[Learn More](#)

**Lambda Function Associations**

Event Type 

Lambda Function ARN 

**Distribution Settings**

Price Class  Use All Edge Locations (Best Performance) 

AWS WAF Web ACL  None 

Alternate Domain Names (CNAMEs)  tiles.myvectortiles.xyz,a.tiles.myvectortiles.xyz,b.tiles.myvectortiles.xyz 

SSL Certificate

- Default CloudFront Certificate (\*.cloudfront.net)
 

Choose this option if you want your users to use HTTPS or HTTP to access your content with the CloudFront domain name (such as <https://d111111abcdef8.cloudfront.net/logo.jpg>).  
Important: If you choose this option, CloudFront requires that browsers or devices support TLSv1 or later to access your content.
- Custom SSL Certificate (example.com):
 

Choose this option if you want your users to access your content by using an alternate domain name, such as <https://www.example.com/logo.jpg>. You can use a certificate stored in AWS Certificate Manager (ACM) in the US East (N. Virginia) Region, or you can use a certificate stored in IAM.

[\\*.myvectortiles.xyz \(0f7f926b-2f6f-4c0e-!\[\]\(ce17e64d0d204e92267aeb712c328aee\_img.jpg\)](#)

[Request or Import a Certificate with ACM](#)

We don't need a default root object so we can go ahead and Create the Distribution. While this is being provisioned and our vector tiles being sent to edge locations all around the world we can setup our DNS, let's head back over to Route 53:

We will setup aliases for each of our endpoints: tiles, a.tiles and b.tiles as so:

**Create Record Set**

**Name:** a.tiles .myvectortiles.xyz.

**Type:** A – IPv4 address

**Alias:**  Yes  No

**Alias Target:** dflikw2hs44nab.cloudfront.net ⚠

**Alias Hosted Zone ID:** Z2FDTNDATAQYW2

You can also type the domain name for the resource. Examples:  
 - CloudFront distribution domain name: d11111abcdef8.cloudfront.net  
 - Elastic Beanstalk environment CNAME: example.elasticbeanstalk.com  
 - ELB load balancer DNS name: example-1.us-east-1.elb.amazonaws.com  
 - S3 website endpoint: s3-website.us-east-2.amazonaws.com  
 - Resource record set in this hosted zone: www.example.com  
[Learn More](#)

**Routing Policy:** Simple

Route 53 responds to queries based only on the values in this record. [Learn More](#)

**Evaluate Target Health:**  Yes  No ⚠

**Create**

Let's check the status of the Distribution, it should be deployed in around 10-15 minutes all being well:

Viewing : Any Delivery Method ▾ Any State ▾									
	Delivery Method	ID	Domain Name	Comment	Origin ▾	CNAMEs	Status	State	Last Modified
<input type="checkbox"/>	Web	EI6KZVAGD1CKQ	dflikw2hs44nab.cloudfront.net	-	tiles.myvectortiles.xyz	tiles.myvectortiles.xyz	Deployed	Enabled	2018-08-14 15:26 UTC
<input type="checkbox"/>	Web	E10HDIQCSD3SU8	d5hk6craar07h.cloudfront.net	-	www.myvectortiles.xyz	www.myvectortiles.xyz	Deployed	Enabled	2018-08-13 17:51 UTC

Let's check our new URLs to make sure this is all working:

<https://tiles.myvectortiles.xyz/tzadar/tile.json>  
<https://a.tiles.myvectortiles.xyz/tzadar/tile.json>  
<https://b.tiles.myvectortiles.xyz/tzadar/tile.json>

We should see our JSON file and a green padlock for each to indicate they are secure:



The screenshot shows a browser window with the URL <https://a.tiles.myvectortiles.xyz/tzadar/tile.json>. The page displays a JSON object representing a tile configuration. The JSON structure includes fields for attribution, basename, bounds, center, description, and format. The 'bounds' field contains coordinates for a specific geographic area, and the 'center' field specifies the central point of the map.

```

{
  "attribution": "<a href=\"http://www.openmaptiles.org/\" target=_blank>OpenStreetMap contributors</a>",
  "basename": "tzadar.mbtiles",
  "bounds": [
    38.894,
    -7.12,
    39.661,
    -6.502
  ],
  "center": [
    39.2775,
    -6.811,
    14
  ],
  "description": "Extract from https://openmaptiles.org",
  "format": "pbf",
}

```

So let's revisit our requirements:


- ~~We need to host some pbf (binary) files using a known directory structure~~
- ~~We need to host some JSON config files (style.json and a tilesset.json file)~~
- ~~We need to support HTTPS~~
- ~~We need to support multiple subdomains to optimise performance~~

We are now ready to put all this into practice! We will update our index.html with details of the new service, let's make the map occupy the whole page as well so we can revel in our success! The new file should look like this

[https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/06\\_OSMVectorTilesAWS/index.html](https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/06_OSMVectorTilesAWS/index.html)

We will again upload it to our [www.myvectortiles.xyz](https://www.myvectortiles.xyz) bucket.

Let's see what is happening at <https://www.myvectortiles.xyz/> et voila!

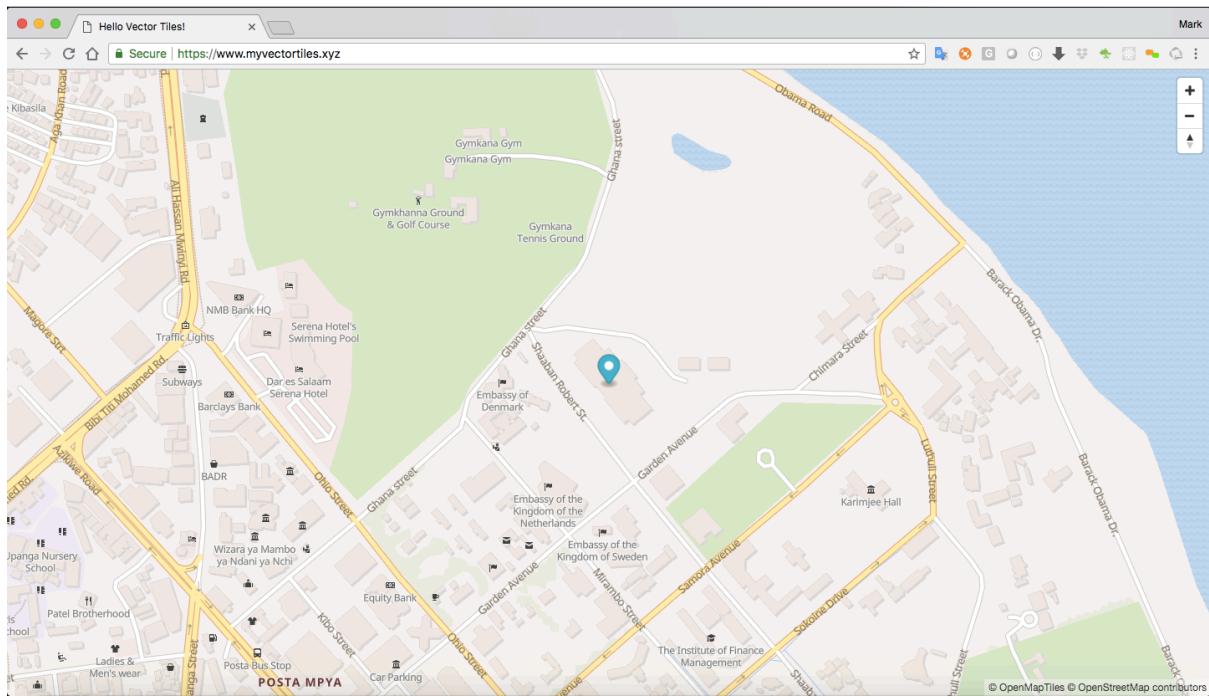

**Note:** content can be cached for an hour or so, if we do not see a map straight away, we can force a refresh of the cache by going to the CloudFront console, selecting our distribution and create an invalidation as follows:

CloudFront Distributions > E10HDIQCS3SU8

General Origins Behaviors Error Pages Restrictions **Invalidations** Tags

Invalidating objects removes them from CloudFront edge caches. A faster and less expensive method is to use versioned object or directory names. For more information, see [Invalidate Objects](#) in the [Amazon CloudFront Developer Guide](#).

**Create Invalidation**

Distribution ID: E10HDIQCS3SU8

Object Paths: /\*

Invalidate


This process can take 15-20 minutes as all of the edge locations around the world need to re-sync to our master region.

## 7. Publish our own geo data to S3/CloudFront

We now come to our final section, publishing our own content. This is actually fairly simple thanks to the excellent tools from Mapbox. To get started though we will need some data to overlay on our map of Dar Es Salaam. A quick Google search shows that ward information is available for download for Tanzania can be downloaded from

<https://data.humdata.org/dataset/2012-census-tanzania-wards-shapefiles>

We download the file and preview it in QGIS:

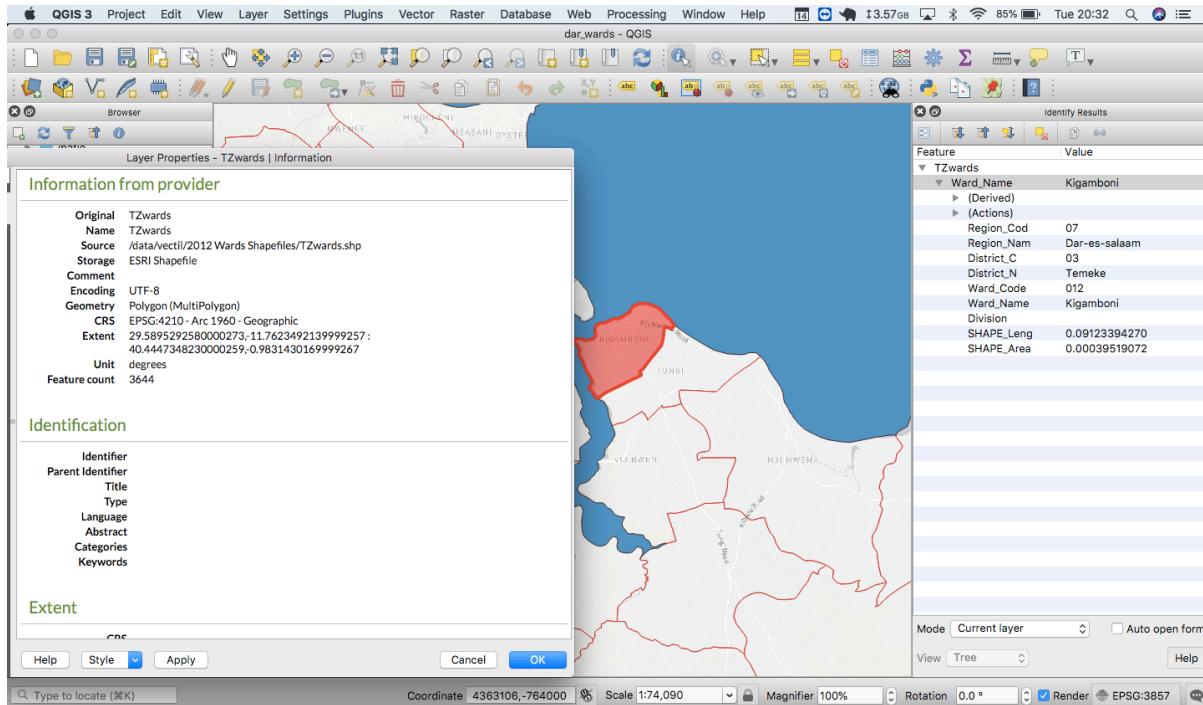

It looks good however looking at the Layer Properties and we can see that the CRS is EPSG:4210 we will need to convert this into EPSG:4326 to work with the Mapbox tools. We also need to convert the file from an ESRI Shapefile to GeoJSON. Luckily we can do both of these in a single operation with the excellent ogr2ogr <https://www.gdal.org/ogr2ogr.html> tool that is available as part of GDAL <https://www.gdal.org/>


We issue the following command:

```
ogr2ogr -f GeoJSON tza_wards.geojson TZwards.shp -s_srs EPSG:4210 -t_srs EPSG:4326 -progress
```

We can see that the conversion was successful and very quick. There is another shapefile in the download, waterbodies, vector tiles files can include multiple layers so let's process that too:

```
ogr2ogr -f GeoJSON tza_wards.geojson TZwards.shp -s_srs EPSG:4210 -t_srs EPSG:4326 -progress
```

**Note:** if we wanted to generate our GeoJSON file from a spatial database such as PostGIS or practically any other spatial format ogr2ogr has drivers for almost all of them!

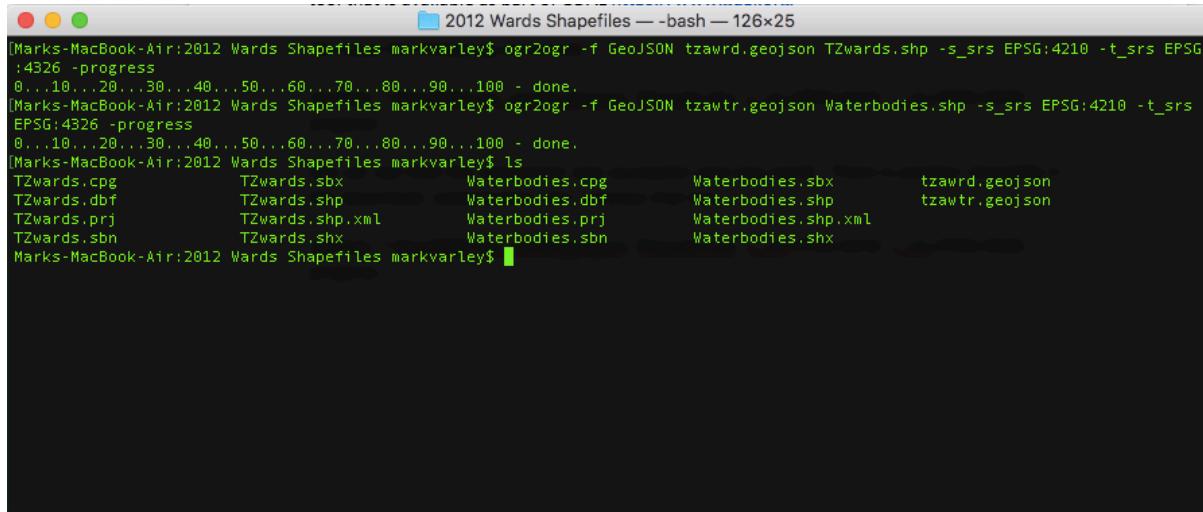


```
[Marks-MacBook-Air:2012 Wards Shapefiles markvarley$ ogr2ogr -f GeoJSON tzawrd.geojson TZwards.shp -s_srs EPSG:4210 -t_srs EPSG:4326 -progress
0...10...20...30...40...50...60...70...80...90...100 - done.
[Marks-MacBook-Air:2012 Wards Shapefiles markvarley$ ogr2ogr -f GeoJSON tzawtr.geojson Waterbodies.shp -s_srs EPSG:4210 -t_srs EPSG:4326 -progress
0...10...20...30...40...50...60...70...80...90...100 - done.
[Marks-MacBook-Air:2012 Wards Shapefiles markvarley$ ls
TZwards.cpg      TZwards.sbx      Waterbodies.cpg      Waterbodies.sbx      tzawrd.geojson
TZwards.dbf      TZwards.shp      Waterbodies.dbf      Waterbodies.shp      tzawtr.geojson
TZwards.prj      TZwards.shp.xml  Waterbodies.prj      Waterbodies.shp.xml
TZwards.sbn      TZwards.shx      Waterbodies.sbn      Waterbodies.shx
Marks-MacBook-Air:2012 Wards Shapefiles markvarley$ ]
```

We now need to convert our geojson into vector tiles. For this we can use the excellent Mapbox Tippecanoe tool <https://github.com/mapbox/tippecanoe>

With Tippecanoe installed (use the instructions in the repo or on a Mac we can issue brew install Tippecanoe) we run the following command which will create a directory with our vector tiles in it:

```
tippecanoe -f -e tzacen -L wards:tzawrd.geojson -L water:tzawtr.geojson --minimum-zoom=10 --maximum-zoom=14
```

Once complete we have a new directory tzacen with the familiar structure and a new metadata.json file

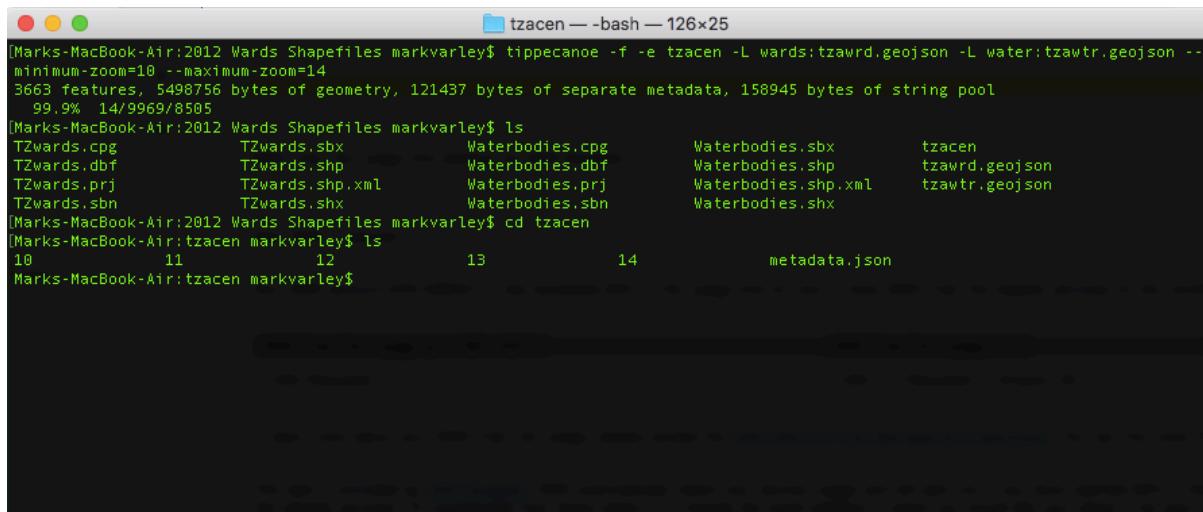

```
[Marks-MacBook-Air:2012 Wards Shapefiles markvarley$ tippecanoe -f -e tzacen -L wards:tzawrd.geojson -L water:tzawtr.geojson --minimum-zoom=10 --maximum-zoom=14
3663 features, 5498756 bytes of geometry, 121437 bytes of separate metadata, 158945 bytes of string pool
99.9% 14/9969/8505
[Marks-MacBook-Air:2012 Wards Shapefiles markvarley$ ls
TZwards.cpg      TZwards.sbx      Waterbodies.cpg      Waterbodies.sbx      tzacen
TZwards.dbf      TZwards.shp      Waterbodies.dbf      Waterbodies.shp      tzawrd.geojson
TZwards.prj      TZwards.shp.xml  Waterbodies.prj      Waterbodies.shp.xml
TZwards.sbn      TZwards.shx      Waterbodies.sbn      Waterbodies.shx
[Marks-MacBook-Air:2012 Wards Shapefiles markvarley$ cd tzacen
[Marks-MacBook-Air:tzacen markvarley$ ls
10               11               12               13               14               metadata.json
Marks-MacBook-Air:tzacen markvarley$ ]
```

As before with the openmaptiles bundle we upload this directory to our S3 bucket and set the appropriate headers:

```
aws s3 cp tzacen s3://tiles.myvectortiles.xyz/tzacen/ --recursive --content-type application/x-protobuf --content-encoding 'gzip'
```

Once complete we need to configure our tile.json file using the contents of our metadata.json file. The approach is as before and we will end up with something like this [https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/07\\_CustomVectorTilesAWS/tile.json](https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/07_CustomVectorTilesAWS/tile.json)

We need to update our style file to add support for our new tileset and layers. Here is an example of some simple styling:

[https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/07\\_CustomVectorTilesAWS/bright.json](https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/07_CustomVectorTilesAWS/bright.json). Search for tzacen and you should be able to work out how this all hangs together.

Finally we will add a few extra controls and a new custom layer control using simple HTML to our client page: [https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/07\\_CustomVectorTilesAWS/index.html](https://raw.githubusercontent.com/addresscloud/serverless-tiles/master/07_CustomVectorTilesAWS/index.html)

Our final result looks like this, not bad at all for something we have written and hosted ourselves for almost free!

