
YOLOv3 Documentation

Release 0.3

Anthony DeGennaro

Jan 15, 2019

CONTENTS:

1	Introduction	3
2	Requirements	5
3	Installation	7
3.1	Anaconda	7
3.2	PyTorch	8
3.3	GPU Support	8
3.4	YOLOv3	9
4	Code Docs	11
4.1	Src/	11
4.2	Utils/	17
4.3	Tests/	18
5	Dependency Graphs	21
5.1	train2	21
5.2	detect	21
5.3	models	22
5.4	NetworkTrainer	22
5.5	targets.Target	22
5.6	datasets.ListDataset	23
6	Contact	25
7	Indices and tables	27
	Python Module Index	29
	Index	31

Project repository: <https://github.com/adegenna/xview-yolov3>.

INTRODUCTION

The following project is a Python implementation of the YOLOv3 object detection algorithm. This specific software began as a project intended for use with the Xview dataset specifically by Glenn Jocher at Ultralytics (<https://github.com/ultralytics/xview-yolov3.git>). It has since been modified extensively for the purposes of generality, maintainability, and usability by Anthony DeGennaro at Brookhaven National Laboratory (<https://www.bnl.gov/compsci/people/staff.php?q=168> / adegennaro@bnl.gov).

You may access the main project repository at <https://github.com/adegenna/xview-yolov3>.

REQUIREMENTS

This software requires Python 3.6, along with the following packages:

- numpy
- scipy
- sklearn
- matplotlib
- torch
- opencv-python
- h5py
- tqdm

INSTALLATION

The purpose of this document is to provide detailed, step-by-step instructions on how to install Pytorch, YOLOv3, and all associated dependencies.

3.1 Anaconda

We first need to install Anaconda for Python virtual environments.

1. Download the Anaconda installer (shell script) from the Anaconda website:

```
wget https://repo.anaconda.com/archive/Anaconda2-5.3.0-Linux-x86_64.sh
```

Note: this assumes you have a 64-bit Linux architecture. If you have something else, then visit <https://www.anaconda.com/download/> and select your preferred version.

2. Launch the Anaconda installer:

```
bash Anaconda2-5.3.0-Linux-x86_64.sh
```

Accept the user terms and accept the default filepath for installation, which should be `/home/[user]/anaconda2/`.

3. Open your `.bashrc` file in a file editor (e.g., `emacs .bashrc`) and paste the following line to the end:

```
source /home/[user]/anaconda2/etc/profile.d/conda.sh
```

4. Save the `.bashrc` file, exit, and reload it in your terminal with:

```
source .bashrc
```

5. Confirm conda was installed:

```
conda --version
```

This should output the version of the Anaconda install, if successful

6. Create a custom Anaconda virtual environment for this project:

```
conda create -n [envname] python=3.6 anaconda
```

In the above, replace `[envname]` with your desired environment name (do not include the brackets)

7. To verify that this was successful, run:

```
conda info --envs
```

If successful, [envname] should appear as one of the choices.

3.2 PyTorch

We will now install PyTorch, a Python deep-learning framework

1. Install PyTorch/Torchvision to your Anaconda environment:

```
conda install -n [envname] pytorch torchvision -c pytorch
```

2. To verify that this was successful, activate your conda environment:

```
conda activate [envname]
```

Then, check the PyTorch version with:

```
python -c "import torch; print(torch.__version__)"
```

Also check the Torchvision version with:

```
python -c "import torchvision; print(torchvision.__version__)"
```

If successful, both commands should output the installed versions.

3.3 GPU Support

If you have Nvidia GPU hardware but do not have the drivers installed, you may do so as follows. If you already have Nvidia drivers installed, skip this. Note: this may require sudo privileges. Also, the following instructions assume a Redhat OS. The equivalent process for another Linux OS (e.g., Ubuntu) is very similar.

1. Prepare your machine by installing necessary prerequisite packages:

```
yum -y update

yum -y groupinstall "Development Tools"

yum -y install kernel-devel epel-release

yum install dkms
```

2. Download desired Nvidia driver version from their archive at <https://www.nvidia.com/object/unix.html> (e.g., using wget from the terminal)
3. If your machine is currently using open-source drivers (e.g., nouveau), you will need to change the configuration /etc/default/grub file. Open this file, find the line beginning with GRUB_CMDLINE_LINUX and add the following text to it:

```
nouveau.modeset=0
```

4. Reboot your machine
5. Stop all Xorg servers:

```
systemctl isolate multi-user.target
```

6. Run the bash script installer:

```
bash NVIDIA-Linux-x86_64-*
```

7. Reboot your system

8. Confirm that the installation was successful by inspecting the output of this command:

```
nvidia-smi
```

If successful, this should display all Nvidia GPUs currently installed in your machine

3.4 YOLOv3

Note: For now, we are simply using a version of YOLOv3 freely available on Github. We plan to fork this and modify it as needed. For now, we only describe the installation directions for the community-available version of YOLOv3.

1. Activate your anaconda environment:

```
conda activate [envname]
```

2. Clone the YOLOv3 git repo:

```
git clone https://github.com/adegenna/xview-yolov3
```

3. Navigate to the project directory (xview-yolov3) and open the file requirements.txt. All of Python packages listed there must be installed to your local conda environment. Check whether the listed packages are installed with:

```
conda list | grep [package]
```

4. If one of the required packages is missing, then install it; for example, install opencv-python with:

```
conda install -n [envname] -c menpo opencv
```


4.1 Src/

`src.train.main()`

Main driver script for training the YOLOv3 network.

Inputs:

args: command line arguments used in shell call for this main driver script. *args* must have a *inputfilename* member that specifies the desired inputfile name.

Outputs:

inputs.outdir/results.txt: output metrics for each training epoch

inputs.loadaddr/latest.pt: checkpoint file for latest network configuration

inputs.loadaddr/best.pt: checkpoint file for best current network configuration

inputs.loadaddr/backup.pt: checkpoint file for backup purposes

`class src.detect.ConvNetb(num_classes=60)`

forward(x)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the `Module` instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

`class src.InputFile.InputFile(args=[])`

Class for packaging all input/config file options together.

Inputs:

args: (passed to constructor at runtime) command line arguments used in shell call for main driver script. *args* must have a *inputfilename* member that specifies the desired inputfile name.

Options:

inputtype: Options are *train* or *detect*
projdir: Absolute path to project directory
datadir: Absolute path to data directory
loaddir: Absolute path to load directory
outdir: Absolute path to output directory
targetspath: Absolute path to target file
targetfiletype: Type of target file
traindir: Type of target file
targetfiletype: Type of target file

Options (Train-Specific):

traindir: Type of target file
epochs: Number of training epochs
epochstart: Starting epoch
batchsize: Training batch size
networkcfg: Network architecture file
imgsize: Base image crop size
resume: Boolean value specifying whether training is resuming from previous iteration
invalid_class_list: Comma-separated list of classes to be ignored from training data
boundingboxclusters: Desired number of bounding-box clusters for the YOLO architecture
computeboundingboxclusters: Boolean value specifying whether to compute bounding box clusters

Options (Detect-Specific):

imagepath: Image path
plotflag: Flag for plotting
secondary_classifier: Boolean value specifying whether to use a secondary classifier
networkcfg: Network architecture file
class_path: Absolute path to class
conf_thres: Confidence threshold for detection
nms_thres: NMS threshold
batch_size: Desired batchsize
img_size: Desired cropped image size

printInputs ()

Method to print all config options.

readDetectInputfile (inputfilestream)

Method to read config options from a detection inputfile

Inputs:

inputfilestream: specified inputfilestream.

readTrainingInputfile (inputfilestream)

Method to read config options from a training inputfile.

Inputs:

inputfilestream: specified inputfilestream.

class `src.models.Darknet` (*inputs*)
YOLOv3 object detection model

forward (*x*, *targets=None*, *requestPrecision=False*, *weight=None*, *epoch=None*)
Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the `Module` instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

class `src.models.EmptyLayer`
Placeholder for 'route' and 'shortcut' layers

class `src.models.YOLOLayer` (*anchors*, *nC*, *img_dim*, *anchor_idxs*)

forward (*p*, *targets=None*, *requestPrecision=False*, *weight=None*, *epoch=None*)
Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the `Module` instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

`src.models.create_modules` (*module_defs*)
Constructs module list of layer blocks from module configuration in *module_defs*

`src.models.create_yolo_architecture` (*inputs*, *targets*)
Creates a yolo-v3 layer configuration file from desired options

`src.models.create_yolo_config_file` (*template_file_path*, *output_config_file_path*, *n_anchors*,
n_classes, *anchor_coordinates*)
Creates a yolo-v3 layer configuration file from desired options

`src.models.parse_model_config` (*path*)
Parses the yolo-v3 layer configuration file and returns module definitions

class `src.targets.Target` (*inputs*)
Class for handling target pre-processing tasks.

apply_mask_to_filtered_data ()
Method to apply mask to filtered data variables.

compute_bounding_box_clusters_using_kmeans (*n_clusters*)

Method to compute bounding box clusters using kmeans.

Inputs:

n_clusters: number of desired kmeans clusters

compute_cropped_data()

Method to crop image data based on the width and height. Filtered variables are then computed based on the updated image coordinates.

compute_filtered_data_mask()

Method to compute filtered data by applying several filtering operations.

compute_filtered_variables_from_filtered_coords()

Method to compute filtered variables from filtered coordinates.

compute_filtered_variables_from_filtered_xy()

Method to compute filtered variables from filtered xy.

compute_image_weights_with_filtered_data()

Method to compute image weights from filtered data. Weight is simply inverse of class frequency.

detect_nonexistent_chip(chip_i)

Method to detect all instances in database of a chip that does not exist

edge_requirements(w_lim, h_lim, x2_lim, y2_lim)

Method to compute filtering based on edge specifications.

Inputs:

w_lim: limit for image width

h_lim: limit for image height

x2_lim: limit for image x2

y2_lim: limit for image y2

Outputs:

indices where filtered variables satisfy the dimension requirements.

load_target_file()

Method to load a targetfile of type specified in the input file. Supported types: .json.

manual_dimension_requirements(area_lim, w_lim, h_lim, AR_lim)

Method to compute filtering based on specified dimension requirements.

Inputs:

area_lim: limit for image area

w_lim: limit for image width

h_lim: limit for image height

AR_lim: limit for image aspect ratio

Outputs:

indices where filtered variables satisfy the dimension requirements.

process_target_data()

Method to perform all target processing.

remove_nonexistent_chips_from_database (*idx_nonexistent*)

Method to remove all nonexistent chips from database

set_image_w_and_h ()

Method to set width and height of images associated with targets.

sigma_rejection_indices (*filtered_data*)

Method to compute a mask based on a sigma rejection criterion.

Inputs:

filtered_data: data to which sigma rejection is applied and from which mask is computed

Outputs:

mask_reject: binary mask computed from sigma rejection

strip_image_number_from_chips_and_files ()

Method to strip numbers from image filenames from both chips and files.

`src.targets.fcn_sigma_rejection` (*x*, *srl*=3, *ni*=3)

Function to perform sigma rejection on a dataset.

Inputs:

x: dataset

srl: desired cutoff number of standard deviations for rejection

ni: desired number of iterations

Outputs:

x: dataset with outliers removed

inliers: indices of inliers w.r.t. original dataset

`src.targets.per_class_stats` (*classes*, *w*, *h*)

Function to calculate statistics of target data.

Inputs:

classes: target data processed/produced with the Target class

w: image width

h: image height

Outputs:

class_mu: mean of target classes

class_sigma: standard deviation of target classes

class_cov: covariance of target classes

class `src.datasets.ListDataset` (*inputs*)

Image dataset class for training

`src.datasets.pickRandomPoints` (*pts, img0, height, M, img1*)

Function to select random points of a specified chip size from a specified transformed image

Inputs:

pts: number of desired random points

img0: dataset image loaded by OpenCV

height: desired chip size

M: random affine transformation to use (calculated with `random_affine`)

img1: transformed version of *img0* (calculated with `random_affine` applied to *img0*)

Outputs:

r: random points from specified image *img0*, transformed with the same random affine mapping used to take *img0* to *img1*

`src.datasets.augmentHSV` (*img0*)

Function to perform HSV augmentation (by a random factor of +/- 50%)

Inputs:

img0: dataset image loaded by OpenCV

Outputs:

img: transformed image

`src.datasets.resize_square` (*img, height=416, color=(0, 0, 0)*)

Function to resize a rectangular image to a padded square

Inputs:

img: dataset image loaded by OpenCV

height: desired image height

color: triplet specifying fill values for image borders

Outputs:

img: transformed image

`src.datasets.random_affine` (*img, targets=None, degrees=(-10, 10), translate=(0.1, 0.1), scale=(0.9, 1.1), shear=(-3, 3), borderValue=(0, 0, 0)*)

Function to performs a random affine transformation on a specified image/target combination. See <https://medium.com/uruvideo/dataset-augmentation-with-random-homographies-a8f4b44830d4> for a general discussion.

Inputs:

img: dataset image loaded by OpenCV
targets: a target from a ListDataset object
degrees: min/max range of possible degrees of rotation
translate: max possible values for scaling, specified as a percentage of the vertical and horizontal dimensions of img
scale: min/max range of possible values for scaling (specified such that no scaling = 1)
shear: min/max range of possible values of degrees for shearing
borderValue: triplet specifying fill values for image borders

Outputs:

imw: transformed image
targets: transformed targets (if targets is not None)
M: affine transformation used (if targets is not None)

4.2 Utils/

`utils.utils.bbox_iou (box1, box2, x1y1x2y2=True)`

Returns the IoU of two bounding boxes

`utils.utils.build_targets (pred_boxes, pred_conf, pred_cls, target, anchor_wh, nA, nC, nG, requestPrecision)`

returns nGT, nCorrect, tx, ty, tw, th, tconf, tcls

`utils.utils.compute_ap (recall, precision)`

Compute the average precision, given the recall and precision curves. Code originally from <https://github.com/rbgirshick/py-faster-rcnn>. # Arguments

recall: The recall curve (list). precision: The precision curve (list).

Returns The average precision as computed in py-faster-rcnn.

`utils.utils.convert_tif2bmp (p)`

Function to convert .tif -> .bmp

Inputs:

p: Absolute path to the dataset directory

`utils.utils.load_classes (path)`

Loads class labels at 'path'

`utils.utils.readBmpDataset (path)`

Function to read a .bmp dataset. If the provided directory does not contain .bmp files, a conversion is attempted.

Inputs:

path: Absolute path to the dataset directory

`utils.utils.zero_center_class_indices (classes)`

This function takes a list of N elements with M<N unique labels, and relabels them such that the labels are 0,1,...,M-1. Note that this function assumes that all class labels of interest appear at least once in classes.

Inputs:

classes: N-list of original class indices.

Outputs:

classes_zeroed: N-list of classes relabeled such that the labels are 0...M-1

e.g., [5,9,7,12,7,9] -> [0,2,1,3,1,2]

4.3 Tests/

class `tests.unittests.DataProcessingTests (methodName='runTest')`

Class for all data processing unit tests.

setUp ()

Basic setup method. Note that ResourceWarnings and DeprecationWarnings are ignored.

test_get_dataset_filenames ()

Test loading of dataset filenames.

test_get_dataset_height_width_channels ()

Test loading sizes of dataset images.

test_get_labels_geojson ()

Test loading of geojson formatted data.

test_strip_image_number_from_filename ()

Test functionality to strip image number from image filename.

class `tests.unittests.DatasetTests (methodName='runTest')`

Class for all dataset-involved unit tests.

setUp ()

Basic setup method. Note that ResourceWarnings and DeprecationWarnings are ignored.

test_load_targets ()

Test functionality to load training data.

test_show_targets ()

Test functionality to label training data.

class `tests.unittests.GPUtests (methodName='runTest')`

Class for all GPU/cuda unit tests.

setUp ()

Basic setup method. Note that ResourceWarnings and DeprecationWarnings are ignored.

test_cuda_available ()

Test whether cuda is available.

test_cuda_version ()

Test that cuda version is >= 9.

```

test_gpu_avail()
    Test that GPU hardware is available.

class tests.unittests.ModelsTests (methodName='runTest')
    Class for all models-involved unit tests.

    setUp()
        Basic setup method. Note that ResourceWarnings and DeprecationWarnings are ignored.

    test_create_yolo_config_file()
        Test functionality to create custom YOLOv3 config file from a template.

class tests.unittests.TargetTests (methodName='runTest')
    Class for all target-involved unit tests.

    setUp()
        Basic setup method. Note that ResourceWarnings and DeprecationWarnings are ignored.

    test_apply_mask_to_filtered_data()
        Test mask application to filtered data method.

    test_area_requirements()
        Test area requirements method.

    test_compute_bounding_box_clusters_using_kmeans()
        Test bounding box cluster computation method.

    test_compute_cropped_data()
        Test functionality for cropping targets.

    test_compute_image_weights_with_filtered_data()
        Test class weight computation method.

    test_compute_width_height_area()
        Test functionality for computing target coordinate area.

    test_edge_requirements()
        Test functionality for computing edge requirements on target data.

    test_fcn_sigma_rejection()
        Test functionality for computing sigma rejection.

    test_invalid_class_requirement()
        Test invalid class requirement method.

    test_load_target_file()
        Test functionality for loading target data (.json file).

    test_manual_dimension_requirements()
        Test functionality for imposing manual dimensions requirements on target data.

    test_nan_inf_size_requirements()
        Test nan/inf/size requirements method.

    test_per_class_stats()
        Test per_class_stats function.

    test_sigma_rejection_indices()
        Test functionality for computing sigma rejection indices.


    test_xy_coords()
        Test functionality for target coordinate parsing.

```



DEPENDENCY GRAPHS

Below are a collection of dependency graphs for all code in Src/.


5.1 train2

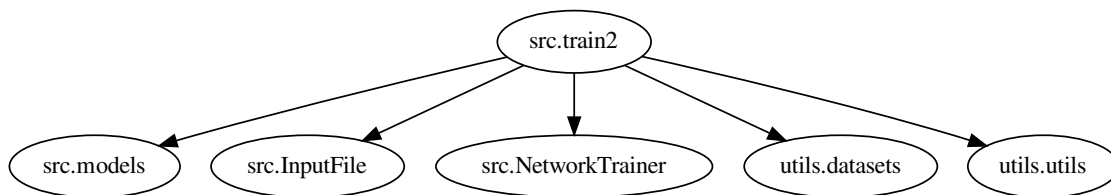


5.2 detect

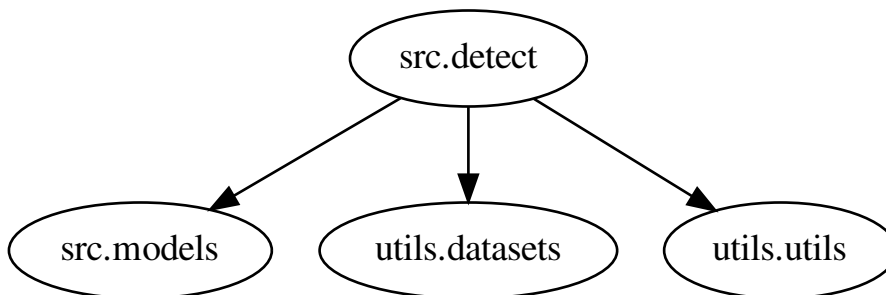


5.3 models

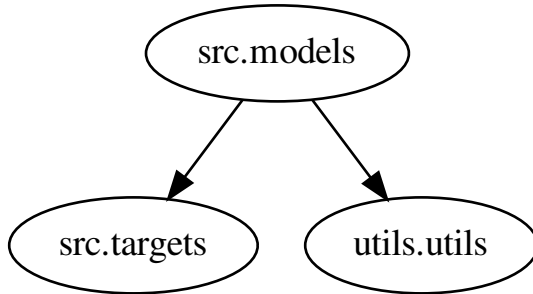


5.4 NetworkTrainer

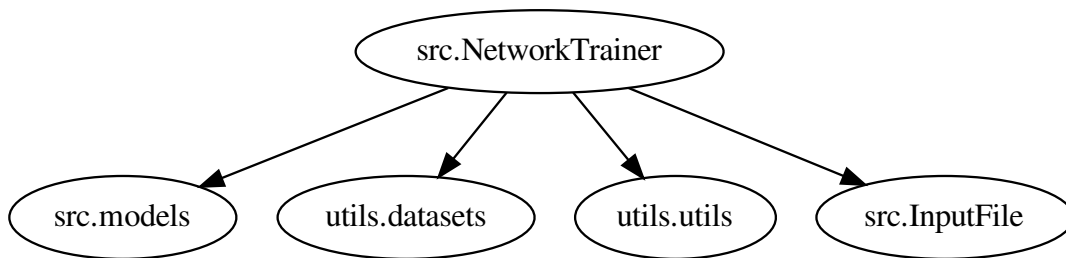

5.5 targets.Target

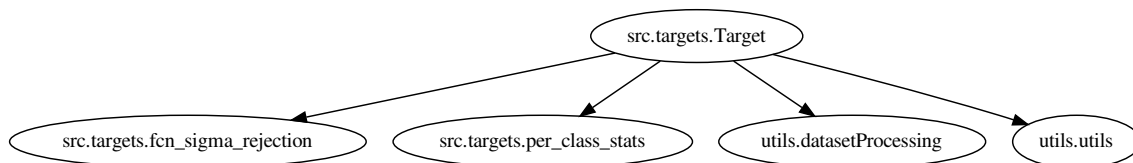

5.6 datasets.ListDataset

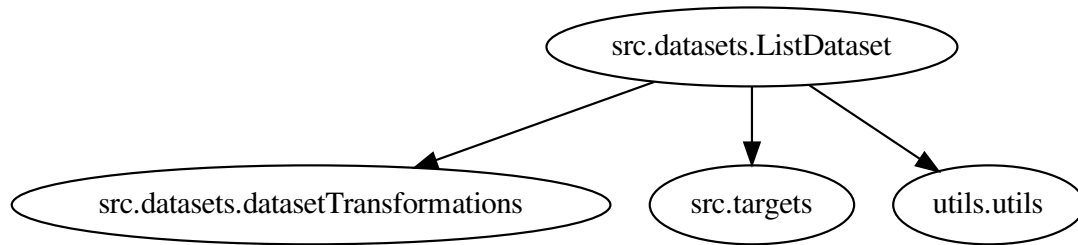

CONTACT

Any questions/comments may be directed to the main BNL project developer, Anthony DeGennaro (<https://www.bnl.gov/compsci/people/staff.php?q=168> / adegennaro@bnl.gov).

INDICES AND TABLES

- `genindex`
- `modindex`
- `search`

PYTHON MODULE INDEX

S

- `src.datasets`, 15
- `src.detect`, 11
- `src.InputFile`, 11
- `src.models`, 13
- `src.NetworkTrainer`, 13
- `src.targets`, 13
- `src.train`, 11

t

- `tests.unittests`, 18

u

- `utils.datasetProcessing`, 17
- `utils.utils`, 17
- `utils.utils_xview`, 18

A

`apply_mask_to_filtered_data()`
(*src.targets.Target method*), 13
`augmentHSV()` (*in module src.datasets*), 16

B

`bbox_iou()` (*in module utils.utils*), 17
`build_targets()` (*in module utils.utils*), 17

C

`compute_ap()` (*in module utils.utils*), 17
`compute_bounding_box_clusters_using_kmeans()`
(*src.targets.Target method*), 13
`compute_cropped_data()` (*src.targets.Target method*), 14
`compute_filtered_data_mask()`
(*src.targets.Target method*), 14
`compute_filtered_variables_from_filtered_coords()`
(*src.targets.Target method*), 14
`compute_filtered_variables_from_filtered_xy()`
(*src.targets.Target method*), 14
`compute_image_weights_with_filtered_data()`
(*src.targets.Target method*), 14
`convert_tif2bmp()` (*in module utils.utils*), 17
`ConvNetb` (*class in src.detect*), 11
`create_modules()` (*in module src.models*), 13
`create_yolo_architecture()` (*in module src.models*), 13
`create_yolo_config_file()` (*in module src.models*), 13

D

`Darknet` (*class in src.models*), 13
`DataProcessingTests` (*class in tests.unittests*), 18
`DatasetTests` (*class in tests.unittests*), 18
`detect_nonexistent_chip()` (*src.targets.Target method*), 14

E

`edge_requirements()` (*src.targets.Target method*), 14
`EmptyLayer` (*class in src.models*), 13

F

`fcn_sigma_rejection()` (*in module src.targets*), 15
`forward()` (*src.detect.ConvNetb method*), 11
`forward()` (*src.models.Darknet method*), 13
`forward()` (*src.models.YOLOLayer method*), 13

G

`GPUtests` (*class in tests.unittests*), 18

I

`InputFile` (*class in src.InputFile*), 11

L

`ListDataset` (*class in src.datasets*), 15
`load_classes()` (*in module utils.utils*), 17
`load_target_file()` (*src.targets.Target method*), 14

M

`main()` (*in module src.train*), 11
`manual_dimension_requirements()`
(*src.targets.Target method*), 14
`ModelsTests` (*class in tests.unittests*), 19

P

`parse_model_config()` (*in module src.models*), 13
`per_class_stats()` (*in module src.targets*), 15
`pickRandomPoints()` (*in module src.datasets*), 16
`printInputs()` (*src.InputFile.InputFile method*), 12
`process_target_data()` (*src.targets.Target method*), 14

R

`random_affine()` (*in module src.datasets*), 16
`readBmpDataset()` (*in module utils.utils*), 17
`readDetectInputfile()` (*src.InputFile.InputFile method*), 12
`readTrainingInputfile()`
(*src.InputFile.InputFile method*), 12
`remove_nonexistent_chips_from_database()`
(*src.targets.Target method*), 14

`resize_square()` (in module `src.datasets`), 16

S

`set_image_w_and_h()` (`src.targets.Target` method), 15

`setUp()` (`tests.unittests.DataProcessingTests` method), 18

`setUp()` (`tests.unittests.DatasetTests` method), 18

`setUp()` (`tests.unittests.GPUtests` method), 18

`setUp()` (`tests.unittests.ModelsTests` method), 19

`setUp()` (`tests.unittests.TargetTests` method), 19

`sigma_rejection_indices()` (`src.targets.Target` method), 15

`src.datasets` (module), 15

`src.detect` (module), 11

`src.InputFile` (module), 11

`src.models` (module), 13

`src.NetworkTrainer` (module), 13

`src.targets` (module), 13

`src.train` (module), 11

`strip_image_number_from_chips_and_files()` (`src.targets.Target` method), 15

T

`Target` (class in `src.targets`), 13

`TargetTests` (class in `tests.unittests`), 19

`test_apply_mask_to_filtered_data()` (`tests.unittests.TargetTests` method), 19

`test_area_requirements()` (`tests.unittests.TargetTests` method), 19

`test_compute_bounding_box_clusters_using_kmeans()` (`tests.unittests.TargetTests` method), 19

`test_compute_cropped_data()` (`tests.unittests.TargetTests` method), 19

`test_compute_image_weights_with_filtered_data()` (`tests.unittests.TargetTests` method), 19

`test_compute_width_height_area()` (`tests.unittests.TargetTests` method), 19

`test_create_yolo_config_file()` (`tests.unittests.ModelsTests` method), 19

`test_cuda_available()` (`tests.unittests.GPUtests` method), 18

`test_cuda_version()` (`tests.unittests.GPUtests` method), 18

`test_edge_requirements()` (`tests.unittests.TargetTests` method), 19

`test_fcn_sigma_rejection()` (`tests.unittests.TargetTests` method), 19

`test_get_dataset_filenames()` (`tests.unittests.DataProcessingTests` method), 18

`test_get_dataset_height_width_channels()` (`tests.unittests.DataProcessingTests` method), 18

`test_get_labels_geojson()` (`tests.unittests.DataProcessingTests` method), 18

`test_gpu_avail()` (`tests.unittests.GPUtests` method), 18

`test_invalid_class_requirement()` (`tests.unittests.TargetTests` method), 19

`test_load_target_file()` (`tests.unittests.TargetTests` method), 19

`test_load_targets()` (`tests.unittests.DatasetTests` method), 18

`test_manual_dimension_requirements()` (`tests.unittests.TargetTests` method), 19

`test_nan_inf_size_requirements()` (`tests.unittests.TargetTests` method), 19

`test_per_class_stats()` (`tests.unittests.TargetTests` method), 19

`test_show_targets()` (`tests.unittests.DatasetTests` method), 18

`test_sigma_rejection_indices()` (`tests.unittests.TargetTests` method), 19

`test_strip_image_number_from_filename()` (`tests.unittests.DataProcessingTests` method), 18

`test_xy_coords()` (`tests.unittests.TargetTests` method), 19

`tests.unittests` (module), 18

U

`utils.datasetProcessing` (module), 17

`utils.kmeans` (module), 17

`utils.utils_xview` (module), 18

Y

`YOLOv3` (class in `src.models`), 13

Z

`zerocenter_class_indices()` (in module `utils.utils`), 17