

C language

Q) What is C?

C is a programming language. It is a medium for us to communicate with computer.

C is one of the oldest and first programming languages.

Q) Uses of C

C language is used to program a wide variety of systems.

Some of the uses are as follows:-

- i) Major parts of windows, Linux and other program are written in C.
- ii) It is used to write driver program for devices like tablets, printer etc.
- iii) It is used to program embedded system where programs need to run fast in limited memory (Microwave, Camera etc.)
- iv) C is used to develop games, an area where latency is very important i.e. Computer has to react quickly on user input.

Q) Variables, Constants & keywords

Variable:-

A Variable is a container which stores a 'value'. In Kitchen, we have containers storing rice, Dal, sugar etc. similar to that variables in C stores value of a constant. Eg:-

$a = 3;$ // a is assigned "3"
 $b = 4.7;$ // b is assigned "4.7"
 $c = 'A'$ // c is assigned 'A'

Rules for naming variables in C.

- 1) First character must be an alphabet or underscore(-)
- 2) No commas, blanks allowed.
- 3) No special symbol other than (_) allowed.
- 4) Variables names are case sensitive.

* We must create meaningful variable names in our programs. This enhances readability of our program.

Constants:-

- ⇒ An entity whose value doesn't change is called as a Constant.
- ⇒ A variable is an entity whose value can be changed.

Types of Constants

Primarily, there are three types of constants:-

- 1) Integer Constant → -1, 0, 7, 9
 - 2) Real Constant → -322.1, 2.5, 7.0
 - 3) Character Constant → 'a', '\$', @
- Must be enclosed within single inverted commas.

Keywords :-

These are reserved words, whose meaning is already known to the compiler. There are 32 keywords available in C.

auto	double	int	struct
break	long	else	switch
case	return	enum	typedef
char	register	extern	union
const.	short	float	unsigned
continue	signed	for	void
default	size of	goto	volatile
do	static	if	while

Our first C Program.

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    printf("Hello, I am coder");
```

```
    return 0;
```

```
}
```

[File: first.c]

Basic structure of a C Program.

All C programs have to follow a basic structure. A C program starts with a main function and executes instructions present inside it.

- * Each instruction is terminated with a semicolon (;)

There are some rules which are applicable to all the C programs:

- 1) Every program's execution starts from main() function.
- 2) All the statements are terminated with a semicolon.
- 3) Instructions are case-sensitive.

4) Instructions are allowed executed in the same order in which they are written.

Comments :-

Comments are used to clarify something about the program in plain language. It is a way for us to add notes to our program. There are two types of comments in C.

i) Single-line comment:- // This is Comment.

ii) Multi-line : /* This is a multi-line comment */

* Comments in a C program are not executed and are ignored.

Completion and Execution.

First.c \Rightarrow [C Compiler] \Rightarrow First.exe in VS code.

A compiler is a computer program which converts a C program into machine language so that it can be easily understood by the computer.

A C program is written in plain text.

This plain text is combination of instructions in a particular sequence.

The compiler performs some basic checks and finally converts the program into an executable.

Library functions.

C language has a lot of valuable library functions which is used to carry out certain tasks. For instance printf function is used to print values on the screen.

`printf("This is %d", i);`

`% d` for integers.

`% f` for real values.

`% c` for characters.

Types of Variables.

I) Integer variable \rightarrow `int a = 33;`

II) Real variables \rightarrow wrong as `7.7` is real.
 \rightarrow do, `float a = 7.7;`

III) Character Variable \rightarrow `char a = 'B';`

Receiving input from the user.

In order to take input from the user and assign it to a variable we use `scanf` function.

Syntax for using `scanf`:

`scanf("%c", &i);`

\hookrightarrow This & is important!

& is the address of operator and it means that the supplied value should be copied to the address which is indicated by variable i.

Chapter 2: Introduction and Operators.

A C program is a set of instructions. It is just like a recipe - which contains instructions to prepare a particular dish.

Types of Instructions:-

- i) Type declaration Instruction.
- ii) Arithmetic Instruction.
- iii) Control Instruction.

Type declaration Instruction

```
int a;
```

```
float b;
```

Other variations:

```
int i = 10; int j = i; int a = 2
```

```
int j = a + j - i;
```

```
float b = 0.73; float a = 1.1
```

This gives error! ←

as we are trying to use a before defining it.

`int a, b, c, d;`

`a = b = c = d = 30;`

(Value of a, b, c, & d will be
30 each)

Arithmetic Instructions.

`int i = (3 * 2) + 1`

Operands can be int/float etc + - * / are arithmetic operators.

`int b = 2, c = 3;`

`int z; z = b * c; ✓ legal`

`int z; b * c = z; ✗ illegal (Not allowed)`

`%` → Modular division operator

`%` → Returns the remainder

`%` → Cannot be applied on float

`%` → Tiger is same as of

Numerator ($-5 \% 2 = -1$)

i.e. $5 \% 2 = 1$ and $-5 \% 2 = -1$

Note:-

1) No operator is assumed to be present.

`int i = ab` → Invalid

`int i = a * b` → Valid

11) There is no operator to perform exponentiation on in C.

=) However we can use `pow(x, y)` from `<math.h>`
 ↳ (Explained later)

Type Conversion

An arithmetic operation between -

Int and Int → Int

Int and float → float

float and float → float.

$$\begin{array}{ccc} \frac{5}{2} & \rightarrow & 2 \\ & & \downarrow \\ & & \frac{5.0}{2} \rightarrow 2.5 \end{array} \quad \left. \begin{array}{c} \\ \\ \end{array} \right\} \text{Important}$$

$$\begin{array}{ccc} \frac{2}{5} & \rightarrow & 0 \\ & & \downarrow \\ & & \frac{2.0}{5} \rightarrow 0.4 \end{array} \quad \left. \begin{array}{c} \\ \\ \end{array} \right\}$$

Note:-

int a = 3.5; In this case 3.5 (float) will be demoted to 3 (Int) because a is not able to store floats.

float a = 8; a will store 8.0

8 → 8.0 (promotion to float)

Quick Quiz

Q) int k = 3.019 value of k? and why?

Soln → $3.019 = 0.333$ but since k is an int, it cannot store floats & value 0.33 is denoted to 0.

Operator precedence in C

$3 * x - 8y$ is $(3x) - (8y)$ or $3(x - 8y)$?

⇒ In C language simple mathematical rules like BODMAS, no longer applies.

- The answer to the above question is provided by operator precedence and associativity.

Operator precedence.

The following table lists the operator priority in C.

Priority	Operators
1st	* / %
2nd	+ -
3rd	=

Operators of higher priority are evaluated first in the absence of parentheses.

Operator Associativity.

When operators of equal priority are present in an expression, the tie is taken care of by associativity.

$$x * y / z \Rightarrow (x * y) / z$$

$$x / y * z \Rightarrow (x / y) * z$$

* , / follows left to right associativity.

Control Instructions.

Determines the flow of control in a program.
Four types of Control Instructions in C are:-

- I) Sequence Control Instruction.
- II) Decision Control Instruction.
- III) Loop Control Instruction.
- IV) Case Control Instruction.

Chapter 3 - Conditional Instruction.

- Sometimes we want to watch comedy videos on youtube if the day is sunday.
- Sometimes we order junk food if it is our friend's birthday in hostel.
- ⇒ All these are decisions which depends on a condition being met.
- ⇒ In C language too, one must be able to execute instructions on a condition being met.

Decision making Instructions in C.

- If-else statement
- Switch statement

If - else statement.

Syntax:

if (Condition to be checked) {

 Statements if condition - true;

} else {

 Statements if condition - false;

}

Example:-

int a = 23;

if(a > 18) {

 printf("You can drive in");

}

- Note that else block is not necessary but optional.

Relational Operators in C.

Relational operators are used to evaluate conditions (true or false) inside the if statements.

⇒ Some example of relational operators are:

=, ==, >, <, <=, !=

Greater than
an equal to

not equal to

Important note:

= is used for assignment where as == is used for equality check.

- The condition can be any valid expression. In C a non-zero value is considered to be true.

Logical Operators.

- &&, || and ! are three logical operators in C.
- These are read as "And", "Or" and "not" respectively.
- They are used to provide logic to own C program.

Usage of logical operators.

- 1) && → "And" → is true when both the conditions are true.

Eg. Let '1' be true & 0 be false then.

1) "1 and 0" is evaluated as false.

2) "1 and 1" is evaluated as true.

Eg.

```
if {  
    // statements ; }  
else if {  
    // statements ; }  
else { // statement }
```

- It keeps on checking condition of & when it is satisfied, then that statement is evaluated.
- => The last else is executed only if all conditions fail.
- => Using if-else-if-else reduces indents.
- => There can be any numbers of "else" operator precedence.

Priority	Operator
1 st	!
2 nd	* , / , %
3 rd	+ , -
4 th	< , <= , >=
5 th	= = , !=
6 th	&&
7 th	
8 th	=

ii) $|| \rightarrow \text{Or} \rightarrow$ is true when at least one of the conditions is true.

Eg. $(1 \text{ or } 0 \rightarrow 1)$ $(1 \text{ or } 1 \rightarrow 1)$

$$\begin{array}{ccc}
 \downarrow & \swarrow & \searrow \\
 \text{True} & \text{False} & \text{True}
 \end{array}$$

iii) $! \rightarrow$ returns true if given false and false if given true.

Eg. $!(3 == 3) \rightarrow$ evaluates to false
 $!(3 > 30) \rightarrow$ evaluates to true.

As the number of conditions increases the level of indentation increases. This reduces readability logical operators come to rescue in such cases.

Else - if - clause

Instead of using multiple if statement we can also use else-if along with if thus forming an if - else - if - else ladder.

Conditional Operators.

A short hand "if - else" can be written using the conditional or ternary operators.

Condition ? Expression - if - true : expression - if - false.
→ Ternary operators.

- Switch Case Control Instruction.

Switch case is used when we have to make a choice between number of different alternatives for a given variable.

switch (integer - expression)
{

Case C₁:

Code: $\Rightarrow C_1, C_2, C_3 \rightarrow$ Constant.

Case C₂: \Rightarrow Code \rightarrow Any valid C code.

Code:

Case C₃:

Code:

default:

Code:

g

The value of integer - expression is matched against C₁, C₂, C₃.... If it matches any of these cases, that case along with all subsequent "case" and "default" statement are executed.

- Points to Remember

- 1.) We can use switch case statements even by writing cases in any order of our choice (not necessarily ascending).
- 2.) Char values are allowed as they can be easily evaluated to an integer.
- 3.) A switch can occur within another but in practice this is rarely done.

Chapter - 4 Loop Control Statement.

* Why Loops?

Sometimes we want our programs to execute few set of instructions over & over again.

Eg:- Printing 1 to 100, Print just 100 even numbers etc.

Hence, Loops make it easy for a programmm - ex to tell computer that a given set of instructions must be executed properly repeatedly.

Types of loops:-

Primarily, there are three types of loops in C language:-

- 1) For loop.
- 2) While loop.
- 3) do-while loop.

We will look into these one by one.

- 1) Do-while loop.

Syntax looks like this:-

```
do
```

```
{
```

```
// Code;
```

```
// Code;
```

```
}
```

```
while (condition)
```

do while loop works very similar to while loop.

while → Checks the condition first & then executes the code.

do-while → executes the code & then checks the condition.

- DO-while loops executes at least once.

Q WAP to print first n natural nos using do-while loop.

Input: 4

Output: 1

2

3

4

The loop counter need not be int, it can be float as well!

- Increment & Decrement Operator.

$i++ \rightarrow i$ is increased by 1

$i-- \rightarrow i$ is decreased by 1

* `printf ("--i = %d", --i);`

This first decrements i and then prints it.

* `printf ("i-- = %d", i--);`

This first prints i and then decrements it.

\Rightarrow $+++$ operator doesn't exist. (Important)

\Rightarrow $+ =$ is compound assignment operator just like $-=$, $*=$, $/=$ & $%=$ (Also important)

2) While loop

Syntax :-

while (condition is true):

{

// Code

// Code

→ The block keeps executing
as long as the condition
is true.

Eg:-

```
int i=0
while (i<10)
    {
```

```
    cout << "The value of i is " << i;
    i++;
}
```

Note:- If the condition never become false,
the while loop keeps getting executed. Such
a loop is known as an infinite loop.

Q) WAP to print natural no.s from 10 to 20
when initial loop counter i is initialized
to 0.

3) For loop

Syntax:-

for (initialize : test : increment & decrement)

{

// code;

// code;

// code;

}

Initialize → setting a loop counter to an initial value.

Test → checking a condition.

Increment → Updating the loop counter.

Example:

```
for (i=0; i<3; i++)
```

```
{  
    cout << "%d", i;  
    cout << "Im";  
}
```

Output: 0

1

2

A case of decrementing for loop.

```
for (i=5; i; i--)  
    cout << "%dIm", i;
```

⇒ This for loop will keep on running until i becomes 0.

This loop runs in following steps:-

- i is initialized to 8.
- The condition "i" (0 or non 0) is tested.
- The code is executed.
- i is decremented.
- Conditions i is checked and code is executed if its not 0.
- And so on until i is non 0.

Break Statement in C

The break statement is used to exit the loop irrespective of whether the condition is true or false. Whenever a "break" is encountered inside the loop the control is sent outside the loop.

Example:-

```
for (i=0; i<100; i++)
{
```

```
    printf ("%d\n", i);
    if (i==5)
    {
```

```
        break;
    }
```

Output:- 0 1 2 3 4 5
and not 0 to 100.

- The execution of loop stops when i is equal to 5.

Continue Statement.

The continue statement is used to immediately move to next iterations of the loop.

The control is taken to the next iteration thus skipping everything below "continue" inside the loop for that iteration.

Example:

```
int skip = 5;
```

```
int i = 0;
```

```
while (i < 10)
```

```
{
```

```
    if (i != skip)
```

```
        continue;
```

```
    else
```

```
        printf ("%d", i);
```

```
}
```

Output \Rightarrow 5

and not 0....9

Note:-

1) Sometimes the name of the variable might not indicate the behaviour of the program.

2) Break statement completely exists the loop.

3) Continue statement skips the particular iteration of the loop.

Q

WAP to check whether a given no is prime or not using loops.

Chapter - 5 Functions and Recursion.

Sometimes our program gets bigger in size and it's not possible for a programmer to track which piece of code is doing what. Function is a way to break our code into chunks so that it is possible for a programmer to reuse them.

- What is a function?
- A function is a block of code which performs a particular task.
- It can be used any number of times in a given program.

Example and syntax of function:-

```
#include <stdio.h>
```

- 1) void display(); ⇒ Function Prototype.
- 2) int main
{
 int a; ⇒ Function call.
 display();

Function definition.

This part contains the exact set of instructions which are executed during the function call. When a function is called from main(), the main function falls asleep and gets temporarily suspended.

⇒ During this time the control goes to the function being called. When the function body is done executing main() resumes.



WAP with 3 functions:-

- 1) Good morning function which prints "Good morning". "Good morning".
- 2) Goodafternoon function which prints "Good afternoon". "Good afternoon".
- 3) Goodnight function which prints "Good night".

main() should call all these in order 1 → 2 → 3

return 0;

}

III) void display ()
{

 cout << "Hello, I am PikachuDev.".;

}

 → Function definition.

Function Prototype.

Function prototype is a way to tell the computer compiler about the function we are going to define in the program.

Here void indicates that the function returns nothing.

Function call

Function call is a way to tell the compiler to execute the function body at the time the call is made.

⇒ Note that the program execution starts from the main function in the sequence the instructions are written.

Important points.

- Execution of a C program starts from main()
- A C program can have more than one function.
- Every function gets called directly or indirectly from main().
- There are two types of functions in C. Let's talk about them.

Types of function.

- 1) Library functions:- Commonly require functions grouped together in a library file on disk.
- 2) User defined functions:- These are the functions declared and defined by the user.

Passing values to functions

We can pass values to a function and can get a value in return from a function.

`int sum(int a, int b)`

The above prototype means that sum is a function which takes values a (of type int) and b (of type int) and returns a value of type int.

Function definition of sum can be:

`int sum (int a, int b)`

{

`int c;`

`c = a + b;` \Rightarrow 'a' and 'b' are
return c; parameters.

}

Now we can call sum(2,3); from main to get 5 in return.

Hence 2 and 3 are arguments.

`int d = sum(2,3);` \rightarrow d becomes 5

Note:-

1) Parameters are the values or variable placeholders in the function definition. ex a & b.

2) Arguments are the actual values passed to the function to make a call. eg 2 and 3.

iii) A function can return only one valuable value at a time.

iv) If the passed variable is changed inside the function, the function call doesn't change the value in the calling function.

```
int change (int a)
```

```
{
```

```
a = 77;
```

\Rightarrow Misname.

```
return 0;
```

```
}
```

Changes is a function which changes to a 77 number if we call it from main like this.

```
int b = 22
```

change (b); \Rightarrow The value of b remains 22.

```
cout << ("b is %d", b);
```

\hookrightarrow prints "b is 22"

* This happens because a copy of b is passed to the change function.

Q Use the library functions to calculate the area of square & with side a.

Recursion.

A function defined in C can call itself. This is called recursion.

A function calling itself is also called 'Recursive function'.

Example:-

A very good example of recursion is factorial.

$$\text{Factorial}(n) = 1 \times 2 \times 3 \times \dots \times n$$

$$\text{Factorial}(n) = 1 \times 2 \times 3 \times \dots \times \underline{(n-1)} \times n$$



$$\text{Factorial}(n) = \text{Factorial}(n-1) \times n$$

Since we can write factorial of a number in terms of itself. We can program it using recursion.

```
int factorial (int n)
```

```
{
```

```
    int f;
```

```
    if (n == 0 || n == 1)
```

```
        return 1;
```

```
    else
```

```
        f = n * factorial (n-1);
```


```
        return f;
```

```
}
```

This is a program to calculate factorial using recursion.

Note:- Recursion is sometimes the most direct way to code an algorithm.

How does the above code work?

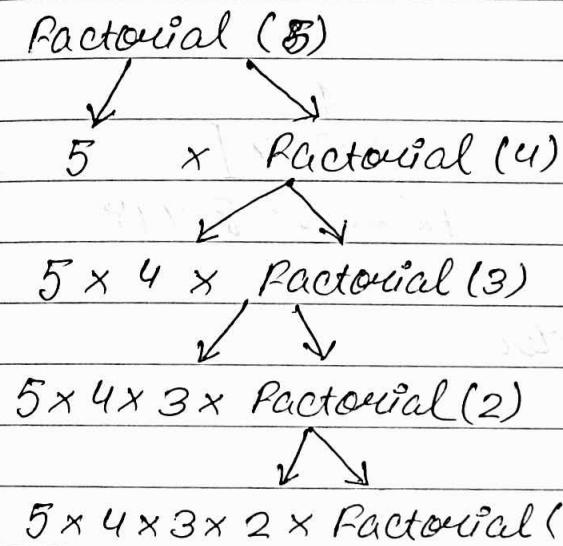


Important Point.

- 1) The condition which doesn't call the function any further in a recursive function is called as the base condition.
- 2) Sometimes due to a mistake made by the programmer, a recursive function can keep running without returning resulting in a memory error.

Chapter 6 - Pointers

A pointer is a variable which stores the address of another variable.

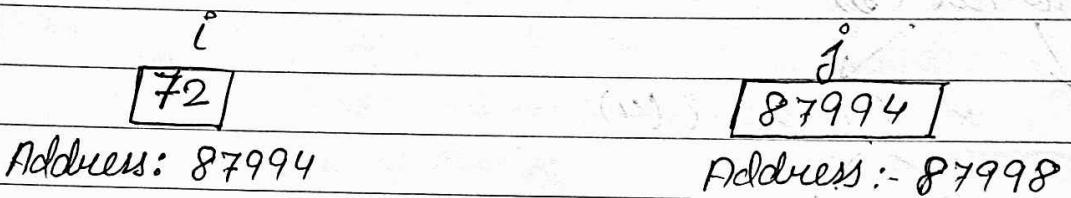

Hence, *j* is a pointer
j points to *i*.

The "address of" (&) operator.

The address of operator is used to obtain the address of a given variable.

If you refer to the diagram above:-

$$\&i \Rightarrow 87994$$

$$\&j \Rightarrow 87998$$

Format specifier for printing pointer address is '%L'.

The 'value at address' operator (*)

The value at address or operator is used to obtain the value present at given memory address. It is denoted by *.

$$*(\&i) = 72$$

$*(&j) = 87994$

How to declare a pointer?

A pointer is declared using the following syntax.

`int * j;` \Rightarrow declare a variable j of type
int - pointer.

$j = \&i$

\hookrightarrow store address of i in j .

Just like pointer of type integer. we also have pointer of char float etc.

`int * Ch-pte;` \Rightarrow Pointer of integer

`Char * Ch-pte;` \Rightarrow Pointer of character

`float * Ch-pte;` \Rightarrow Pointer to float.

* Although its a good practice to use meaningful variable names, we should be very careful while reading and working on programs from fellow programmers.

A program to demonstrate pointer.

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
int i = 8;
```

```
int *j;
```

```
j = &i;
```

```

printf("Add i = %.ulm", &i);
printf("Add i = %.ulm", j);
printf("Add j = %.ulm", &j);
printf("Value i = %.dIm", i);
printf("Value i = %.dIm", *(&i));
printf("Value i = %.dIm, *j");
return 0;
}

```

Output:

Add i = 87994

Add i = 87994

Add j = 87998

Value i = 8

Value i = 8

Value i = 8.

This program sums it all. If you understand it, you have got the idea of pointers.

Pointer to a pointer.

Just like j is pointing to i or storing the address of i, we can have another variable k which can further store the address of j. What will be the type of k.

int **k;

k = &j;

<table border="1"> <tr> <td>72</td> </tr> </table>	72	<table border="1"> <tr> <td>87994</td> </tr> </table>	87994	<table border="1"> <tr> <td>87998</td> </tr> </table>	87998
72					
87994					
87998					
87994	87998	88004			
int	int *	int **			

We can even go functions one level and create a variable l of type int *** to store the address of R. We mostly use int * and int ** sometimes in real world programs.

Types of function call.

Based on the way we pass arguments to the function, function calls are of two types.

- 1) Call by value \Rightarrow sending the value of arguments.
- 2) Call by reference \Rightarrow sending the address of arguments.

1) Call by value

Here the value of the arguments are passed to the function consider the example.

int C = sum (3, 4) \Rightarrow assume x = 3
 y and y = 4

If sum is defined as sum (int a, int b), the values 3 and 4 are copied to a and b, nothing happens to the variables x and y. This is call by value.

In C we usually make a call by value.

Call by reference.

Here the address of variables is passed to the function as arguments.

Now since the addresses are passed to the function, the function can now modify the value of a variable in calling function using * and & operators.

Example :-

void swap (int *x, int *y)

{

int temp;

temp = *x;

*x = *y;

*y = temp;

}

This function is capable of swapping the values passed to it if $a=3$ and $b=4$ before a call to swap (a, b). $a=4$ and $b=3$ after calling swap.

int main ()

{

int a=3;

int b=4; \Rightarrow a is 3 and b is 4.

swap (a, b)

return 0; \Rightarrow Now a is 4 and b is 3.

}

- Q 1) WAP to print the value of a variable & by using "pointer to pointer" type of variable.
- 2) WAP using a function which calculates the sum and average of two numbers. Use pointers and print the values of sum and average in main().

Chapter - 7 Arrays.

An array is a collection of similar element.

one variable : Capable of storing multiple values.

Syntax:-

The syntax of declaring an array looks like this

`int marks [90];` \Rightarrow Integer array

`char name [20];` \Rightarrow Character array

`float percentile [90];` \Rightarrow Float array.

The values can now be assigned to marks array like this

`marks [0] = 33;`

`marks [1] = 12;`

Note:- It is very important to note that the array index starts with 0.

Marks \rightarrow	[7 6 21 3 91 3]	[88 89]
	0 1 2 3 4 5	88 89
Total 90 elements.		

*

Numbering starts from 0.

Accessing elements.

Elements of an array can be accessed using:

`scanf ("%d", &marks[0]);` → Input first value

`printf ("%d", marks[0]);` → Output first value of array.

Initialization of an array.

There are many other ways in which an array can be initialized.

`int cgpa [3] = {9, 8, 8};`

→ Arrays can be initialized while declaration.

`float marks [] = {33, 40};`

Arrays in memory.

Consider this array

`int arr [3] = {1, 2, 3};` ⇒ 1 integer is equal to 4 bytes.

This will reserve $4 \times 3 = 12$ bytes in memory
4 bytes for each integer.

1	2	3
62302	62306	62310

⇒ arr in memory

Pointer Arithmetic

A pointer can be incremented to point to the next memory locations of that type.

Example

`int i = 32;`

`i`
32

`int *a = &i;` Address: 87994

`a++;` $\rightarrow a = 87994$

Now `a = 87998`

`char a = 'A';`

`char *b = &a;` $\Rightarrow b = 87994$

`b++;` \Rightarrow Now `b = 87995`

`float i = 1.7;`

`float *a = &i;` \Rightarrow Address of `i` or `a = 87994`
`a++;` \Rightarrow Now `a = 87998`

Following operations can be performed on a pointer:-

- 1) Addition of a number to a pointer.
- 2) Subtraction of a number from a pointer.
- 3) Subtraction of one pointer from another.
- 4) Comparison of two pointer variables.

Accessing Arrays using Pointers.

Consider the array

7	9	2	8	1
---	---	---	---	---

Index: 0 1 2 3 4

↑

ptr

If `ptr` points to index 0, `ptr ++` will point to index 1 & so on.....

This way we can have an integer pointer pointing to just element of the array like this:

`int * ptr = & arr[0];` ⇒ or simply `arr`
`ptr++;`
`* ptr` ⇒ will have 9 as its value.

Passing arrays to functions.

Arrays can be passed to the function like this.

`print Array(arr, n);` ⇒ Function call

`void print array (int * i, int n);` ⇒ Function
 prototype.
 Or

`Void print array (int l[], int n);`

Multidimensional arrays

An array can be of 2 dimensional / 3 dimensional / m dimension.

A two - dimension array can be defined as:

`int arr [3][2] = { {1, 4},
 {7, 9},
 {11, 22} };`

We can access the elements of this array as:

$\text{arr}[0][0]$, $\text{arr}[0][1]$ & so on....
↓ ↓
Value = 1 Value = 4

2-D arrays in memory.

⇒ A 2D array, like a 1D array is stored in contiguous memory block like this.....
 $\text{arr}[0][0]$ $\text{arr}[0][1]$

1	4	7	9	11	22
---	---	---	---	----	----

87224 87228.....

Q Create a 2-d array by taking input from the user. Write a display function to print the content of this 2-d array on the screen.

Q WAP containing function which counts the numbers of positive integers in an array.

Chapter - 8 Strings.

A string is a 1-D character array terminated by a null ('10') →
This is null character.

Null character is used to denote string termination characters are stored in contiguous memory location.

Initializing String

Since string is an array of characters it can be initialized as follows:-


char s[] = {'P', 'I', 'K', 'A', '10'};

There is another shortcut for initializing strings in C language.

char s[] = "PIKA"; ⇒ In this case C add a null character automatically.

Strings in Memory.

A string is stored just like an array in the memory as shown below-

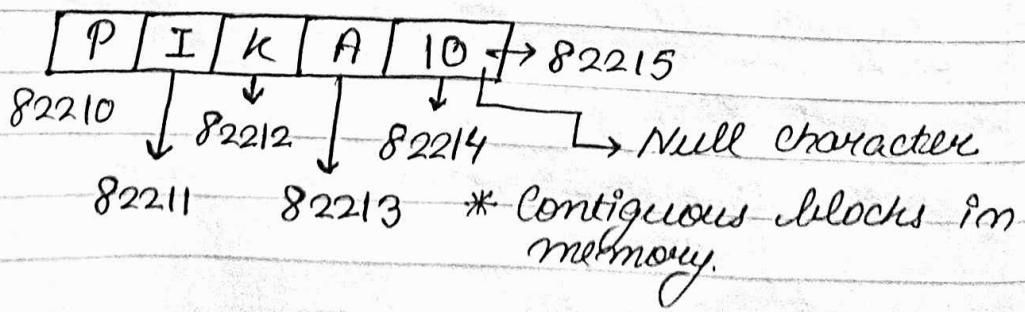

Q Create a string using " " and print its content using a loop.

Printing strings

A string can be printed character by character using printf and %c. But there is another convenient way to print strings in C.

```
char st[] = "Harry";
printf ("%s", st); // prints the entire string.
```

Taking string input from the user.
We can use %s with scanf to take string input from the user.

```
char st[50];
scanf ("%s", &st);
```

scanf automatically adds the null character when the enter key is pressed.

Note:

- 1) The string should be short enough to fit into the array.
- 2) scanf cannot be used to input multi-word strings with spaces.

gets() and puts()

gets() is a function which can be used to receive a multi-word string.

char st[30];

gets(st) \Rightarrow The entered string is stored in st!

Multiple gets() calls will be needed for multiple strings.

Likewise puts can be used to output a string.

puts(st); \Rightarrow prints the string places the cursor on the next line.

Declaring a string using pointers.

We can declare strings using pointers.

char * ptr = "Harry";

This tells the compiler to ^{store} the string in memory and assigned address is stored in a char pointer.

Note:-

- Once a string is defined using char st[] = "Harry", it cannot be reinitialized to something else.

2) A string defined using pointers can be uninitialized.

```
ptr = "Rohan";
```

⇒ Standard Library functions for strings.
C provides a set of standard library functions for string manipulation.
Some of the most commonly used string functions are:

`strlen()`

This function is used to count the number of characters in the string excluding the null ('\'0') characters.

```
int length = strlen(st);
```

These functions are declared under <string> header file.

`strcpy()`

This function is used to copy the content of second string into first string passed to it.

```
char source[] = "Harry";
```

```
char target[30];
```

```
strcpy(target, source); ⇒ target  
now contains "Harry".
```

Target string should have enough capacity to store the source string.

strcat()

This function is used to concatenate two strings.

char s₁[11] = "Hello";

char s₂[5] = "Harry";

strcat(s₁, s₂); \Rightarrow s₁ now contains
"HelloHarry"
<no space in between>

strcmp()

- \Rightarrow This function is used to compare two strings.
- \Rightarrow It returns: 0 if strings are equal.
- \Rightarrow Negative value if first string's mismatching character's ASCII value is not greater than second string's corresponding mismatching character.
- \Rightarrow It returns positive value otherwise.

strcmp("Ror", "Joke"); \Rightarrow Positive value

strcmp("Joke", "Ror"); \Rightarrow Negative value.

Chapter-9 Structures.

Arrays and strings \Rightarrow similar data
(int, float, char)

Structures can hold \Rightarrow dissimilarities data.

Syntax for creating structures.

A C structure can be created as follows:-

```
struct Employee {  
    int code;            $\Rightarrow$  This declares a new  
    float salary;       user defined data  
    char name [10];    type!  
};
```

\hookrightarrow Semicolon is important

We can use this user defined data type
as follows:-

```
struct employee e1;  
strcpy (e1.name, "Harry");  
e1.code = 100;  
e1.salary = 71.22;
```

\hookrightarrow creating a
structure variable.

So a structure in C is a collection of
variables of different types under a single
name.

Why use structure?

We can create the datatypes in the employee structure separately but when the number of properties in a structure increases; it becomes difficult for us to create data variables without structures.

In short:-

- 1) It keeps the data organised.
- 2) It makes data management simple for a programmer.

Array of structures

To create an array of structures

struct employee Facebook [100];

↳ An array of structures.

We can access data by using:

Facebook [0]. Code = 180;

Facebook [1]. Code = 101;

..... and so on

Initializing structures

Structures can also be initialized as follows:

struct employee Harry = {100, 71.22, "Harry"};

struct employee Pika = {0};

→ All elements set to 0.

Structures in Memory

Structures are stored in contiguous memory locations. For the structure `e1` of type struct employee, memory layout looks like this:

100	71.22	"Harry"
-----	-------	---------

Address → 78810 78814 78818

In an array of structures these employee instances are stored adjacent to each other.

Pointer to structures.

A pointer to structure can be created as follows:-

```
struct employee * ptr;  
ptr = &e1;
```

Now we can print structure elements using:

```
printf("%d", *(ptr).code);
```

Arrow Operator

Instead of writing `* (ptr).code`, we can use arrow operator to access structure properties as follows

```
* (ptr).code or ptr → code
```

Here → is known as arrow operator.

Passing Structure to a function.

A structure can be passed to a function just like any other data types.

void show (struct employee *e);
Function Prototype ↴

typedef keyword.

We can use the `typedef` keyword to create an alias name for data types in C.

`typedef` is more commonly used with structures.

struct complex
{

 float real; ⇒ struct complex C₁, C₂;
 float img; for defining complex
}; numbers.

typedef struct complex
{

 float real;
 float img; ⇒ complex no C₁, C₂;
 complex number; for defining complex
}; numbers.


Q/

Write a structure capable of storing date.
Write a function to compare those dates.

Chapter-10 File I/O

The RAM is volatile and its content is lost once the program terminates. In order to persist the data forever we use files.

- ⇒ A file is data stored in a storage device. A C program can talk to the file by reading content from it and writing content to it.

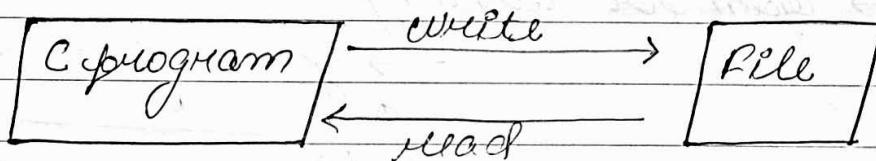

File Pointer

A file is a structure which needs to be created before opening the file.

A file pointer is a pointer to this structure of the file.

- File pointer is needed for communication between the file and the program.

A file pointer can be created as follows:

```

FILE * ptr;
ptr = fopen("filename.ext", "mode");
  
```

File opening modes in C

Following modes are primarily used in C file I/O

"r" → open for reading ⇒ If the file doesn't exist, fopen.

"rb" → open for reading
in binary.

"w" → open for writing.

↳ If the file exists,

"wb" → open for writing (The content with the
in Binary. overwritten).

"o" → open for append ⇒ If the file does not
exist, it will be created.

Types of files.

There are two types of files:

- 1) Text files (.txt, .c)
- 2) Binary files (jpg, dat)

Reading a file

A file can be opened for reading as follows:-

```
FILE *ptr;
```

```
ptr = fopen("Harry.txt", "r");  
int num;
```

Let us assume that "Harry.txt" contains an integer. We can read that integer using:

```
fscanf(ptr, "%d", &num);
```

fscanf is file consuming
version of scanf.

This will read an integer from file in num variable.

Closing the file.

It is very important to close the file after read or write. This is achieved using fclose as follows:

```
fclose(ptr);
```

This will tell the compiler that we are done working with this file and the associated resources could be freed.

Writing to a file.

We can write to a file in a very similar manner like we read file.

```
FILE *ptr;
```

```

fptr = fopen ("Harry.txt", "w");
int num = 432;
fprintf (fptr, "%d", num);
fclose (fptr);

```

fgetc() and fputc()

fgetc and fputc are used to read and write a character from / to a file.

fgetc(ptn) \Rightarrow used to read a character from file.

fputc('C', ptn); \Rightarrow used to write character 'C' to the file.

EOF: End of file

fgetc returns EOF when all the characters from a file have been read. So we can write a check like below to detect end of file.

while (1) {

ch = fgetc(ptn);

if (ch == EOF) { \Rightarrow when all the content of a file has been read, break the loop.
break;

// code

}

Chapter 11 - Dynamic Memory

Instructions.

C is a language with some fined rules of programming. For example changing the size of an array is not allowed.

Dynamic Memory Allocation.

It is a way to allocate memory to a data structure during the runtime we can use DMA functions available in C to allocate and free memory during runtime.

Functions for DMA in C.

- 1.) malloc()
- 2.) calloc()
- 3.) free()
- 4.) realloc()

malloc() function.

malloc stands for memory allocation. It keep number of byte to be allocated as an input and returns a pointer of type void.

Syntax:

ptr = (int *) malloc(30 * size of (int))
 ↑ ↓ ↳ returns size of
 casting Space 1 int.
var pointer for 30
 int.

The expression returns a null pointer if the memory can't be allocated.

Calloc() function

- ⇒ Calloc stands for continuous allocation.
- ⇒ It initializes each memory block with a default value of 0.

Syntax:

```
ptu = (float *) Calloc (30, size of (float));
```

↑
allocates contiguous space in memory
for 30 blocks (floats).

If the space is not sufficient, memory allocation fails and a null pointer is returned.

Free() function.

We can use free() function to deallocate the memory.

Syntax:

```
Free (ptu); ⇒ Memory of ptu is released.
```

Realloc() function

Sometimes the dynamically allocated memory is insufficient or more than required.

Realloc is used to allocate memory of new size using the previous pointer and size.

Syntax:

`ptr = realloc (ptr, new size);`

`ptr = realloc (ptr, 3 * size of (int));`

`ptr` now points to the
new block of memory capable
of storing 3 integers.