
## **A Developer Diary**

{about:"code learn and share"}

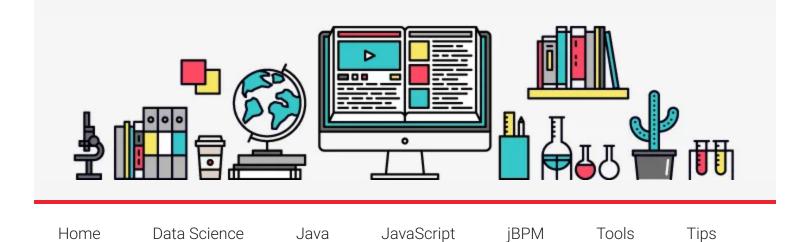

About

April 4, 2016 By Abhisek Jana — 9 Comments (Edit)

# How to Create Spring Boot Application Step by Step




Spring Boot had been built for Rapid Application Development. In this tutorial we will learn How to Create Spring Boot Application using some easy examples. We will also focus on How to deploy spring boot application in different application servers.

Here are the following topics that we will cover in this series:

- 1. Create Spring Boot Application using
  - start.spring.io
  - Eclipse STS
  - IntelliJ IDEA STS
- 2. Run Spring Boot Application using
  - Java CLI
  - Eclipse/IntelliJ IDEA
- 3. Create a Basic Spring Boot application using REST
- 4. How to use Spring Actuator
- 5. Deploy Spring Boot application in
  - IBM Liberty Profile

IBM Application Server 8.5

If you need an introduction of Spring Boot please find my previous post below.

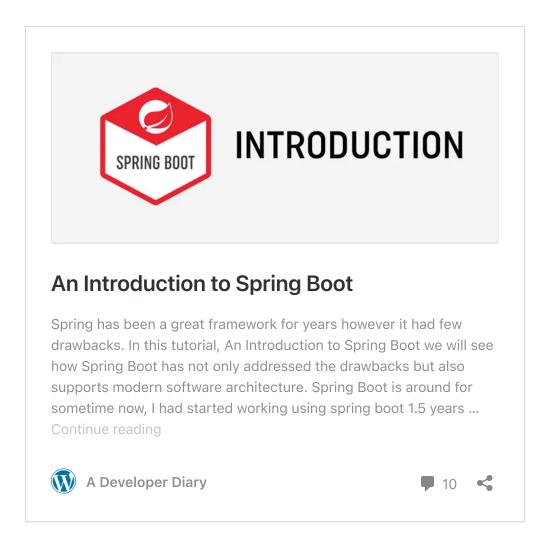

# Create Spring Boot Application using start.spring.io

The best way of bootstrapping Spring Boot application is by using Spring Initializr. Let's first start by opening <a href="http://start.spring.io">http://start.spring.io</a>. As you already know, you can use either Maven or Gradle to build, however we will use Maven in this tutorial. Click on <a href="Switch to the full Version">Switch to the full Version</a> and you will be able to see the below screen.


### Software Needed

- JDK 1.8 (You can use 1.7 or 1.6)
- Maven 3.x


[the\_ad id="765"]

### Steps:

- Select Maven Project
- If you want, change the Group/Package name. We will use com.adeveloperdiary
- Change the Artifact to **SpringBoot**, Name will automatically change to the same
- Leave the packaging to Jar, Java Version to 1.8 (Make sure you have JDK
   1.8 in your local or use 1.7 )
- Either type the Dependencies or select them below. We will add Web and Actuator here
- Click on Generate Project button to download the zip file

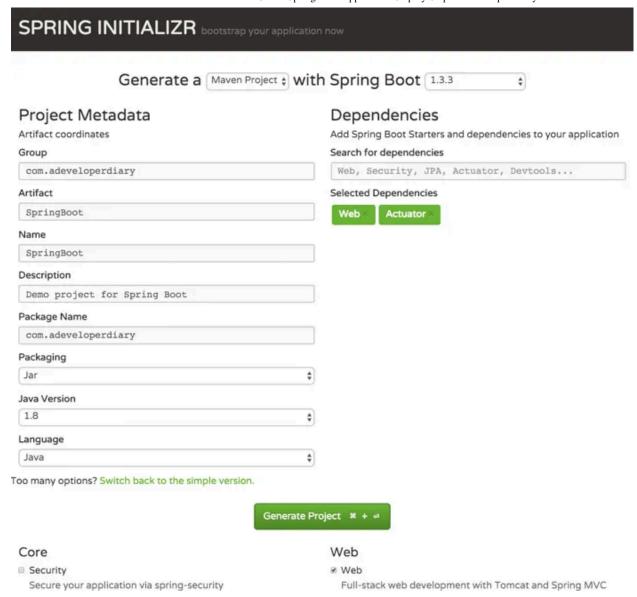

Now Extract the zip and you will have the following files.

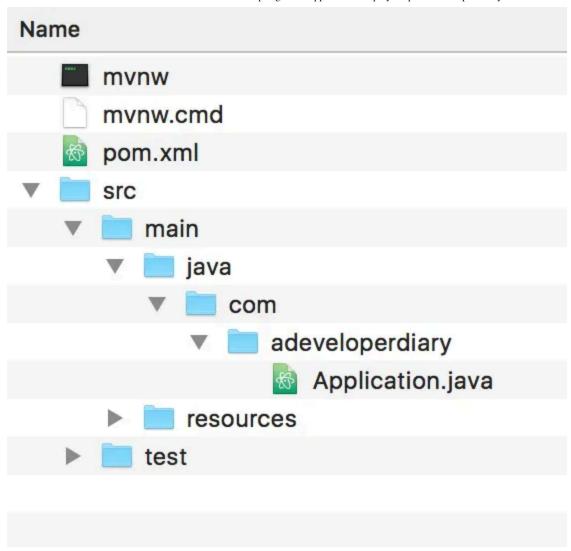

Open Terminal and navigate to the above folder. Type **mvn clean package** and press enter. The Build will start now.

```
gframework.boot.actuate.endpoint.mvc.EndpointMvcAdapter.invoke()
2016-04-02 22:05:57.564 INFO 38542 --- [
                                                    main] com.adeveloperdiary.ApplicationTests
                                                                                                   : Started A
pplicationTests in 2.13 seconds (JVM running for 2.575)
Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 2.217 sec - in com.adeveloperdiary.Application
2016-04-02 22:05:57.577 INFO 38542 --- [
                                               Thread-1] o.s.w.c.s.GenericWebApplicationContext : Closing o
rg.springframework.web.context.support.GenericWebApplicationContext@498d318c: startup date [Sat Apr 02 22:05:5
5 EDT 2016]; root of context hierarchy
Results:
Tests run: 1, Failures: 0, Errors: 0, Skipped: 0
[INFO]
[INFO] --- maven-jar-plugin:2.5:jar (default-jar) @ SpringBoot --
[INFO] Building jar: /Users/abhisekjana/Documents/workspace/j2ee/GettingStartedWithSpringBoot/SpringBoot/targe
t/SpringBoot-0.0.1-SNAPSHOT.jar
[INFO]
[INFO]
        -- spring-boot-maven-plugin:1.3.3.RELEASE:repackage (default) @ SpringBoot --
[INFO]
[INFO] BUILD SUCCESS
[INFO]
[INFO] Total time: 5.526 s
[INFO] Finished at: 2016-04-02T22:05:58-04:00
[INFO] Final Memory: 30M/318M
[INFO]
Abhiseks-MacBook-Pro:SpringBoot abhisekjana$
```

Once the build has been completed, you will have the **SpringBoot-0.0.1-SNAPSHOT.jar** created inside the **target** folder.


[the\_ad id="763"]

The Size of the jar would be around 13MB since it will have the embedded Tomcat server in it.

```
Abhiseks-MacBook-Pro:target abhisekjana$ ls -ll
-rw-r--r-- 1 abhisekjana staff 13876787 Apr 2 22:05 SpringBoot-0.0.1-SNAPSHOT.jar
                                     2833 Apr 2 22:05 SpringBoot-0.0.1-SNAPSHOT.jar.original
           1 abhisekjana staff
drwxr-xr-x 4 abhisekjana staff
                                     136 Apr 2 22:05 classes
drwxr-xr-x 3 abhisekjana staff
                                     102 Apr 2 22:05 generated-sources
drwxr-xr-x 3 abhisekjana staff
                                     102 Apr 2 22:05 generated-test-sources
drwxr-xr-x 3 abhisekjana staff
                                     102 Apr 2 22:05 maven-archiver
drwxr-xr-x 3 abhisekjana staff
                                      102 Apr
                                              2 22:05 maven-status
drwxr-xr-x 4 abhisekjana staff
                                      136 Apr
                                              2 22:05 surefire-reports
drwxr-xr-x 3 abhisekjana staff
                                      102 Apr 2 22:05 test-classes
Abhiseks-MacBook-Pro:target abhisekjana$
```


# Create Spring Boot Application using Eclipse

We will use STS Toolkit to bootstrap when using eclipse. I am using eclipse MARS .1 version. We will first install the STS (SpringSource Tools Suite). Open Eclipse Marketplace, Type STS in Find and install the STS.

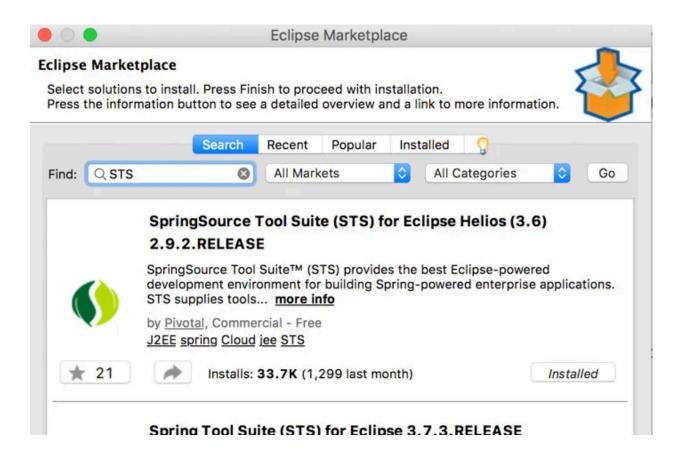


Then open **Spring** perspective.


[the\_ad id="767"]

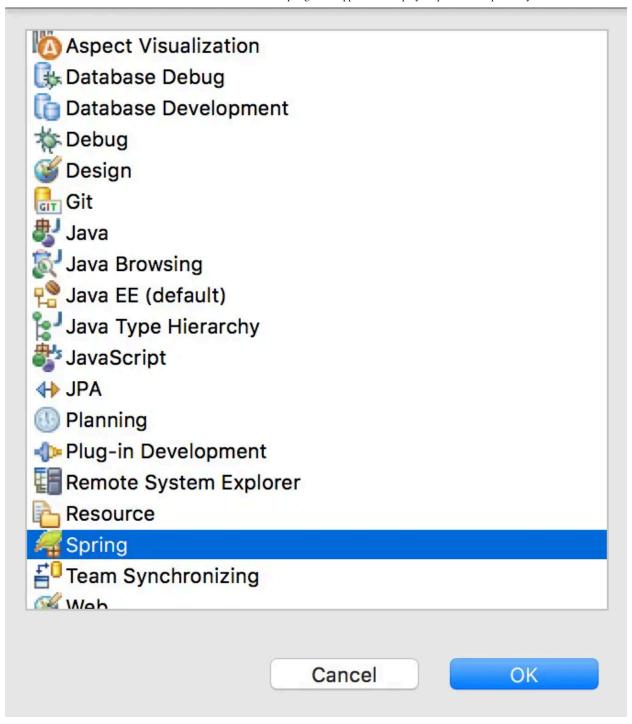


Create a New -> Spring Starter Project.

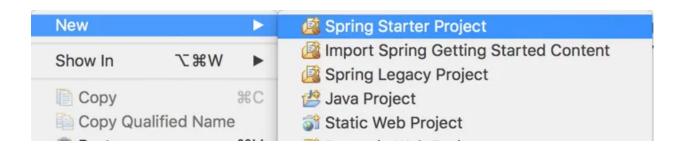


Enter the following details. Click Next.

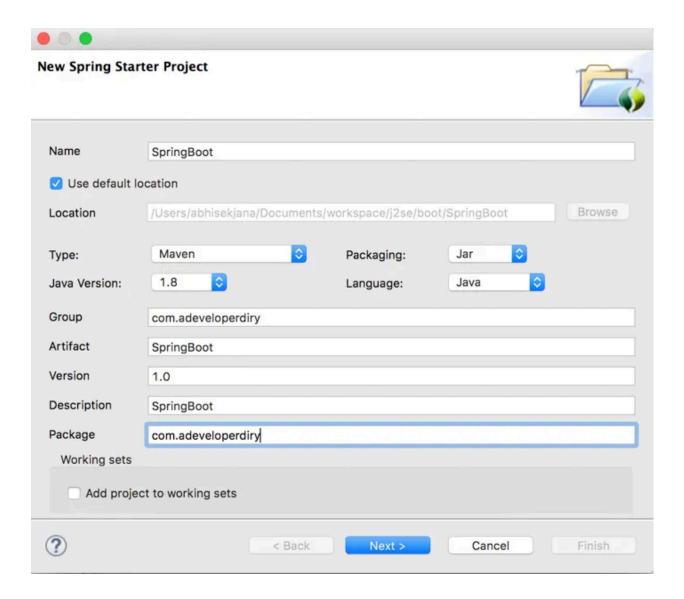


Select Web and Actuator. Click on Next.




### **New Spring Starter Project**

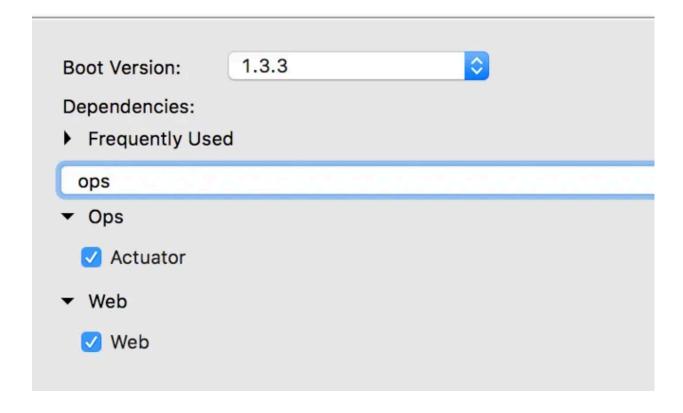

Click on Finish.

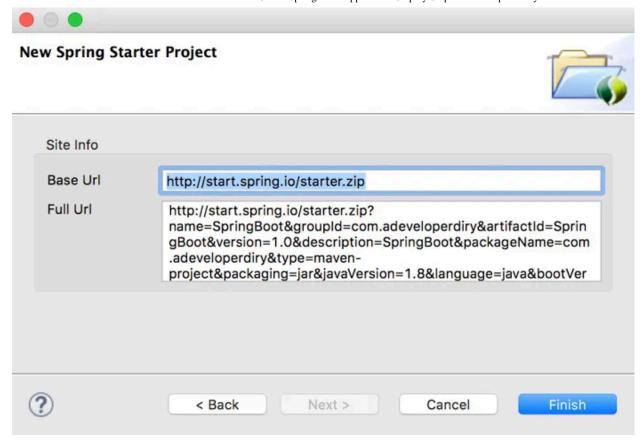


This should create the Spring Boot Project in Eclipse.

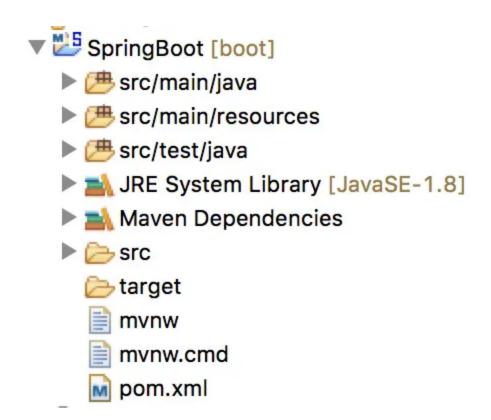


# Create Spring Boot Application using IntelliJ IDEA


We will now use IntelliJ IDEA to create our Spring Boot Application.I recommend to use the latest version of IntelliJ. Create a New Project. Select **Spring Initializr**. Click on Next.

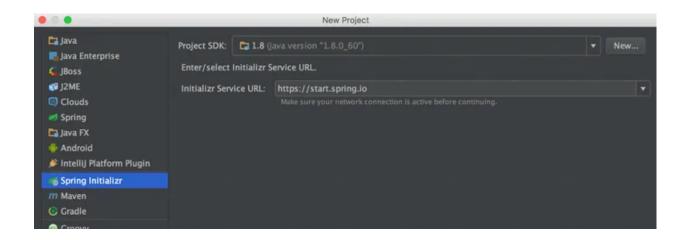


Enter the following details. Click Next.

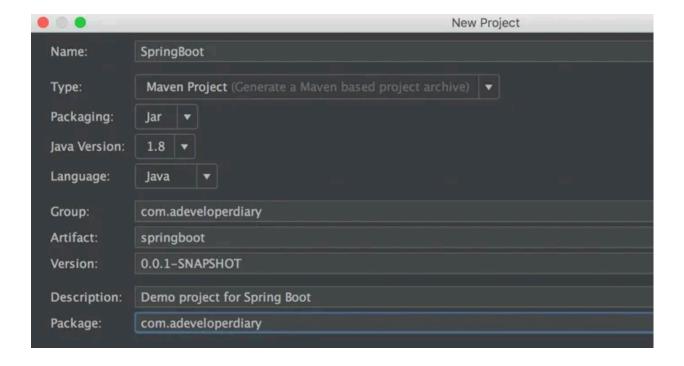


Select Web and Actuator . Click Next.

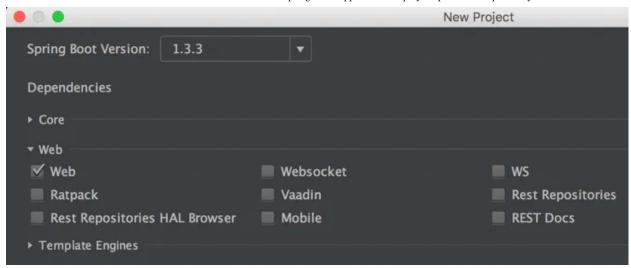

Enter the project Name and click Finish.



Your Spring Boot Project has been created now.

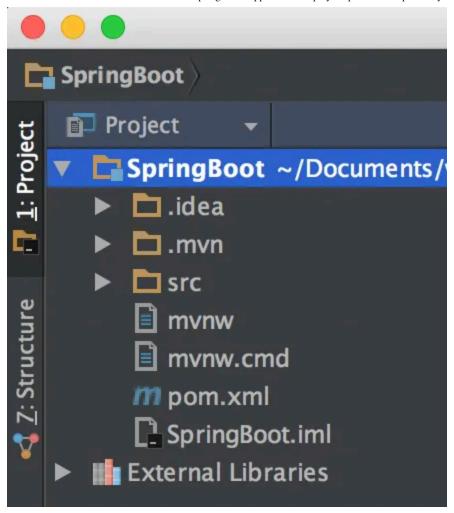

## Run Spring Boot Application using CLI

We had created the jar file, now we will run it from Command Line by executing this line

java -jar target/SpringBoot-0.0.1-SNAPSHOT.jar

You should be able to see Spring Boot in the Command Line.


```
Abhiseks-MacBook-Pro:SpringBoot abhisekjana$ java -jar tarqet/SpringBoot-0.0.1-SNAPSHOT.jar
2016-04-02 22:42:15.906 INFO 62672 --- [
                                                   main] com.adeveloperdiary.Application
Starting Application v0.0.1-SNAPSHOT on Abhiseks-MacBook-Pro.local with PID 62672 (/Users/abhisekja
na/Documents/workspace/j2ee/GettingStartedWithSpringBoot/SpringBoot/target/SpringBoot-0.0.1-SNAPSHOT
jar started by abhisekjana in /Users/abhisekjana/Documents/workspace/j2ee/GettingStartedWithSpringB.
oot/SpringBoot)
2016-04-02 22:42:15.909 INFO 62672 --
                                                  main] com.adeveloperdiary.Application
No active profile set, falling back to default profiles: default
2016-04-02 22:42:15.952 INFO 62672 --- [
                                                  main] ationConfigEmbeddedWebApplicationContext
Refreshing org.springframework.boot.context.embedded.AnnotationConfigEmbeddedWebApplicationContext@
28bbd79c: startup date [Sat Apr 02 22:42:15 EDT 2016]; root of context hierarchy
2016-04-02 22:42:16.430 INFO 62672 --- [
                                                   main] o.s.b.f.s.DefaultListableBeanFactory
Overriding bean definition for bean 'beanNameViewResolver' with a different definition: replacing
Root bean: class [null]; scope=; abstract=false; lazyInit=false; autowireMode=3; dependencyCheck=0;
autowireCandidate=true; primary=false; factoryBeanName=org.springframework.boot.autoconfigure.web.En
```

The server should have started and the default port number will also be displayed as below.


```
main] o.s.j.e.a.AnnotationMBeanExporter : Registering beans for JMX exposure on startumain] o.s.c.support.DefaultLifecycleProcessor : Starting beans in phase 0
main] s.b.c.e.t.TomcatEmbeddedServletContainer : Tomcat started on port(s): 8080 (http)
main] com.adeveloperdiary.Application : Started Application in 2.97 seconds (JVM runn
```

## Run Spring Boot Application in Eclipse

Its much easier to run the Spring Boot app in eclipse. Select the project, Right Click and, move to **Run As** and click on **Spring Boot App**. Again, remember you need to select the project to get this option, not the pom file.

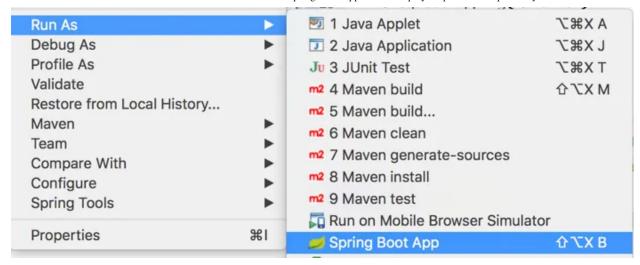


Here is the output.

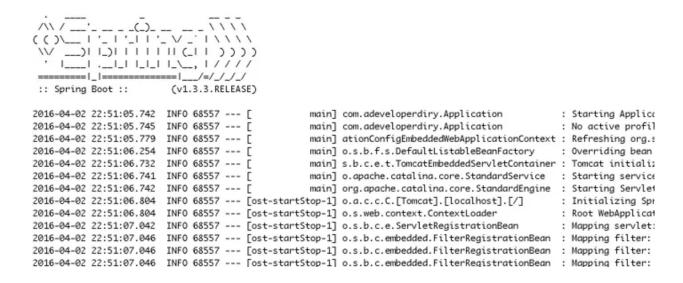

## Run Spring Boot Application in IntelliJ IDEA

Its probably most easy, click on the run icon.



You should be able to see the logs that the application has started.

```
tualMachines/jdk1.8.0_60.jdk/Contents/Home/bin/java ...
          Boot ::
2016-04-02 22:52:44.104
                         INFO 69639
                                                     main] com.adeveloperdiary.Application
2016-04-02 22:52:44.106
                         INFO 69639
                                                     main] com.adeveloperdiary.Application
2016-04-02 22:52:44.159
                         INFO 69639
                                                     main]
                                                           ationConfigEmbeddedWebApplicationContext
2016-04-02 22:52:44.645
                         INFO 69639
                                                     main]
2016-04-02 22:52:45.207
                              69639
2016-04-02 22:52:45.217
                               69639
                                                     main] o.apache.catalina.core.StandardService
2016-04-02 22:52:45.218
                         INFO 69639
2016-04-02 22:52:45.286
                         INFO 69639
                                         [ost-startStop-1]
    -04-02
           22:52:45.286
                              69639
                                          [ost-startStop-1]
                              69639
                                          [ost-startStop-1]
```

## Conclusion

Hope this Step by Step approach will help you. Next we will learn how to create RESTServices and use Actuator in Spring Boot. Later we will also learn how to deploy Spring Boot Application in IBM Liberty Profile and IBM WAS 8.5 Server.

This is the 2nd part of Getting Started with Spring Boot Series. Find all the parts here.

- 1. An Introduction to Spring Boot
- 2. How to Create Spring Boot Application Step by Step
- 3. How to create RESTFul Webservices using Spring Boot
- 4. How to deploy Spring Boot application in IBM Liberty and WAS 8.5

#### Related



How to deploy Spring Boot application in IBM Liberty and WAS 8.5

In "Spring Boot"



An Introduction to Spring Boot

In "Spring Boot"




How to create RESTFul Webservices using Spring Boot

In "Spring Boot"

Filed Under: Spring Boot tutorial

Tagged With: Java, Microservices, Spring, Spring Boot, step by step,

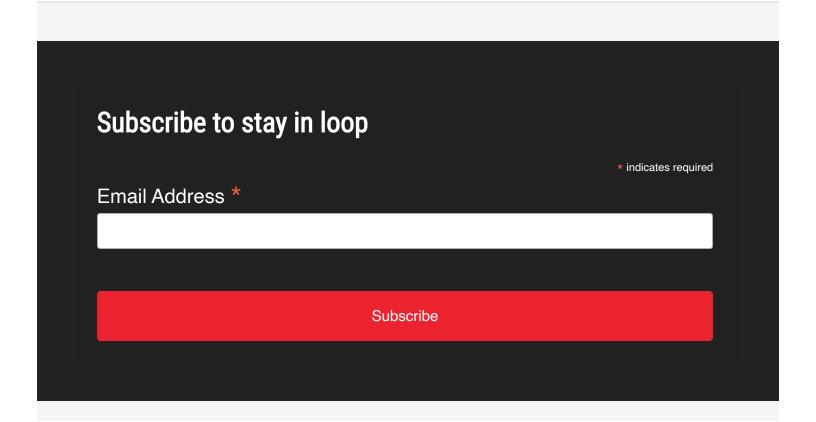

#### **Comments**



Naseem Ahamed says October 16, 2016 at 2:29 pm

#### (Edit)

If I run a project more than once on the same port with STS, it gives me an error that the port is already in use. If I change the port again, it is working for the first time only. Can you please help me on this? Should I stop and start the server again and again for every code change?

#### Error:

java.net.BindException: Address already in use: bind

application.properties entry: server.port=8080

#### Reply



adeveloperdiary says October 16, 2016 at 3:03 pm

#### (Edit)

The application is still running at the background. You can restart the server, that should resolve the problem. If you are running it as standalone jar make sure that its stopped while you try to run it again.

In case this does not help, pleas let me know what type of server you are using and how you are running it (IDE, Server Name, Steps etc).

#### Reply



Vivek Agarwal says
December 1, 2016 at 4:16 am

(Edit)

The application is still running in the background. you ca restart the server, which might solve the problem.

#### Reply



Raj B says May 8, 2017 at 2:54 am

#### (Edit)

stop server by clicking the red the square button which you can find on console tab..

restart the server is also another solution but i think its is not good solution.

#### Reply



muff says November 25, 2016 at 8:28 am

#### (Edit)

hi ... i have installed STS from eclipse market place..i am using Eclipse Luna. When i create a new project-> spring starter project
It is giving me error that M2e connector is not installed. before Installing
STS, maven was there, but after installing it just vanished frm my system..
I hv even downloaded m2e connectors from market place.. stl no success.
please help

#### Reply



# Kate says December 7, 2016 at 12:29 pm

#### (Edit)

I am attempting to mvn clean package.

However, it keeps displaying BUILD FAILURE

Total time: 0.059 s

[INFO] Finished at: 2016-12-07T11:26:14-05:00

[INFO] Final Memory: 6M/310M

[INFO] -----

[ERROR] The goal you specified requires a project to execute but there is no POM in this directory

(C:\Downloads\SpringBoot\src\main\java\com\adeveloperdiary). Please verify you invoked Maven from the correct directory.

this is my mvn -version

Apache Maven 3.3.9 (bb52d8502b132ec0a5a3f4c09453c07478323dc5;

2015-11-10T11:41:47-05:00)

Maven home: C:\Users\kbultman\Downloads\apache-maven-3.3.9\apache-

maven-3.3.9

Java version: 1.7.0\_79, vendor: Oracle Corporation

Java home: C:\Program Files\Java\jdk1.7.0\_79\jre

Default locale: en\_US, platform encoding: Cp1252

OS name: "windows 8.1", version: "6.3", arch: "amd64", family: "windows"

#### Reply

JReis says



February 3, 2017 at 2:28 pm

(Edit)

had the same issue. Run the command from "C:\Downloads\SpringBoot\". Its not super clear from the tutorial but you are not supposed to go to the adeveloperdiary folder.

Basically run it from the pom.xml folder 🙂

Reply



Richard says
June 4, 2017 at 3:54 pm

#### (Edit)

I have created a Spring boot with Web and Actuator and it works fine. Now, I want to add Config Server. How do I do that?

#### Reply



Mach Speed says June 14, 2017 at 3:41 pm

#### (Edit)

This is very nice. Earlier I was creating the spring boot project from the starter/spring.io website. Now I know how to directly create it in eclipse

Reply

### Leave a Reply

Logged in as Abhisek Jana. Edit your profile. Log out? Required fields are marked \*

Comment \*

Post Comment

This site uses Akismet to reduce spam. Learn how your comment data is processed.

Copyright © 2024 A Developer Diary