SightLine

A medicine label, read aloud — on your phone, with no network.

It says the label back in **Cantonese** — a first build that **speaks only what it can translate and refuses the rest**. Every accuracy number in this deck was measured on the English read.

Team STEMB · Imperial Hackathon Hong Kong & Macau 2026 — Grand Final

Live: adeviwon.github.io/SightLine

THE MOMENT WE BUILT THIS FOR

She is 78. The box of medicine is in her hand, and she cannot read it.

Two things stop her at once: her eyes no longer make out the small print, and what is printed on that box is **English she never learned**.

So the dose gets guessed — or it waits for a neighbour who is not coming today.

No statistic on this slide. It is the reason the next one matters.

THE PROBLEM AT SCALE

199,600 people

report long-term seeing difficulty in Hong Kong — **2.7% of the population**, **three in four of them 65 or over**, and 188,569 people over 65 live alone.

The second barrier compounds the first: the label names the drug, the strength and the directions **in English**. An app that only magnifies the print leaves the language problem standing; one that only translates assumes she can see the text.

Every cloud reader on the market asks them to upload that label first. For medication, offline is not a feature — it is the only answer that holds.

[source: docs/13_ROUND1_SUBMISSION_KIT.md — HKSAR Census and Statistics Department, Special Topics Report No. 63, *Persons with disabilities and chronic diseases* (December 2021, 2020 survey round), Appendix 4, via the Hong Kong Blind Union; 188,569 over-65s living alone, 2021 Census, same file]

THE SOLUTION


Photograph the medicine label. It reads it aloud, names the drug, the strength and the dose — and refuses what it cannot read.

Our own recogniser: **942,166 parameters**, 37 symbols (0-9, A-Z, space). No OCR library, no cloud, no account.

26.7 MB of ONNX on the device. Airplane mode: nothing about their medication leaves the phone.

Cantonese ships, a first build: drug name from an **18,839-pair licensed zh/en lexicon**, dose from the read text, directions from a closed phrase set — and a **refusal** for a name it cannot translate. WebKit 14/14.

Every accuracy number is the **English** read. On **150 real medicine labels** the name landed **verbatim 8×** — a floor (Taiwan, not HK).

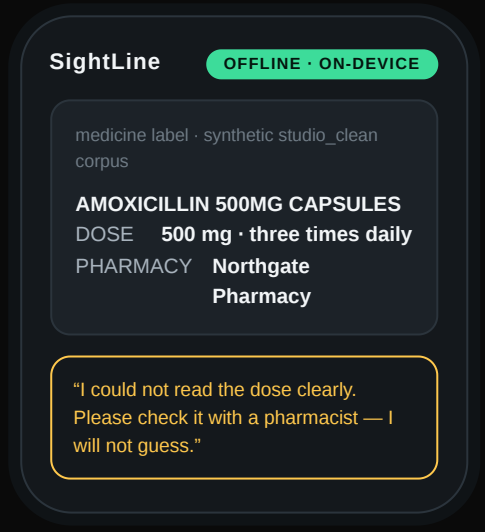

[source: artifacts/ocr_training.json (params 942166, charset 37 symbols) · HANDOFF.md §payload (26.7 MB installable) · app/index.html (design tokens and UI) · app/js/tts.js (`speak(text, {lang})` / `pickVoice(lang)` / `hasVoice(lang)` — en-GB default, zh-HK offered) · app/js/say_cantonese.js (18,839-pair lexicon, refusal path) · docs/26_IDEA_REFINED.md §3–§4, §7–§8 (the Cantonese build, the two bugs, the measured limits — `ml/src/eval_medicine_labels.py`, `artifacts/medicine_labels_eval.json`, 150 real labels) · app/tools/render_samples.py (the sample label is synthetic, not a real patient’s)]

LIVE DEMO


Airplane mode on. Watch it read.

1. Open **adeviwon.github.io/SightLine** on this phone — installed, then reloaded with the network off.
2. **Airplane mode ON.** Wi-Fi off, data off. Nothing is uploaded; there is nowhere for it to go.
3. Scan the box of medicine. Hear it read the drug name and the dose aloud.
4. Scan the label it cannot read. Watch it **refuse** the dose and say why, instead of guessing.

> Fallback if the phone or the room fails: the same pipeline runs from the repo (**bash run.sh serve**), and the 12-document bench replays from **artifacts/pipeline_raw_shipped.json**.

[source: docs/05_DEMO_RUNBOOK.md]

HOW IT WORKS

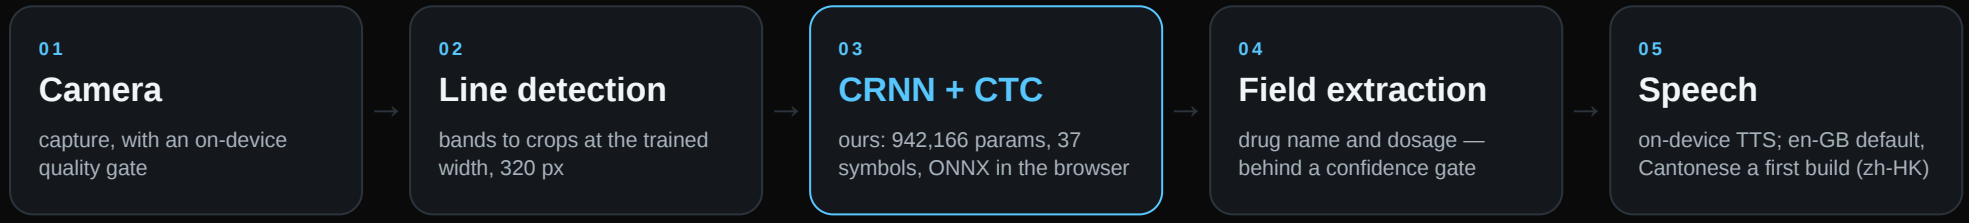

Hard part 1 — inference in a browser. ONNX Runtime Web, our own graph, 26.7 MB shipped to the phone. No OCR library, no server, no fallback engine.

Hard part 2 — the refusal threshold. A field below confidence is omitted, never guessed: 10 of the 24 ground-truth fields on our bench are missing rather than wrong (current fixtures; 15 of 24 on the previous generation).

Why Cantonese needed no Chinese OCR. HK medicine labels print the drug name, strength and directions in English — the `0-9 A-Z` alphabet we already read. The gap was only the voice (`zh-HK`) and a licensed zh/en lexicon, so the remaining risk is a **wrong match, not a missing alphabet**: an unknown name is refused, never guessed.

[source: app/js/pipeline.js · app/js/field_guard.js · app/js/recognizer.js · app/js/tts.js · app/js/say_cantonese.js · artifacts/ocr_training.json · artifacts/pipeline_raw_shipped.json · docs/26_IDEA_REFINED.md §3]

MEASURED RESULTS, HONESTLY

Tesseract wins this bench — every profile, hand-held included.

SAME 12 DOCUMENTS · SAME CROPS · SAME GROUND TRUTH (188 LINES)	LINE EXACT	WORD ACC	CER	FIELDS
Tesseract 4.1.1 — whole page, `--psm 3` (its fair integration)	95.7%	98.9%	0.000	100.0%
Tesseract 4.1.1 — native-resolution line crops (its fair input)	86.7%	96.8%	0.007	95.8%
Tesseract — the *identical* 32 px crops we read (unfair control, labelled)	22.9%	68.0%	0.183	45.8%
ours — CRNN on 32 px crops (what ships)	**10.6%**	**67.2%**	**0.152**	**75.0%**

> **A claim withdrawn:** the previous version quoted Tesseract at **12.4% word accuracy on `handheld_light`**, a claimed 5.5× win for us. That profile came from an over-harsh simulator; on the regenerated fixtures Tesseract reads **98.2%** there against our **78.4%**. The 12.4% was the fixture, not the engine — the other three profiles are pixel-identical and its reads on them unchanged.
> **Our row moved too:** the retrained model, not the fixtures — on the three *unchanged* profiles ours gained +2.9 / +6.9 / +4.4 pts.
> **Fairness correction, stated not hidden:** our 37-symbol alphabet cannot emit punctuation, and 120 of the 188 rows contain it: that alone is the 10.6% → 48.9% line-exact gap. Punctuation-blind on the identical-pixel control, ours takes **49 lines** Tesseract misses and loses 17. **Safety:** on the clean page Tesseract read the dosage **500mg as 300mg**.
> **Ships today: 57.2% words · CER 0.217 · 33.3% fields · 91.7% classification** (`pipeline_raw_shipped.json`); of the move from 45.9%, +1.7 pts is the fixture correction and +9.5 the retrain.

[source: docs/24_ENGINE_HEAD_TO_HEAD.md · artifacts/engine_head_to_head.json — the four rows above RE-MEASURED on the current fixtures (previous generation: `engine_head_to_head_oldfixtures.json`), 12 documents, 188 lines, Tesseract 4.1.1 · shipped 57.2% / 0.217 / 33.3% / 91.7% vs 45.9% / 0.303 before · hard case 20 hand-photographed pages, 1.8% line-exact (`docs/14`)]

WHAT WE GOT WRONG — AND FIXED

Four train/serve contract defects. We found them in our own code, measured them, and gated them.

1 · the graph was baked at 256 px; training crops are clamped to 320. The app fed the model the first 256 px of 98.8% of lines. 3.6% → 22.4% word accuracy; 200/200 crops changed their read.

2 · padding is not inert in a bidirectional CRNN. The backward pass resumes at the right edge, inside the pad, so zeros moved the hidden states across valid frames. 30.5% vs 19.0% crop-exact; CER 0.198 vs 0.308.

3 · the candidate list replaced the preprocessed image. Only CLAHE arms were offered, and raw deskewed grey measured best. 26.9% vs 23.9% word accuracy — the best input was unreachable.

4 · the deskew sign was inverted. We rotated by the estimate and doubled the tilt instead of removing it. 4.5° applied read back as 6.5–9.0°; it zeroed the two marginal off-axis pages.

> Each defect now has a gate that fails if it returns: **test_graph_width_contract.py** · **test_padding_invariant.py** · **crop_contract.js** · **deskew_verify.js**.

[source: docs/18_CRNN_ACCURACY_STRATEGIES.md §0.1 · docs/14_HACKATHON_BENCHMARK.md (256 vs 320) · app/js/pipeline.js (candidate list, deskew sign)]

IMPACT AND POLICY

46.4% of older Hong Kong people

take five or more medicines at once — the highest of Hong Kong, Taiwan, South Korea, the UK and Australia (2016), and rising 2.7% a year. Polypharmacy plus sight loss is our use case.

¶75 · 2025 Policy Address — AI application: "…render carer support through an AI chatbot to give carers more convenient access to information", and generative AI in clinical workflows. A carer hearing their own medicine label read out, on the phone they already own.

¶227 · 2025 — healthcare reform for an ageing society (¶226 opens the section): "enhancing ophthalmic services … a new high-capacity ambulatory cataract surgery centre". The only directly vision-facing commitment in either edition.

¶266 · 2025 — Working Group on Ageing Society Strategies covering "…elderly care, healthcare, housing, culture and leisure, and gerontechnology"; and "…by 2046, people aged 65 and above will account for **36%** of our total population".

2026 is the funded follow-through, not the anchor: ¶113 allocates **$300 million** to the "AI for Welfare Lab"; ¶398–400 earmark **$100 million** for the Gerontechnology Promotion Scheme.

[source: docs/19_POLICY_ANCHOR.md — the **2025** Policy Address paras 75 / 227 / 266 quoted verbatim from `policy-full_en.pdf`, sha256 c4ecaf20…18f3ec (the edition the Open Challenge rule names, official FAQ read 2026-10-21); 2026 follow-through from the 2026 PDF, sha256 f24973cd…49246b · docs/12_HACKATHON_SUBMISSION.md — 46.4%, Lee H. et al., *Age and Ageing* 2023, doi:10.1093/ageing/afad014]

It reads the label — or it says it cannot.

Photograph the box of medicine. Hear the drug, the strength, the dose.

The voice is **Cantonese** — a `zh-HK` voice and a licensed zh/en lexicon, no Chinese OCR needed — and it **refuses a name it cannot translate**. It is not yet reviewed by a Cantonese speaker, and every accuracy number here was measured on the English read.

Live: adeviwon.github.io/SightLine

Repo: github.com/adeviwon/SightLine

Team STEMB — T on-device ML · E restoration · S accessibility research · M medication safety · B deployment