

Lecture Deck

HTML - Body Section

Semantic layout • Text content • Lists • Images • Links • Iframes • Tables

Goal: learn each HTML body element with syntax, real use case, and correct browser output.

Structure

Content

Media

Navigation

Data

Lecture Roadmap

We will move from page structure to real UI building blocks.

1. Semantic Layout

header, nav, main, section, article, aside, footer, dialog

2. Text Content

headings, paragraph, blockquote, formatting, entities

3. Lists

ordered, unordered, nested, pagination, scrollable lists

4. Images

img, attributes, responsive images, cards, backgrounds

5. Links & Iframes

anchor, URL vs URI, downloads, iframe navigation

6. Tables

table elements, formatting, attributes, modern alternatives

Every important element is shown with: meaning + syntax + browser output + when to use it.

What is the HTML Body Section?

The body is the part of the HTML document that becomes visible in the browser.

HTML Code

```
1  <!DOCTYPE html>
2  <html>
3    <head>
4      <title>My Page</title>
5    </head>
6    <body>
7      <h1>Hello Students</h1>
8      <p>This content is visible.</p>
9    </body>
10 </html>
```

Output

Hello Students


This content is visible.

Use

Put everything the user should see inside `<body>`: text, links, images, lists, tables, forms, videos, layouts, and UI sections.

Semantic Layout: One Big Page Structure

Semantic tags describe the role of each part of the page.

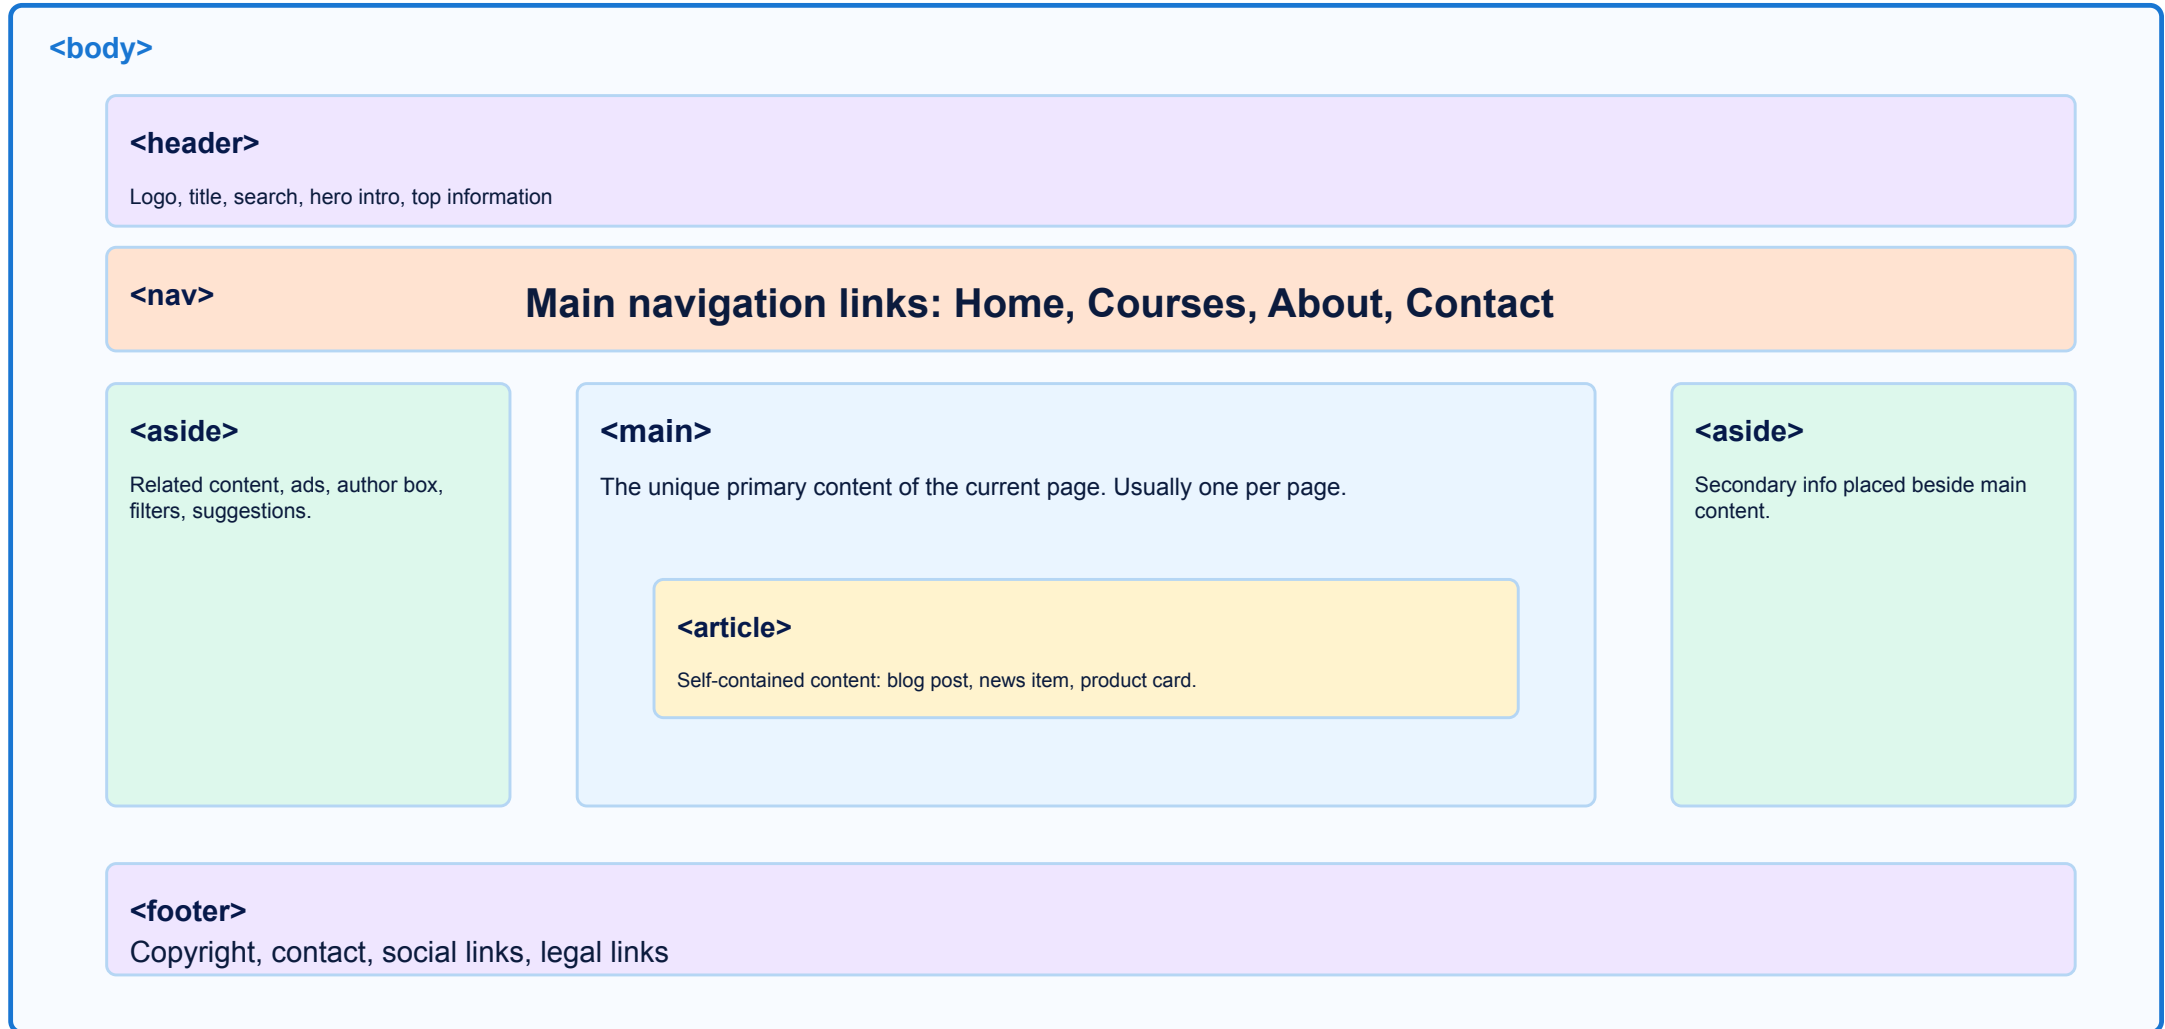

Why Not Use <div> Everywhere?

<div> only means “generic container”. Semantic tags add meaning.

Using only <div>	Using semantic tags	Why it matters
<div class="top">	<header>	Meaning is clear even before reading class names.
<div class="menu">	<nav>	Assistive tools know this is navigation.
<div class="content">	<main>	Search engines and readers identify the main content.
<div class="post">	<article>	A blog/news/product item can stand alone.
<div class="side">	<aside>	Related content is separated from primary content.
<div class="bottom">	<footer>	Footer purpose is immediately clear.

When is <div> correct?

Use <div> when you only need a wrapper for styling or layout and no semantic tag fits.

Simple rule

Semantic first. If there is no specific HTML element for the meaning, use <div> or .

Common Semantic Tags for Layout

Use the element that best describes the meaning of the content.

Element	Meaning	Use it for
<header>	Introductory area	Logo, title, search, page/section intro
<nav>	Navigation area	Menus, table of contents, major links
<main>	Primary page content	The main unique content of a page
<section>	Thematic group	A group with a heading, like “Features”
<article>	Independent content	Blog post, news item, forum post, product card
<aside>	Related side content	Sidebar, tips, ads, related links
<footer>	Ending area	Copyright, contact, social/legal links
<dialog>	Popup/modal box	Confirmations, login modals, alerts

Important: semantic HTML does not automatically create beautiful design. It creates meaning. CSS creates the visual design.


<div>, and padding

<div> is block-level. is inline. padding creates inner space.

HTML Code

```
1 <div class="card">
2   Welcome to <span>PW IOI</span>
3 </div>
4
5 <style>
6 .card {
7   padding: 24px;
8   border: 1px solid gray;
9 }
10 span { color: blue; font-weight: bold; }
11 </style>
```

Output

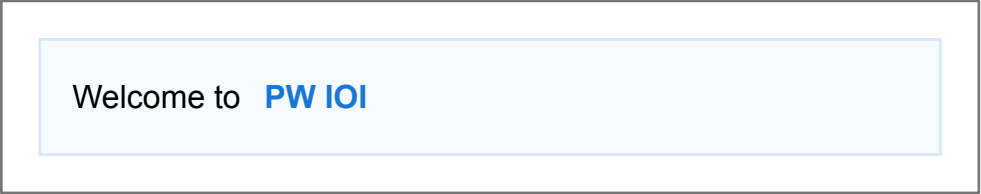

Welcome to **PW IOI**

padding = space inside border

Key point

<div> starts on a new line and can hold many elements. stays inside a line and is used for small inline styling.

<header> and <nav>

A header introduces a page/section. A nav groups important navigation links.

HTML Code

```
1 <header>
2   <h1>PW IOI</h1>
3   <p>Full Stack Development</p>
4   <nav>
5     <a href="/">Home</a>
6     <a href="/courses">Courses</a>
7     <a href="/contact">Contact</a>
8   </nav>
9 </header>
```

Output

PW IOI

Full Stack Development

[Home](#)[Courses](#)[Contact](#)

Key point

Do not use <header> only for the top of the whole website. You can also use it inside an <article> or <section>.

<main>, <section> and <article>

Main is unique page content. Section groups a topic. Article can stand independently.

HTML Code

```
1 <main>
2   <section>
3     <h2>Latest Articles</h2>
4     <article>
5       <h3>How Browsers Read HTML</h3>
6       <p>A short article about DOM
creation.</p>
7     </article>
8   </section>
9 </main>
```

Output

Latest Articles

How Browsers Read HTML

A short article about DOM creation.

Key point

<section> usually has a heading. Use <article> for content that still makes sense if copied somewhere else.

<aside> and <footer>

Aside is related secondary content. Footer is ending information.

HTML Code

```
1 <main>
2   <article>HTML tutorial content...</article>
3   <aside>
4     <h3>Related Links</h3>
5     <ul><li>CSS
Basics</li><li>Forms</li></ul>
6   </aside>
7 </main>
8 <footer>© 2026 PW Skills</footer>
```

Output

HTML tutorial content...

Related Links
• CSS Basics
• Forms

© 2026 PW Skills

Key point

Use <aside> for related but non-essential content. Removing an aside should not break the main article.


<dialog> Element

Dialog creates a native modal/popup for confirmations, alerts, or small forms.

HTML Code

```
1 <button onclick="box.showModal()">Open</button>
2
3 <dialog id="box">
4   <h3>Delete file?</h3>
5   <p>This action cannot be undone.</p>
6   <button onclick="box.close()">Cancel</button>
7 </dialog>
```

Output

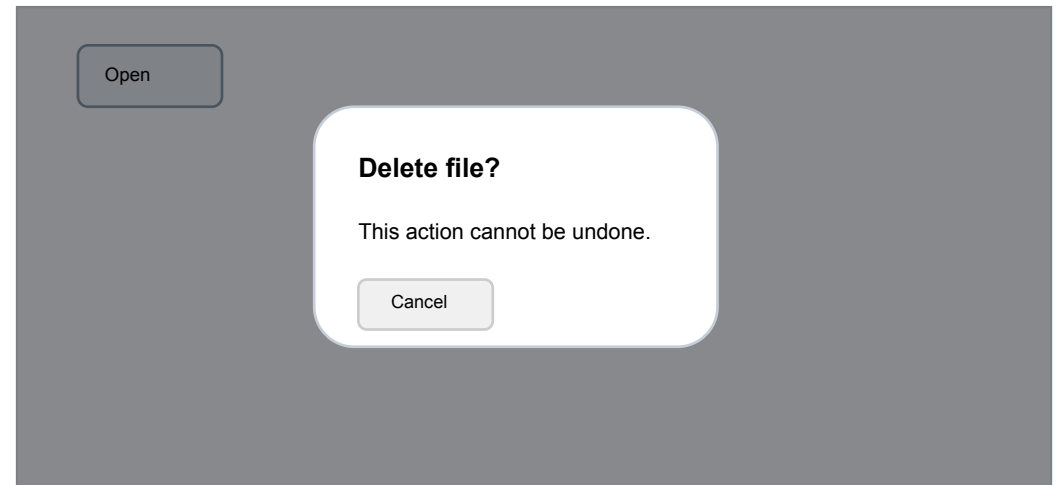

Key point

<dialog> is better than a random <div> modal because the browser understands it as a dialog. Use JavaScript: showModal() and close().


<figure> and <figcaption>

Use them when an image/diagram needs a caption connected to it.

HTML Code

```
1 <figure>
2   
3   <figcaption>Figure 1: DOM tree structure</figcaption>
4 </figure>
```

Output

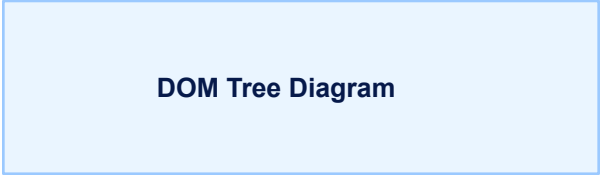

DOM Tree Diagram

Figure 1: DOM tree structure

Key point


The caption is part of the meaning, not just random text below an image.

DOM Structure

The browser converts HTML into a tree-like Document Object Model.

HTML Code

```
1 <body>
2   <header>
3     <h1>PW IOI</h1>
4   </header>
5   <main>
6     <p>Hello</p>
7   </main>
8 </body>
```

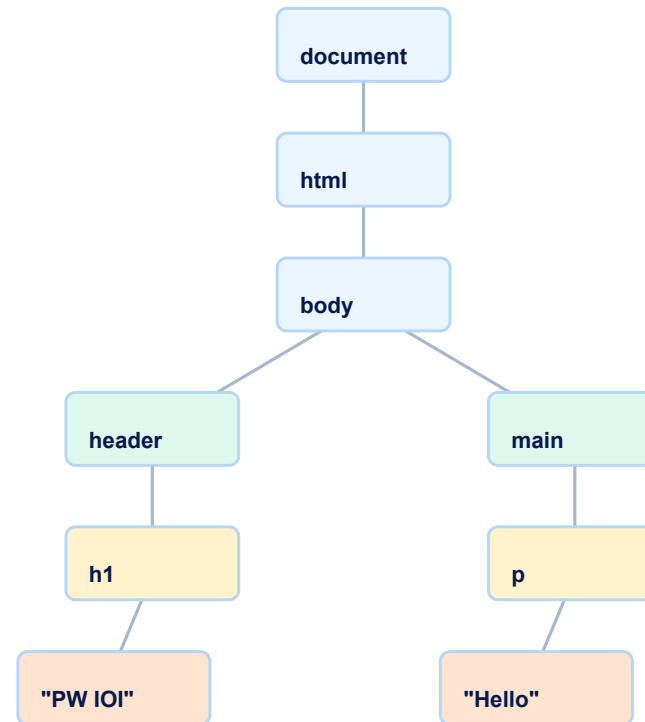

key point

When students open DevTools → Elements, they are mostly seeing this DOM tree. The browser parsed the HTML and created objects for each element.


Practical Example: Netflix-style Header Clone

Semantic tags help us create a meaningful header before CSS makes it beautiful.

HTML Code

```
1 <header class="netflix-header">
2   <div class="logo">NETFLIX</div>
3   <nav>
4     <a href="#home">Home</a>
5     <a href="#series">Series</a>
6     <a href="#movies">Movies</a>
7   </nav>
8   <button>Sign In</button>
9 </header>
```

Output

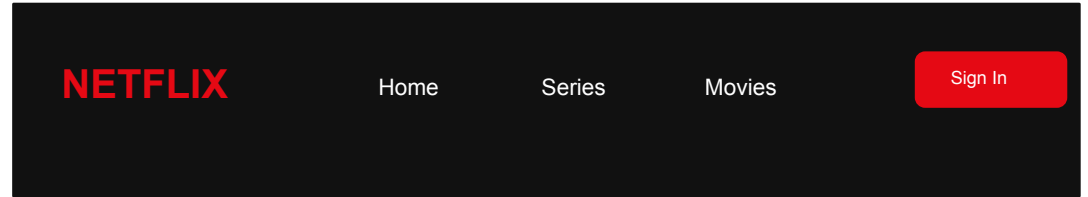

Why semantic here?

The outer container is `<header>` because it is the top intro/navigation area. The menu is `<nav>` because those links move users around the site.

HTML Basic Entities: ,
, <pre>

Entities and whitespace elements control special text cases.

HTML Code

```
1 <p>Hello&nbsp;&nbsp;&nbsp;World</p>
2 <p>Line one<br>Line two</p>
3 <pre>
4   Name      Marks
5   Adfar     95
6 </pre>
```

Output

Hello World

Line one

Line two

Name	Marks
Adfar	95

Key point

 adds non-breaking spaces,
 forces a line break, and <pre> preserves spaces and line breaks.

Text Entities: `<code>`, `<var>`, `<samp>`

These tags mark programming-related text with meaning.

HTML Code

```
1 <p>Use <code>console.log()</code>.</p>
2 <p>The variable is <var>x</var>.</p>
3 <p>Output: <samp>Hello World</samp></p>
```

Output

Use `console.log()`.

The variable is x. x

Output: Hello World

Key point

`<code>` means code, `<var>` means variable, and `<samp>` means sample output from a program.

<small> and <big>

<small> is valid for side comments. <big> is obsolete and should not be used.

HTML Code

```
1 <p>Price: ₹999 <small>including  
taxes</small></p>  
2  
3 <!-- Obsolete: avoid this -->  
4 <p><big>Large text</big></p>  
5  
6 <!-- Modern CSS -->  
7 <p class="large">Large text</p>
```

Output

Price: ₹999 including taxes

Large text

Modern recommendation: use CSS font-size instead of <big>.

Key point

<small> is useful for disclaimers, copyright, and fine print. <big> is not recommended in HTML5.

Headings in HTML

Headings create a content hierarchy from `<h1>` to `<h6>`.

HTML Code

```
1 <h1>Main Page Title</h1>
2 <h2>Section Title</h2>
3 <h3>Subsection Title</h3>
4 <h4>Small Heading</h4>
5 <h5>Minor Heading</h5>
6 <h6>Tiny Heading</h6>
```

Output

Main Page Title

Section Title

Subsection Title

Small Heading

Minor Heading

Tiny Heading

Key point

Use one meaningful `<h1>` for the main topic. Do not choose headings only because of size; choose them for structure.

Paragraphs and <blockquote>

<p> is normal text. <blockquote> is a quoted block from another source.

HTML Code

```
1 <p>HTML helps us structure content on a  
web page.</p>  
2  
3 <blockquote>  
4   The web is for everyone.  
5 </blockquote>
```

Output

HTML helps us structure content on a web page.

The web is for everyone.

Key point

<p> groups normal reading text. <blockquote> shows a longer quotation and usually appears indented by default.

 vs <div>: Same Idea, Different Flow

Both are generic containers, but their default display behavior is different.

<div> block-level

Starts on a new line.

Takes the full available width by default.

Best for layout wrappers and sections when no semantic tag fits.

Example:

```
<div>Card 1</div>
```

```
<div>Card 2</div>
```

 inline

Stays inside the current line.

Only takes the width of its content.

Best for styling a word or small part of text.

Example:

```
<p>Hello <span>Adfar</span></p>
```

 Tag and Web Safe Fonts

 is obsolete. Modern websites use CSS for fonts.

HTML Code

```
1  <!-- Old HTML: avoid -->
2  <font face="Arial" color="red"
size="5">Hello</font>
3
4  <!-- Modern way -->
5  <p style="font-family: Arial; color: red;
font-size: 20px;">
6    Hello
7  </p>
```

Output

Hello

Web safe examples: Arial, Verdana, Georgia, Times New Roman, Courier New

Key point

Teach for awareness only. In real projects use CSS: font-family, color, and font-size.

Text Formatting: `<b>`, `<i>`, `<em>`, `<strong>`

Some tags change look; some also add meaning.

HTML Code

```
1 <p><b>Bold only</b></p>
2 <p><strong>Important text</strong></p>
3 <p><i>Italic only</i></p>
4 <p><em>Emphasized text</em></p>
```

Output

Bold only

Important text

Italic only

Emphasized text

Key point

`<b>` and `<i>` are mostly visual. `<strong>` means important. `<em>` means emphasis.

Text Changes: <u>, <ins>, <strike>,

Use semantic elements for inserted or deleted content.

HTML Code

```
1 <p><u>Underlined text</u></p>
2 <p><ins>Newly added text</ins></p>
3 <p><strike>Old text</strike></p>
4 <p><del>Removed text</del></p>
```

Output

Underlined text

Newly added text

~~Old text~~

~~Removed text~~

Key point

<strike> is obsolete. Use for deleted content and <ins> for inserted content.

Superscript and Subscript: <sup>, <sub>

Use them for math, chemistry, footnotes, and references.

HTML Code

```
1 <p>2<sup>3</sup> = 8</p>
2 <p>H<sub>2</sub>O is water</p>
3 <p>HTML<sup>[1]</sup></p>
```

Output

$2^3 = 8$

H₂O is water

HTML¹

Key point

<sup> moves text slightly above the baseline. <sub> moves text slightly below the baseline.

Types of Lists in HTML

Lists help group related items in a clean structure.

Ordered List

Used when order matters.

Examples: steps, ranking, recipe instructions, roadmap.

Default output:

1. Install VS Code
2. Create index.html
3. Open browser

Unordered List

Used when order does not matter.

Examples: features, menu items, checklist, tags.

Default output:

- HTML
- CSS
- JavaScript

Extra

Lists can be nested inside other lists. They can also be styled with CSS for navigation bars, sidebars, pagination, and scrollable menus.

Ordered List: type, start, reversed, nesting

Ordered lists support numbering control through attributes.

HTML Code

```
1 <ol type="A" start="3" reversed>
2   <li>HTML</li>
3   <li>CSS</li>
4   <li>JavaScript
5     <ol>
6       <li>DOM</li>
7     </ol>
8   </li>
9 </ol>
```

Output

```
C. HTML
B. CSS
A. JavaScript
  1. DOM
```

Key teaching point

type can be 1, A, a, I, i. start changes the first number. reversed counts backward.

Unordered List and list-style

Unordered lists show bullets by default; CSS changes marker style.

HTML Code

```
1 <ul style="list-style: square;">
2   <li>Frontend</li>
3   <li>Backend</li>
4   <li>Database</li>
5 </ul>
```

Output

- Frontend
- Backend
- Database

Key point

Common CSS values: disc, circle, square, none. Use list-style: none for nav menus.


Scrollable List

A list becomes scrollable when its box has a fixed height and overflow.

HTML Code

```
1 <ul class="topics">
2   <li>HTML</li><li>CSS</li><li>JS</li>
3   <li>React</li><li>Node</li><li>MongoDB</li>
4 </ul>
5 <style>
6 .topics { height: 90px; overflow-y: auto; }
7 </style>
```

Output

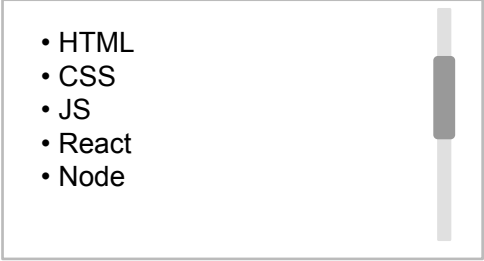- 
- HTML
 - CSS
 - JS
 - React
 - Node

Key point

Scrollable lists are common in sidebars, dropdowns, notification panels, and long menus.

Pagination Using a List

Pagination is navigation, so it is commonly built with `<nav>` + `<ul>` + links.

HTML Code

```
1 <nav aria-label="Pages">
2   <ul class="pagination">
3     <li><a href="?page=1">1</a></li>
4     <li><a href="?page=2">2</a></li>
5     <li><a href="?page=3">3</a></li>
6   </ul>
7 </nav>
```

Output



Key point

Use a list because page numbers are a set of related navigation items. CSS turns it into buttons.

Types of Images and Their Use Cases

Choose the image format based on the goal.

Type	Best for	Notes
JPEG / JPG	Photos, realistic images	Small file size, lossy compression
PNG	Logos, transparent images, screenshots	Larger but supports transparency
SVG	Icons, logos, illustrations	Scales without losing quality
WebP	Modern web images	Often smaller than JPEG/PNG
GIF	Tiny animations	Use carefully; often replaced by video/WebP

Use meaningful alt text for important images. Decorative images can have empty alt: alt="".

 Tag and Basic Attributes

 displays an image. It is a void element, so it does not need a closing tag.

HTML Code

```
1 
```

Output



student.jpg

Key teaching point

src is the image path. alt explains the image if it cannot load and helps screen readers. width/height reserve space.

Legacy Image Attributes: border, align, hspace, vspace

These attributes may appear in old notes, but modern projects use CSS.

HTML Code

```
1  <!-- Old style: avoid in new projects -->
2  
3
4  <!-- Modern CSS -->
5  
6  <style>
7  .logo {
8    border: 2px solid black;
9    float: left;
10   margin: 10px;
11  }
12 </style>
```

Old attribute	Modern CSS
border	border
align	float / flex / grid / text-align
hspace	margin-left + margin-right
vspace	margin-top + margin-bottom

learn them as legacy awareness, not as the recommended coding style.

Card with Image

Cards are common UI blocks for courses, products, blogs, and profiles.

HTML Code

```
1 <article class="card">
2   
3   <h2>MERN Stack</h2>
4   <p>Build full stack apps.</p>
5 </article>
```

Output

MERN image

MERN Stack

Build full stack apps.

Key point

Use `<article>` for a card when each card can stand alone as an independent item.

Practical Example: Amazon-style Home Page Cards


E-commerce home pages use grids of image cards inside semantic sections.

HTML Code

```
1 <main>
2   <section class="deals">
3     <h2>Shop by Category</h2>
4     <article class="card">
5       
6       <h3>Laptops</h3>
7       <a href="/laptops">Shop now</a>
8     </article>
9   </section>
10 </main>
```


Output

Shop by Category




Laptops

[Shop now](#)



Mobiles

[Shop now](#)



Books

[Shop now](#)

Semantic thinking

The whole shopping area is a `<section>`. Each product/category card can be an `<article>`. The image needs a useful alt text.

Card with Background Image

Use background-image for decoration or layout effects, not meaningful content.

HTML Code

```
1 <div class="hero-card">
2   <h2>Learn HTML</h2>
3 </div>
4
5 <style>
6   .hero-card {
7     background-image: url("bg.jpg");
8     background-size: cover;
9   }
10 </style>
```

Output



Key teaching point

If the image is content, use . If the image is only decoration behind text, use CSS background-image.

Anchor Tag: <a>

The anchor tag creates a link.

HTML Code

```
1 <a href="https://pwskills.com">Visit PW Skills</a>
```

Output

[Visit PW Skills](https://pwskills.com)

Key teaching point

href tells the browser where the link should go. Without href, it is not a real navigable link.

Different href Values

href can point to pages, sections, files, email, phone, or JavaScript-free actions.

HTML Code

```
1 <a href="/courses">Relative page</a>
2 <a href="https://example.com">Absolute URL</a>
3 <a href="#faq">Jump to FAQ</a>
4 <a href="mailto:hello@example.com">Email</a>
5 <a href="tel:+911234567890">Call</a>
6 <a href="file.pdf" download>Download PDF</a>
```

Output

[Relative page](#)

[Absolute URL](https://example.com)

[Jump to FAQ](#faq)

[Email](mailto:hello@example.com)

[Call](tel:+911234567890)

[Download PDF](file.pdf)

Key teaching point

Use clear link text. Avoid “click here” when the link purpose can be more specific.

URL and URI

URI identifies a resource. URL is a URI that also tells where/how to access it.

URI

URL

`https://pwskills.com/courses`

URI example

`urn:isbn:9780131103627` identifies a book but does not necessarily tell where to fetch it.

URL example

`https://example.com/page` identifies the resource and tells the access location.

Intra-document and Inter-document Links

Intra-document links jump inside the same page. Inter-document links open another page.

HTML Code

```
1 <a href="#pricing">Go to Pricing</a>
2 <section id="pricing">
3   <h2>Pricing</h2>
4 </section>
5
6 <a href="about.html">About Page</a>
```

Output

[Go to Pricing](#)

[About Page](#)



Pricing

Key point

Use id for same-page targets. Use file paths or URLs for other documents.

Anchor Attribute: download

download tells the browser to download the file instead of navigating to it when possible.

HTML Code

```
1 <a href="notes.pdf" download>Download Notes</a>
2
3 <a href="notes.pdf" download="html-notes.pdf">
4   Download with custom name
5 </a>
```

Output



Download Notes

Browser downloads: html-notes.pdf

Key teaching point

download works best for same-origin files. For some external URLs, browser/server rules may override it.

<iframe> Basic Syntax

iframe embeds another page inside the current page.

HTML Code

```
1 <iframe
2   src="about.html"
3   width="500"
4   height="250"
5   title="About page preview">
6 </iframe>
```

Output

about.html

About Page Preview

Key teaching point

Always add a title to iframe for accessibility. Some websites block embedding for security.

iframe Attributes: src, target, width, height, name, frameborder

name lets links load pages inside a specific iframe.

HTML Code

```
1 <a href="page1.html" target="viewer">Page
1</a>
2 <a href="page2.html" target="viewer">Page
2</a>
3
4 <iframe name="viewer" src="page1.html"
width="500" height="250"></iframe>
5
6 <!-- frameborder is old; use CSS border
instead -->
```

Output

[Page 1](#) [Page 2](#)

Page 1 content loaded in iframe named viewer

Key teaching point

target="viewer" looks for an iframe with name="viewer" and opens the linked page inside it.


Practical Example: YouTube-style Video Page with iframe

iframes are often used for embedded videos, maps, forms, and external widgets.

HTML Code

```
1 <main class="watch-page">
2   <iframe
3
4   src="https://www.youtube.com/embed/video_id"
5   title="HTML lecture video"
6   allowfullscreen>
7 </iframe>
8 <aside>
9   <h3>Recommended videos</h3>
10 </aside>
11 </main>
```

Output



HTML Body Section Lecture

Video 1

Video 2

Video 3

Good practice

Use a descriptive title, allowfullscreen when needed, and check embed rules from the provider.

HTML Table

Tables represent tabular data: rows and columns. Do not use tables for page layout.

Use tables for

Student marks
Timetable
Pricing comparison
Attendance records
Invoice details

Do not use tables for

Website layout
Navigation bars
Image grids
Responsive page structure

Correct thinking

If the content makes sense in rows and columns, use a table. If you only want columns for design, use CSS Flexbox/Grid.

Table Elements

A complete table has a structure that describes header, body, and footer rows.

Element	Purpose
<table>	The table container
<caption>	Title/description of the table
<thead>	Group of header rows
<tbody>	Group of main data rows
<tfoot>	Group of summary/footer rows
<tr>	One table row
<th>	Header cell; bold and centered by default
<td>	Data cell
<colgroup>	Group columns for shared styling

Complete Table Syntax

This is the standard structure you should teach students first.

HTML Code

```
1 <table border="1">
2   <caption>Student Marks</caption>
3   <thead>
4     <tr><th>Name</th><th>Marks</th></tr>
5   </thead>
6   <tbody>
7     <tr><td>Ayaan</td><td>92</td></tr>
8     <tr><td>Zara</td><td>88</td></tr>
9   </tbody>
10  <tfoot>
11    <tr><td>Average</td><td>90</td></tr>
12  </tfoot>
13 </table>
```

Output

Student Marks

Name	Marks
Ayaan	92
Zara	88
Average	90

Key point

The browser displays <caption> above the table by default. <thead>, <tbody>, and <tfoot> improve structure.

<tr>, <th>, <td>

Rows contain cells. Cells can be header cells or data cells.

HTML Code

```
1 <tr>
2   <th>Technology</th>
3   <th>Use</th>
4 </tr>
5 <tr>
6   <td>HTML</td>
7   <td>Structure</td>
8 </tr>
```

Output

Technology	Use
HTML	Structure

Key point

<th> tells the browser this cell is a heading. <td> tells the browser this cell is normal data.

<colgroup>

<colgroup> applies shared styling to one or more columns.

HTML Code

```
1 <table>
2   <colgroup>
3     <col style="background: #eaf5ff">
4     <col style="background: #fff3ce">
5   </colgroup>
6   <tr><th>Name</th><th>Role</th></tr>
7   <tr><td>Adfar</td><td>Instructor</td></tr>
8 </table>
```

Output

Name	Role
Adfar	Instructor

Key point

Useful when many cells in a column need the same width, background, or style.

Old Table Formatting Attributes

These exist in old HTML, but modern projects use CSS instead.

Old attribute	Old purpose	Modern CSS alternative
border	Draw table border	border: 1px solid #ccc
cellspacing	Space between cells	border-spacing / border-collapse
cellpadding	Space inside cells	padding on th/td
frame	Which outer table borders show	CSS border control
rules	Which inner borders show	CSS border on rows/cells

For learning, students should recognize old attributes. For projects and interviews, prefer CSS.

Table Attributes: bgcolor, background, align, width, height

These are legacy HTML attributes. Teach modern CSS as the correct approach.

HTML Code

```
1  <!-- Legacy -->
2  <table bgcolor="lightyellow" width="400"
height="120" align="center">
3    <tr><td>HTML</td></tr>
4  </table>
5
6  <!-- Modern -->
7  <table class="data-table">...</table>
8  <style>
9    .data-table { width: 400px; background:
lightyellow; margin: auto; }
10 </style>
```

Output



Centered table, light yellow background

Key point

Use CSS for background color, background images, alignment, width, and height in real projects.

Background Color, Background Image, Alignment, Width, Height

In modern HTML teaching, these are CSS responsibilities.

HTML Code

```
1 <table class="report">
2   <tr><th>Name</th><th>Marks</th></tr>
3   <tr><td>Ayaan</td><td>92</td></tr>
4 </table>
5
6 <style>
7 .report {
8   width: 80%;
9   margin: auto;
10  background-color: #f8fbff;
11 }
12 th, td { padding: 12px; text-align: center; }
13 </style>
```

Output

Name	Marks
Ayaan	92

width: 80% + margin: auto centers the table

Mini Project: Semantic HTML Page

Combine layout, text, images, links, lists, iframe, and table.

HTML Code

```
1 <body>
2   <header><h1>PW IOI</h1><nav>...</nav></header>
3   <main>
4     <section>
5       <h2>Full Stack Development</h2>
6       <article>
7         
8         <p>Learn by building projects.</p>
9       </article>
10    </section>
11    <aside>Related links...</aside>
12  </main>
13  <footer>© 2026 PW Skills</footer>
14 </body>
```

Output

Header

PW IOI + nav

Nav

Home | Courses | Contact

Main

Full Stack Development
Image card + paragraph + link

Aside

Related links
Resources
Updates

Footer

© 2026 PW Skills

Class Practice Assignment

Students should build this after the lecture.

Build: PW IOI Student Portal Page

Requirements:

1. Use semantic layout: header, nav, main, section, article, aside, footer.
2. Add a course image with useful alt text.
3. Add ordered and unordered lists.
4. Add intra-page and inter-page links.
5. Embed one iframe.
6. Create a student timetable using a table.
7. Use CSS for spacing, fonts, colors, and table styling.

Evaluation Checklist

Meaningful semantic tags
Correct syntax
Correct output in browser
Accessible alt text and iframe title
Lists used for related items
Table used only for real tabular data
No obsolete tags used in final project

End message: HTML is not just tags. HTML is the structure and meaning of your web page.