
Do We Still Need Humans in the Loop?

Human vs. LLM Annotation in Active Learning for TikTok Hate Speech Detection

Ahmad Dawar Hakimi **Lea Hirlimann** **Isabelle Augenstein** **Hinrich Schütze**

EMNLP2026 BUDAPEST | LMU LUDWIG-MAXIMILIANS-UNIVERSITÄT MÜNCHEN | mcml Munich Center for Machine Learning | COPENLU | UNIVERSITY OF COPENHAGEN



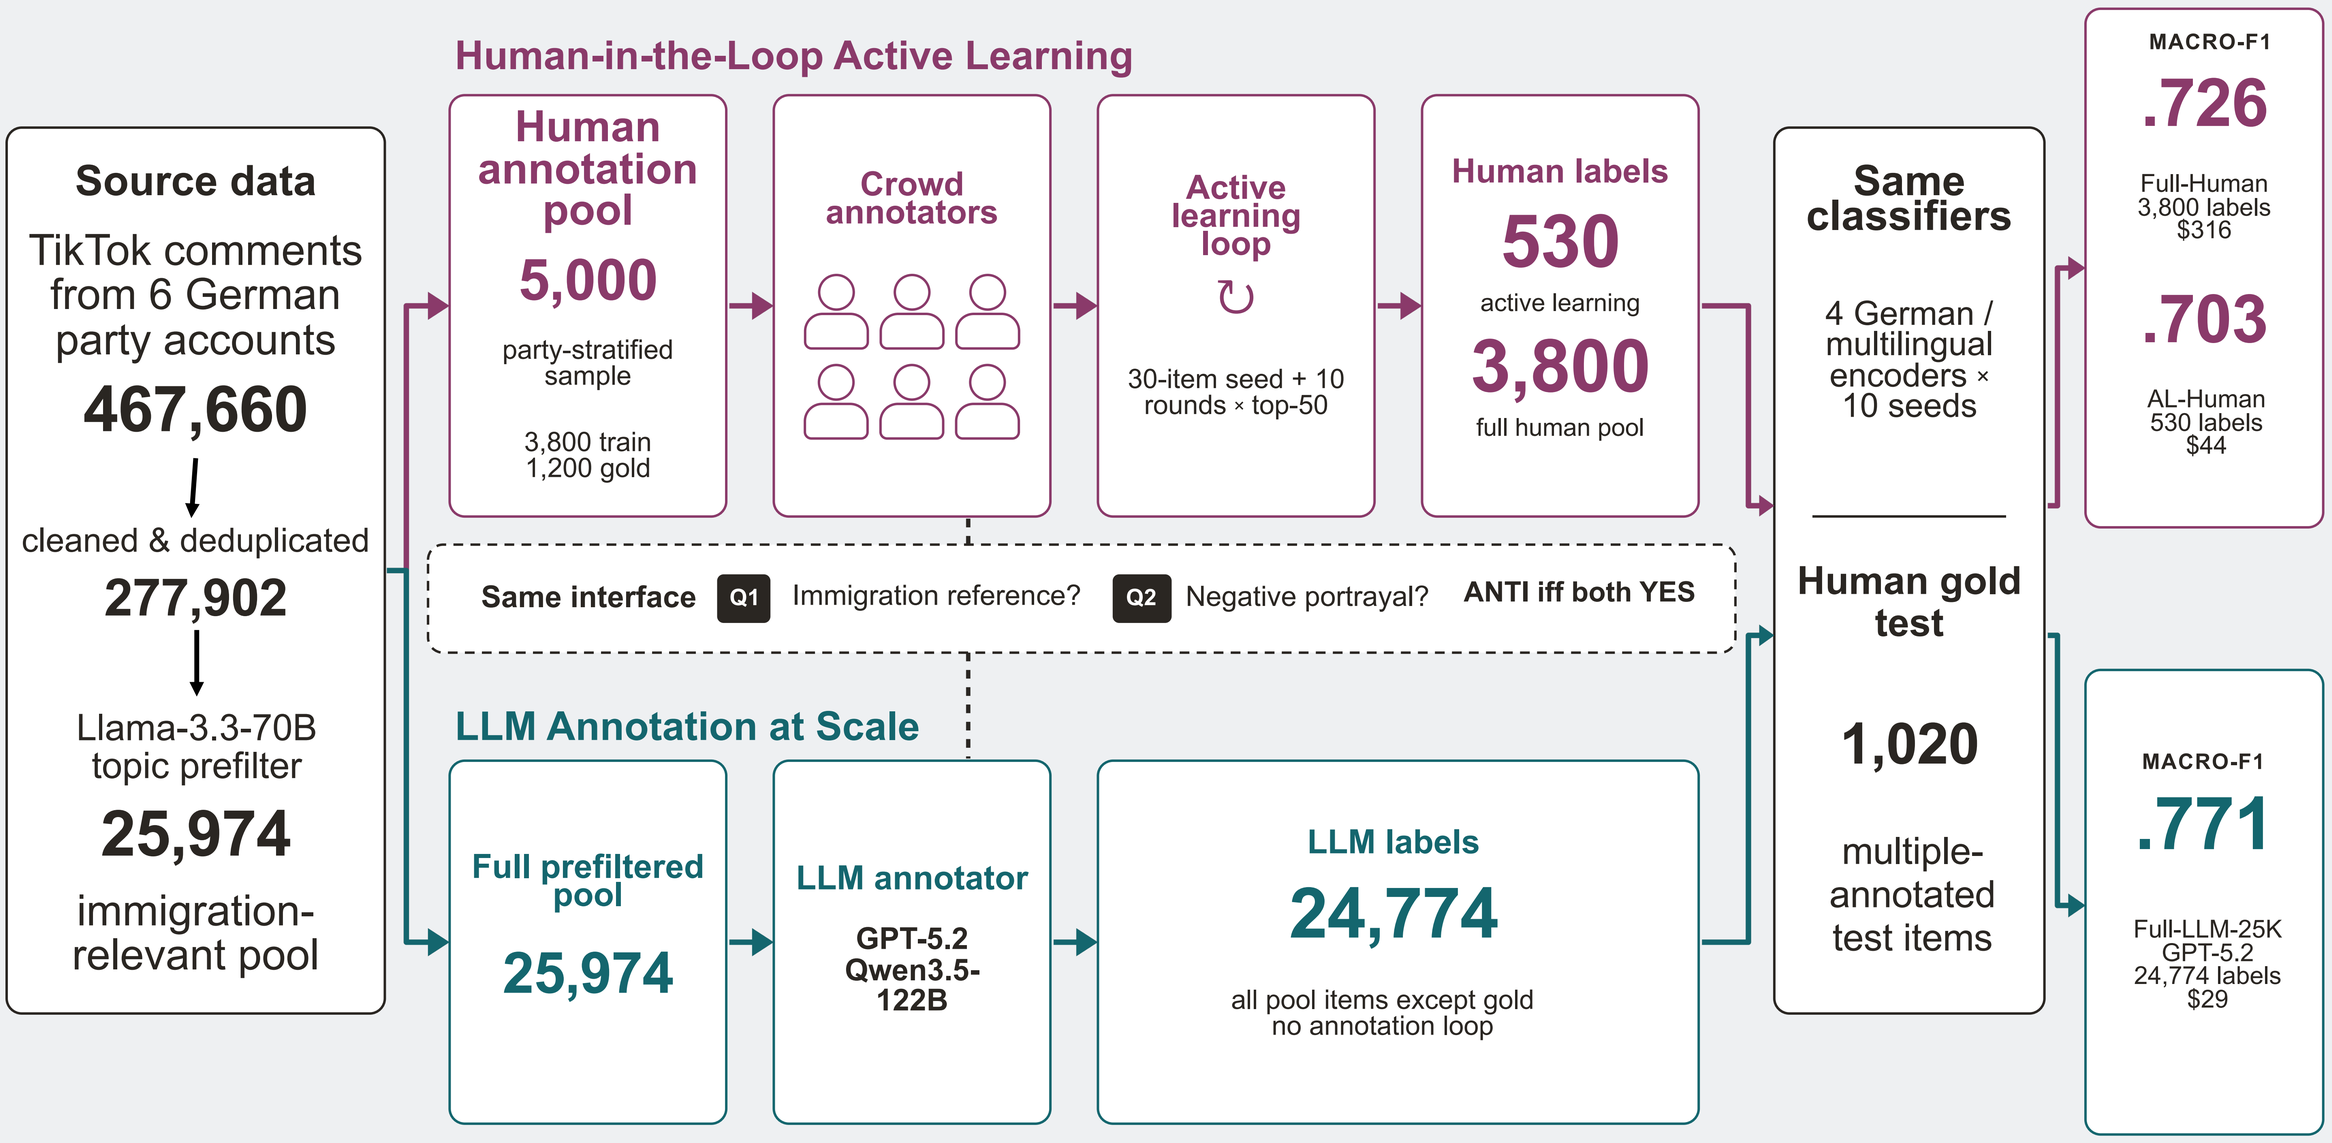

LLM labels at scale beat human labels at one-tenth the cost.


Crowd - 3,800 labels

.726 **$316**


GPT-5.2 - 24,774 labels

.771 **$29**


		Macro-F1			F1 anti-immigrant		
		Mod.	gbert	xlm-r	Mod.	gbert	xlm-r
Human	Random	.677	.690	.702	.492	.529	.548
	AL	.703	.706	.704	.537	.545	.562
	Full	.726	.735	.725	.573	.599	.594
GPT-5.2	Random	.699	.701	.703	.535	.552	.564
	AL	.714	.720	.677	.555	.577	.501
	Full-25K	**.771**	**.759**	**.752**	**.656**	**.638**	**.621**

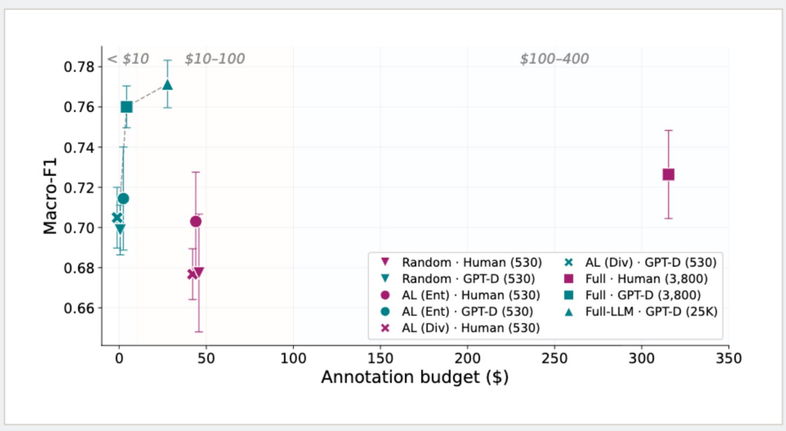

Active learning doesn't help: no acquisition strategy reliably beats random sampling

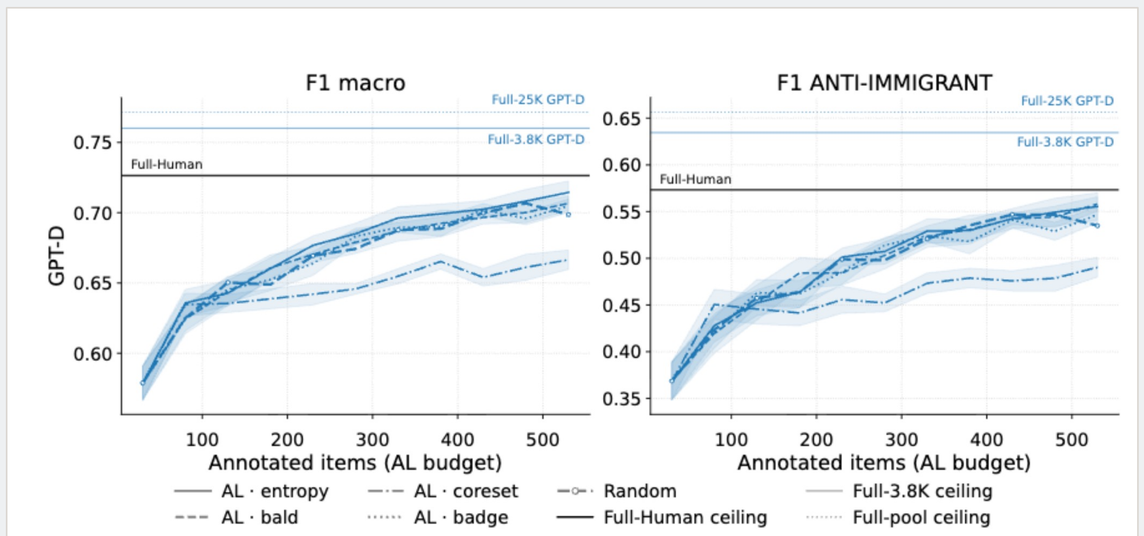

GPT- 5.2 keeps the human error balance, but errs more confidently

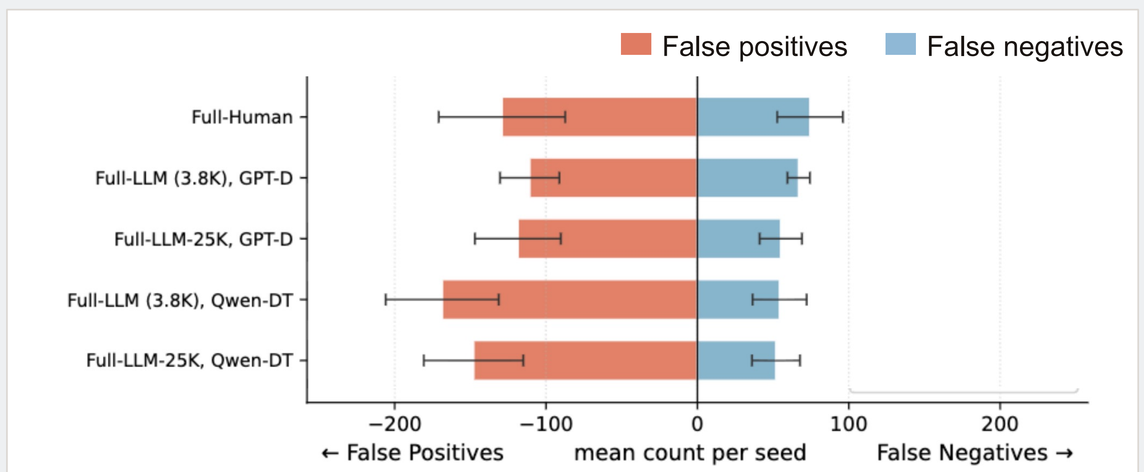

Humans remain essential as evaluators. For training labels, the question shifts to which LLM, which interface, and what shape of pool.