

**Untuk :**  
guru tamu Skaneda  
siswa RPL Skaneda

Kontak :  
Instagram : @minarsih.tech  
@minarsihmerch

# MATERI LARAVEL SKANEDA 2




**DARI:**  
Minarsih TECH






# INTREGASI TEMPLATE USER

Download dulu file template\_user.zip, lalu ekstrak di folder public.

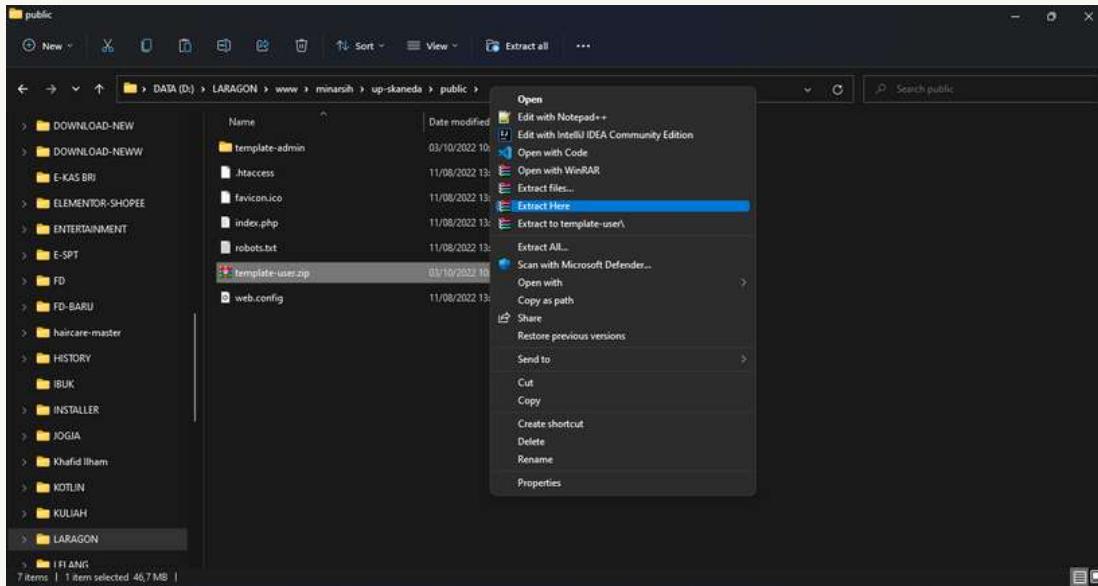

Jika sudah, kembali ke Text Editor VS Code.

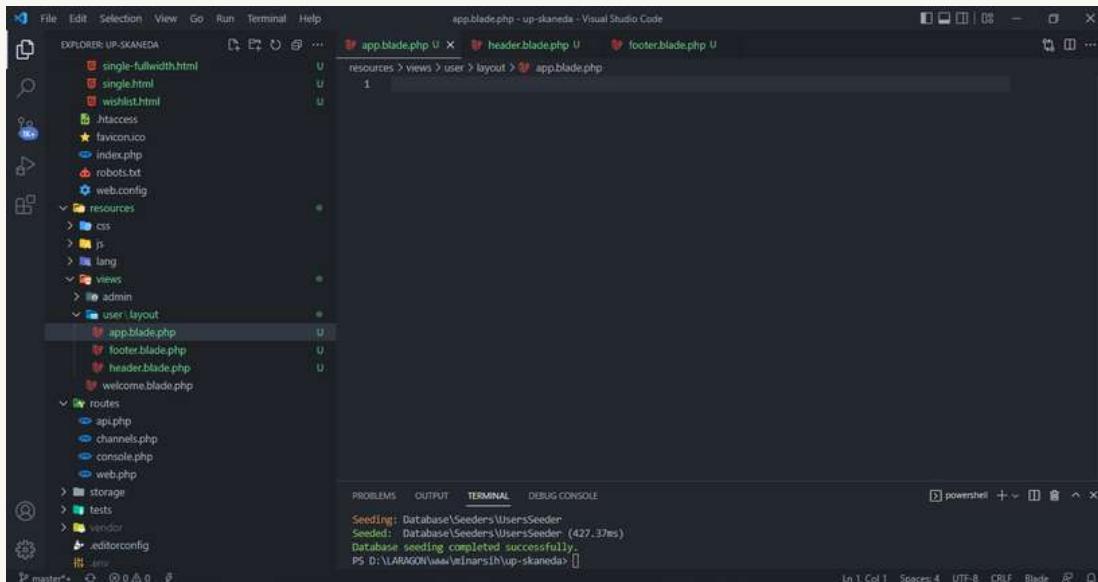

Di folder views, buat folder user, di dalam folder user  
buat folder layout, lalu buat 3 file dengan nama  
app.blade.php, header.blade.php, footer.blade.php

```
<div class="header-middle sticky-header">
    <div class="container">
        <div class="header-left">
            <button class="mobile-menu-toggler">
                <span class="sr-only">Toggle mobile menu</span>
                <i class="icon-bars"></i>
            </button>
        </div>
        <a href="index.html" class="logo">
            
        </a>
        <nav class="main-nav">
            <ul class="menu sf-arrows">
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Seeding: Database\Seeder\UsersSeeder  
Seeded: Database\Seeder\UsersSeeder (427.37ms)  
Database seeding completed successfully.  
PS D:\LARAGON\www\mInansh\up-skanedA>

Ln 73, Col 46 Spaces: 4 UFT-8 CRLF HTML

Buka file index.html yang ada di public/template\_user

File Edit Selection View Go Run Terminal Help index.html - up-skanedA - Visual Studio Code

EXPLORER: UP-SKANEDA app.blade.php index.html indexHTML header.blade.php footer.blade.php

public > template-user > index.html

Copy

Find All References

Rename Symbol

Change All Occurrences

Format Document

Format Selection

Refactor...

Cut

Copy

Paste

Command Palette...

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Seeding: Database\Seeder\UsersSeeder  
Seeded: Database\Seeder\UsersSeeder (427.37ms)  
Database seeding completed successfully.  
PS D:\LARAGON\www\mInansh\up-skanedA>

Ln 73, Col 46 Spaces: 4 UFT-8 CRLF HTML

Blok semua file lalu copy semua isi file tersebut

```
<!-- Plugins JS File -->
<script src="assets/js/jquery.mln.js"></script>
<script src="assets/js/bootstrap.bundle.min.js"></script>
<script src="assets/js/jquery.hoverIntent.min.js"></script>
<script src="assets/js/jquery.waypoints.min.js"></script>
<script src="assets/js/superfish.min.js"></script>
<script src="assets/js/owl.carousel.min.js"></script>
<script src="assets/js/bootstrap-input-spinner.js"></script>
<script src="assets/js/jquery-plugin.min.js"></script>
<script src="assets/js/jquery.magnific-popup.min.js"></script>
<script src="assets/js/jquery.countdown.min.js"></script>
<!-- Main JS File -->
<script src="assets/js/main.js"></script>
<script src="assets/js/demos/demo-10.js"></script>
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Seeding: Database\Seeder\UsersSeeder  
Seeded: Database\Seeder\UsersSeeder (427.37ms)  
Database seeding completed successfully.  
PS D:\LARAGON\www\mInansh\up-skanedA>

Ln 2544, Col 8 Spaces: 4 UFT-8 CRLF Blade

Lalu pastekan di file app.blade.php yang tadi sudah kita buat.


Lalu kita coba buka di web, kira-kira seperti ini, nanti syntaxnya bergantung pada file mana yang bisa melihat preview dari file app.blade.php tadi.

```

12 /*
13  * Web Routes
14  */
15
16 Here is where you can register web routes for your application. These
17 routes are loaded by the RouteServiceProvider within a group which
18 contains the "web" middleware group. Now create something great!
19
20 */
21
22
23 // Route::get('/', function () {
24 //     return redirect('/dashboard');
25 // });
26
27 Route::get('/', function () {
28     return view('user.layout.app');
29 });
30
31
32 Route::get('/login', [AuthController::class, 'login'])->name('login');
33 Route::post('/postlogin', [AuthController::class, 'postlogin'])->name('postLogin');
34 Route::get('/logout', [AuthController::class, 'logout'])->name('logout');
35
36 Route::group(['middleware' => ['checkLogin']], function () {
37     Route::get('/dashboard', [DashboardController::class, 'main'])->name('dashboard');
38 });

```

Database seeding completed successfully.  
PS D:\LARAGON\www\minarsih\up-skanneda>

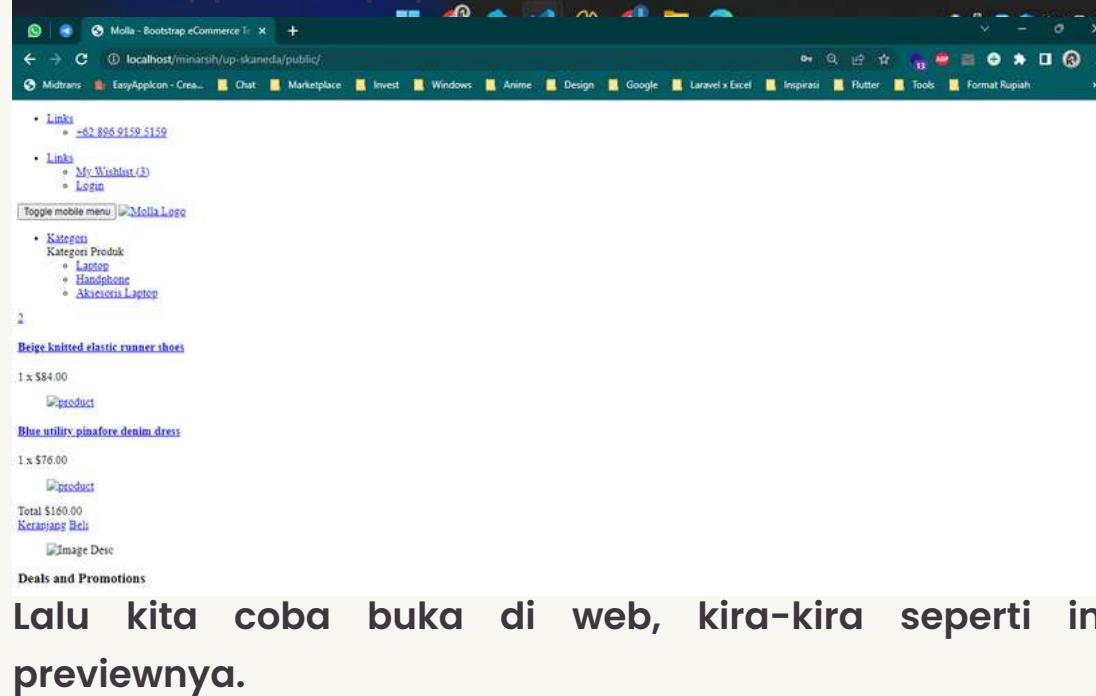

Lalu kita coba buka di web, kira-kira seperti ini previewnya.

Agar css bisa terbaca, kita harus menambahkan {{asset('...')}}

```

resources > views > user > layout > app.blade.php > html > head > link
14     <!-- Favicon -->
15     <link rel="apple-touch-icon" sizes="180x180" href="assets/images/favicons/180x180.png">
16     <link rel="icon" type="image/png" sizes="32x32" href="assets/images/favicons/32x32.png">
17     <link rel="icon" type="image/png" sizes="16x16" href="assets/images/favicons/16x16.png">
18     <link rel="manifest" href="assets/images/icons/site.html">
19     <link rel="mask-icon" href="assets/images/icons/safari-pinned-tab.svg" color="#666666">
20     <link rel="shortcut icon" href="assets/images/icons/favicon.ico">
21     <meta name="apple-mobile-web-app-title" content="Molla">
22     <meta name="application-name" content="Molla">
23     <meta name="msapplication-tileColor" content="#cc9966">
24     <meta name="msapplication-config" content="assets/images/icons/browserconfig.xml">
25     <meta name="theme-color" content="#fffffe">
26
27     <!-- Plugins CSS File -->
28     <link rel="stylesheet" href="assets/css/bootstrap.min.css">
29     <link rel="stylesheet" href="assets/css/plugins/owl-carousel/owl.carousel.css">
30     <link rel="stylesheet" href="assets/css/plugins/magnific-popup/magnific-popup.css">
31     <link rel="stylesheet" href="assets/css/plugins/jquery.countdown.css">
32
33     <!-- Main CSS File -->
34     <link rel="stylesheet" href="assets/css/style.css">
35     <!-- Link rel="stylesheet" href="assets/css/skins/skin-demo-10.css" -->
36     <link rel="stylesheet" href="assets/css/demos/demo-10.css">
37
38 
```

Database seeding completed successfully.  
PS D:\LARAGON\www\minarsih\up-skanneda> php artisan key:generate  
Application key set successfully.  
PS D:\LARAGON\www\minarsih\up-skanneda>

The screenshot shows the Visual Studio Code interface with the file 'app.blade.php' open. The code includes standard head links for favicons, manifest, and other assets. Below the head section, there's a body with a header and a footer. The footer contains a link to 'header-tme'. The terminal at the bottom shows the command 'php artisan key:generate' being run successfully.

```
<!-- Favicon -->
<link rel="apple-touch-icon" sizes="180x180" href="assets/images/icons/favicon-180x180.png">
<link rel="icon" type="image/png" sizes="32x32" href="assets/images/icons/favicon-32x32.png">
<link rel="icon" type="image/png" sizes="16x16" href="assets/images/icons/favicon-16x16.png">
<link rel="manifest" href="assets/images/icons/site.html">
<link rel="mask-icon" href="assets/images/icons/safari-pinned-tab.svg" color="#606666">
<link rel="shortcut icon" href="assets/images/icons/favicon.ico" />
<meta name="apple-mobile-web-app-title" content="Molla">
<meta name="application-name" content="Molla">
<meta name="msapplication-tilecolor" content="#cc9966">
<meta name="msapplication-config" content="assets/images/icons/browserconfig.xml">
<meta name="theme-color" content="#ffffff">
<!-- Plugins CSS File -->
<link rel="stylesheet" href="assets/css/bootstrap.min.css"/>
<link rel="stylesheet" href="assets/css/plugins/owl-carousel/owl.carousel.css"/>
<link rel="stylesheet" href="assets/css/plugins/magnific-popup/magnific-popup.css"/>
<link rel="stylesheet" href="assets/css/plugins/jquery.countdown.css"/>
<!-- Main CSS File -->
<link rel="stylesheet" href="assets/css/style.css"/>
<!-- link rel="stylesheet" href="assets/css/skins/skin-demo-10.css"/>
<link rel="stylesheet" href="assets/css/demos/demo-10.css"/>
</head>
<body>
    <div class="page-wrapper">
        <header class="header">
            <div class="header-tme">
```

Kita tambahkan tutupnya dulu '})}'

This screenshot shows the same code as above, but with the closing brace '}' added at the end of the blade template '})}' to properly close the block.


```
<!-- Favicon -->
<link rel="apple-touch-icon" sizes="180x180" href="assets/images/icons/favicon-180x180.png">
<link rel="icon" type="image/png" sizes="32x32" href="assets/images/icons/favicon-32x32.png">
<link rel="icon" type="image/png" sizes="16x16" href="assets/images/icons/favicon-16x16.png">
<link rel="manifest" href="assets/images/icons/site.html">
<link rel="mask-icon" href="assets/images/icons/safari-pinned-tab.svg" color="#606666">
<link rel="shortcut icon" href="assets/images/icons/favicon.ico" />
<meta name="apple-mobile-web-app-title" content="Molla">
<meta name="application-name" content="Molla">
<meta name="msapplication-tilecolor" content="#cc9966">
<meta name="msapplication-config" content="assets/images/icons/browserconfig.xml">
<meta name="theme-color" content="#ffffff">
<!-- Plugins CSS File -->
<link rel="stylesheet" href="asset('template-user/assets/css/bootstrap.min.css')"/>
<link rel="stylesheet" href="asset('template-user/assets/css/plugins/owl-carousel/owl.carousel.css')"/>
<link rel="stylesheet" href="asset('template-user/assets/css/plugins/magnific-popup/magnific-popup.css')"/>
<link rel="stylesheet" href="asset('template-user/assets/css/plugins/jquery.countdown.css')"/>
<!-- Main CSS File -->
<link rel="stylesheet" href="asset('template-user/assets/css/style.css')"/>
<!-- link rel="stylesheet" href="asset('template-user/assets/css/skins/skin-demo-10.css')"/>
<link rel="stylesheet" href="asset('template-user/assets/css/demos/demo-10.css')"/>
</head>
<body>
    <div class="page-wrapper">
        <header class="header">
            <div class="header-tme">
```

Untuk depannya kita tambahkan {{asset('template-user')}}

This screenshot shows the code with the asset helper added to the blade template. The 'header-tme' block now includes the asset helper to reference the 'header-tme' file from the 'template-user' directory.

```
<!-- Favicon -->
<link rel="apple-touch-icon" sizes="180x180" href="asset('template-user/assets/images/icons/favicon-180x180.png')"/>
<link rel="icon" type="image/png" sizes="32x32" href="asset('template-user/assets/images/icons/favicon-32x32.png')"/>
<link rel="icon" type="image/png" sizes="16x16" href="asset('template-user/assets/images/icons/favicon-16x16.png')"/>
<link rel="manifest" href="asset('template-user/assets/images/icons/site.html')"/>
<link rel="mask-icon" href="asset('template-user/assets/images/icons/safari-pinned-tab.svg')" color="#606666"/>
<link rel="shortcut icon" href="asset('template-user/assets/images/icons/favicon.ico') />
<meta name="apple-mobile-web-app-title" content="Molla">
<meta name="application-name" content="Molla">
<meta name="msapplication-tilecolor" content="#cc9966">
<meta name="msapplication-config" content="asset('template-user/assets/images/icons/browserconfig.xml')"/>
<meta name="theme-color" content="#ffffff">
<!-- Plugins CSS File -->
<script src="asset('template-user/assets/js/jquery.min.js')"/></script>
<script src="asset('template-user/assets/js/bootstrap.bundle.min.js')"/></script>
<script src="asset('template-user/assets/js/jquery.hoverIntent.min.js')"/></script>
<script src="asset('template-user/assets/js/jquery.waypoints.min.js')"/></script>
<script src="asset('template-user/assets/js/superfish.min.js')"/></script>
<script src="asset('template-user/assets/js/owl.carousel.min.js')"/></script>
<script src="asset('template-user/assets/js/bootstrap-input-spinner.js')"/></script>
<script src="asset('template-user/assets/js/jquery.plugin.min.js')"/></script>
<script src="asset('template-user/assets/js/jquery.magnific-popup.min.js')"/></script>
<script src="asset('template-user/assets/js/jquery.countdown.min.js')"/></script>
<!-- Main JS File -->
<script src="asset('template-user/assets/js/main.js')"/></script>
<script src="asset('template-user/assets/js/demos/demo-10.js')"/></script>
</body>
<!-- molla/index-10.html 22-Nov-2019 09:58:22 GMT -->
</html>
```


Nah untuk import file javascriptnya juga sama, menambahkan {{asset('...')}}

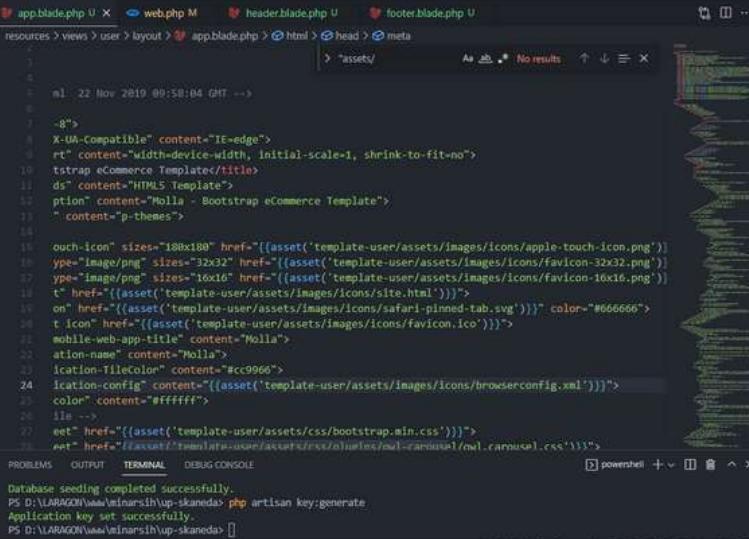


```

        <?>
        <!-- User Agent Compatible -->
        <meta name="X-UA-Compatible" content="IE=edge">
        <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
        <title>Bootstrap eCommerce Template</title>
        <meta name="description" content="HTML5 Template">
        <meta name="author" content="Molla - Bootstrap eCommerce Template">
        <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
        <meta name="apple-mobile-web-app-capable" content="yes">
        <meta name="apple-touch-icon" content="{{asset('template-user/assets/images/icons/apple-touch-icon.png')}}">
        <meta name="icon" content="{{asset('template-user/assets/images/icons/favicon-32x32.png')}}">
        <meta name="mobile-web-app-title" content="Molla">
        <meta name="apple-mobile-web-app-status-bar-style" content="black">
        <meta name="application-name" content="Molla">
        <meta name="application-filecolor" content="#cccccc">
        <meta name="application-config" content="{{asset('template-user/assets/images/icons/browserconfig.xml')}}">
        <meta name="color" content="#cccccc">
        <meta name="theme-color" content="#000000">
        <meta name="msapplication-TileColor" content="#cccccc">
        <meta name="msapplication-TileImage" content="{{asset('template-user/assets/images/icons/ms-canonical.tile.jpg')}}">
        <meta name="msapplication-starturl" content="{{asset('template-user/assets/images/icons/ms-canonical.msappicon')}}">
        <meta name="og:title" content="Molla - Bootstrap eCommerce Template">
        <meta name="og:type" content="website">
        <meta name="og:url" content="http://www.molla.id">
        <meta name="og:image" content="http://www.molla.id/assets/images/logo/og-image.png">
        <meta name="og:description" content="The most modern, powerful and clean eCommerce template based on Bootstrap 4">
        <meta name="og:site_name" content="Molla">
        <meta name="og:locale" content="id_ID">
        <meta name="og:updated_time" content="2019-11-22T08:04:00+00:00">
        <link href="{{asset('template-user/assets/css/bootstrap.min.css')}}" rel="stylesheet">
        <link href="{{asset('template-user/assets/css/molla.css')}}" rel="stylesheet">
    
```

Untuk file-file asset lainnya jangan lupa diimport dengan cara yang sama.

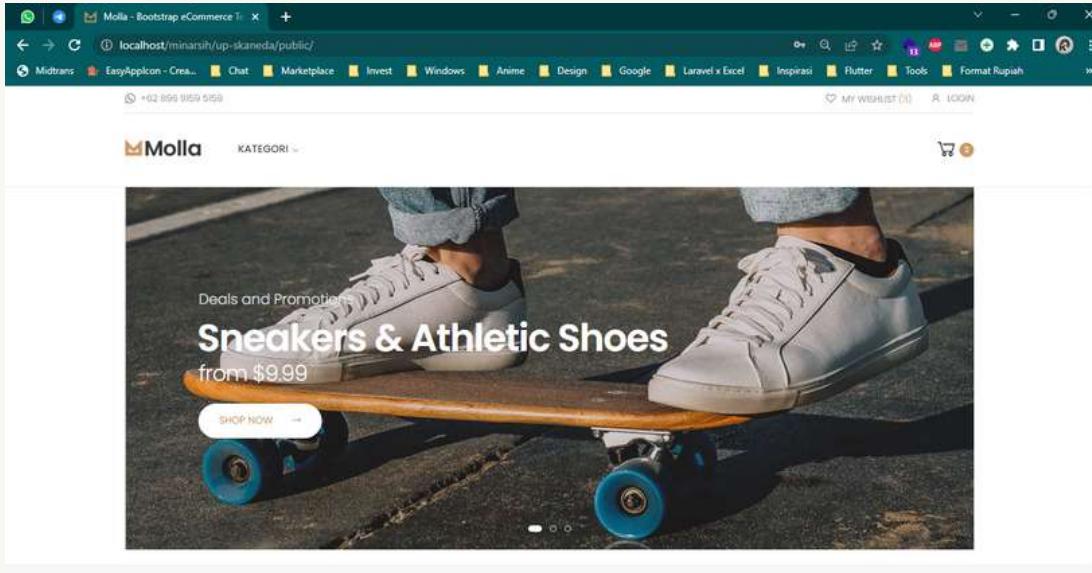

Kira kira seperti ini kalau kita buka webnya

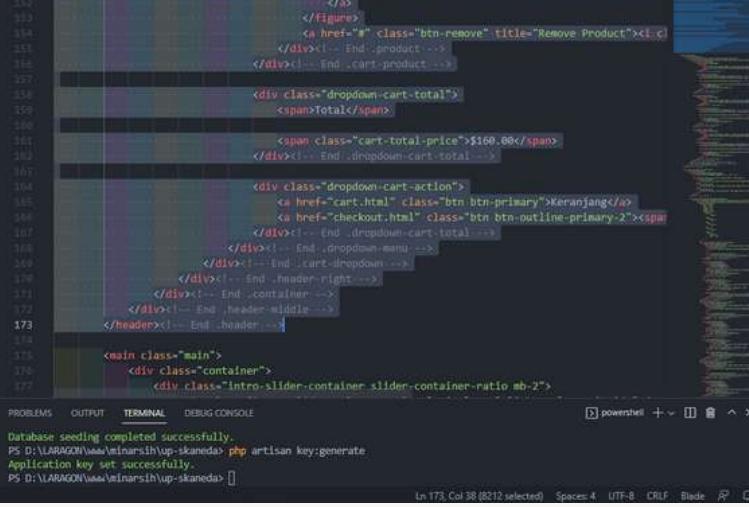

```

        <!-- Header -->
        <header>
            <div class="page-wrapper">
                <div class="dropdown-cart-total">
                    <span>$100.00</span>
                </div>
                <div class="dropdown-cart-action">
                    <a href="cart.html" class="btn btn-primary">Keranjang</a>
                    <a href="checkout.html" class="btn btn-outline-primary-2">Checkout</a>
                </div>
                <div class="dropdown-menu">
                    <a href="#">Remove Product</a>
                </div>
            </div>
            <div class="container">
                <div class="row align-items-center justify-content-between">
                    <div class="col-12 col-md-6 col-lg-5">
                        <div class="text-left">
                            <div class="dropdown">
                                <span>Total:</span>
                                <span>$100.00</span>
                            </div>
                            <div>
                                <a href="#">Remove Product</a>
                            </div>
                        </div>
                    </div>
                    <div class="col-12 col-md-6 col-lg-7">
                        <div class="text-right">
                            <div class="dropdown">
                                <span>Total:</span>
                                <span>$100.00</span>
                            </div>
                            <div>
                                <a href="#">Remove Product</a>
                            </div>
                        </div>
                    </div>
                </div>
            </div>
        </header>
    
```

Setelah itu mari kita cut syntax header

```
resources > views > user > layout > header.blade.php -> @html > body > div.page-wrapper
  <link rel="stylesheet" href="{{asset('template-user/assets/css/plugins/magnific-popup/magnific-popup.css')}}"/>
  <link rel="stylesheet" href="{{asset('template-user/assets/css/plugins/jquery.countdown.css')}}"/>
  <!-- Main CSS File -->
  <link rel="stylesheet" href="{{asset('template-user/assets/css/style.css')}}">
  <!-- link rel="stylesheet" href="{{asset('template-user/assets/css/skins/skin-demo-10.css')}}">
  <link rel="stylesheet" href="{{asset('template-user/assets/css/demos/demo-10.css')}}">
</head>
<body>
  <div class="page-wrapper">
    <main class="main">
      <div class="container">
        <div class="intro-slider-container slider-container-ratio mb-2">
          <div class="intro-slider owl-carousel owl-simple owl-light owl-nav-inside" data-owl-stage="stage-1">
            <div class="slide-item">
              <figure class="slide-image">
                
              </figure>
            </div><!-- End .slide-item -->
            <div class="slide-item">
              <figure class="slide-image">
                
              </figure>
            </div><!-- End .slide-item -->
            <div class="slide-item">
              <figure class="slide-image">
                
              </figure>
            </div><!-- End .slide-item -->
          </div><!-- End .intro-slider -->
        </div><!-- End .container -->
      </main>
      <div class="intro-content">
        <h3 class="intro-subtitle">Deals and Promotions</h3><!-- End .h3 -->
        <h3 class="intro-subtitle">New Arrivals</h3><!-- End .h3 -->
        <h3 class="intro-subtitle">Customer Testimonials</h3><!-- End .h3 -->
      </div>
    </div>
  </body>
</html>
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Database seeding completed successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> php artisan key:generate  
Application key set successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> [ ]

Jika sudah di cut, mari kita buka file header.blade.php

```
<figure class="product-image-container">
  <a href="product.html" class="product-image">
    
  </a>
</figure>
<a href="#" class="btn-remove" title="Remove Product"><i class="icon ion-ios-close"></i></a>
</div><!-- End .product -->
</div><!-- End .cart-product -->
<div class="dropdown-cart-total">
  <span>Total:</span>
  <span class="cart-total-price">$160.00</span>
</div><!-- End .dropdown-cart-total -->
<div class="dropdown-cart-action">
  <a href="cart.html" class="btn btn-primary">Keranjang</a>
  <a href="checkout.html" class="btn btn-outline-primary-2">Beli</a>
</div><!-- End .dropdown-menu -->
</div><!-- End .cart-dropdown -->
</div><!-- End .header-right -->
</div><!-- End .containner -->
</div><!-- End .header-middle -->
</div><!-- End .header -->
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Database seeding completed successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> php artisan key:generate  
Application key set successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> [ ]

Lalu pastekan isi cut tadi ke file header.blade.php

```
resources > views > user > layout > app.blade.php -> @html > body > div.page-wrapper
@import "header.blade.php";
<link rel="stylesheet" href="{{asset('template-user/assets/css/plugins/magnific-popup/magnific-popup.css')}}"/>
<link rel="stylesheet" href="{{asset('template-user/assets/css/plugins/jquery.countdown.css')}}"/>
<!-- Main CSS File -->
<link rel="stylesheet" href="{{asset('template-user/assets/css/style.css')}}">
<!-- link rel="stylesheet" href="{{asset('template-user/assets/css/skins/skin-demo-10.css')}}">
<link rel="stylesheet" href="{{asset('template-user/assets/css/demos/demo-10.css')}}">
</head>
<body>
  <div class="page-wrapper">
    @include('user.layout.header')
    <main class="main">
      <div class="container">
        <div class="intro-slider-container slider-container-ratio mb-2">
          <div class="intro-slider owl-carousel owl-simple owl-light owl-nav-inside" data-owl-stage="stage-1">
            <div class="slide-item">
              <figure class="slide-image">
                
              </figure>
            </div><!-- End .slide-item -->
            <div class="slide-item">
              <figure class="slide-image">
                
              </figure>
            </div><!-- End .slide-item -->
            <div class="slide-item">
              <figure class="slide-image">
                
              </figure>
            </div><!-- End .slide-item -->
          </div><!-- End .intro-slider -->
        </div><!-- End .container -->
      </main>
      <div class="intro-content">
        <h3 class="intro-subtitle">Deals and Promotions</h3><!-- End .h3 -->
        <h3 class="intro-subtitle">New Arrivals</h3><!-- End .h3 -->
        <h3 class="intro-subtitle">Customer Testimonials</h3><!-- End .h3 -->
      </div>
    </div>
  </body>
</html>
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Database seeding completed successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> php artisan key:generate  
Application key set successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> [ ]

Jika sudah jangan lupa diimport di file app.blade.php kita, dengan syntaxt @include()

```
<!-- Main CSS File -->
<link rel="stylesheet" href="{{asset('template-user/assets/css/style.css')}}">
<!-- link rel="stylesheet" href="{{asset('template-user/assets/css/skins/skin-demo-10.css')}}">
<link rel="stylesheet" href="{{asset('template-user/assets/css/demos/demo-10.css')}}">

</head>
<body>
    <div class="page-wrapper">
        @include('user.layout.header')

        <main class="main">
            <div class="container">
                <div class="intro-slider-container slider-container-ratio mb-2">
                    <div class="intro-slider owl-carousel owl-simple owl-light owl-nav-inside" data="owl-item">
                        <div class="intro-slide">
                            <figure class="slide-image">
                                
                            </figure>
                            <div class="intro-content">
                                <h3 class="intro-subtitle">Deals and Promotions</h3>
                                <h1 class="intro-title text-white">Sneakers & Athletic Shoes</h1>
                            </div>
                        </div>
                    </div>
                </div>
            </div>
        </main>
    </div>
</body>
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Database seeding completed successfully.  
PS D:\LARAGON\www\minarish\up-skanneda> php artisan key:generate  
Application key set successfully.  
PS D:\LARAGON\www\minarish\up-skanneda> [ ]

Ln 42, Col 1 (151274 selected) Spaces: 4 UTF-8 CRLF Blade ⌂

## Blok Syntax-syntax yang ada di dalam tag main

```
<!-- Main CSS File -->
<link rel="stylesheet" href="{{asset('template-user/assets/css/style.css')}}">
<!-- link rel="stylesheet" href="{{asset('template-user/assets/css/skins/skin-demo-10.css')}}">
<link rel="stylesheet" href="{{asset('template-user/assets/css/demos/demo-10.css')}}">

</head>
<body>
    <div class="page-wrapper">
        @include('user.layout.header')

        <main class="main">
            </main><!-- End .main -->

        <footer class="footer">...
            </footer><!-- End .footer -->
        </div><!-- End .page-wrapper -->
        <button id="scroll-top" title="Back to Top">i class="icon-arrow-up"</i></button>

        <!-- Mobile Menu -->
        <div class="mobile-menu-overlay"></div><!-- End .mobile-menu-overlay -->

        <div class="mobile-menu-container">
            <div class="mobile-menu-wrapper">
                <span class="mobile-menu-close">i class="icon-close"</i></span>
            </div>
        </div>
    </div>
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Database seeding completed successfully.  
PS D:\LARAGON\www\minarish\up-skanneda> php artisan key:generate  
Application key set successfully.  
PS D:\LARAGON\www\minarish\up-skanneda> [ ]

Ln 42, Col 1 (151274 selected) Spaces: 4 UTF-8 CRLF Blade ⌂

## Lalu cut semua syntaxnya

```
</div><!-- End .product-price -->
</div><!-- End .product-body -->

<div class="product-footer">
    <div class="ratings-container">
        <div class="ratings">
            <div class="ratings-val" style="width: 40%;"></div><!-- End .ratings-val -->
        </div><!-- End .ratings -->
        <span class="ratings-text">( 7 Reviews )</span>
    </div><!-- End .rating-container -->

    <div class="product-action">
        <a href="#" class="btn-product btn-cart" title="Add to cart"><span>add to cart</span></a>
        <a href="popup/quickview.html" class="btn-product btn-quickview" title="Quick view"><span>quick view</span></a>
    </div><!-- End .product-action -->
</div><!-- End .product-footer -->
</div><!-- End .product -->
</div><!-- End .col-6 col-md-4 col-lg-3 -->
</div><!-- End .row -->
</div><!-- End .products -->
</div><!-- End .tab-pane -->
</div><!-- End .tab-content -->

<div class="more-container text-center mt-5">
    <a href="category.html" class="btn btn-outline-lightgray btn-more btn-round"><span>Lihat Produk Lainnya</span><i class="icon-long-arrow-right"></i></a>
</div><!-- End .more-container -->
</div><!-- End .mb5 -->
```

Buka Notepad lalu pastekan syntax tadi.

```
resources > views > user > layout > app.blade.php > html > body > div.page-wrapper > main
  <link rel="stylesheet" href="{{asset('template-user/assets/css/style.css')}}"
  <!-- link rel="stylesheet" href="{{asset('template-user/assets/css/skins/skin-demo-10.css')}} -->
  <link rel="stylesheet" href="{{asset('template-user/assets/css/demos/demo-10.css')}}"

</head>
<body>
  <div class="page-wrapper">
    @include('user.layout.header')

    <main class="main">
      @yield('content')
    </main><!-- End .main -->

    <footer class="footer">...
    </footer><!-- End .footer -->
  </div><!-- End .page-wrapper -->
  <button id="scroll-top" title="Back to Top"><i class="icon-arrow-up"></i></button>

  <!-- Mobile Menu -->
  <div class="mobile-menu-overlay"></div><!-- End .mobil-menu-overlay -->

  <div class="mobile-menu-contained">
    <div class="mobile-menu-wrapper">
      <span class="mobile-menu-close"><i class="icon-close"></i></span>
      ...
    </div>
  </div>
</body>
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Database seeding completed successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> php artisan key:generate  
Application key set successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> [ ]

Di dalam isi tag main, tambahkan @yield('content'). Ini nanti bakal berguna untuk mengisi konten kita.

```
resources > views > user > layout > footer.blade.php > footer
  <link rel="stylesheet" href="{{asset('template-user/assets/css/footer.css')}}"
  <!-- link rel="stylesheet" href="{{asset('template-user/assets/css/demos/demo-10.css')}} -->
  <link rel="stylesheet" href="{{asset('template-user/assets/css/skins/skin-demo-10.css')}}"

</head>
<body>
  <div class="page-wrapper">
    @include('user.layout.header')

    <main class="main">
      @yield('content')
    </main><!-- End .main -->

    <footer class="footer">
      <div class="footer-middle">
        <div class="container">
          <div class="row">
            <div class="col-sm-6 col-lg-3">
              <div class="widget widget-about">
                
                Praesent dapibus, neque id conus ultricies, tortor neque egestas at.
                ...
                <div class="social-icons">
                  <a href="#" class="social-icon" title="Facebook" target="_blank"></a>
                  <a href="#" class="social-icon" title="Twitter" target="_blank"></a>
                  <a href="#" class="social-icon" title="Instagram" target="_blank"></a>
                  <a href="#" class="social-icon" title="Youtube" target="_blank"></a>
                </div>
              </div>
            </div>
          </div>
        </div>
      </div>
    </footer>
  </div>
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Database seeding completed successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> php artisan key:generate  
Application key set successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> [ ]

Blok semua tag footer

```
resources > views > user > layout > footer.blade.php > footer
  <link rel="stylesheet" href="{{asset('template-user/assets/css/footer.css')}}"
  <!-- link rel="stylesheet" href="{{asset('template-user/assets/css/demos/demo-10.css')}} -->
  <link rel="stylesheet" href="{{asset('template-user/assets/css/skins/skin-demo-10.css')}}"

</head>
<body>
  <div class="page-wrapper">
    @include('user.layout.header')

    <main class="main">
      @yield('content')
    </main><!-- End .main -->

    </div><!-- End .page-wrapper -->
    <button id="scroll-top" title="Back to Top"><i class="icon-arrow-up"></i></button>

    <!-- Mobile Menu -->
    <div class="mobile-menu-overlay"></div><!-- End .mobil-menu-overlay -->

    <div class="mobile-menu-contained">
      <div class="mobile-menu-wrapper">
        <span class="mobile-menu-close"><i class="icon-close"></i></span>
        ...
      </div>
    </div>
  </body>
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Database seeding completed successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> php artisan key:generate  
Application key set successfully.  
PS D:\LARAGON\www\minaristi\up-skanned> [ ]

Lalu cut semua syntaxnya

```

<div class="widget">
    <div> <!-- End .widget-->
        <h4 class="Widget-title">My Account</h4>
        <ul class="widget-list">
            <li><a href="#">Sign In</a></li>
            <li><a href="#">Cart.html</a><!-- View Cart--></li>
            <li><a href="#">My Wishlist</a></li>
            <li><a href="#">Track My Order</a></li>
            <li><a href="#">Help</a></li>
        </ul><!-- End .widget-list-->
    </div><!-- End .col-sm-6 col-lg-3 -->
</div><!-- End .row -->
</div><!-- End .container -->
</div><!-- End .footer-middle -->

<div class="Footer-bottom">
    <div class="container">
        <p>Copyright © 2019 Molla Store. All Rights Reserved.</p><!--
        <figure class="Footer-payments">
            
        </figure><!-- End .Footer-payments -->
    </div><!-- End .container -->
</div><!-- End .Footer-bottom -->
</div><!-- End .footer -->

```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Database seeding completed successfully.  
PS D:\LARAVEL\www\minarish\up-skanneda> php artisan key:generate  
Application key set successfully.  
PS D:\LARAVEL\www\minarish\up-skanneda>

In 74, Col 30 Spaces: 4 UTF-8 CRLF Blade

Jika sudah, pastekan syntax tadi ke file footer.blade.php

```

<div class="Site-wrapper">
    <!-- Nav Bar -->
    @include('admin.layout.header')
    <!-- /.nav-bar -->

    <!-- Main Sidebar Container -->
    @include('admin.layout.sidebar')

    <!-- Content Wrapper. Contains page content -->
    <div class="content-wrapper">
        <yield('content')>
    </div>
    <!-- /.content-wrapper -->

    <!-- Control Sidebar -->
    <aside class="control-sidebar control-sidebar-dark">
        <!-- Control sidebar content goes here -->
    </aside>
    <!-- /.control-sidebar -->
</div>
<!-- ./wrapper -->

```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Install the latest PowerShell for new features and improvements! <https://aka.ms/PSWindows>

PS D:\LARAVEL\www\minarish\up-skanneda>

In 39, Col 3 (11 selected) Spaces: 2 UTF-8 CRLF Blade

Jangan lupa tambahkan include seperti header tadi

**Molla** KATEGORI

**Useful Links**

- About Molla
- How to shop on Molla
- FAQ
- Contact us
- Log in

**Customer Service**

- Payment Methods
- Money-back guarantee!
- Returns
- Shipping
- Terms and conditions
- Privacy Policy

**My Account**

- Sign in
- View Cart
- My Wishlist
- Track My Order
- Help

Copyright © 2019 Molla Store. All Rights Reserved.


VISA MASTERCARD AMERICAN EXPRESS PAYPAL

Kira kira seperti ini webnya ketika dipreview



# MEMBUAT DASHBOARD

Mari kita buat folder dashboard dahulu di dalam folder user

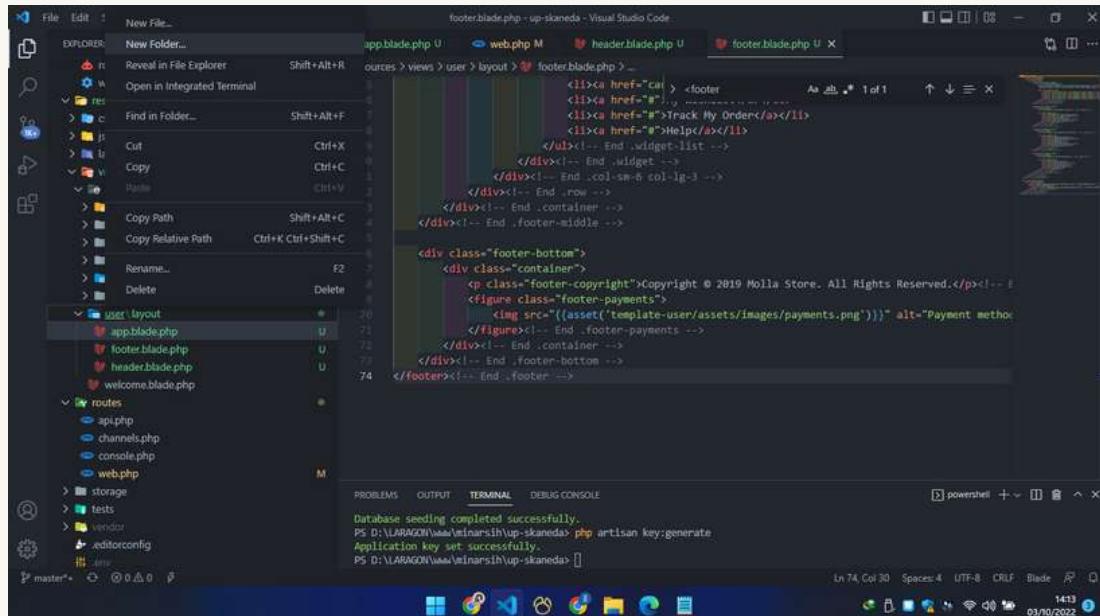


The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer:** Shows the project structure:
  - app.blade.php
  - footer.blade.php
  - header.blade.php
  - welcome.blade.php
  - user/layout
  - routes
  - storage
  - tests
  - vendor
  - .editorconfig
  - .gitignore
- Code Editor:** Displays the footer.blade.php file content, which includes links for footer, track my order, and help.
- Terminal:** Shows the command line output:

```
Database seeding completed successfully.
PS D:\LARAGON\www\minarsih\up-skaneda> php artisan key:generate
Application key set successfully.
PS D:\LARAGON\www\minarsih\up-skaneda>
```
- Status Bar:** Shows the current file is footer.blade.php, and the status bar indicates Line 74, Column 30, Spaces: 4, UTF-8, CRLF, Blade, and the date 03/10/2022.

Jika sudah, kita bikin file main.blade.php

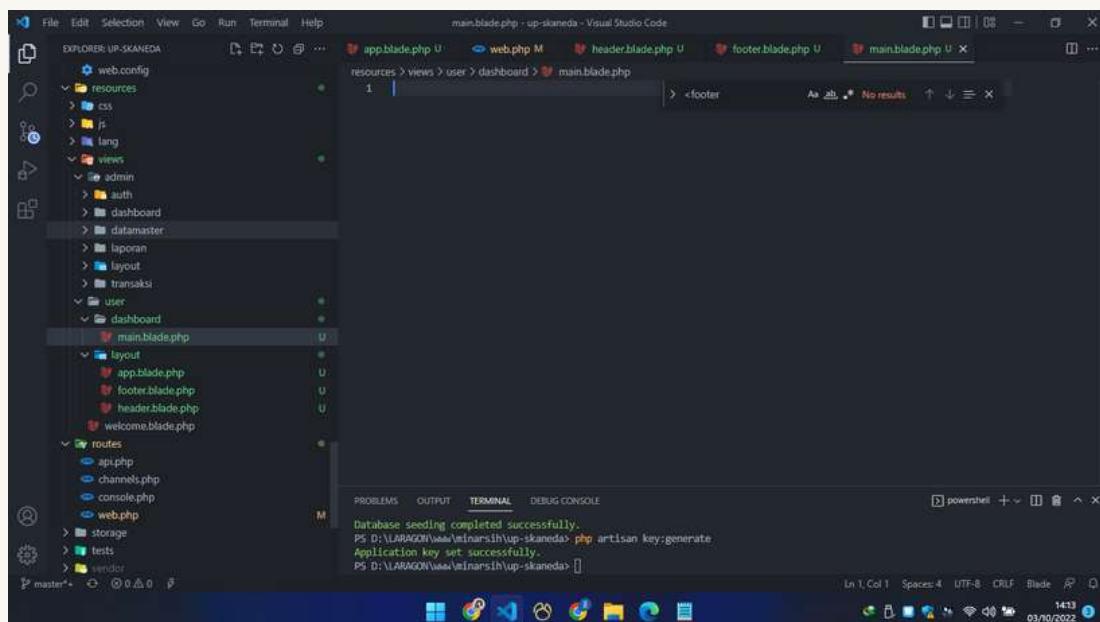

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer:** Shows the project structure, including a new file main.blade.php under the dashboard directory of the user view.
- Code Editor:** Displays the main.blade.php file content, which is currently empty: <footer>.
- Terminal:** Shows the command line output:

```
Database seeding completed successfully.
PS D:\LARAGON\www\minarsih\up-skaneda> php artisan key:generate
Application key set successfully.
PS D:\LARAGON\www\minarsih\up-skaneda>
```
- Status Bar:** Shows the current file is main.blade.php, and the status bar indicates Line 1, Column 1, Spaces: 4, UTF-8, CRLF, Blade, and the date 03/10/2022.

Kira-kira seperti ini tampilan file baru kita.

```

main.blade.php - up-skaned - Visual Studio Code
EXPLORER UP-SKANEDA
blade.php U web.php M header.blade.php U footer.blade.php U main.blade.php U index.html U
resources > views > user > dashboard > main.blade.php
@extends('user.layout.app')
@section('content')
@endsection

```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

Database seeding completed successfully.  
PS D:\LARAGON\www\minarsih\up-skaned> php artisan key:generate  
Application key set successfully.  
PS D:\LARAGON\www\minarsih\up-skaned> []

Ketikkan syntax seperti ini, extend digunakan untuk mendeklarasikan bahwa file ini, ikut file app.blade.php kita. Untuk section berguna untuk memberitahu si program bahwa kita ingin mengisi @yield('content') yang sudah kita buat tadi

```

<div><!-- End .product-body -->
</div><!-- End .product -->

<div class="product-footer">
  <div class="ratings-container">
    <div class="ratings">
      <div class="ratings-val" style="width: 40%;"></div><!-- End .ratings-val -->
    </div><!-- End .ratings -->
    <span class="ratings-text">7 Reviews</span>
  </div><!-- End .rating-container -->

  <div class="product-action">
    <a href="#" class="btn-product btn-cart" title="Add to cart"><span>Add to cart</span></a>
    <a href="popup/quickView.html" class="btn-product btn-quickview" title="Quick view"><span>Quick view</span></a>
  </div><!-- End .product-action -->
</div><!-- End .product-footer -->
</div><!-- End .col-6 col-md-4 col-lg-3 -->
</div><!-- End .row -->
</div><!-- End .products -->
</div><!-- End .tab-pane -->
</div><!-- End .tab-content -->

<div class="more-container text-center mt-5">
  <a href="category.html" class="btn btn-outline-lightgray btn-more btn-round"><span>Lihat Produk Lainnya</span><i class="icon-long-arrow-right"></i>
</a>
</div><!-- End .more-container -->
</div><!-- End .container -->

<div class="mb-5"></div><!-- End .mb5 -->

```

Buka notepad kita tadi, blok lalu cut

```

resources > views > user > dashboard > main.blade.php


<div class="ratings-container">
    <div class="ratings">
      <div class="ratings-val" style="width: 40%;"></div><!-- End .ratings-val -->
    </div><!-- End .ratings -->
    <span class="ratings-text">7 Reviews</span>
  </div><!-- End .rating-container -->

  <div class="product-action">
    <a href="#" class="btn-product btn-cart" title="Add to cart"><span>Add to cart</span></a>
    <a href="popup/quickView.html" class="btn-product btn-quickview" title="Quick view"><span>Quick view</span></a>
  </div><!-- End .product-action -->
</div><!-- End .product-footer -->
</div><!-- End .col-6 col-md-4 col-lg-3 -->
</div><!-- End .row -->
</div><!-- End .products -->
</div><!-- End .tab-pane -->
</div><!-- End .tab-content -->

<div class="more-container text-center mt-5">
  <a href="category.html" class="btn btn-outline-lightgray btn-more btn-round"><span>Lihat Produk Lainnya</span><i class="icon-long-arrow-right"></i>
</a>
</div><!-- End .more-container -->
</div><!-- End .container -->

<div class="mb-5"></div><!-- End .mb5 -->


```

Pastekan di dalam section content yang ada di file main.blade.php tadi.

```

    /*
     * Web Routes
     */

    Here is where you can register web routes for your application. These
    routes are loaded by the RouteServiceProvider within a group which
    contains the "web" middleware group. Now create something great!
    */

    // Route::get('/', function () {
    //     return redirect()->route('dashboard');
    // });

    Route::get('/', function () {
        return view('user.dashboard.main');
    });


    Route::get('/login', [AuthController::class, 'login'])->name('login');
    Route::post('/postLogin', [AuthController::class, 'postLogin'])->name('postLogin');
    Route::get('/logout', [AuthController::class, 'logout'])->name('logout');

    Route::group(['middleware' => ['checkLogin']], function () {
        Route::get('/dashboard', [DashboardController::class, 'main'])->name('dashboard');
    });

    Database seeding completed successfully.
    PS D:\LARAGON\www\minarishup-skanneda> php artisan key:generate
    Application key set successfully.
    PS D:\LARAGON\www\minarishup-skanneda>

```

Jika sudah, buka route web, lalu ubah yang awalnya return app, ganti return dashboard

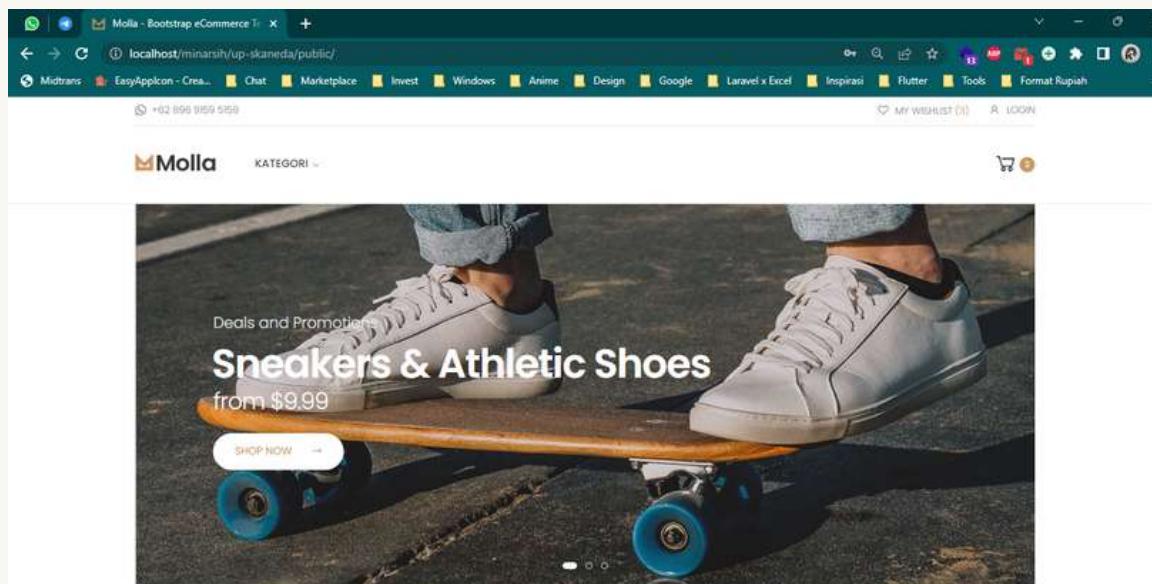

Kalau dipreview kira-kira seperti ini, sebenarnya sama kayak yang tadi, tapi bedanya ini lebih mempersimple syntax

```

    routes > web.php > ...

    // Route::get('/', function () {
    //     return redirect()->route('dashboard');
    // });

    Route::get('/', function () {
        return view('user.dashboard.main');
    });

    Route::group(['prefix' => 'admin'], function () {
        Route::get('/login', [AuthController::class, 'login'])->name('login');
        Route::post('/postLogin', [AuthController::class, 'postLogin'])->name('postLogin');
        Route::get('/logout', [AuthController::class, 'logout'])->name('logout');

        Route::group(['middleware' => ['checkLogin']], function () {
            Route::get('/dashboard', [DashboardController::class, 'main'])->name('dashboard');

            Route::group(['prefix' => 'users'], function () {
                Route::group(['prefix' => 'users'], function () {
                    Route::get('/', [UserController::class, 'index'])->name('users');
                    Route::get('/create', [UserController::class, 'create'])->name('usersCreate');
                    Route::post('/store', [UserController::class, 'store'])->name('usersStore');
                    Route::get('/show/{id}', [UserController::class, 'show'])->name('usersShow');
                    Route::get('/edit/{id}', [UserController::class, 'edit'])->name('usersEdit');
                    Route::post('/update/{id}', [UserController::class, 'update'])->name('usersUpdate');
                    Route::get('/delete/{id}', [UserController::class, 'destroy'])->name('usersDelete');
                });
            });
        });
    });

    Database seeding completed successfully.
    PS D:\LARAGON\www\minarishup-skanneda> php artisan key:generate
    Application key set successfully.
    PS D:\LARAGON\www\minarishup-skanneda>

```

Untuk memisahkan antara web admin, sama web user, kita buatkan prefix admin

File Edit Selection View Go Run Terminal Help

routes > web.php

```
Route::get('/tolak/{id}', [TransaksiController::class, 'tolak'])->name('transaksitolak');
Route::get('/proses/{id}', [TransaksiController::class, 'proses'])->name('transaksiproses');
Route::get('/kirim/{id}', [TransaksiController::class, 'kirim'])->name('transaskirim');
Route::get('/selesai/{id}', [TransaksiController::class, 'selesai'])->name('transaksiSelesai');

Route::group(['prefix' => 'laporan'], function () {
    Route::group(['prefix' => 'penjualan'], function () {
        Route::get('/', [LaporanPenjualanController::class, 'index'])->name('laporanPenjualanIndex');
        Route::get('/print', [LaporanPenjualanController::class, 'print'])->name('laporanPenjualanPrint');
    });
});
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

```
Database seeding completed successfully.
PS D:\LARAGON\www\minarsih\up-skanedea> php artisan key:generate
Application key set successfully.
PS D:\LARAGON\www\minarsih\up-skanedea>
```

Lalu kita apit dengan }});

EXPLORER: UP-SKANEDA

```
routes > web.php #Function:#1709#B7
| routes are loaded by the RouteServiceProvider within a group which
| contains the "web" middleware group. Now create something great!
|
|
```

```
// Route::get('/', function () {
//     return redirect()->route('dashboard');
// });

Route::get('/', function () {
    return view('user.dashboard.main');
});

Route::group(['prefix' => 'admin'], function () {
    Route::get('/', function () {
        return redirect()->route('dashboard');
    });

    Route::get('/login', [AuthController::class, 'login'])->name('login');
    Route::post('/postlogin', [AuthController::class, 'postlogin'])->name('postlogin');
    Route::get('/logout', [AuthController::class, 'logout'])->name('logout');


    Route::group(['middleware' => 'checklogin'], function () {
        Route::get('/dashboard', [DashboardController::class, 'main'])->name('dashboard');
    });

    Route::group(['prefix' => 'datamaster'], function () {
        Route::group(['prefix' => 'users'], function () {
```


PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

```
Database seeding completed successfully.
PS D:\LARAGON\www\minarsih\up-skanedea> php artisan key:generate
Application key set successfully.
PS D:\LARAGON\www\minarsih\up-skanedea>
```

Jangan lupa kita buat Route default kita mengakses admin, langsung ke dashboard admin

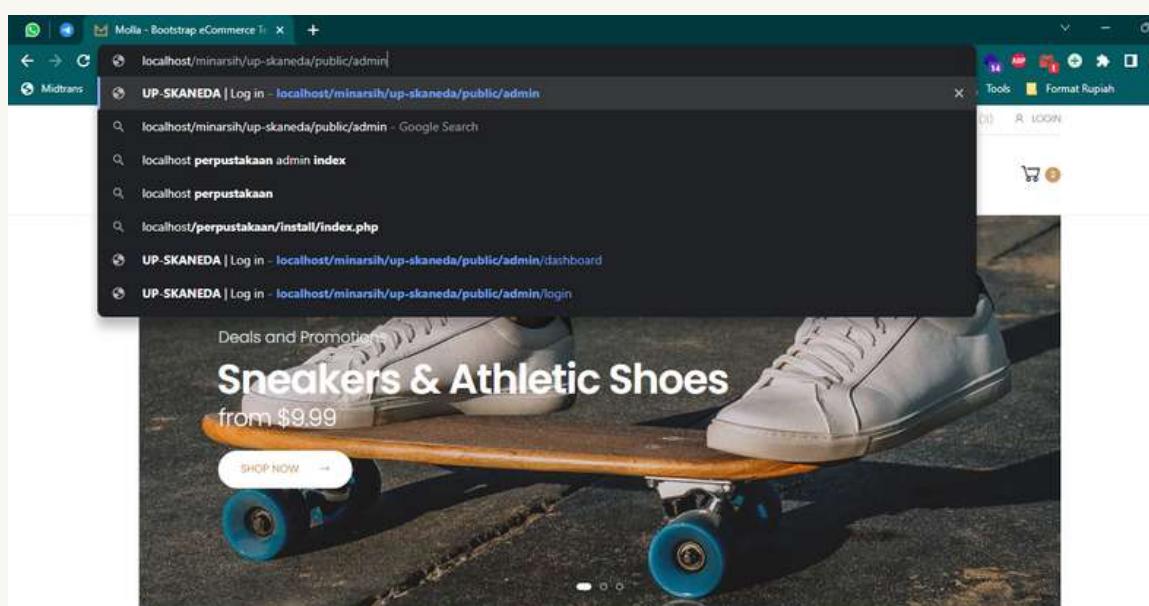

Kita coba akses halaman admin yang sudah kita buat.

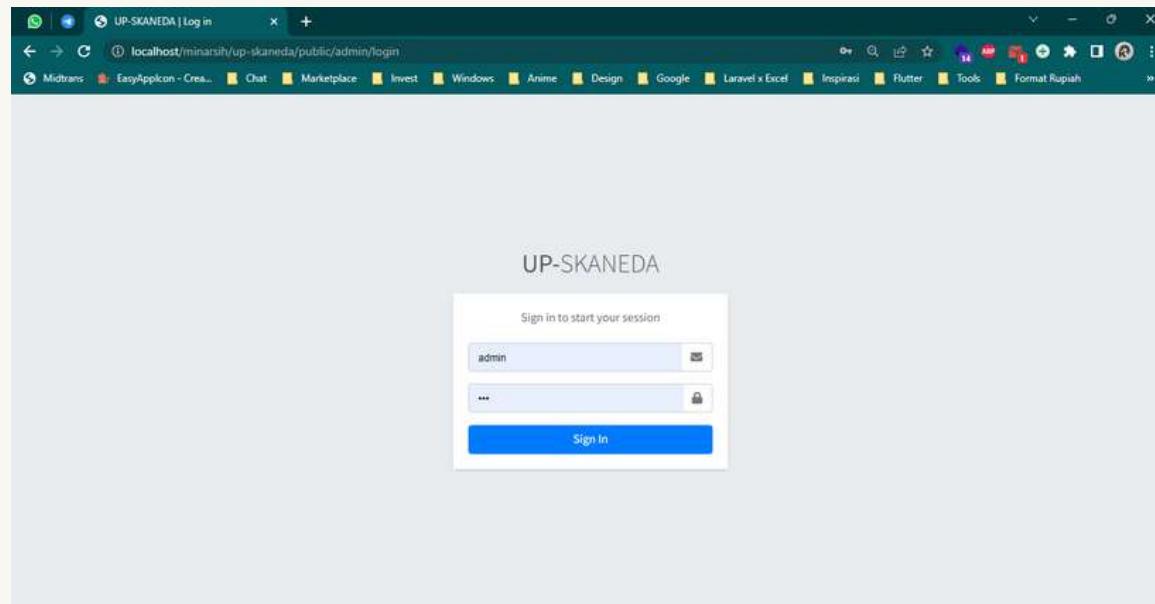

Nah kita sudah berhasil memisah antara dashboard admin, sama dashboard user.

```
File Edit Selection View Go Run Terminal Help
EXPLORER: UP-SKANEDA
app
  - Console
  - Exceptions
  - Http
    - Controllers
      - User
        - DashboardController.php
        - AuthController.php
        - Controller.php
        - DashboardController.php
        - KategoriProdukController.php
        - KeranjangController.php
        - LaporanPenjualanController.php
        - ProdukController.php
        - TransaksiController.php
        - TransaksiDetailController.php
        - UsersController.php
      - Middleware
        - Kernel.php
    - Models
    - Providers
  - bootstrap
  - config
  - database
    - factories
    - migrations
      - 2014_10_12_000000_create_users_table.php
      - 2014_10_12_100000_create_password_resets_table.php
      - 2019_08_19_000000_create_failed_jobs_table.php
  - routes
  - app.blade.php
  - header.blade.php
  - footer.blade.php
  - web.php
  - DashboardController.php
  - routes
  - Database seeding completed successfully.
  PS D:\LARAGON\www\minarsih\up-skaned> php artisan key:generate
  Application key set successfully.
  PS D:\LARAGON\www\minarsih\up-skaned> php artisan make:igration User/DashboardController
  PS D:\LARAGON\www\minarsih\up-skaned> ^C
  PS D:\LARAGON\www\minarsih\up-skaned> ^C
  PS D:\LARAGON\www\minarsih\up-skaned> php artisan make:controller User/DashboardController
  Controller created successfully.
  PS D:\LARAGON\www\minarsih\up-skaned>

```

Kita buat controller dengan nama "DashboardController" yang mau kita taruh di dalam folder Controllers/User

```
File Edit Selection View Go Run Terminal Help
DashboardController.php - up-skaned - Visual Studio Code
EXPLORER: UP-SKANEDA
app
  - Console
  - Exceptions
  - Http
    - Controllers
      - User
        - DashboardController.php
        - AuthController.php
        - Controller.php
        - DashboardController.php
        - KategoriProdukController.php
        - KeranjangController.php
        - LaporanPenjualanController.php
        - ProdukController.php
        - TransaksiController.php
        - TransaksiDetailController.php
        - UsersController.php
      - Middleware
        - Kernel.php
    - Models
    - Providers
  - bootstrap
  - config
  - database
    - factories
    - migrations
      - 2014_10_12_000000_create_users_table.php
      - 2014_10_12_100000_create_password_resets_table.php
      - 2019_08_19_000000_create_failed_jobs_table.php
  - routes
  - app.blade.php
  - header.blade.php
  - footer.blade.php
  - web.php
  - DashboardController.php
  - DashboardController.php
  - $direktor
  - namespace App\Http\Controllers\User;
  use App\Http\Controllers\Controller;
  use Illuminate\Http\Request;

  class DashboardController extends Controller
  {
    protected $judul = 'Dashboard';
    protected $menu = 'dashboard';
    protected $sub_menu = '';
    protected $direktor = 'user.dashboard';

    public function main(Request $request)
    {
      $data['judul'] = $this->judul;
      $data['menu'] = $this->menu;
      $data['sub_menu'] = $this->sub_menu;

      return view($this->direktor.'main', $data);
    }
  }

  PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE
  PS D:\LARAGON\www\minarsih\up-skaned>
  PS D:\LARAGON\www\minarsih\up-skaned> ^C
  PS D:\LARAGON\www\minarsih\up-skaned> php artisan make:controller User/DashboardController
  Controller created successfully.
  PS D:\LARAGON\www\minarsih\up-skaned>
```

Kita isi file DashboardController tersebut dengan syntax main seperti ini.

```

use App\Http\Controllers\User\DashboardController as UserDashboardController;

use App\Http\Controllers\AuthController;
use App\Http\Controllers\DashboardController;
use App\Http\Controllers\KategoriProdukController;
use App\Http\Controllers\LaporanController;
use App\Http\Controllers\LaporanPenjualanController;
use App\Http\Controllers\ProdukController;
use App\Http\Controllers\TransaksiController;
use App\Http\Controllers\UsersController;
use Illuminate\Support\Facades\Route;

/*
|--------------------------------------------------------------------------
| Web Routes
|--------------------------------------------------------------------------
|
| Here is where you can register web routes for your application. These
| routes are loaded by the RouteServiceProvider within a group which
| contains the "web" middleware group. Now create something great!
|
*/

```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

```

PS D:\LARAGON\www\minarsih\up-skanneda> ^C
PS D:\LARAGON\www\minarsih\up-skanneda> ^C
PS D:\LARAGON\www\minarsih\up-skanneda> php artisan make:controller User/DashboardController
Controller created successfully.
PS D:\LARAGON\www\minarsih\up-skanneda> []

```

Untuk import Controllernya kita kasih "as", agar system bisa membedakan antara Controller Dashboard admin, sama Controller Dashboard user

```

use App\Http\Controllers\User\DashboardController as UserDashboardController;

Route::get('/', function () {
    return redirect()->route('userDashboard');
});
Route::get('/dashboard', [UserDashboardController::class, 'main'])->name('userDashboard');

Route::group(['prefix' => 'admin'], function () {
    Route::get('/', function () {
        return redirect()->route('dashboard');
    });
    Route::get('/login', [AuthController::class, 'login'])->name('login');
    Route::post('/postlogin', [AuthController::class, 'postlogin'])->name('postlogin');
    Route::get('/logout', [AuthController::class, 'logout'])->name('logout');

    Route::sgroup(['middleware' => ['checkLogin']], function () {
        Route::get('/dashboard', [DashboardController::class, 'main'])->name('dashboard');
    });
});

```


PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

```

PS D:\LARAGON\www\minarsih\up-skanneda> ^C
PS D:\LARAGON\www\minarsih\up-skanneda> ^C
PS D:\LARAGON\www\minarsih\up-skanneda> php artisan make:controller User/DashboardController
Controller created successfully.
PS D:\LARAGON\www\minarsih\up-skanneda> []

```

Kita buat route default / agar mengarah langsung ke dashboard user, sama kita buat route untuk dashboard usernya

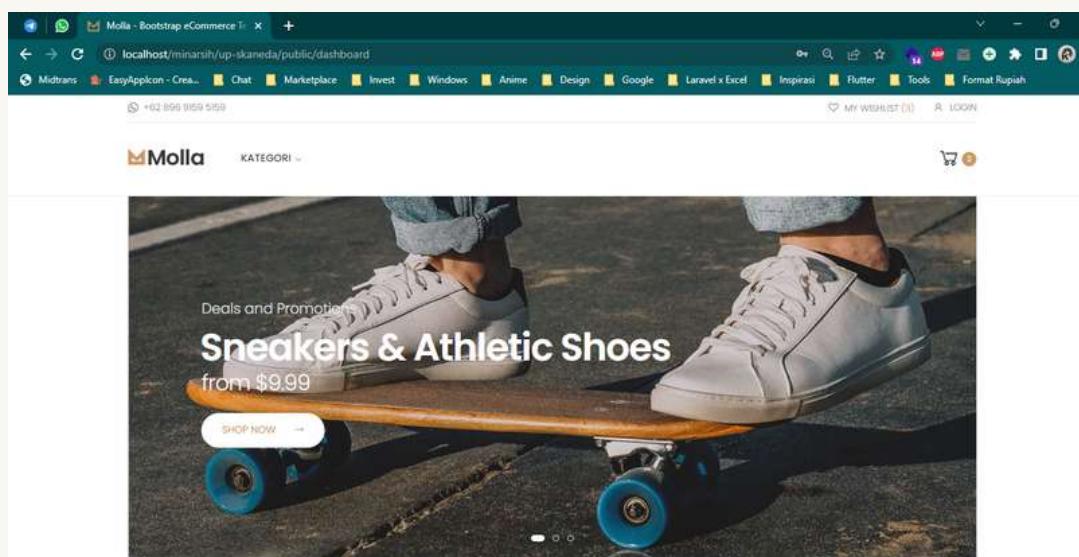

Kira kira seperti ini webnya kalau kita buka, otomatis langsung mengarah ke Dashboard user

Kita scroll kebawah, akan menemukan section produk, untuk langkah selanjutnya kita akan mengambilkan produk dari tabel yang sudah dibuat.

```

class DashboardController extends Controller
{
    protected $judul = 'Dashboard';
    protected $menu = 'dashboard';
    protected $sub_menu = '';
    protected $direktorri = 'user.dashboard';

    public function main(Request $request)
    {
        $data['judul'] = $this->judul;
        $data['menu'] = $this->menu;
        $data['sub_menu'] = $this->sub_menu;

        $data['kategori_produk'] = KategoriProduk::with('produk')->get();
        $data['produk'] = Produk::with('kategori_produk')->get();

        return view($this->direktorri.'.main', $data);
    }
}

```

Di function main kita tambahkan syntax untuk memanggil data kategori\_produk, dan produk.

```


<div class="tab-pane p-0 fade show active" id="top-all-tab" role="tabpanel" aria-labelledby="top-all-tab">
        <div class="products just-action-icons-sm">
            <div class="row">
                <div class="col-6 col-md-4 col-lg-3 col-xl-5col">
                    </div><!-- End .col-6 col-md-4 col-lg-3 -->
                <div class="col-6 col-md-4 col-lg-3 col-xl-5col">
                    </div><!-- End .col-6 col-md-4 col-lg-3 -->
                <div class="col-6 col-md-4 col-lg-3 col-xl-5col">
                    </div><!-- End .col-6 col-md-4 col-lg-3 -->
                <div class="col-6 col-md-4 col-lg-3 col-xl-5col">
                    </div><!-- End .col-6 col-md-4 col-lg-3 -->
                <div class="col-6 col-md-4 col-lg-3 col-xl-5col">
                    </div><!-- End .col-6 col-md-4 col-lg-3 -->
                <div class="col-6 col-md-4 col-lg-3 col-xl-5col">
                    </div><!-- End .col-6 col-md-4 col-lg-3 -->
            </div><!-- End .row -->
        </div><!-- End .products -->
    </div><!-- End .tab-pane -->
    <div class="tab-pane p-0 fade" id="top-women-tab" role="tabpanel" aria-labelledby="top-women-tab">
        <div class="products just-action-icons-sm">
            <div class="row">


```

Hapus semua produk manual tadi, jangan lupa disisakan satu, untuk kita looping dari tabel produk

```
<div class="tab-content">
  <div class="tab-pane p-0 fade show active" id="top-all-tab" role="tabpanel" aria-labelledby="top-all-link">
    <div class="products just-action-icons-sm">
      <div class="row">
        @foreach($produk as $p)
          <div class="col-6 col-md-4 col-lg-3 col-xl-5col">
            <div><!-- End .row -->
            </div><!-- End .products -->
          </div><!-- End .tab-pane -->
        <div class="tab-pane p-0 fade" id="top-women-tab" role="tabpanel" aria-labelledby="top-women-link">
          <div class="products just-action-icons-sm">
            <div class="row">
              <div><!-- End .row -->
              </div><!-- End .products -->
            </div><!-- End .tab-pane -->
        <div class="tab-pane p-0 fade" id="top-men-tab" role="tabpanel" aria-labelledby="top-men-link">
          <div class="products just-action-icons-sm">
            <div class="row">
              <div><!-- End .row -->
              </div><!-- End .products -->
            </div><!-- End .tab-pane -->
        </div><!-- End .products -->
      </div><!-- End .row -->
    </div><!-- End .products -->
  </div><!-- End .tab-pane -->
</div><!-- End .tab-content -->
</div><!-- End .row -->
</div><!-- End .products -->

```

Kita tambahkan foreach variabel produk yang sudah kita buatkan di controller tadi

```
resources > views > user > dashboard > main.blade.php > div.container > div.tab-content
  is="tab-pane p-0 fade show active" id="top-all-tab" role="tabpanel" aria-labelledby="top-all-link">
    class="products just-action-icons-sm">
      <div class="row">
        @foreach($produk as $p)
          <div class="col-6 col-md-4 col-lg-3 col-xl-5col">
            <div class="product product-item text-center">
              <figure class="product-media">
                <span class="product-label label-primary">New</span>
                <a href="product.html">
                  
                </a>
              </figure>
              <div class="product-action-vertical">
                <a href="#" class="btn-product-icon btn-wishlist btn-expandable"><span>Add to wishlist</span></a>
              </div><!-- End .product-action-vertical -->
            </div><!-- End .product-media -->
            <div class="product-body">
              <div class="product-cat">
                <a href="#">{{($p->kategori_produk->nama_kategori_produk)}}</a>
              </div><!-- End .product-cat -->
              <h3 class="product-title"><a href="product.html">{{($p->nama_produk)}}</a></h3>
              <div class="product-price">
                Rp. {{($p->harga_produk)}}
              </div><!-- End .product-price -->
            </div><!-- End .product-body -->
            <div class="product-footer">
              <div class="ratings-container">
                <div class="ratings">
                  <div class="ratings-val" style="width: 40%;></div><!-- End .ratings-val -->
                </div><!-- End .ratings -->
                <span class="ratings-text">( 7 Reviews )</span>
              </div><!-- End .rating-container -->
            </div><!-- End .product-footer -->
          </div><!-- End .row -->
        </div><!-- End .products -->
      </div><!-- End .tab-pane -->
    </div><!-- End .tab-content -->
    </div><!-- End .row -->
  </div><!-- End .products -->

```

```
resources > views > user > dashboard > main.blade.php > div.container > div.tab-content
  is="tab-pane p-0 fade show active" id="top-all-tab" role="tabpanel" aria-labelledby="top-all-link">
    class="products just-action-icons-sm">
      <div class="row">
        @foreach($produk as $p)
          <div class="col-6 col-md-4 col-lg-3 col-xl-5col">
            <div class="product product-item text-center">
              <ca href="#">{{($p->kategori_produk->nama_kategori_produk)}}</a>
            </div><!-- End .product-cat -->
            <h3 class="product-title"><a href="product.html">{{($p->nama_produk)}}</a></h3>
            <div class="product-price">
              Rp. {{($p->harga_produk)}}
            </div><!-- End .product-price -->
          </div><!-- End .product-body -->
          <div class="product-footer">
            <div class="ratings-container">
              <div class="ratings">
                <div class="ratings-val" style="width: 40%;></div><!-- End .ratings-val -->
              </div><!-- End .ratings -->
              <span class="ratings-text">( 7 Reviews )</span>
            </div><!-- End .rating-container -->
          </div><!-- End .product-footer -->
        </div><!-- End .row -->
      </div><!-- End .products -->
    </div><!-- End .tab-pane -->
  </div><!-- End .tab-content -->
  </div><!-- End .row -->
</div><!-- End .products -->

```


Lalu ubah sedemikian rupa syntax-syntax tadi, agar bisa ambil data dari database.



## PENJUALAN PRODUK TERATAS

ALL LAPTOP HANDPHONE


Kira-kira seperti ini tampilan semua produk yang ada di tabel produk kita

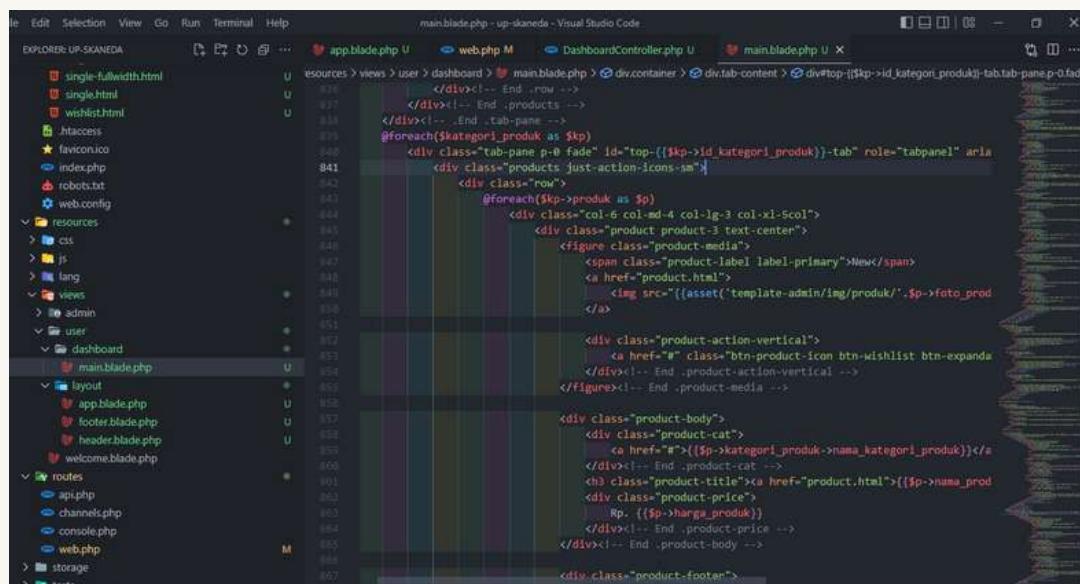

```

<div class="tab-pane p-0 fade" id="top-({$kp->id_kategori_produk})-tab" role="tabpanel" aria-labelledby="top-({$kp->id_kategori_produk})-tab-label">
    <div class="products just-action-icons-sm">
        <div class="row">
            @foreach($kp->produk as $p)
                <div class="col-6 col-md-4 col-lg-3 col-xl-5 col">
                    <div class="product product-3 text-center">
                        <figure class="product-media">
                            <span class="product-label label-primary">New
                            <a href="product.html">
                                
                            
                        </figure>
                        <div class="product-action-vertical">
                            <a href="#" class="btn-product-icon btn-wishlist btn-expand">
                                <span>Wishlist</span>
                            
                        </div><!-- End .product-action-vertical -->
                    </div><!-- End .product-media -->
                    <div class="product-body">
                        <div class="product-cat">
                            <a href="#">({$p->kategori_produk->nama_kategori_produk})</a>
                        </div><!-- End .product-cat -->
                        <h3 class="product-title"><a href="product.html">({$p->nama_produk})</a></h3>
                        <div class="product-price">
                            Rp. {{($p->harga_produk)}}
                        </div><!-- End .product-price -->
                    </div><!-- End .product-body -->
                </div><!-- End .col -->
            @endforeach
        </div><!-- End .row -->
    </div><!-- End .products -->

```

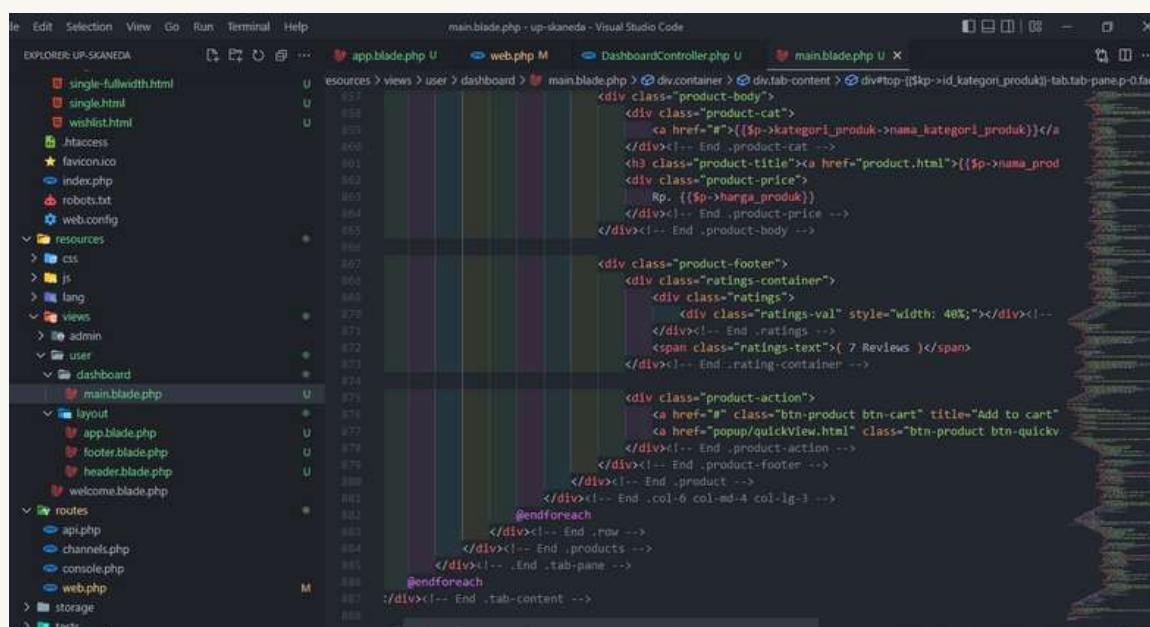

```

<div class="product-footer">
    <div class="rating-container">
        <div class="rating">
            <div class="ratings-val" style="width: 40%;">( 7 Reviews )</span>
    </div><!-- End .rating-container -->

```

```

<div class="product-action">
    <a href="#" class="btn-product btn-cart" title="Add to cart">Add to cart</a>
    <a href="popup/quickView.html" class="btn-product btn-quickView" title="Quick View"><span>Quick View</span></a>

```

```

</div><!-- End .product-action -->
</div><!-- End .product -->
</div><!-- End .col-6 col-md-4 col-lg-3 -->
@endforeach
</div><!-- End .row -->
</div><!-- End .products -->

```

Untuk yang tab produk berdasarkan kategori, kita ubah seperti ini, ini caranya berbeda karena tadi semua produk, tidak ada filter berdasarkan kategori. kalau ini kita filter berdasarkan kategori produk.

The screenshot shows the Visual Studio Code interface with the main.blade.php file open. The code is part of a navigation bar section:

```
<div class="nav nav-pills justify-content-center" role="tablist">
    <li class="nav-item">
        <a class="nav-link active" id="top-all-link" data-toggle="tab" href="#top-all-tab" role="tab" aria-controls="top-all-tab" aria-selected="true">All</a>
    </li>
    @foreach($kategori_produk as $kp)
        <li class="nav-item">
            <a class="nav-link" id="top-({$kp->id_kategori_produk})-link" data-toggle="tab" href="#top-({$kp->id_kategori_produk})-tab" role="tab" aria-controls="top-({$kp->id_kategori_produk})-tab" aria-selected="false">{$kp->nama_kategori_produk}</a>
        </li>
    @endforeach
</ul>
</div><!-- End .heading -->
```

Kita scroll ke atas, lalu menemukan nav-item. Rencana kita kan ketika kategori produk di klik, akan keluar produk yang kita inginkan. Ketikkan syntax sedemikian rupa.


The screenshot shows the main.blade.php file in VS Code. The 'All' tab in the navigation bar is highlighted with a red background. The code for the 'All' tab is:

```
"tab" href="#top-all-tab" role="tab" aria-controls="top-all-tab" aria-selected="true">All</a>
```

The screenshot shows the main.blade.php file in VS Code. The 'All' tab in the navigation bar is highlighted with a red background. The code for the 'All' tab is:

```
selected="true">All</a>
```

Jika sudah, mari kita coba preview web kita.

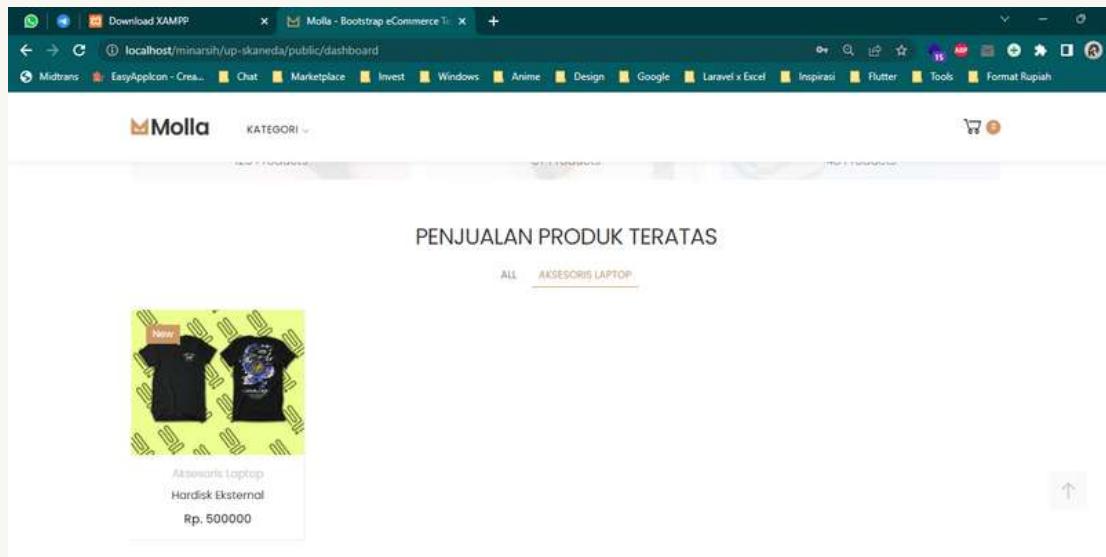

PENJUALAN PRODUK TERATAS

ALL AKSESORIS LAPTOP


New

Aksesoris Laptop

Hardisk Eksternal

Rp. 500000


Kira-kira seperti ini ketika filter berdasarkan kategori produk, sudah bisa tampil sesuai yang kita inginkan.

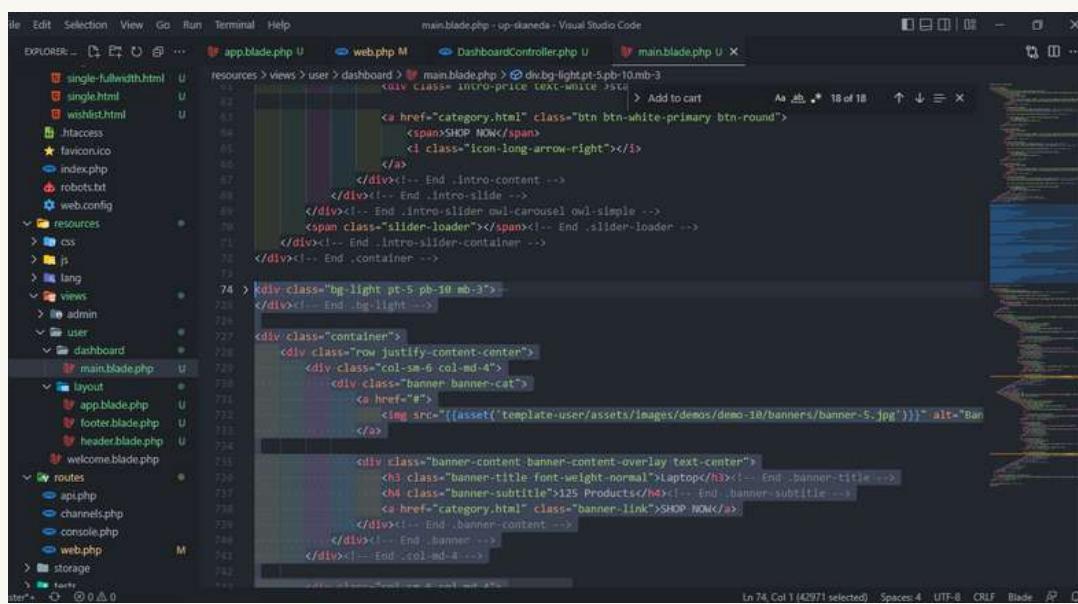

```
resources > views > user > dashboard > main.blade.php > ...<div><!-- Intro-price text-white -->
    <a href="category.html" class="btn btn-white-primary btn-round">
        <span>SHOP NOW</span>
        <i class="icon-long-arrow-right"></i>
    </a>
</div><!-- End .intro-content -->
</div><!-- End .intro-slide -->
</div><!-- End .intro-slider owl-carousel owl-simple -->
<span class="slider-loader"><span><i></i></span></span><!-- End .slider-loader -->
</div><!-- End .intro-slider-container -->
</div><!-- End .container -->
```

```
74 > <div class="bg-light pt-5 pb-10 mb-3">
    </div><!-- End .bg-light -->
    <div class="container">
        <div class="row justify-content-center">
            <div class="col-sm-6 col-md-4">
                <div class="banner banner-cat">
                    <a href="#">
                        
                    <div class="banner-content banner-content-overlay text-center">
                        <h3 class="banner-title font-weight-normal">Laptop</h3><!-- End .banner-title -->
                        <h4 class="banner-subtitle">125 Products</h4><!-- End .banner-subtitle -->
                        <a href="category.html" class="banner-link">SHOP NOW</a>
                    </div><!-- End .banner-content -->
                </div><!-- End .banner -->
            </div><!-- End .col-md-4 -->
        </div><!-- End .row -->
    </div><!-- End .container -->
```

Mari kita hapus beberapa section yang emang nggak kita butuhkan, agar mempersimpel web kita.

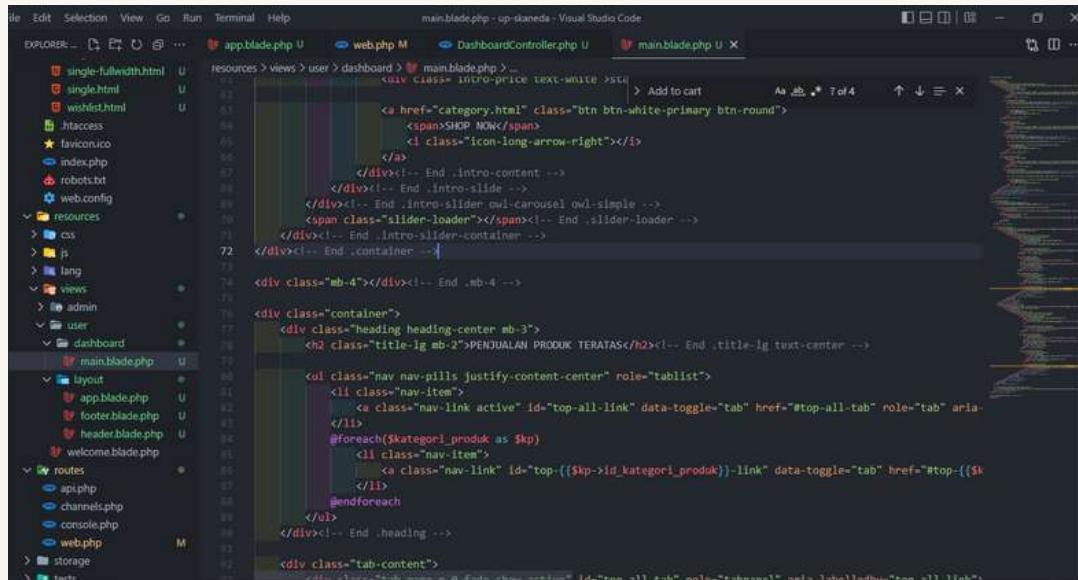

```
resources > views > user > dashboard > main.blade.php > ...<div><!-- Intro-price text-white -->
    <a href="category.html" class="btn btn-white-primary btn-round">
        <span>SHOP NOW</span>
        <i class="icon-long-arrow-right"></i>
    </a>
</div><!-- End .intro-content -->
</div><!-- End .intro-slide -->
</div><!-- End .intro-slider owl-carousel owl-simple -->
<span class="slider-loader"><span><i></i></span></span><!-- End .slider-loader -->
</div><!-- End .intro-slider-container -->
</div><!-- End .container -->
```

```
74 > <div class="mb-4"></div><!-- End .mb-4 -->
    <div class="container">
        <div class="heading heading-center mb-3">
            <h2 class="title-lg mb-2">PENJUALAN PRODUK TERATAS</h2><!-- End .title-lg text-center -->
        </div>
        <ul class="nav nav-pills justify-content-center" role="tablist">
            <li class="nav-item">
                <a class="nav-link active" id="top-all-link" data-toggle="tab" href="#top-all-tab" role="tab" aria-...
            </li>
            @foreach($kategori_produk as $kp)
                <li class="nav-item">
                    <a class="nav-link" id="top-{{($kp->id_kategori_produk)}}-link" data-toggle="tab" href="#top-{{($...
                </li>
            @endforeach
        </ul>
    </div><!-- End .heading -->
    <div class="tab-content">
```

The screenshot shows a product listing for 'AKSESORIS LAPTOP'. It features a large image of two black t-shirts with a blue design. Below the image, the text 'Aksesoris Laptop' and 'Hardisk Eksternal' is visible, along with a price of 'Rp. 500000'. A rating of '★★★☆☆ (7 reviews)' is shown, followed by a 'View Details' button.

Kira-kira seperti ini tampilannya, terlihat lebih simple sectionnya

The screenshot shows a simplified product listing for 'AKSESORIS LAPTOP'. It features a large image of two black t-shirts with a blue design. Below the image, the text 'Aksesoris Laptop' and 'Hardisk Eksternal' is visible, along with a price of 'Rp. 500000'. A rating of '★★★☆☆ (7 reviews)' is shown, followed by a 'View Details' button.

Langkah yang ingin kita buat selanjutnya yaitu stok produk, kita memanfaatkan rating menjadi stok produk.

The screenshot shows the Visual Studio Code interface with the main.blade.php file open. The code includes sections for product details and ratings. A specific line of code is highlighted: `<span class="ratings-text">( 7 Reviews )</span>`. This line is part of a larger block that handles product ratings and actions.

```

File Edit Selection View Go Run Terminal Help
main.blade.php - up-skanneda - Visual Studio Code
EXPLORER: main.blade.php U web.php M DashboardController.php U main.blade.php U
wishlist.html .htaccess favicon.ico index.php robots.txt web.config
resources css js lang views admin user dashboard main.blade.php
layout app.blade.php footer.blade.php header.blade.php welcome.blade.php
routes api.php channels.php console.php web.php
storage tests vendor editorconfig
Ln 122 Col 1 (252 selected) Spaces: 4 UTF-8 CR LF Blade R D
<div class="product-body">
    <div class="product-cat">
        <a href="#">{ $p->kategori_produk->nama_kategori_produk}</a>
    </div><!-- End .product-cat -->
    <h3 class="product-title"><a href="product.html">{ $p->nama_produk}</a></h3>
    <div class="product-price">
        Rp. { $p->harga_produk}
    </div><!-- End .product-price -->
</div><!-- End .product-body -->

<div class="product-footer">
    <div class="rating-container">
        <div class="rating">
            <div class="rating-val" style="width: 40%;></div><!-- End .rating-val -->
        <span class="rating-text">( 7 Reviews )</span>
    </div><!-- End .rating-container -->
</div>
<div class="product-action">
    <a href="#" class="btn-product btn-cart" title="Add to cart"><span>add to c
    </span></a>
    <a href="#" class="popups/quickview.html" class="btn-product btn-quickview" title="Qui
    </a>
</div><!-- End .product-action -->
</div><!-- End .product -->
</div><!-- End .col-6 col-md-4 col-lg-3 -->
    &endforeach
</div><!-- End .row -->
</div><!-- End .products -->
</div><!-- End .tab-pane -->
#foreach($kategori_produk as $kp)
    <div class="tab-pane p-0 fade" id="top-{ $kp->id_kategori_produk }-tab" role="tabpanel" aria-labelledby="

```

Kita hapus div dengan class rating, soalnya kita hanya membutukan span dengan class ratings-text.

EXPLORER ... app.blade.php U web.php M DashboardController.php U main.blade.php U

```

<div class="product-body">
    <div class="product-cat">
        <a href="#">{$_p->kategori_produk->nama_kategori_produk}</a>
    </div><!-- End .product-cat -->
    <h3 class="product-title"><a href="product.html">{$_p->nama_produk}</a></h3><!--
    <div class="product-price">
        Rp. {$_p->harga_produk}
    </div><!-- End .product-price -->
</div><!-- End .product-body -->

<div class="product-footer">
    <div class="ratings-container">
        | <span class="ratings-text">{$_p->rating}</span>
    </div><!-- End .rating-container -->

    <div class="product-action">
        <a href="#" class="btn-product btn-cart" title="Add to cart"><span>add to cart</span></a>
        <a href="popup/quickview.html" class="btn-product btn-quickview" title="Quick View"><span>Quick View</span></a>
    </div><!-- End .product-action -->
</div><!-- End .product-footer -->

</div><!-- End .col-6.col-md-4.col-lg-3.col-xl-5col > </div><!-- End .product-->
</div><!-- End .row -->
</div><!-- End .products -->
</div><!-- End .tab-pane -->
@foreach($kategori_produk as $kp)
    <div class="tab-pane p-0 fade" id="top-{$kp->id_kategori_produk}-tab" role="tabpanel" aria-labelledby="{$kp->id_kategori_produk}-tab">
        <div class="products just-action-icons-sm">
            <div class="row">
                @foreach($kp->produk as $p)

```

## Blok isi span

EXPLORER ... app.blade.php U web.php M DashboardController.php U main.blade.php U

```

<div class="product-body">
    <div class="product-cat">
        <a href="#">{$_p->kategori_produk->nama_kategori_produk}</a>
    </div><!-- End .product-cat -->
    <h3 class="product-title"><a href="product.html">{$_p->nama_produk}</a></h3><!--
    <div class="product-price">
        Rp. {$_p->harga_produk}
    </div><!-- End .product-price -->
</div><!-- End .product-body -->


<div class="product-footer">
    <div class="ratings-container">
        | <span class="ratings-text">stok : {{$_p->stok_produk}}</span>
    </div><!-- End .rating-container -->

    <div class="product-action">
        <a href="#" class="btn-product btn-cart" title="Add to cart"><span>add to cart</span></a>
        <a href="popup/quickview.html" class="btn-product btn-quickview" title="Quick View"><span>Quick View</span></a>
    </div><!-- End .product-action -->
</div><!-- End .product-footer -->

</div><!-- End .col-6.col-md-4.col-lg-3.col-xl-5col > </div><!-- End .product-->
</div><!-- End .row -->
</div><!-- End .products -->
</div><!-- End .tab-pane -->
@foreach($kategori_produk as $kp)
    <div class="tab-pane p-0 fade" id="top-{$kp->id_kategori_produk}-tab" role="tabpanel" aria-labelledby="{$kp->id_kategori_produk}-tab">
        <div class="products just-action-icons-sm">
            <div class="row">
                @foreach($kp->produk as $p)

```

Lalu ketikkan Stok : {{\$\_p->stok\_produk}}

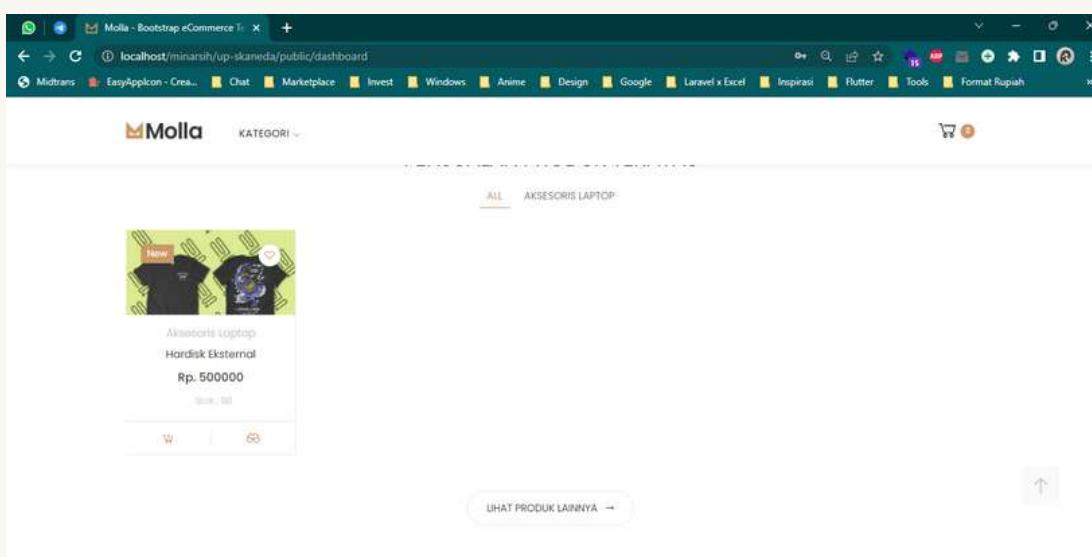

Seperti ini jika stoknya sudah kita tampilkan.

```
return view($this->direktori.'.main', $data);
}

public function addToCart(Request $request)
{
    $id = $request->id;
    // Check Dulu Dikeranjang Ada Produk
    // Yang Sama atau Tidak
    if(Auth::check()){
        $check_keranjang = Keranjang::where('produk_id', $id)
            ->where('user_id', Auth::id())
            ->first();

        if($check_keranjang){
            $check_keranjang->qty = $check_keranjang->qty + 1;
        } else {
            $check_keranjang = new Keranjang();
            $check_keranjang->produk_id = $id;
            $check_keranjang->qty = 1;
            $check_keranjang->user_id = Auth::id();
        }
        $check_keranjang->save();

        if($check_keranjang){
            return redirect()->route('userDashboard')
                ->with('status', 'success')
                ->with('message', 'Berhasil Menambah Ke Keranjang');
        } else {
            return redirect()->route('userDashboard')
                ->with('status', 'error')
                ->with('message', 'Gagal Menambah Ke Keranjang');
        }
    } else {
        return redirect()->route('login')
            ->with('status', 'error')
            ->with('message', 'Anda Belum Login');
    }
}
```

Kita buatkan function addToCart

```
return view($this->direktori.'.main', $data);
}

public function addToCart(Request $request)
{
    $id = $request->id;
    // Check Dulu Dikeranjang Ada Produk
    // Yang Sama atau Tidak
    if(Auth::check()){
        $check_keranjang = Keranjang::where('produk_id', $id)
            ->where('user_id', Auth::id())
            ->first();

        if($check_keranjang){
            $check_keranjang->qty = $check_keranjang->qty + 1;
        } else {
            $check_keranjang = new Keranjang();
            $check_keranjang->produk_id = $id;
            $check_keranjang->qty = 1;
            $check_keranjang->user_id = Auth::id();
        }
        $check_keranjang->save();

        if($check_keranjang){
            return redirect()->route('userDashboard')
                ->with('status', 'success')
                ->with('message', 'Berhasil Menambah Ke Keranjang');
        } else {
            return redirect()->route('userDashboard')
                ->with('status', 'error')
                ->with('message', 'Gagal Menambah Ke Keranjang');
        }
    } else {
        return redirect()->route('login')
            ->with('status', 'error')
            ->with('message', 'Anda Belum Login');
    }
}
```

Jadi function addToCart tadi digunakan untuk menambahkan produk ke keranjang pembeli.

```
routes > web.php > ...
routes > web.php > ...
    | web Routes
    |
    | ...
    |
    | Here is where you can register web routes for your application. These
    | routes are loaded by the RouteServiceProvider within a group which
    | contains the "web" middleware group. Now create something great!
    |
    | ...

Route::get('/', function () {
    return redirect()->route('userDashboard');
});
Route::get('/dashboard', [UserDashboardController::class, 'main']->name('userDashboard'));
Route::post('/addToCart', [UserDashboardController::class, 'addToCart']->name('userAddToCart'));

Route::group(['prefix' => 'admin'], function () {
    Route::get('/', function () {
        return redirect()->route('dashboard');
    });
    Route::get('/login', [AuthController::class, 'login']->name('login'));
    Route::post('/postlogin', [AuthController::class, 'postlogin']->name('postingin'));
    Route::get('/logout', [AuthController::class, 'logout']->name('logout'));

    Route::group(['middleware' => ['checkLogin']], function () {
        Route::get('/dashboard', [DashboardController::class, 'main']->name('dashboard'));
        Route::group(['prefix' => 'datamaster'], function () {
            Route::group(['prefix' => 'users'], function () {
                Route::get('/', [UsersController::class, 'index']->name('users'));
                Route::get('/create', [UsersController::class, 'create']->name('usersCreate'));
                Route::post('/store', [UsersController::class, 'store']->name('usersStore'));
                Route::get('/show/{id}', [UsersController::class, 'show']->name('usersShow'));
            });
        });
    });
});
```


Jangan lupa kita tambahkan juga di routes/web.php

```

<div class="product-body">
    <div class="product-cat">
        <a href="#">{{ $p->kategori_produk->nama_kategori_produk}}</a>
    </div><!-- End .product-cat -->
    <h3 class="product-title"><a href="product.html">({{$p->nama_produk}})</a></h3><!-- End .product-title -->
    <div class="product-price">
        Rp. {{ $p->harga_produk}}
    </div><!-- End .product-price -->
    <div><!-- End .product-body -->

```

Kita buka file main.blade.php, kita tambahkan form yang akan menuju ke route addToCart tadi.

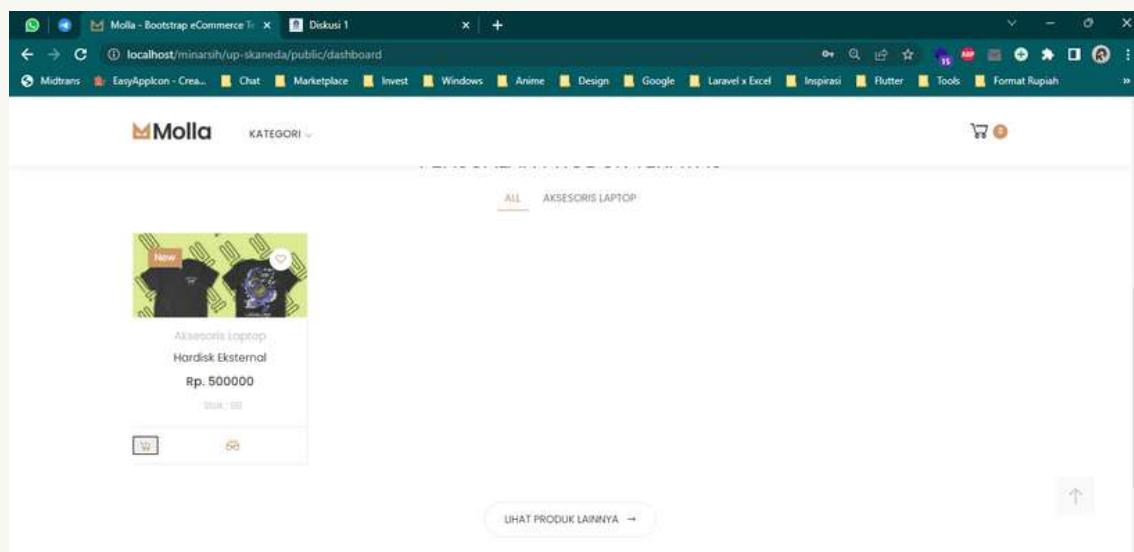


Kira-kira seperti ini tampilan di web kita.

```

<script src="{{asset('template-user/assets/js/jquery.waypoints.min.js')}}">

```


Agar message yang kita kirim di controller berguna, jangan lupa menambahkan import toast, sama script yang sudah kita custom. di app.blade.php

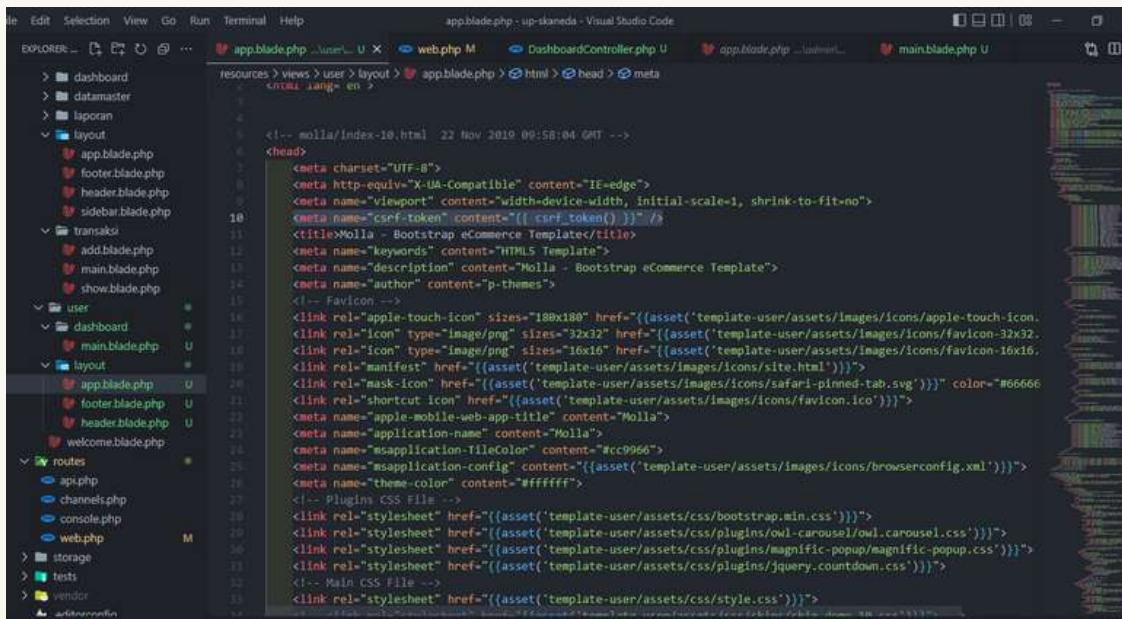

```
<!-- molla/index-10.html 22 Nov 2019 09:58:04 GMT -->
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
    <meta name="csrf-token" content="{{ csrf_token() }}"/>
    <title>Molla - Bootstrap eCommerce Template</title>
    <meta name="keywords" content="HTML5 Template">
    <meta name="description" content="Molla - Bootstrap eCommerce Template">
    <meta name="author" content="P-themes">
    <!-- Favicon -->
    <link rel="apple-touch-icon" sizes="180x180" href="{{asset('template-user/assets/images/icons/apple-touch-icon')}}">
    <link rel="icon" type="image/png" sizes="32x32" href="{{asset('template-user/assets/images/icons/favicon-32x32')}}">
    <link rel="icon" type="image/png" sizes="16x16" href="{{asset('template-user/assets/images/icons/favicon-16x16')}}">
    <link rel="manifest" href="{{asset('template-user/assets/images/icons/site.html')}}">
    <link rel="mask-icon" href="{{asset('template-user/assets/images/icons/safari-pinned-tab.svg')}}" color="#666666">
    <link rel="shortcut icon" href="{{asset('template-user/assets/images/icons/favicon.ico')}}">
    <meta name="apple-mobile-web-app-title" content="Molla">
    <meta name="application-name" content="Molla">
    <meta name="msapplication-TileColor" content="#cc9966">
    <meta name="msapplication-config" content="{{asset('template-user/assets/images/icons/browserconfig.xml')}}">
    <meta name="theme-color" content="#ffffff">
    <!-- Plugins CSS File -->
    <link rel="stylesheet" href="{{asset('template-user/assets/css/bootstrap.min.css')}}">
    <link rel="stylesheet" href="{{asset('template-user/assets/css/plugins/owl-carousel/owl.carousel.css')}}">
    <link rel="stylesheet" href="{{asset('template-user/assets/css/plugins/magnific-popup/magnific-popup.css')}}">
    <link rel="stylesheet" href="{{asset('template-user/assets/css/plugins/jquery.countdown.css')}}">
    <!-- Main CSS File -->
    <link rel="stylesheet" href="{{asset('template-user/assets/css/style.css')}}">

```


Jangan lupa menambahkan meta csrf token, barangkali kita pengen post dengan menggunakan javascript.

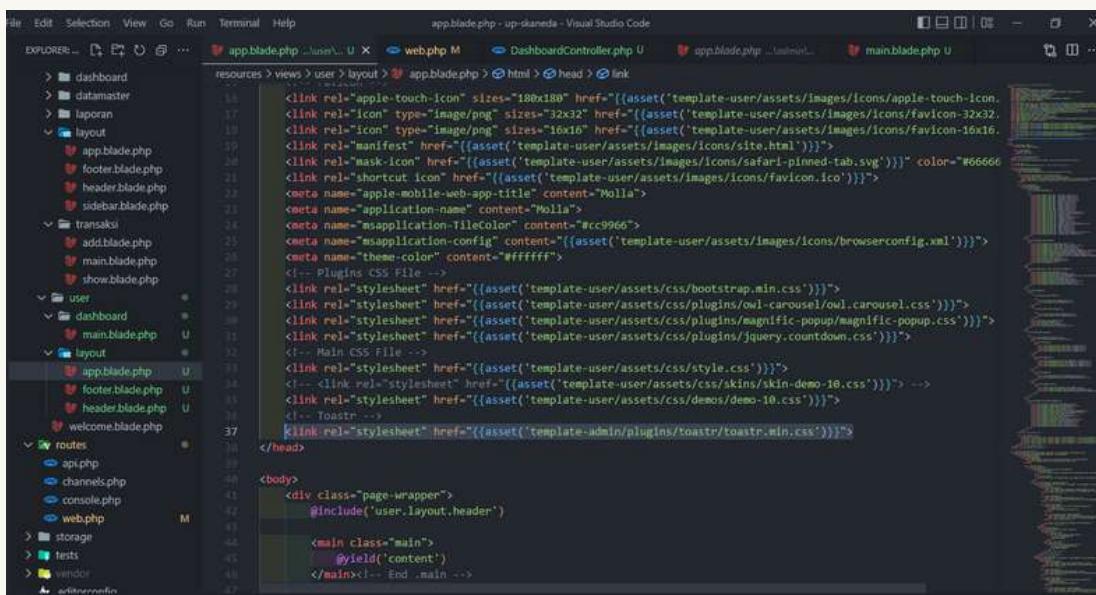

```
<!-- molla/index-10.html 22 Nov 2019 09:58:04 GMT -->
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
    <meta name="csrf-token" content="{{ csrf_token() }}"/>
    <title>Molla - Bootstrap eCommerce Template</title>
    <meta name="keywords" content="HTML5 Template">
    <meta name="description" content="Molla - Bootstrap eCommerce Template">
    <meta name="author" content="P-themes">
    <!-- Favicon -->
    <link rel="apple-touch-icon" sizes="180x180" href="{{asset('template-user/assets/images/icons/apple-touch-icon')}}">
    <link rel="icon" type="image/png" sizes="32x32" href="{{asset('template-user/assets/images/icons/favicon-32x32')}}">
    <link rel="icon" type="image/png" sizes="16x16" href="{{asset('template-user/assets/images/icons/favicon-16x16')}}">
    <link rel="manifest" href="{{asset('template-user/assets/images/icons/site.html')}}">
    <link rel="mask-icon" href="{{asset('template-user/assets/images/icons/safari-pinned-tab.svg')}}" color="#666666">
    <link rel="shortcut icon" href="{{asset('template-user/assets/images/icons/favicon.ico')}}">
    <meta name="apple-mobile-web-app-title" content="Molla">
    <meta name="application-name" content="Molla">
    <meta name="msapplication-TileColor" content="#cc9966">
    <meta name="msapplication-config" content="{{asset('template-user/assets/images/icons/browserconfig.xml')}}">
    <meta name="theme-color" content="#ffffff">
    <!-- Plugins CSS File -->
    <link rel="stylesheet" href="{{asset('template-user/assets/css/bootstrap.min.css')}}">
    <link rel="stylesheet" href="{{asset('template-user/assets/css/plugins/owl-carousel/owl.carousel.css')}}">
    <link rel="stylesheet" href="{{asset('template-user/assets/css/plugins/magnific-popup/magnific-popup.css')}}">
    <link rel="stylesheet" href="{{asset('template-user/assets/css/plugins/jquery.countdown.css')}}">
    <!-- Main CSS File -->
    <link rel="stylesheet" href="{{asset('template-user/assets/css/style.css')}}">
    <!-- Link rel="stylesheet" href="{{asset('template-user/assets/css/skin-demo-10.css')}}"> --->
    <link rel="stylesheet" href="{{asset('template-user/assets/css/demos/demo-10.css')}}">
    <!-- Toastr -->
    <link rel="stylesheet" href="{{asset('template-admin/plugins/toastr/toastr.min.css')}}">

```

Kan kita tadi sudah import JS toast, jangan lupa css toasntnya diimport juga ya!

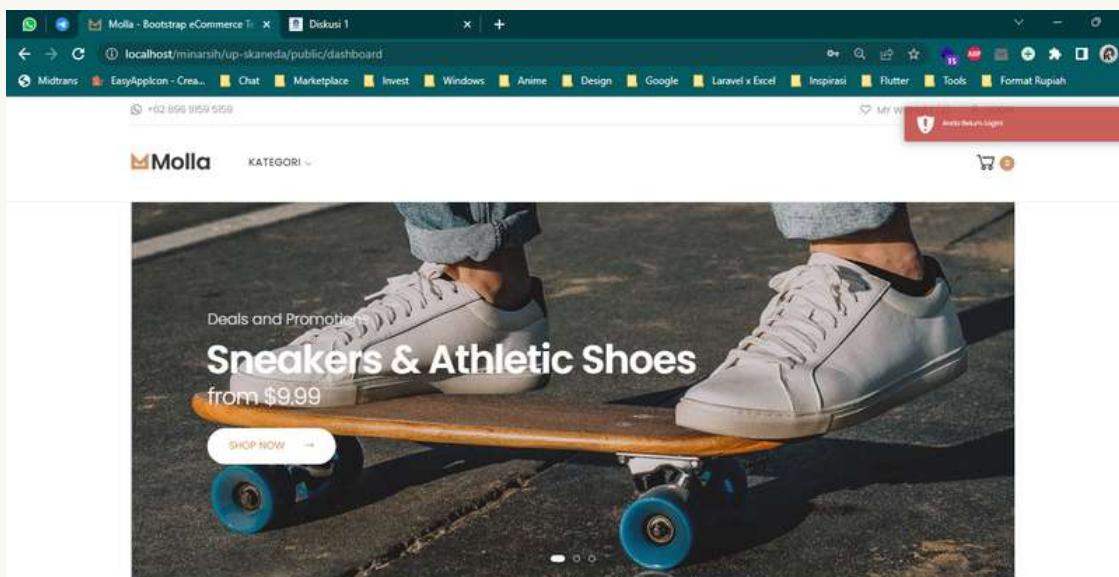

Nah jika tombol keranjang yang ada di produk tadi kita pencet, harusnya keluar alert seperti ini, karena kita belum login.

```

AuthController.php M web.php M DashboardController.php U
app > Http > Controllers > AuthController.php > AuthController > postLogin
    ...
        $users = Users::where('email', $email)->first();
        ...
        // cek email pada tabel users
        if (empty($users)) {
            $data = [
                'email' => $users->email,
                'password' => $password
            ];
            ...
            if (Auth::attempt($data)) {
                if($users->level_user == 'Admin'){
                    return redirect()->route('dashboard')
                        ->with('status', 'success')
                        ->with('message', 'Selamat datang '. $users->nama_lengkap);
                } else {
                    return redirect()->route('userDashboard')
                        ->with('status', 'success')
                        ->with('message', 'Selamat datang '. $users->nama_lengkap);
                }
            } else {
                return redirect()->route('login')->with('status', 'error')->with('message', 'Akun tidak terdaftar');
            }
        } else {
            return redirect()->route('login')->with('status', 'error')->with('message', 'Akun tidak terdaftar');
        }
    }
    public function logout()
    {
        ...
    }

```

Langkah selanjutnya, kita akan menambahkan agar pembeli juga bisa login. Kita buka AuthController, lalu menambahkan script seperti ini.

```

header.blade.php U
    ...
    <ul class="top-menu">
        <li><a href="#">Links</a>
        <ul>
            <li><a href="tel:+62 896 9159 5159"><i class="icon-whatsapp"></i> +62 896 9159 5159</a></li>
        </ul>
    </li>
    </ul><!-- End .top-menu -->
    <li><a href="#">My Wishlist <span>(3)</span></a></li>
    <li><a href="#sign-in-modal" data-toggle="modal"><i class="icon-user"></i>Log in</a></li>
    </ul><!-- End .header-dropdown -->
    <li><a href="#">Logout</a></li>
    </ul><!-- End .header-right -->
    <li><a href="#">Links</a>
        <ul>
            <li><a href="tel:+62 896 9159 5159"><i class="icon-whatsapp"></i> +62 896 9159 5159</a></li>
        </ul>
    </li>
    <li><a href="#">Logout</a></li>
    </ul><!-- End .top-menu -->
    <li><a href="#">Logout</a></li>
    </ul><!-- End .header-dropdown -->
    <li><a href="#">Logout</a></li>
    </ul><!-- End .header-right -->
    <li><a href="#">Logout</a></li>
    </ul><!-- End .header-top -->
    <div class="mobile-menu-toggle">
        <span>Toggle mobile menu</span>
        <i class="icon-bars"></i>
    </div>

```


Jika sudah, kita buka file header.blade.php lalu kita cari ul dengan class top-menu

```


header.blade.php U
    ...
    <ul class="top-menu">
        <li><a href="#">Links</a>
        <ul>
            <li><a href="tel:+62 896 9159 5159"><i class="icon-whatsapp"></i> +62 896 9159 5159</a></li>
        </ul>
    </li>
    </ul><!-- End .top-menu -->
    <li><a href="#">My Wishlist <span>(3)</span></a></li>
    <li><a href="#sign-in-modal" data-toggle="modal"><i class="icon-user"></i>Log in</a></li>
    </ul><!-- End .header-dropdown -->
    <li><a href="#">Logout</a></li>
    </ul><!-- End .header-right -->
    <li><a href="#">Links</a>
        <ul>
            <li><a href="tel:+62 896 9159 5159"><i class="icon-whatsapp"></i> +62 896 9159 5159</a></li>
        </ul>
    </li>
    <li><a href="#">Logout</a></li>
    </ul><!-- End .top-menu -->
    <li><a href="#">Logout</a></li>
    </ul><!-- End .header-dropdown -->
    <li><a href="#">Logout</a></li>
    </ul><!-- End .header-right -->
    <li><a href="#">Logout</a></li>
    </ul><!-- End .header-top -->
    <div class="mobile-menu-toggle">
        <span>Toggle mobile menu</span>
        <i class="icon-bars"></i>
    </div>

```


Kita sesuaikan seperti ini scriptnya, agar ada tombol login, dan logout ketika pembeli sudah login.

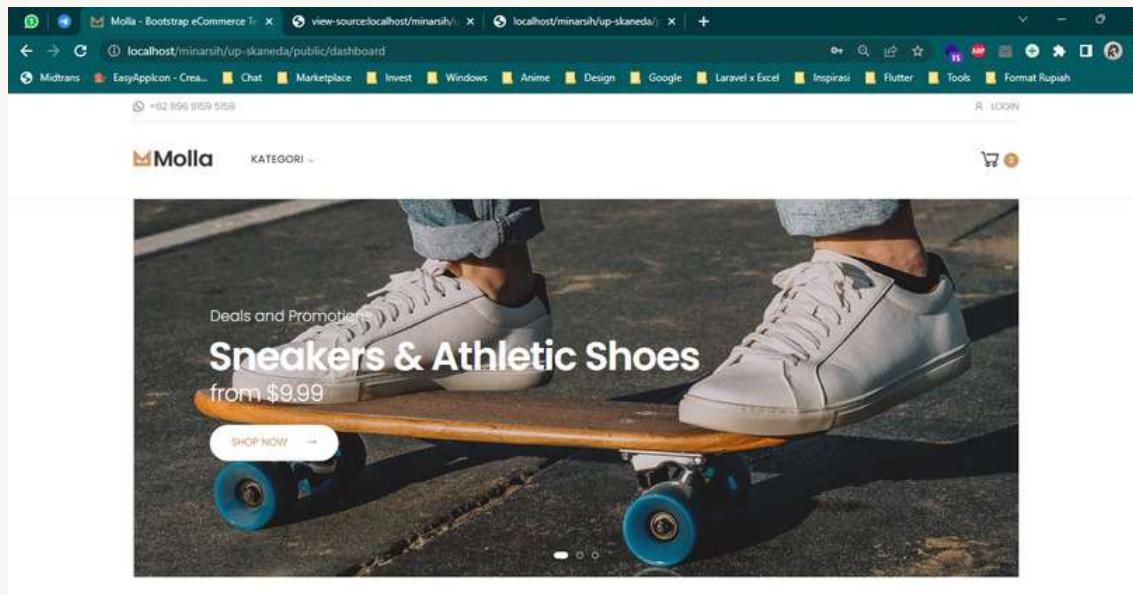


Kira-kira seperti ini tampilan ketika header login sudah kita tambahkan.

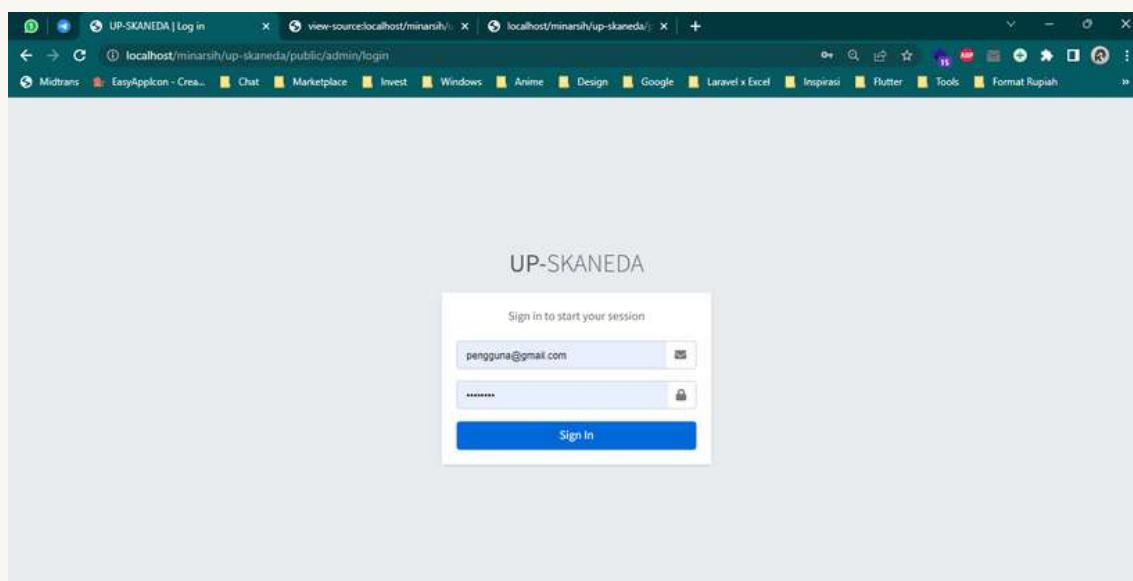


Ketika kita klik, akan mengarahkan kita ke halaman login, lalu kita login pakai akun pengguna@gmail.com

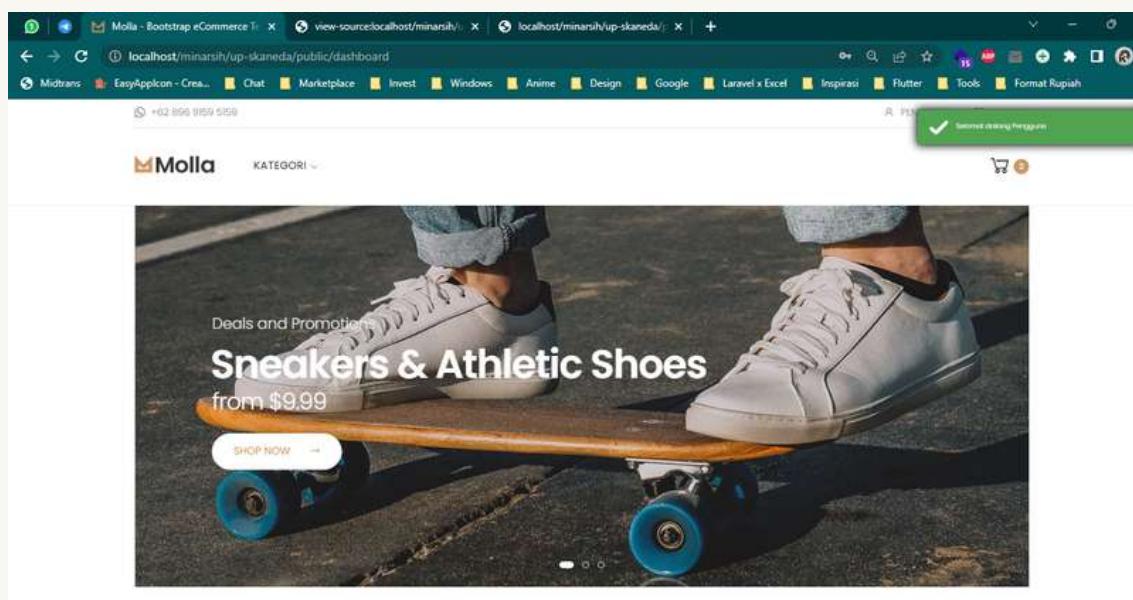


Jika berhasil login akan keluar alert "Selamat datang ...."

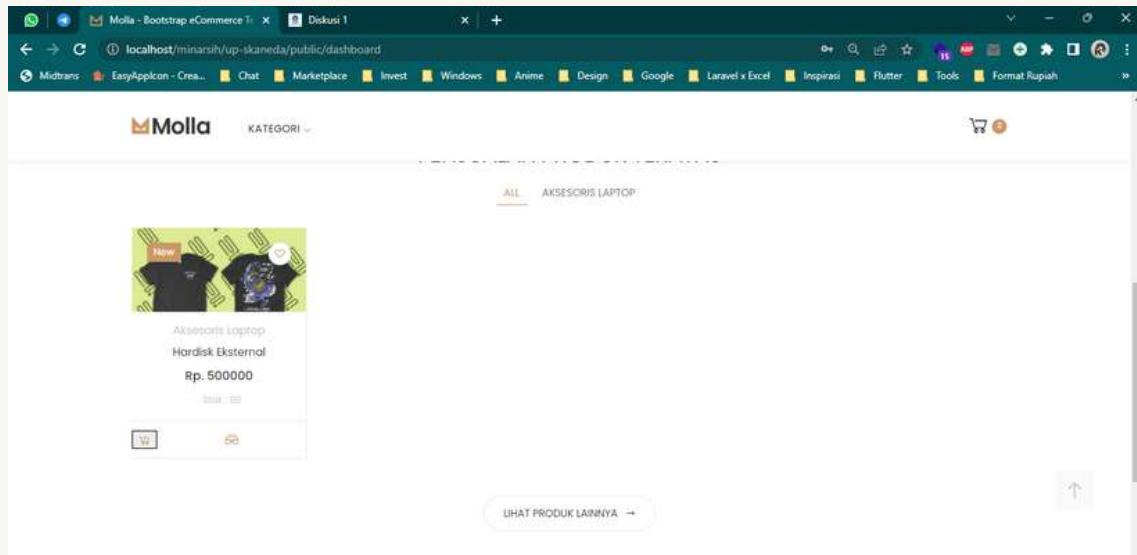

Kan kita sudah login, mari kita coba menambahkan produk ke keranjang.

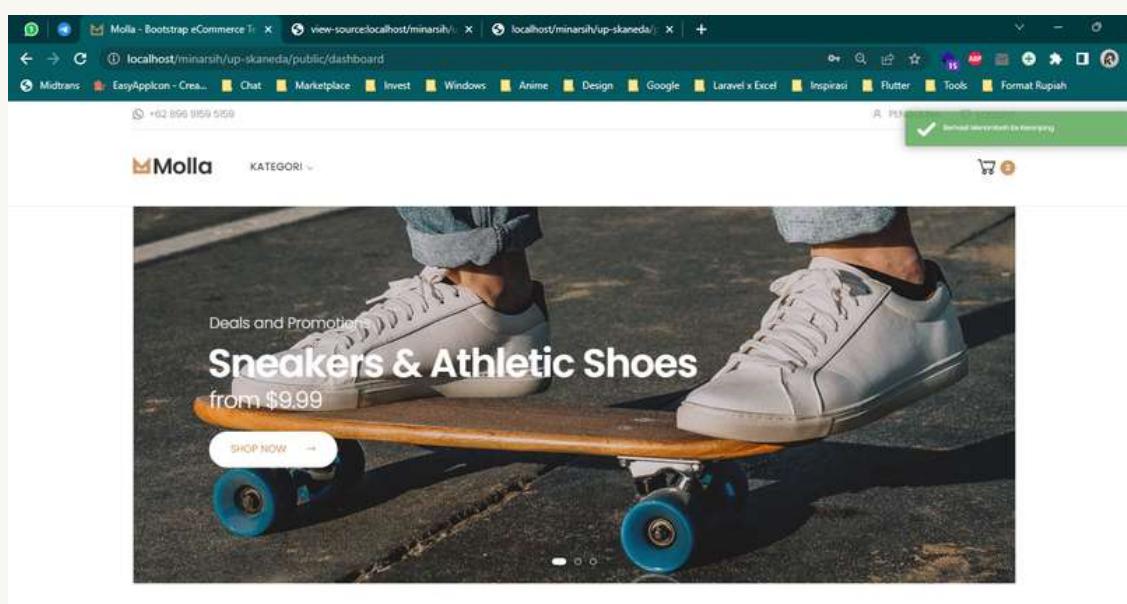


Jika keluar alert seperti ini, berarti sudah berhasil kita menambahkan produk ke keranjang.

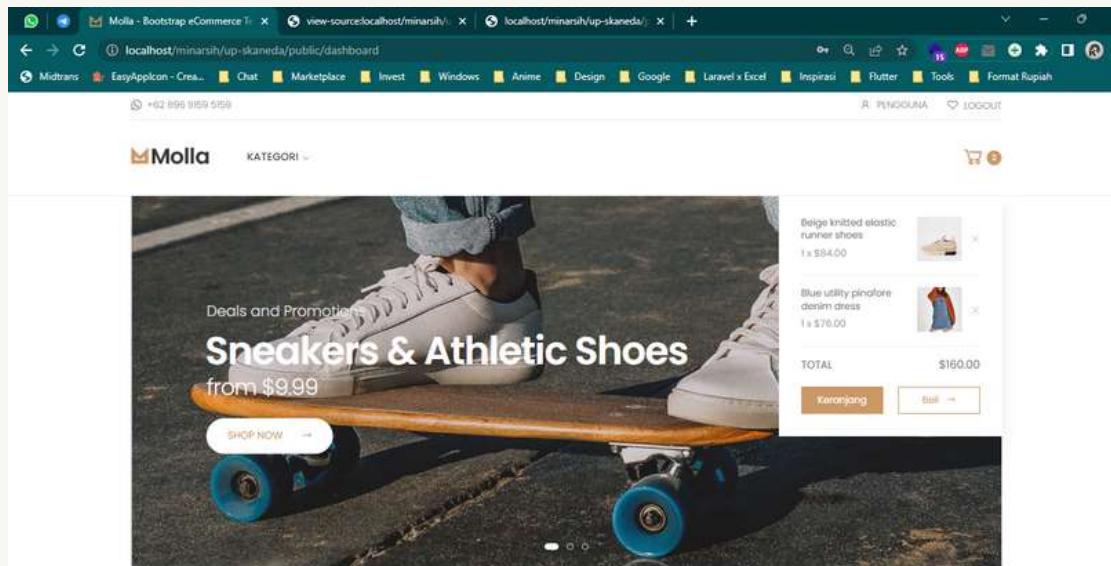

Nah kok ketika keranjang kita ditekan keluarnya gini? nah step selanjutnya kita ubah keranjang manual kita dengan yang ada di database.

```
<span class="cart-count">2</span>
</div>
<div class="dropdown-menu dropdown-menu-right">
    <div class="dropdown-cart-products">
        <div class="product">
            <div class="product-cart-details">
                <h4 class="product-title">
                    <a href="product.html">Beige knitted elastic runner shoes</a>
                </h4>
                <span class="cart-product-info">
                    <span class="cart-product-qty">1</span>
                    x $84.00
                </span>
                <a href="checkout.html" class="btn btn-outline-primary-2"><span>Beli</span></a>
                <i class="icon-long-arrow-right"></i>
            </div>
        </div><!-- End .product-cart-details -->
        <figure class="product-image-container">
            <a href="product.html" class="product-image">
                
            </a>
        </figure>
        <a href="#" class="btn-remove" title="Remove Product"><i class="icon-close"></i></a>
    </div><!-- End .product -->
</div><!-- End .cart-product -->
</div><!-- End .dropdown-menu -->
</div><!-- End .cart-dropdown -->
<div><!-- End .header-right -->
</div><!-- End .container -->
```

Kita sisakan satu produk. Sesuaikan syntaxnya seperti ini.

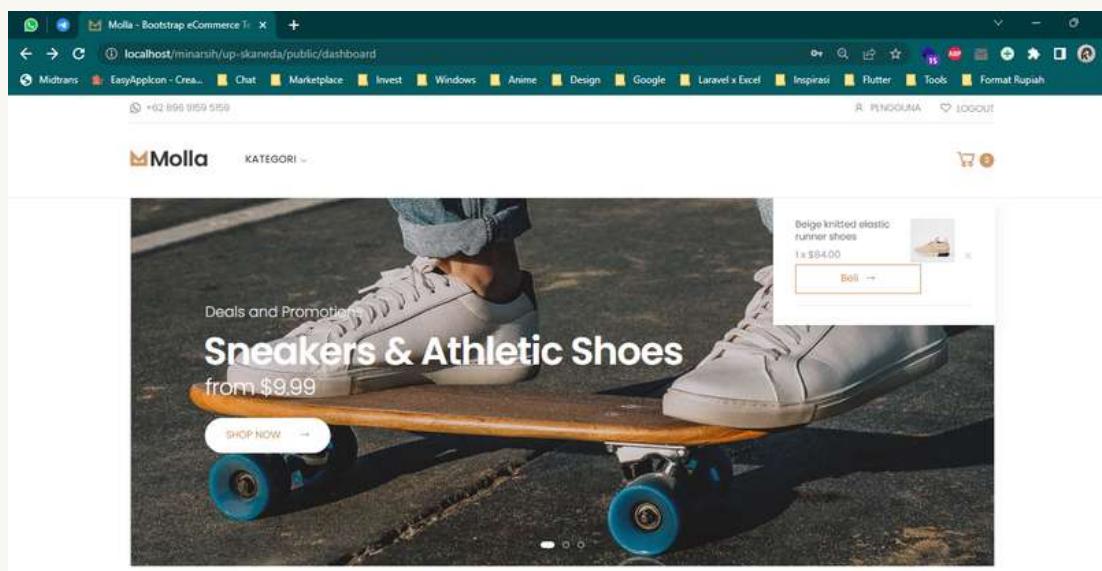

Jika sudah maka akan seperti ini tampilannya.

```
<if(Auth::check())>
    <a href="#" class="dropdown-toggle" role="button" data-toggle="dropdown" aria-haspopup="true" aria-expanded="false">
        <i class="icon-shopping-cart"></i>
        <span class="cart-count">2</span>
    </a>
</if>
<div class="dropdown-menu dropdown-menu-right">
    <div class="dropdown-cart-products">
        <div class="product">
            <div class="product-cart-details">
                <h4 class="product-title">
                    <a href="product.html">Beige knitted elastic runner shoes</a>
                </h4>
                <span class="cart-product-info">
                    <span class="cart-product-qty">1</span>
                    x $84.00
                </span>
                <a href="checkout.html" class="btn btn-outline-primary-2"><span>Beli</span></a>
                <i class="icon-long-arrow-right"></i>
            </div>
        </div><!-- End .product-cart-details -->
        <figure class="product-image-container">
            <a href="product.html" class="product-image">
                
            </a>
        </figure>
        <a href="#" class="btn-remove" title="Remove Product"><i class="icon-close"></i></a>
    </div><!-- End .product -->
</div><!-- End .cart-product -->
</div><!-- End .dropdown-menu -->
</div><!-- End .cart-dropdown -->
<div><!-- End .header-right -->
</div><!-- End .container -->
```

Kita tambahkan Auth::check() digunakan untuk mengecheck apakah kita sudah login atau belum, jika belum login maka tidak bisa melihat keranjang.

Screenshot of Visual Studio Code showing the file structure and code for header.blade.php. The code includes a database query to get items from the cart table.

```
<div class="dropdown-cart dropdown">
    @if(Auth::check())
        @php
            $get_keranjang = DB::table('keranjang as k')
                ->where('user_id', Auth::id())
                ->join('produk p', 'p.id_produk', 'k.produk_id')
                ->get();
        @endphp
        <a href="#" class="dropdown-toggle" role="button" data-toggle="dropdown" aria-haspopup="true" aria-expanded="false">
            <i class="icon-shopping-cart"></i>
            <span class="cart-count">{{ count($get_keranjang) }}</span>
        </a>
        <div class="dropdown-menu dropdown-menu-right">
            <div class="dropdown-cart-products">
                <div class="product">
                    <div class="product-cart-details">
                        <h4 class="product-title">
                            <a href="product.html">Beige knitted elastic runner shoes</a>
                        </h4>
                        <span class="cart-product-info">
                            <span class="cart-product-qty">1</span>
                            x $84.00
                        </span>
                    </div>
                </div>
            </div>
        </div>
    @endif

```


Kita tambahkan syntax DB table, untuk memanggil keranjang di header.blade.php

Screenshot of Visual Studio Code showing the updated header.blade.php code. A tooltip explains the purpose of the span element in the context of the global attributes used.

```
<div class="dropdown-cart dropdown">
    @if(Auth::check())
        @php
            $get_keranjang = DB::table('keranjang as k')
                ->where('user_id', Auth::id())
                ->join('produk p', 'p.id_produk', 'k.produ
        @endphp
        <a href="#" class="dropdown-toggle" role="button" data-toggle="dropdown" aria-haspopup="true" aria-expanded="false">
            <i class="icon-shopping-cart"></i>
            <span class="cart-count">{{ count($get_keranjang) }}</span>
        </a>
        <div class="dropdown-menu dropdown-menu-right">
            <div class="dropdown-cart-products">
                <div class="product">
                    <div class="product-cart-details">
                        <h4 class="product-title">
                            <a href="product.html">Beige knitted elastic runner shoes</a>
                        </h4>
                        <span class="cart-product-info">
                            <span class="cart-product-qty">1</span>
                            x $84.00
                        </span>
                    </div>
                </div>
            </div>
        </div>
    @endif

```

Kita tambahkan syntax count get\_keranjang digunakan untuk menjumlahkan semua produk yang ada di keranjang pembeli.

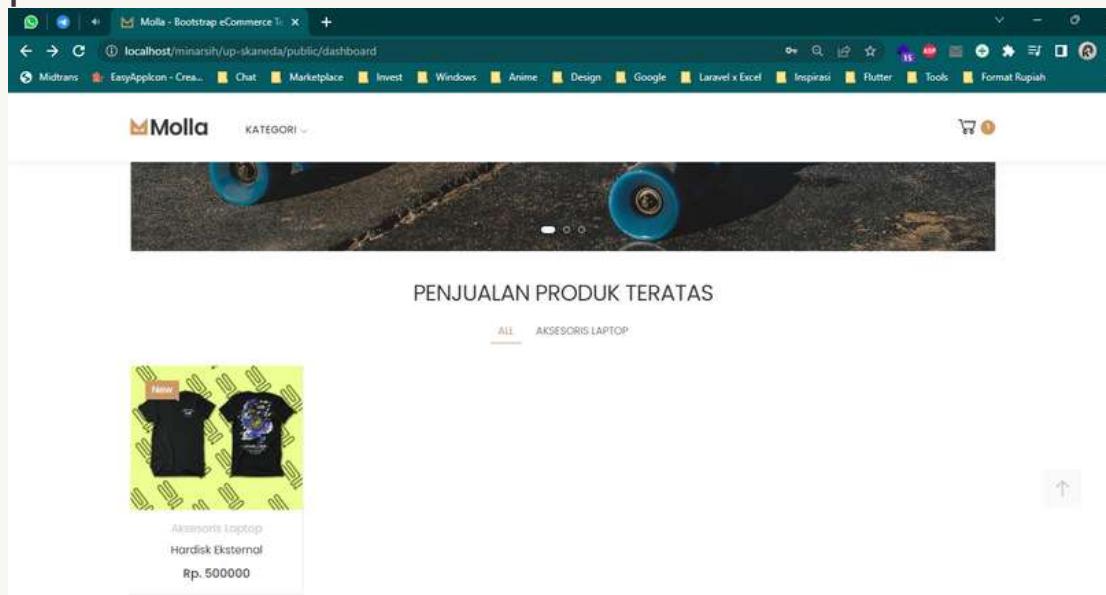

Nah kalau tampilan total keranjangnya 1 berarti sudah benar.

```
<span class="cart-count">{{count($get_keranjang)}}</span>
</div>
<div class="dropdown-menu dropdown-menu-right">
@if(count($get_keranjang) > 0)
<div class="product">
<div class="product-cart-details">
<h4 class="product-title">
Beige knitted elastic runner shoes
</h4>
<span class="cart-product-info">
<span class="cart-product-qty">1</span>
x $84.00
</span>
<a href="checkout.html" class="btn btn-outline-primary-2"><span>Bel</span></a>
<i class="icon-long-arrow-right"></i>
</div><!-- End .product-cart-details -->
<figure class="product-image-container">
<a href="product.html" class="product-image">
![Thumbnail image of a beige knitted elastic runner shoe]({{asset('template-user/assets/images/products/cart/product-1.jpg')}})
</a>
</figure>
<a href="#" class="btn-remove" title="Remove Product"><i class="icon-close"></i></a>
</div><!-- End .product -->
@else
<div>Tidak Ada Produk</div>
@endif
</div><!-- End .cart-product -->
```

Kita ubah syntax isi keranjang seperti ini. jika tidak ada produk di keranjang akan keluar tulisan "Tidak Ada Produk".

```
<span class="cart-count">{{count($get_keranjang)}}</span>
</div>
<div class="dropdown-menu dropdown-menu-right">


@if(count($get_keranjang) > 0)
@foreach($get_keranjang as $gk)
<div class="product">
<div class="product-cart-details">
<h4 class="product-title">
Beige knitted elastic runner shoes
</h4>
<span class="cart-product-info">
<span class="cart-product-qty">1</span>
x $84.00
</span>
<a href="checkout.html" class="btn btn-outline-primary-2"><span>Bel</span></a>
<i class="icon-long-arrow-right"></i>
</div><!-- End .product-cart-details -->
<figure class="product-image-container">
<a href="product.html" class="product-image">
![Thumbnail image of a beige knitted elastic runner shoe]({{asset('template-user/assets/images/products/cart/product-1.jpg')}})
</a>
</figure>
<a href="#" class="btn-remove" title="Remove Product"><i class="icon-close"></i></a>
</div><!-- End .product -->
@else
<div>Tidak Ada Produk</div>
@endif
</div><!-- End .cart-product -->



```

Kita foreach isi keranjang agar bisa keluar sesuai dengan yang ada di keranjang pembeli

```
<div class="product" style="border: 1px solid #ccc; padding: 10px; margin-bottom: 10px;">
<h4 class="product-title">
\({\$gk->nama\_produk}\)
</h4>
<span class="cart-product-info">
<span class="cart-product-qty">({$gk->qty})</span>
- Total : Rp. ({$gk->qty * $gk->harga_produk})
</span>
<a href="checkout.html" class="btn btn-outline-primary-2"><span>Bel</span></a>
<i class="icon-long-arrow-right"></i>
</div><!-- End .product-cart-details -->
<figure class="product-image-container">
<a href="product.html" class="product-image">


</a>
</figure>
<a href="#" class="btn-remove" title="Remove Product"><i class="icon-close"></i></a>
</div><!-- End .product -->
@else
<div>Tidak Ada Produk</div>
@endif
</div><!-- End .cart-product -->
</div><!-- End .dropdown-menu -->
header-right -->
siner -->
idle -->
```

Langkah selanjutnya yaitu kita memanfaatkan hapus produk keranjang agar berfungsi.

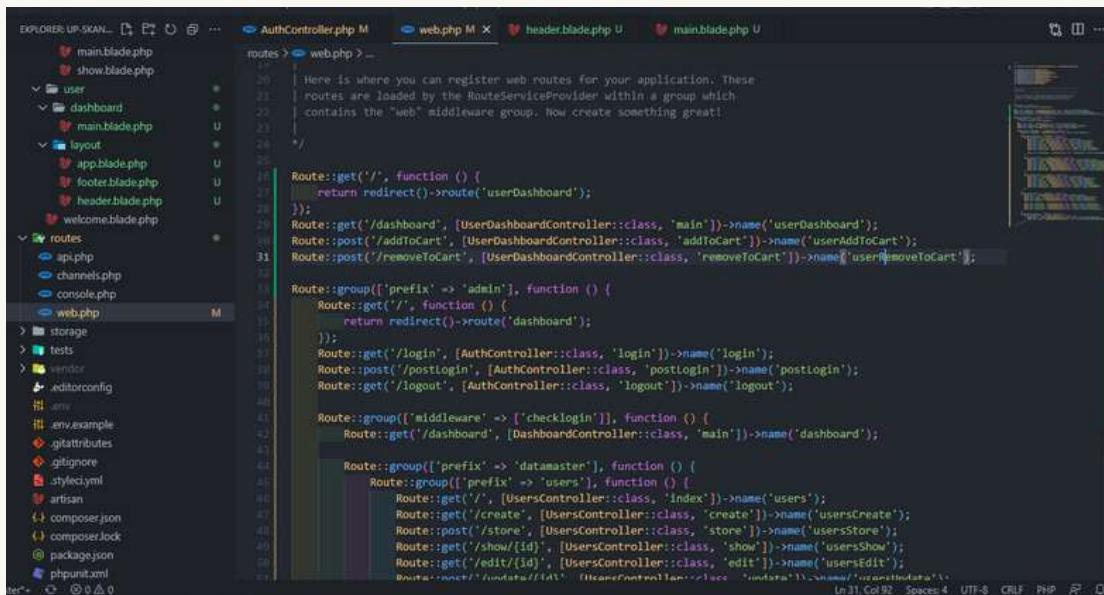

```
routes > web.php M
20 | Here is where you can register web routes for your application. These
21 | routes are loaded by the RouteServiceProvider within a group which
22 | contains the "web" middleware group. Now create something great!
23 |
24 |
25 | Route::get('/', function () {
26 |     return redirect()->route('userDashboard');
27 | });
28 |
29 | Route::get('/dashboard', [UserDashboardController::class, 'main'])->name('userDashboard');
30 | Route::post('/addCart', [UserDashboardController::class, 'addCart'])->name('userAddToCart');
31 | Route::post('/removeCart', [UserDashboardController::class, 'removeCart'])->name('userRemoveToCart');
32 |
33 | Route::group(['prefix' => 'admin'], function () {
34 |     Route::get('/', function () {
35 |         return redirect()->route('dashboard');
36 |     });
37 |     Route::get('/login', [AuthController::class, 'login'])->name('login');
38 |     Route::post('/postLogin', [AuthController::class, 'postLogin'])->name('postLogin');
39 |     Route::get('/logout', [AuthController::class, 'logout'])->name('logout');
40 |
41 |     Route::group(['middleware' => ['checkLogin']], function () {
42 |         Route::get('/dashboard', [DashboardController::class, 'main'])->name('dashboard');
43 |
44 |         Route::group(['prefix' => 'dataMaster'], function () {
45 |             Route::group(['prefix' => 'users'], function () {
46 |                 Route::get('/', [UsersController::class, 'index'])->name('users');
47 |                 Route::get('/create', [UsersController::class, 'create'])->name('usersCreate');
48 |                 Route::post('/store', [UsersController::class, 'store'])->name('usersStore');
49 |                 Route::get('/show/{id}', [UsersController::class, 'show'])->name('usersShow');
50 |                 Route::get('/edit/{id}', [UsersController::class, 'edit'])->name('usersEdit');
51 |             });
52 |         });
53 |     });
54 | });
55 |
56 | Route::group(['prefix' => 'keranjang'], function () {
57 |     Route::get('/cart', [KeranjangController::class, 'index'])->name('keranjang');
58 |     Route::post('/addCart', [KeranjangController::class, 'addCart'])->name('keranjangAdd');
59 |     Route::post('/removeCart', [KeranjangController::class, 'removeCart'])->name('keranjangRemove');
60 | });
61 |
62 | Route::group(['prefix' => 'transaksi'], function () {
63 |     Route::get('/transaksi', [TransaksiController::class, 'index'])->name('transaksi');
64 |     Route::post('/store', [TransaksiController::class, 'store'])->name('transaksiStore');
65 |     Route::post('/detail/{id}', [TransaksiDetailController::class, 'detail'])->name('transaksiDetail');
66 | });
67 |
68 | Route::group(['prefix' => 'produk'], function () {
69 |     Route::get('/produk', [ProdukController::class, 'index'])->name('produk');
70 |     Route::get('/produk/{id}', [ProdukController::class, 'detail'])->name('produkDetail');
71 |     Route::post('/addCart', [ProdukController::class, 'addCart'])->name('produkAddToCart');
72 | });
73 |
74 | Route::group(['prefix' => 'user'], function () {
75 |     Route::get('/login', [AuthController::class, 'login'])->name('login');
76 |     Route::post('/postLogin', [AuthController::class, 'postLogin'])->name('postLogin');
77 |     Route::get('/logout', [AuthController::class, 'logout'])->name('logout');
78 | });
79 |
80 | Route::group(['prefix' => 'admin'], function () {
81 |     Route::get('/dashboard', [DashboardController::class, 'main'])->name('dashboard');
82 | });
83 |
84 | // Check Dulu Diketahui Ada Produk
85 | // Yang Sama atau Tidak
86 | if(Auth::check()){
87 |     $check_keranjang = Keranjang::where('produk_id', $id)
88 |         ->where('user_id', Auth::id())
89 |         ->first();
90 |
91 |     $check_keranjang->delete();
92 |
93 |     if($check_keranjang){
94 |         return redirect()->route('userDashboard')
95 |             ->with('status', 'success')
96 |             ->with('message', 'Berhasil Menghapus Produk');
97 |     } else {
98 |         return redirect()->route('userDashboard')
99 |             ->with('status', 'error')
100 |             ->with('message', 'Gagal Menghapus Produk');
101 |     }
102 | } else {
103 |     return redirect()->route('userDashboard')
104 |         ->with('status', 'error')
105 |         ->with('message', 'Anda Belum Login!');
106 | }
107 |
108 | }
```


Kita tambahkan routenya di web.php

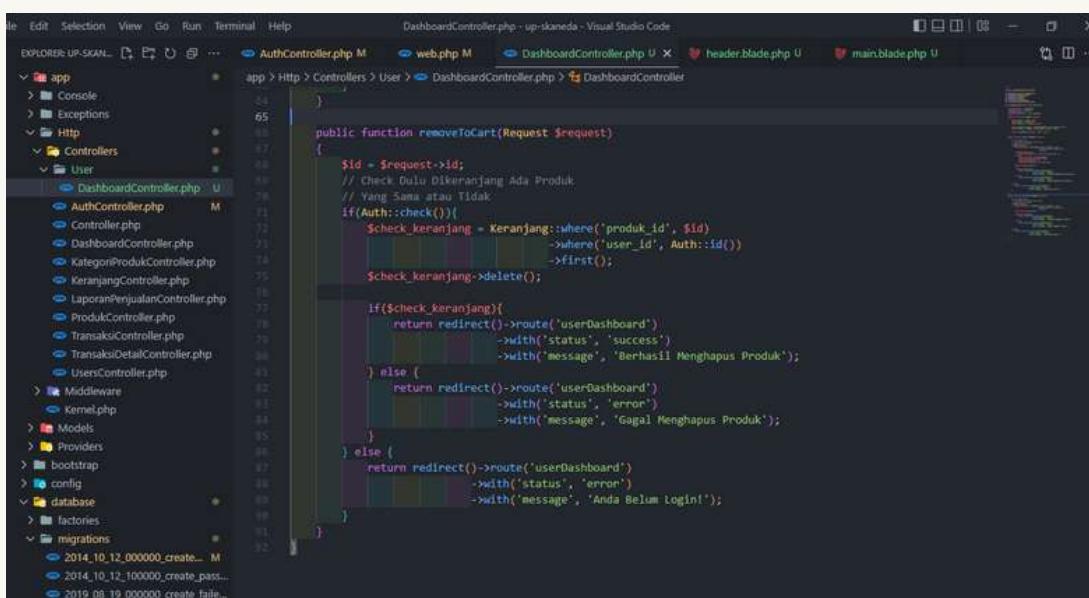

```
app > Http > Controllers > User > DashboardController.php > DashboardController
public function removeToCart(Request $request)
{
    $id = $request->id;
    // Check Dulu Diketahui Ada Produk
    // Yang Sama atau Tidak
    if(Auth::check()){
        $check_keranjang = Keranjang::where('produk_id', $id)
            ->where('user_id', Auth::id())
            ->first();
        $check_keranjang->delete();

        if($check_keranjang){
            return redirect()->route('userDashboard')
                ->with('status', 'success')
                ->with('message', 'Berhasil Menghapus Produk');
        } else {
            return redirect()->route('userDashboard')
                ->with('status', 'error')
                ->with('message', 'Gagal Menghapus Produk');
        }
    } else {
        return redirect()->route('userDashboard')
            ->with('status', 'error')
            ->with('message', 'Anda Belum Login!');
    }
}
```

Kita tambahkan function removeToCart di file DashboardController

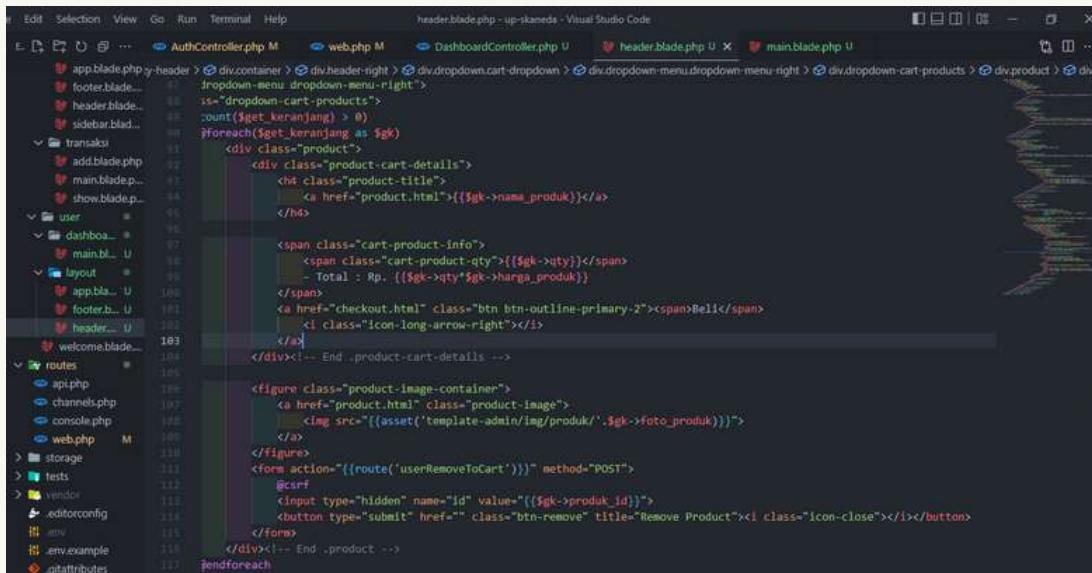


```
header.blade.php > up-skanned - Visual Studio Code



dropdown-cart-products">
    count($get_keranjang) > 0
    @foreach($get_keranjang as $gk)
        <div class="product">
            <div class="product-cart-details">
                <h4 class="product-title">
                    <a href="product.html">{$gk->nama_produk}</a>
                </h4>
                <span class="cart-product-info">
                    <span class="cart-product-qty">{$gk->qty}</span>
                    - Total : Rp. {{($gk->qty * $gk->harga_produk)}}
                </span>
                <a href="checkout.html" class="btn bttc-outline-primary-2">Beli</a>
                <i class="icon-long-arrow-right"></i>
            </div>
        </div><!-- End .product-cart-details -->
    @endforeach
    <figure class="product-image-container">
        <a href="product.html" class="product-image">
            
        </a>
    </figure>
    <form action="{{route('userRemoveToCart')}}" method="POST">
        @csrf
        <input type="hidden" name="id" value="{{$gk->produk_id}}>
        <button type="submit" href="#" class="btn-remove" title="Remove Product"><i class="icon-close"></i></button>
    </form>
</div><!-- End .product -->
@endforeach


```

Kita tambahkan syntax form yang mengarah ke route removeToCart tadi.

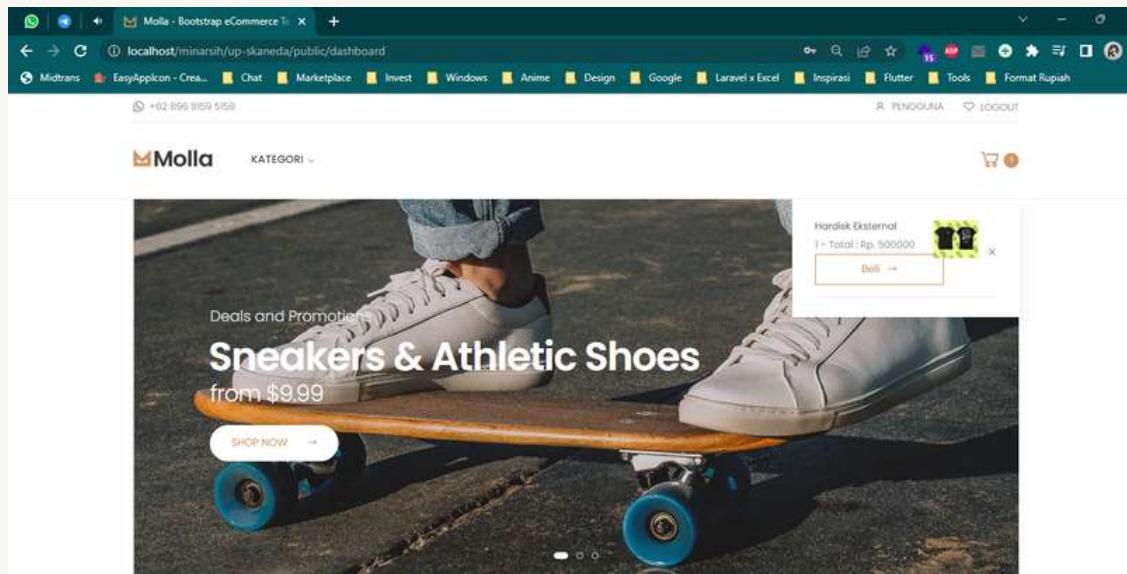

Jika sudah maka tampilannya akan seperti ini, mari kita coba klik tombol x

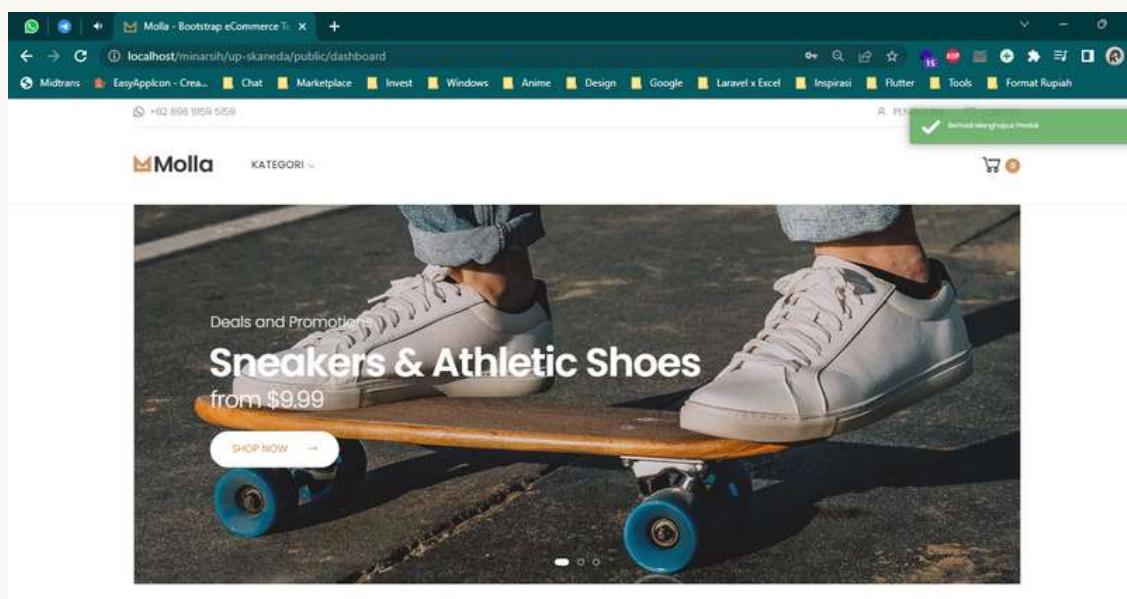


Maka akan keluar alert seperti ini. Berarti sudah berhasil.



# MEMBUAT CHECKOUT

Sebelum kita memasuki materi checkout, jangan lupa menambahkan satu produk ke keranjang lagi.

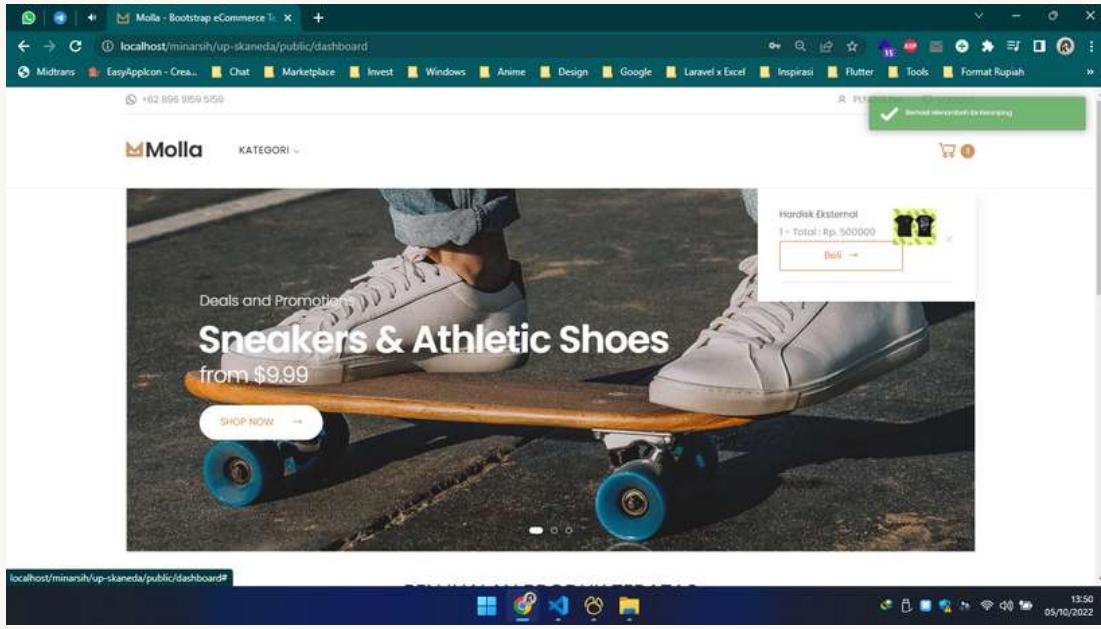

Jika sudah, kita kembali ke file header.blade.php, langkah kita selanjutnya yaitu memanfaatkan agar tombol beli ini berfungsi.

A screenshot of Visual Studio Code showing the file "header.blade.php" from the project "up-skanneda". The code is written in Blade templating language. It includes logic to check if items are in the cart and displays a list of products with their details and a "Beli" button. The code is annotated with several code snippets, likely from the previous image, showing the expanded HTML output for the "Beli" button.

```
<div class="dropdown-menu dropdown-menu-right">
    <div class="dropdown-cart-products">
        @if(count($get_keranjang) > 0)
            @foreach($get_keranjang as $gk)
                <div class="product">
                    <div class="product-cart-details">
                        <h4 class="product-title"><a href="product.html">{$gk->nama_produk}</a></h4>
                        <span class="cart-product-info">
                            <span class="cart-product-qty">({$gk->qty})</span>
                            - Total : Rp. {{($gk->qty)*$gk->harga_produk}}
                        </span>
                        <a href="checkout.html" class="btn btn-outline-primary-2"><span>Bell</span></a>
                    </div>
                </div>
            @endforeach
        </div><!-- End .product-cart-details -->
    </div>
</div><!-- End .dropdown-cart-products -->
<figure class="product-image-container">
    <a href="product.html" class="product-image">
        
    @csrf
    <input type="hidden" name="id" value="{{$gk->produk_id}}">
    <button type="submit" href="" class="btn-remove" title="Remove Product"><i class="icon-close"></i></button>
</form>
</div><!-- End .product -->

```

Kita buat folder baru dengan nama checkout

```
resources > views > user > checkout > main.blade.php
```

Lalu kita buat file main.blade.php di dalamnya.

```
@extends('user.layout.app')
@section('content')
    @endsection
```

Jika sudah, ketikkan syntax sebagai berikut.

```
public > template-user > checkout.html > html > body > div.page-wrapper > main.main
    </div><!-- End .dropdown-cart-total -->
</div><!-- End .dropdown-menu -->
</div><!-- End .header-right -->
</div><!-- End .container -->
</div><!-- End .header-middle -->
</header><!-- End .header -->
<main class="main">
    <div class="page-header next-center" style="background-image: url('assets/images/page-header-bg.jpg')">
        <div><!-- End .page-header -->
            <nav aria-label="breadcrumb" class="breadcrumb-nav">
                <ol><!-- End .breadcrumb-nav -->
                    <li>
                        <div class="page-content">
                            <div><!-- End .page-content -->
<main><!-- End .main -->
<footer class="footer">
    <div class="footer-middle">
        <div class="container">
            <div class="row">
                <div class="col-sm-6 col-lg-3">
                    <div class="widget widget-about">
                        
                        Praesent dapibus, neque id cursus ulibus, tortor neque egestas augue, eu vulputate
                </div>
                <div class="social-icons">
                    <a href="#" class="social-icon" target="_blank" title="Facebook"><i class="icon icon-facebook"></i></a>
                    <a href="#" class="social-icon" target="_blank" title="Twitter"><i class="icon icon-twitter"></i></a>
                    <a href="#" class="social-icon" target="_blank" title="Instagram"><i class="icon icon-instagram"></i></a>
                    <a href="#" class="social-icon" target="_blank" title="Youtube"><i class="icon icon-youtube"></i></a>
                </div>
            </div>
        </div>
    </div>
</footer>
```

Buka file checkout.html yang ada di public/template\_user, lalu copy yang ada di antara tag main.

```
resources > views > user > checkout > main.blade.php > ...
    <div class="card">
        <div class="card-header" id="heading-S">
            <h2 class="card-title">
                <a class="collapsed" role="button" data-toggle="collapse" href="#collapsing-S">
                    Credit Card (Stripe)
                    
            </h2>
        </div><!-- End .card-header -->
        <div id="collapsing-S" class="collapse" aria-labelledby="heading-S" data-parent="#checkout">
            <div class="card-body">Donec nec justo eget felis facilisis fermentum. Lor...
        </div><!-- End .card-body -->
    </div><!-- End .collapse -->
</div><!-- End .card -->
</div><!-- End .accordion -->
<div class="form-group">
    <button type="submit" class="btn btn-outline-primary-2 btn-order btn-block">
        <span class="btn-text">Bayar Sekarang</span>
        <span class="btn-hover-text">Proses Pesanan</span>
    </button>
</div><!-- End .summary -->
</div><!-- End .col-lg-3 -->
</div><!-- End .row -->
</div><!-- End .content -->
</div><!-- End .page-content -->
</div><!-- End .main -->
<footer class="footer">
    <div class="footer-middle">
        <div class="container">
            <div class="row">
                <div class="col-sm-6 col-lg-3">
                    <div class="widget widget-about">
                        
                        Praesent dapibus, neque id cursus ulibus, tortor neque egestas augue, eu vulputate
                </div>
                <div class="social-icons">
                    <a href="#" class="social-icon" target="_blank" title="Facebook"><i class="icon icon-facebook"></i></a>
                    <a href="#" class="social-icon" target="_blank" title="Twitter"><i class="icon icon-twitter"></i></a>
                    <a href="#" class="social-icon" target="_blank" title="Instagram"><i class="icon icon-instagram"></i></a>
                    <a href="#" class="social-icon" target="_blank" title="Youtube"><i class="icon icon-youtube"></i></a>
                </div>
            </div>
        </div>
    </div>
</footer>
```

Jika sudah, paste kan di antara section content, yang ada di file checkout/main.blade.php

```
if($cek_keranjang){
    return redirect()->route('userDashboard')
        ->with('status', 'success')
        ->with('message', 'Berhasil Menambah Ke Keranjang');
} else {
    return redirect()->route('userDashboard')
        ->with('status', 'error')
        ->with('message', 'Gagal Menambah Ke Keranjang');
}
```

Langkah selanjutnya, kita buat controller CheckoutController yang akan kita letakkan di dalam folder Controllers/User

The screenshot shows the Visual Studio Code interface with the file structure of a Laravel application. In the center, the code editor displays the newly created `CheckoutController.php` file under the `Http\Controllers\User` directory. The terminal at the bottom shows the command `php artisan make:controller User\CheckoutController` being run, with the response "Controller created successfully". The status bar indicates the file is saved and the current date and time.

Jika sudah maka tampilannya akan seperti ini.

The screenshot shows the `CheckoutController.php` file with its main function implemented. The function retrieves the user ID from the request, finds the corresponding user, and then finds the `Keranjang` (cart) associated with that user. It also finds the `Kabupaten`, `Provinsi`, and `Produk` (product) associated with the cart. Finally, it returns a view with the data. The terminal shows the command was successful.

Isi function main yang ada di dalam `CheckoutController.php` seperti ini.

The screenshot shows the `routes/web.php` file. It contains a single route definition: `Route::get('/', function () { return redirect()->route('userDashboard'); })`. This route maps the root URL to the `userDashboard` controller. The file also includes imports for various controllers and a note about registering web routes.

Jika sudah, buka route `web.php`, lalu importkan `CheckoutController`, jangan lupa pakai "as" ya.

The screenshot shows the Visual Studio Code interface with the file `AuthController.php` open. A new route has been added under the `web.php` group:

```
Route::get('/checkout', [UserCheckoutController::class, 'main'])->name('userCheckout');
```

Jika sudah, tambahkan route yang mengarah ke `CheckoutController` tadi.

The screenshot shows the Visual Studio Code interface with the file `header.blade.php` open. A form has been added to the header blade:

```
<form action="{{route('userCheckout')}}" method="POST">
    @csrf
    <input type="hidden" name="id" value="{{ $gk->id_keranjang}}>
    <button type="submit" class="btn btn-outline-primary-2"><i class="icon-long-arrow-right"></i>
    </button>
</form>
```

Tambahkan form yang mengapit tombol beli tadi. jangan lupa routenya mengarahkan ke checkout.

The screenshot shows the Visual Studio Code interface with the file `main.blade.php` open. A form for payment details has been added:

```
<div class="row">
    <div class="col-lg-9">
        <div class="row">
            <div class="col-sm-6">
                <label>Nama Lengkap </label>
                <input type="text" class="form-control" readonly value="{{ $user->nama_lengkap}}>
            </div><!-- End .col-sm-6 -->
            <div class="col-sm-6">
                <label>Username </label>
                <input type="text" class="form-control" readonly value="{{ $user->username}}>
            </div><!-- End .col-sm-6 -->
        </div><!-- End .row -->
        <div class="row">
            <div class="col-sm-6">
                <label>Alamat Lengkap </label>
                <textarea class="form-control" name="alamat_lengkap" cols="30" rows="5" placeholder="Nama Jalan, Desa / Perkiraan" required>{{ $user->alamat_lengkap}}</textarea>
            </div><!-- End .col-sm-6 -->
            <div class="col-sm-6">
                <label>Provinsi </label>
                <input type="text" class="form-control" readonly value="{{ $provinsi->nama_provinsi}}>
            </div><!-- End .col-sm-6 -->
        </div><!-- End .row -->
```

Kita buka `checkout/main.blade.php` lalu ubah syntax dengan sedemikian rupa.

File Edit Selection View Go Run Terminal Help main.blade.php - up-skaned - Visual Studio Code

```
resources > views > user > checkout > main.blade.php > div.page-content
    <div class="row">
        <div class="col-sm-6">
            <label>Kabupaten *</label>
            <input type="text" class="form-control" readonly value="{$skabupaten->nama_kabupaten}">
        </div><!-- End .col-sm-6 -->
    </div><!-- End .row -->

    <div class="row">
        <div class="col-sm-6">
            <label>Kode Pos *</label>
            <input type="text" name="kode_pos" class="form-control" readonly required value="{$user->kode_pos}">
        </div><!-- End .col-sm-6 -->
    </div><!-- End .row -->

    <div class="col-sm-6">
        <label>No HP *</label>
        <input type="tel" class="form-control" readonly required value="{$user->no_telp}">
    </div><!-- End .col-sm-6 -->
</div><!-- End .row -->

<label>Pengiriman *</label>
<select name="ekspedisi" id="" class="form-control" required>
    <option value="">... Pilih Pengiriman ...</option>
    <option value="jne">JNE</option>
    <option value="jnt">JNT</option>
    <option value="pos">POS</option>
</select>

<label>Catatan Pembeli (opsional)</label>
<textarea class="form-control" cols="30" rows="4" placeholder="Catatan Pembeli" name="catatan_pembeli"></textarea>
</div><!-- End .col-lg-9 -->
<aside class="col-lg-3">
    <div class="summary">
```

File Edit Selection View Go Run Terminal Help main.blade.php - up-skaned - Visual Studio Code

```
resources > views > user > checkout > main.blade.php > div.page-content
    <h3 class="summary-title">Detail Pesanan</h3><!-- End .summary-title -->

    <table class="table table-summary">
        <thead>
            <tr>
                <th>Produk</th>
                <th>Total</th>
            </tr>
        </thead>

        <tbody>
            <tr>
                <td><a href="#">{$produk->nama_produk}</a></td>
                <td>Rp. {{ $produk->harga_produk*$keranjang->qty }}</td>
            </tr>
            <tr class="summary-total">
                <td>Total:</td>
                <td>Rp. {{ $produk->harga_produk*$keranjang->qty }}</td>
            </tr>
        </tbody>
    </table><!-- End .table table-summary -->

    <button type="submit" class="btn btn-outline-primary-2 btn-order btn-block">
        <span class="btn-text">Bayar Sekarang</span>
        <span class="btn-hover-text">Proses Pesanan</span>
    </button>
</div><!-- End .summary -->
</aside><!-- End .col-lg-3 -->
</div><!-- End .row -->
</form>
</div><!-- End .container -->
</div><!-- End .checkout -->
```

Jika sudah selesai, kita buka CheckoutController

File Edit Selection View Go Run Terminal Help CheckoutController.php - up-skaned - Visual Studio Code


```
app > Http > Controllers > User > CheckoutController.php > proses
public function proses(Request $request)
{
    $id_user = $request->id_user;
    $id_keranjang = $request->id_keranjang;
    $stanggal_transaksi = date('Y-m-d');
    $ekspedisi = $request->ekspedisi;
    $catatan_pembeli = $request->catatan_pembeli;

    //pengesahan
    if (empty($id_user)) {
        return back()->withInput()->with('status', 'error')->with('message', 'Kolom Pembeli Harus Diisi');
    }
    if (empty($id_keranjang)) {
        return back()->withInput()->with('status', 'error')->with('message', 'Kolom Keranjang Harus Diisi');
    }
    if (empty($stanggal_transaksi)) {
        return back()->withInput()->with('status', 'error')->with('message', 'Kolom Tanggal Transaksi Harus Diisi');
    }
    if (empty($ekspedisi)) {
        return back()->withInput()->with('status', 'error')->with('message', 'Kolom Ekspedisi Harus Diisi');
    }
    if (empty($catatan_pembeli)) {
        $catatan_pembeli = '-';
    }

    $users = Users::find($id_user);
    $transaksi = Transaksi::orderBy('id_transaksi', 'DESC')->first();
    $kode_transaksi = 'TR-00' . ((int)substr($transaksi->kode_transaksi, 6) + 1);
    $keranjang = Keranjang::find($id_keranjang);

    //simpan
    $transaksi = new Transaksi();
```

Kita buat function baru, dengan nama proses, gunanya function ini digunakan untuk memproses data yang akan kita checkout.

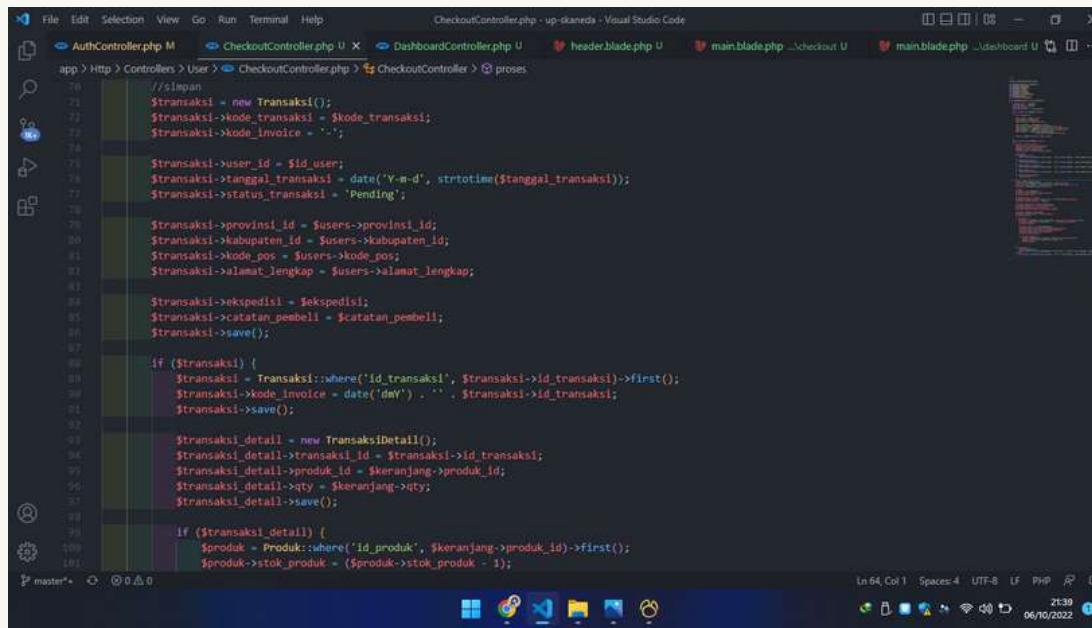

```
// Simpan
$transaksi = new Transaksi();
$transaksi->kode_transaksi = $kode_transaksi;
$transaksi->kode_invoice = '';
$transaksi->user_id = $id_user;
$transaksi->tanggal_transaksi = date('Y-m-d', strtotime($tanggal_transaksi));
$transaksi->status_transaksi = 'Pending';

$transaksi->provinsi_id = $users->provinsi_id;
$transaksi->kabupaten_id = $users->kabupaten_id;
$transaksi->kode_pos = $users->kode_pos;
$transaksi->alamat_lengkap = $users->alamat_lengkap;

$transaksi->ekspedisi = $ekspedisi;
$transaksi->catatan_pembeli = $catatan_pembeli;
$transaksi->save();

if ($transaksi) {
    $transaksi = Transaksi::where('id_transaksi', $transaksi->id_transaksi)->first();
    $transaksi->kode_invoice = date('dmY') . '' . $transaksi->id_transaksi;
    $transaksi->save();

    $transaksi_detail = new TransaksiDetail();
    $transaksi_detail->transaksi_id = $transaksi->id_transaksi;
    $transaksi_detail->produk_id = $keranjang->produk_id;
    $transaksi_detail->qty = $keranjang->qty;
    $transaksi_detail->save();


    if ($transaksi_detail) {
        $produk = Produk::where('id_produk', $keranjang->produk_id)->first();
        $produk->stok_produk -= ($produk->stok_produk - 1);
        $produk->save();
    }
}

if ($transaksi) {
    $transaksi = Transaksi::where('id_transaksi', $transaksi->id_transaksi)->first();
    $transaksi->kode_invoice = date('dmY') . '' . $transaksi->id_transaksi;
    $transaksi->save();

    $transaksi_detail = new TransaksiDetail();
    $transaksi_detail->transaksi_id = $transaksi->id_transaksi;
    $transaksi_detail->produk_id = $keranjang->produk_id;
    $transaksi_detail->qty = $keranjang->qty;
    $transaksi_detail->save();

    if ($transaksi_detail) {
        $produk = Produk::where('id_produk', $keranjang->produk_id)->first();
        $produk->stok_produk -= ($produk->stok_produk - 1);
        $produk->save();
    }

    if ($transaksi) {
        $keranjang->delete();
        return redirect()->route('userDashboard')->with('status', 'success')->with('message', 'Berhasil Menyimpan Data');
    } else {
        return back()->withInput()->with('status', 'error')->with('message', 'Gagal Menyimpan Data');
    }
}
```

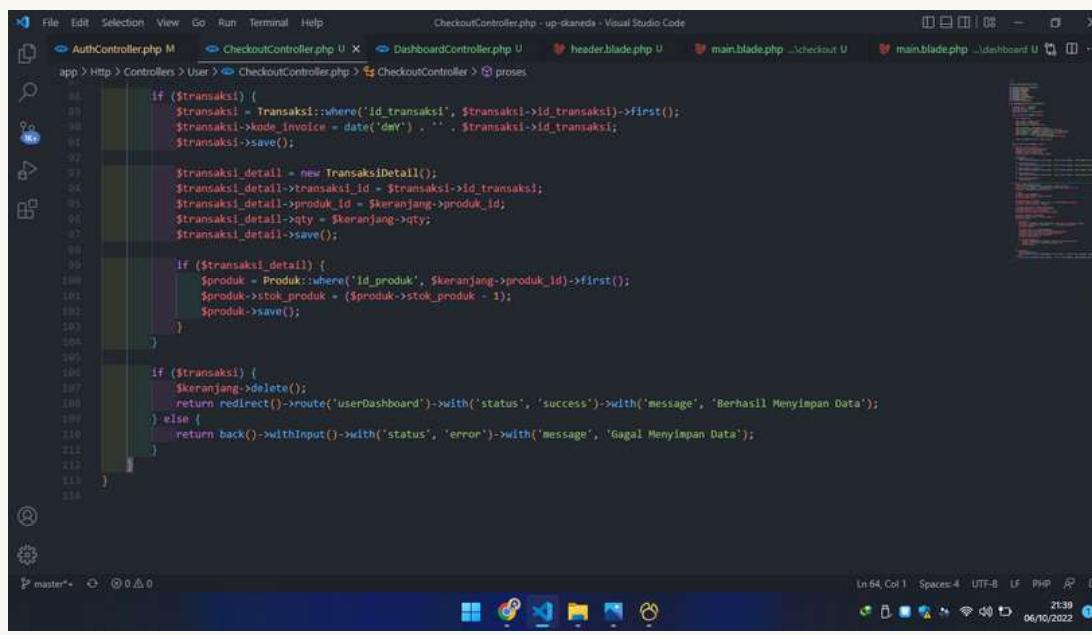


```
if ($transaksi) {
    $transaksi = Transaksi::where('id_transaksi', $transaksi->id_transaksi)->first();
    $transaksi->kode_invoice = date('dmY') . '' . $transaksi->id_transaksi;
    $transaksi->save();

    $transaksi_detail = new TransaksiDetail();
    $transaksi_detail->transaksi_id = $transaksi->id_transaksi;
    $transaksi_detail->produk_id = $keranjang->produk_id;
    $transaksi_detail->qty = $keranjang->qty;
    $transaksi_detail->save();

    if ($transaksi_detail) {
        $produk = Produk::where('id_produk', $keranjang->produk_id)->first();
        $produk->stok_produk -= ($produk->stok_produk - 1);
        $produk->save();
    }

    if ($transaksi) {
        $keranjang->delete();
        return redirect()->route('userDashboard')->with('status', 'success')->with('message', 'Berhasil Menyimpan Data');
    } else {
        return back()->withInput()->with('status', 'error')->with('message', 'Gagal Menyimpan Data');
    }
}
```

Jika sudah, kita buka routes web.php

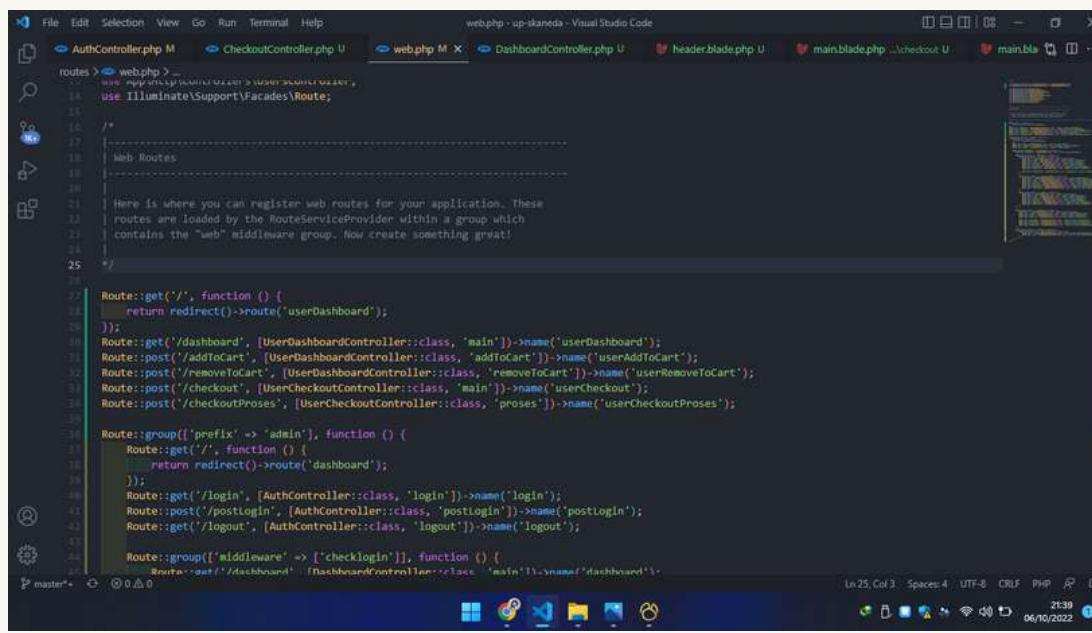

```
use Illuminate\Support\Facades\Route;

/*
| Web Routes
|
| Here is where you can register web routes for your application. These
| routes are loaded by the RouteServiceProvider within a group which
| contains the "web" middleware group. Now create something great!
|
*/


Route::get('/', function () {
    return redirect()->route('userDashboard');
});

Route::get('/dashboard', [UserDashboardController::class, 'main']->name('userDashboard'));
Route::post('/addToCart', [UserDashboardController::class, 'addToCart'])->name('userAddToCart');
Route::post('/removeFromCart', [UserDashboardController::class, 'removeFromCart'])->name('userRemoveFromCart');
Route::post('/checkout', [UserCheckoutController::class, 'main'])->name('userCheckout');
Route::post('/checkoutProses', [UserCheckoutController::class, 'proses'])->name('userCheckoutProses');


Route::group(['prefix' => 'admin'], function () {
    Route::get('/', function () {
        return redirect()->route('dashboard');
    });
    Route::get('/login', [AuthController::class, 'login']->name('login'));
    Route::post('/postlogin', [AuthController::class, 'postlogin']->name('postlogin'));
    Route::get('/logout', [AuthController::class, 'logout'])->name('logout');

    Route::group(['middleware' => ['checklogin']], function () {
        Route::get('/dashboard', [DashboardController::class, 'main']->name('dashboard'));
    });
});
```


Kita tambahkan route checkoutProses

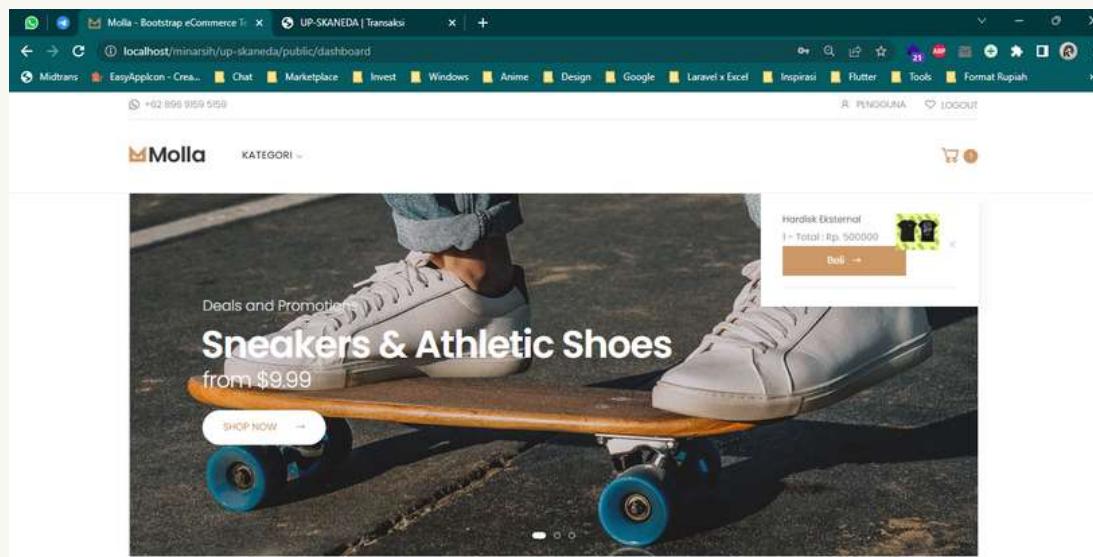

Jika kita buka web kita, maka akan seperti ini tampilannya, kita coba untuk menekan beli.

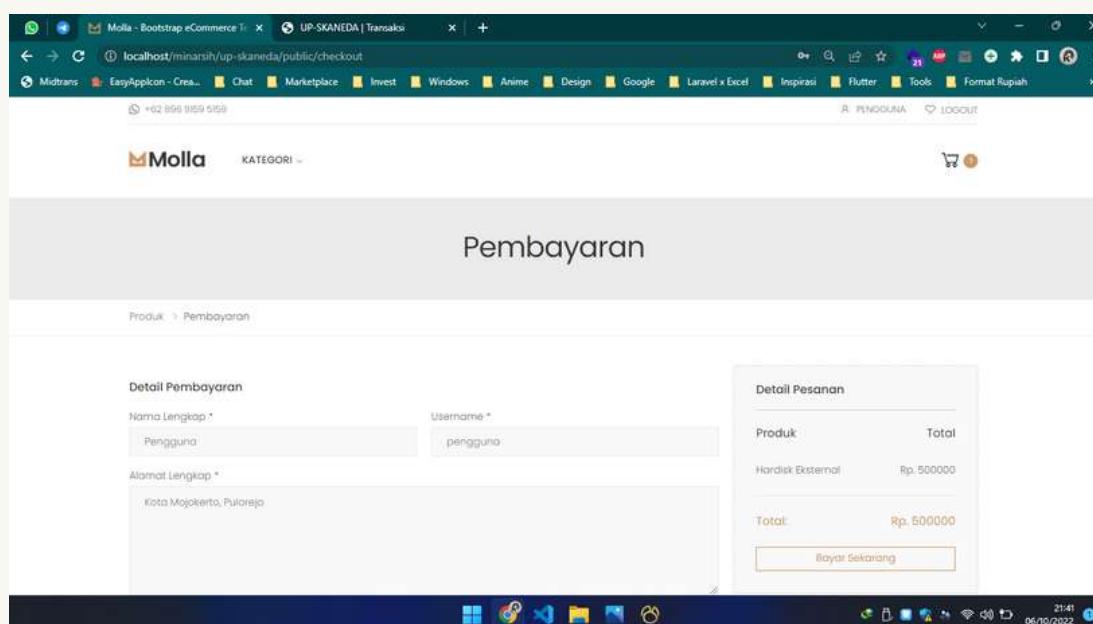

Maka akan keluar tampilan seperti ini.

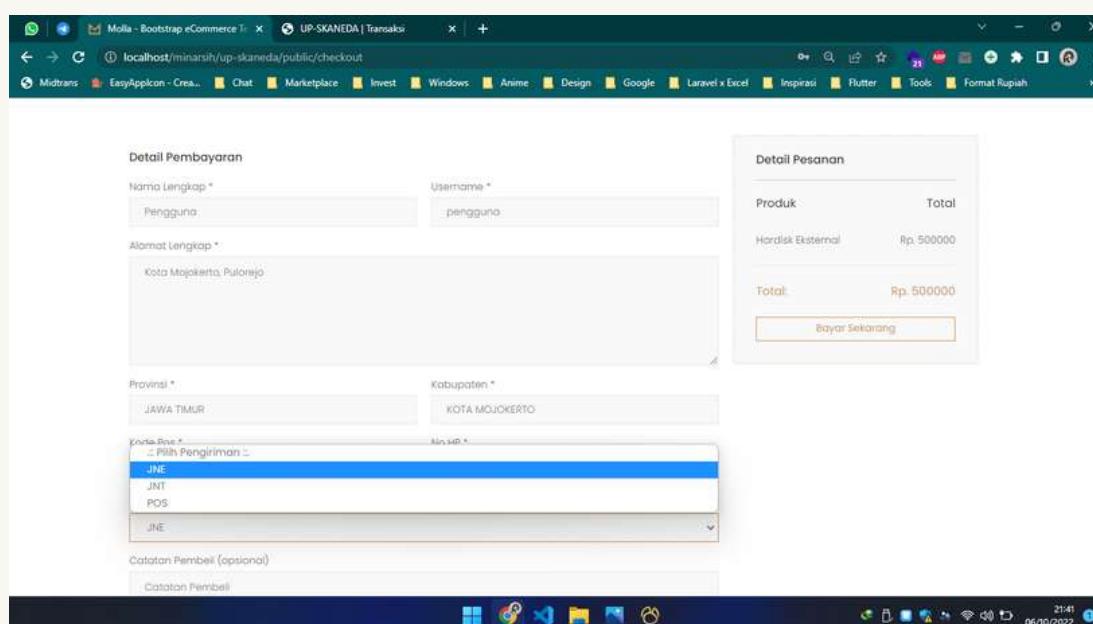

Kita pilih ekspedisi yang akan kita gunakan

Molla - Bootstrap eCommerce Ti UP-SKANEDA | Transaksi

KATEGORI

Provinsi \*

JAWA TIMUR

Kabupaten \*

KOTA MOJOKERTO

Kode Pos \*

61354

No HP \*

089691595159

Pengiriman \*

JNE

Catatan Pembeli (optional)

TARUH ETALASE YA MAS!

Lalu kita tambahkan catatan pembeli.

Molla - Bootstrap eCommerce Ti UP-SKANEDA | Transaksi

Produk > Pembayaran

Detail Pembayaran

Nama Lengkap \*

Pengguna

Username \*

pengguna

Alamat Lengkap \*

Kota Mojokerto, Pulorejo

Provinsi \*

JAWA TIMUR

Kabupaten \*

KOTA MOJOKERTO

Kode Pos \*

61354

No HP \*

089691595159


Pengiriman \*

Detail Pesanan

Produk	Total
Hondisi Eksternal	Rp. 500000
<b>Total:</b>	<b>Rp. 500000</b>

Proses Pesanan


Setelah itu kita tekan Proses Pesanan.

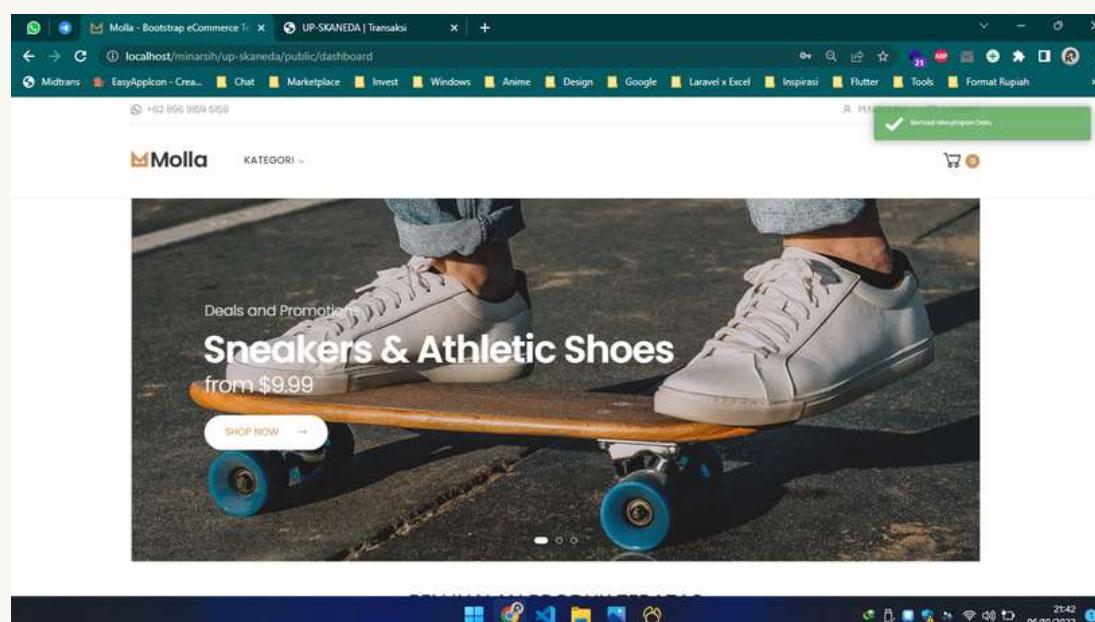


Jika sudah keluar aler seperti ini, berarti sudah berhasil checkout produk.



# MEMBUAT DETAIL PRODUK

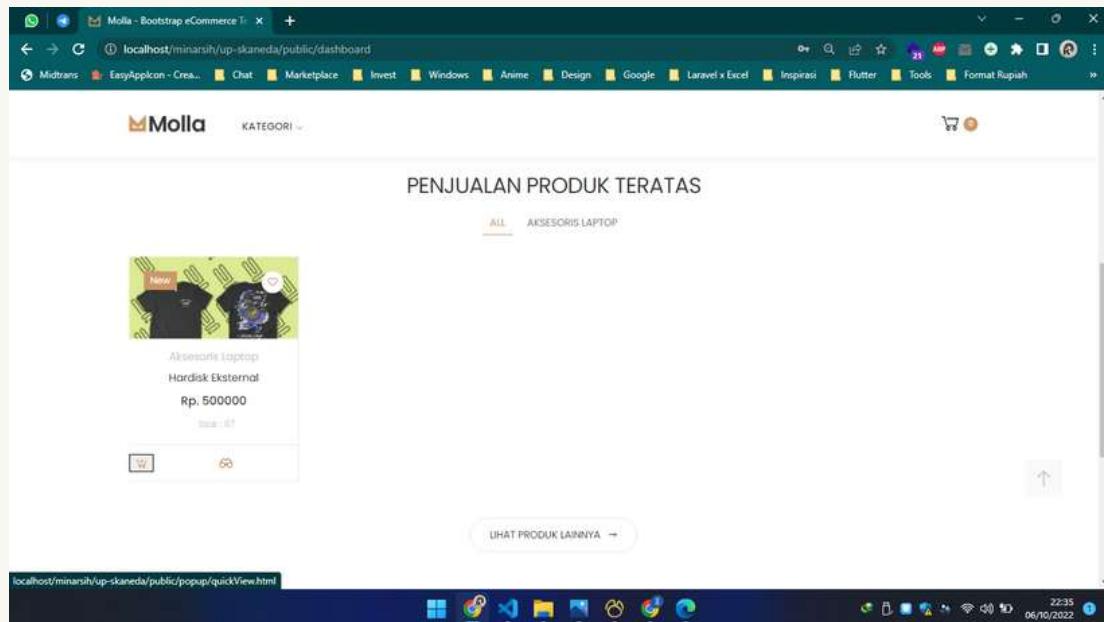

Kita kembali ke halaman dashboard, ke section produk, kita akan memperbaiki tampilan tombol tambah keranjang, dan tombol detail produknya.

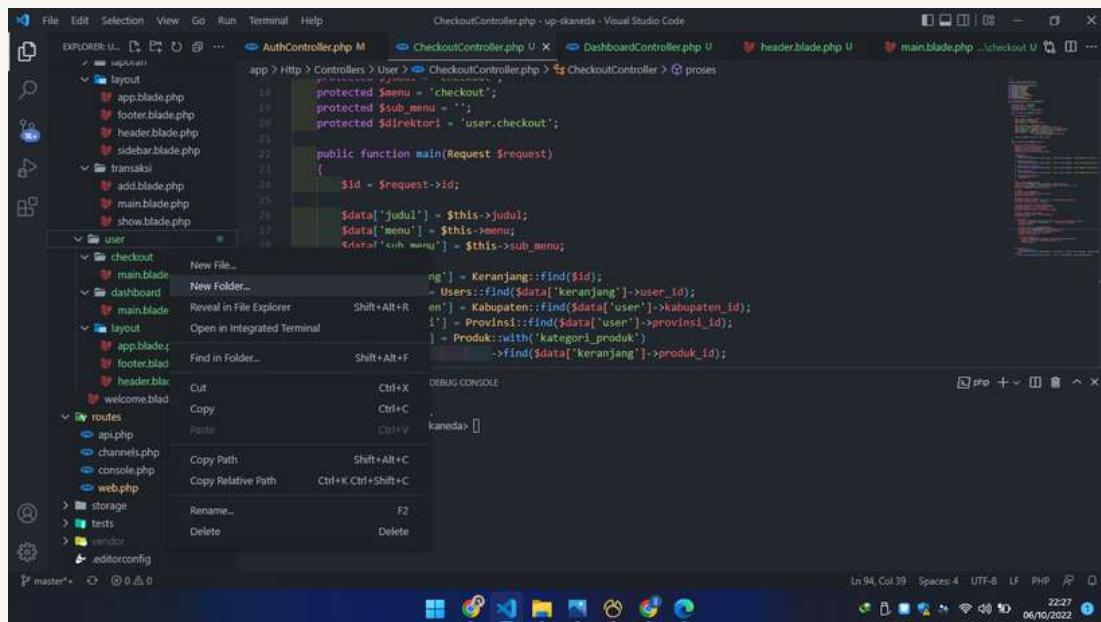

Kita buat folder baru dengan nama produk

```
File Edit Selection View Go Run Terminal Help main.blade.php - up-skanned - Visual Studio Code
EXPLORER U... D... E... resources > views > user > produk > main.blade.php
auth
dashboard
datamaster
laporan
layout
transaksi
user
checkout
main.blade.php
main.blade.php
header.blade.php
sidebar.blade.php
layout
transaksi
add.blade.php
main.blade.php
show.blade.php
user
checkout
main.blade.php
dashboard
main.blade.php
layout
app.blade.php
footer.blade.php
header.blade.php
produk
main.blade.php
welcome.blade.php
routes
api.php
channels.php
console.php
master* 0.0.0 0 intelphense 1.8.2 indexing - PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE Controller created successfully. PS D:\LARAGON\www\minarish\up-skanned> [In 4, Col 1] Spaces:4 UTF-8 CRLF Blade 22:28 06/10/2022
```

Jika sudah kita buat file main.blade.php didalam folder produk tersebut.

```
File Edit Selection View Go Run Terminal Help product.html - up-skanned - Visual Studio Code
EXPLORER U... D... E... main.blade.php - produk U product.html U DashboardController.php U header.blade.php U main.blade.php - checkout U
index-22.html
index-23.html
index-24.html
index.html
login.html
product-category-bo...
product-category-full...
product-centered.html
product-extended.html
product-fullwidth.html
product-gallery.html
product-masonry.html
product-sidebar.html
product-sticky.html
product.html
single-fullwidth-sideb...
single-fullwidth.html
single.html
wishlist.html
.htaccess
favicon.ico
index.php
robots.txt
web.config
resources
css
js
lang
views
main.blade.php
product.html
public > template_user > product.html > html > body > div.page-wrapper > @main
  <a href="cart.html" class="nav-link">Cart</a>
  <a href="checkout.html" class="btn btn-outline-primary-2">Checkout</a>
</div><!-- End .dropdown-menu -->
</div><!-- End .dropdown -->
</div><!-- End .header-right -->
</div><!-- End .container -->
</div><!-- End .header-middle -->
</header><!-- End .header -->
<main class="main">
  <nav aria-label="breadcrumb" class="breadcrumb-nav border-0 mb-0">
    <ol class="list-style-type-none">
      <li class="list-item"><a href="#">Home</a></li>
      <li class="list-item"><a href="#">Product</a></li>
    </ol>
  </nav>
  <div class="page-content">
    <div>
      <div>
        <div>
          <div>
            <div>
              <div>
                <div>
                  <div>
                    <div>
                      <div>
                        <div>
                          <div>
                            <div>
                              <div>
                                <div>
                                  <div>
                                    <div>
                                      <div>
                                        <div>
                                          <div>
                                            <div>
                                              <div>
                                                <div>
                                                  <div>
                                                    <div>
                                                      <div>
                                                        <div>
                                                          <div>
                                                            <div>
                                                              <div>
                                                                <div>
                                                                  <div>
                                                                    <div>
                                                                      <div>
                                                                        <div>
                                                                          <div>
                                                                            <div>
                                                                              <div>
                                                                                <div>
                                                                                  <div>
                                                                                    <div>
                                                                                      <div>
                                                                                        <div>
              </div><!-- End .rating-container -->
              </div><!-- End .product-action -->
              <a href="#" class="btn-product btn-cart">Add to Cart</a>
              <a href="popup/quickview.html" class="btn-product btn-quickview">Quick View</a>
            </div><!-- End .product-footer -->
          </div><!-- End .content -->
        </div><!-- End .owl-carousel -->
      </div><!-- End .page-content -->
    </div>
  </div>
</main><!-- End .main -->
<footer class="footer">
  <div class="container">
    <div class="row">
      <div class="col-sm-6 col-lg-3">
        <div class="widget widget-about">
          
          <p>Praesent dapibus, neque id cursus ucibus, tortor neque egestas augue, eu vulputate magna eget lacinia. Ut enim ac semper. Sed ut perspiciatis unde omnis iste natus error sit voluptatem accusamus et iusto odio dignissimos.
        </div>
      </div>
    </div>
  </div>
</footer>
<div class="page-bottom">
  <div>
    <div>
      <div>
        <div>
          <div>
            <div>
              <div>
                <div>
                  <div>
                    <div>
                      <div>
                        <div>
                          <div>
                            <div>
                              <div>
                                <div>
                                  <div>
                                    <div>
                                      <div>
                                        <div>
                                          <div>
                                            <div>
                                              <div>
                                                <div>
                                                  <div>
                                                    <div>
                                                      <div>
                                                        <div>
                                                          <div>
                                                            <div>
                                                              <div>
                                                                <div>
          </div><!-- End .rating-container -->
          </div><!-- End .product-action -->
          <a href="#" class="btn-product btn-cart">Add to Cart</a>
          <a href="popup/quickview.html" class="btn-product btn-quickview">Quick View</a>
        </div><!-- End .product-footer -->
      </div><!-- End .content -->
    </div>
  </div>
</div><!-- End .page-bottom -->
</div>
</body>
</html>
```

Kita buka file produk.html yang ada di dalam folder public/template\_user, lalu copy syntax diantara tag main.

```
File Edit Selection View Go Run Terminal Help main.blade.php - up-skanned - Visual Studio Code
EXPLORER U... D... E... main.blade.php - produk U product.html U DashboardController.php U header.blade.php U main.blade.php - checkout U
auth
dashboard
datamaster
laporan
layout
transaksi
user
checkout
main.blade.php
main.blade.php
header.blade.php
sidebar.blade.php
layout
transaksi
add.blade.php
main.blade.php
show.blade.php
user
checkout
main.blade.php
dashboard
main.blade.php
layout
app.blade.php
footer.blade.php
header.blade.php
produk
main.blade.php
welcome.blade.php
routes
api.php
channels.php
console.php
master* 0.0.0 0 intelphense 1.8.2 indexing - PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE Controller created successfully. PS D:\LARAGON\www\minarish\up-skanned> [In 13, Col 31] Spaces:4 UTF-8 CRLF Blade 22:29 06/10/2022
```

Jika sudah, pastekan di dalam section content file produk/main.blade.php.

The screenshot shows the Visual Studio Code interface with the file structure of a Laravel application. In the 'Controllers/User' folder, a new file 'ProdukController.php' is being created. The terminal output shows the command 'php artisan make:controller User\ProdukController' being run, and the response 'Controller created successfully.'

```
class DashboardController extends Controller
{
    protected $judul = 'Dashboard';
    protected $menu = 'dashboard';
    protected $sub_menu = '';
    protected $direktori = 'user.dashboard';

    public function main(Request $request)
    {
        $data['judul'] = $this->judul;
        $data['menu'] = $this->menu;
        $data['sub_menu'] = $this->sub_menu;
    }
}
```

Kita buat Controller baru, yaitu ProdukController yang akan ada di dalam folder Controllers/User.

The screenshot shows the Visual Studio Code interface with the file structure of a Laravel application. In the 'Controllers/User' folder, a new file 'ProdukController.php' is being created. The terminal output shows the command 'php artisan make:controller User\ProdukController' being run, and the response 'Controller created successfully.'

```
namespace App\Http\Controllers\User;

use App\Http\Controllers\Controller;
use Illuminate\Http\Request;

class ProdukController extends Controller
{
    //
```

Maka akan seperti ini tampilannya.

The screenshot shows the Visual Studio Code interface with the file structure of a Laravel application. The 'ProdukController.php' file is open, showing the 'main' function. The code has been modified to include a database query to fetch products based on a slug. The terminal output shows the command 'php artisan make:controller User\ProdukController' being run again, and the response 'Controller created successfully.'

```
protected $judul = 'Produk';
protected $menu = 'produk';
protected $sub_menu = '';
protected $direktori = 'user.produk';

public function main(Request $request)
{
    $slug = $request->slug;

    $data['judul'] = $this->judul;
    $data['menu'] = $this->menu;
    $data['sub_menu'] = $this->sub_menu;

    $data['produk'] = Produk::with('kategori_produk')
        ->where('slug_produk', $slug)
        ->first();

    return view($this->direktori.'.main', $data);
}
```

Ubah isi syntax function main sedemikian rupa.

```
use App\Http\Controllers\User\DashboardController as UserDashboardController;
use App\Http\Controllers\User\CheckoutController as UserCheckoutController;
use App\Http\Controllers\User\ProdukController as UserProdukController;

use App\Http\Controllers\AuthController;
use App\Http\Controllers\DashboardController;
use App\Http\Controllers\Kategori\ProdukController;
use App\Http\Controllers\LaporanController;
use App\Http\Controllers\LaporanPenjualanController;
use App\Http\Controllers\ProdukController;
use App\Http\Controllers\TransaksiController;
use App\Http\Controllers\UsersController;
use Illuminate\Support\Facades\Route;
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

```
Controller created successfully.
PS D:\LARAGON\www\minarsihup-skanned> php artisan make:controller User\ProdukController
Controller created successfully.
PS D:\LARAGON\www\minarsihup-skanned> 
```

## Import ProdukController ke routes web.php

```
Route::get('/', function () {
    return redirect()->route('userDashboard');
});

Route::get('/dashboard', [UserDashboardController::class, 'main'])->name('userDashboard');
Route::post('/addToCart', [UserDashboardController::class, 'addToCart'])->name('userAddToCart');
Route::post('/removeFromCart', [UserDashboardController::class, 'removeFromCart'])->name('userRemoveFromCart');
Route::post('/checkout', [UserCheckoutController::class, 'main'])->name('userCheckout');
Route::post('/checkoutProses', [UserCheckoutController::class, 'proses'])->name('userCheckoutProses');
Route::get('/produk/{slug}', [UserProdukController::class, 'main'])->name('userProduk');

Route::group(['prefix' => 'admin'], function () {
    Route::get('/', function () {
        return redirect()->route('dashboard');
    });
    Route::get('/login', [AuthController::class, 'login'])->name('login');
});
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

```
Controller created successfully.
PS D:\LARAGON\www\minarsihup-skanned> php artisan make:controller User\ProdukController
Controller created successfully.
PS D:\LARAGON\www\minarsihup-skanned> 
```

## Tambahkan route produk/{slug}


```
<div class="product-footer mb-1">
    <div class="ratings-container">
        <span class="ratings-text">Stok : {{ $p->stok_produk }}</span>
    </div><!-- End .rating-container -->

    <div class="product-action"> ...
        <form action="{{ route('userAddToCart') }}" method="POST">
            @csrf
            <input type="hidden" name="id" value="{{ $p->id_produk }}>
            <button type="submit" class="btn btn-primary mb-1">Tambah Ke Keranjang</button>
        </form>
        <a href="{{ route('userProduk', $p->slug_produk) }}" class="btn btn-success">Detail Produk</a>
    </div><!-- End .product-action -->
</div><!-- End .product-footer -->
```

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE

```
Controller created successfully.
PS D:\LARAGON\www\minarsihup-skanned> php artisan make:controller User\ProdukController
Controller created successfully.
PS D:\LARAGON\www\minarsihup-skanned> 
```


Kita buka file dashboard/main.blade.php , kita cari class product-footer, lalu ubah syntax sedemikian rupa.

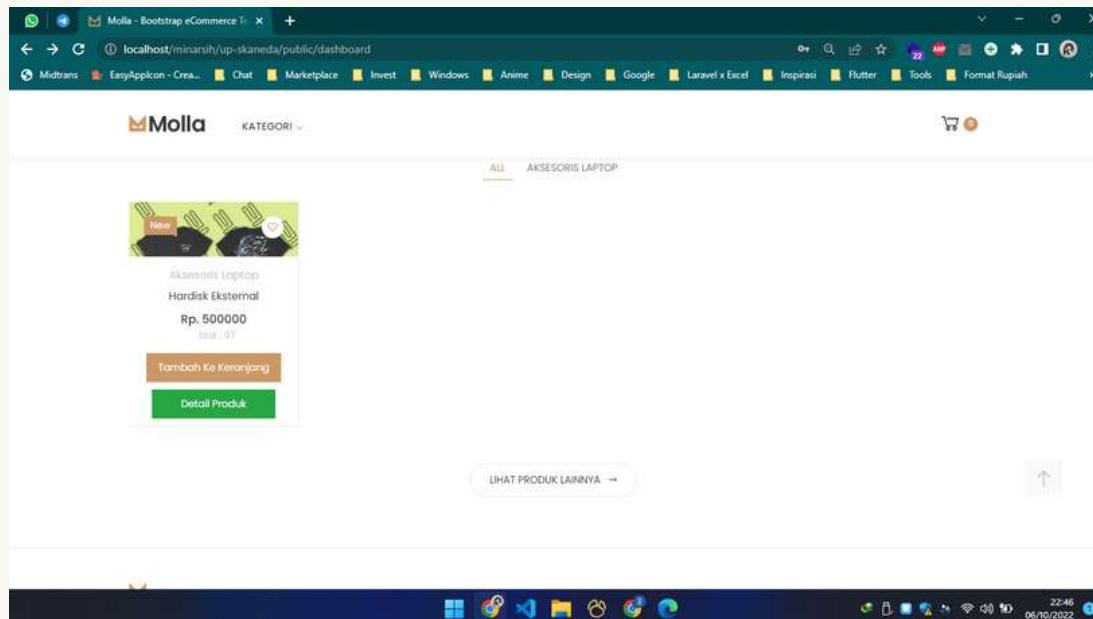

Kira-kira seperti ini tampilannya.


```
header.blade.php - up-skanned - Visual Studio Code
resources > views > user > layout > header.blade.php > header.header > div.header-middle-sticky-header > div.container > div.header-left > a.logo
  <a href="index.html" class="logo">
    
  </a>
```

Buka file header.blade.php, ubah href"index.html" menjadi href"{{route('userDashboard')}}" agar ketika logo molla dipencet, mengarah ke dashboard user.

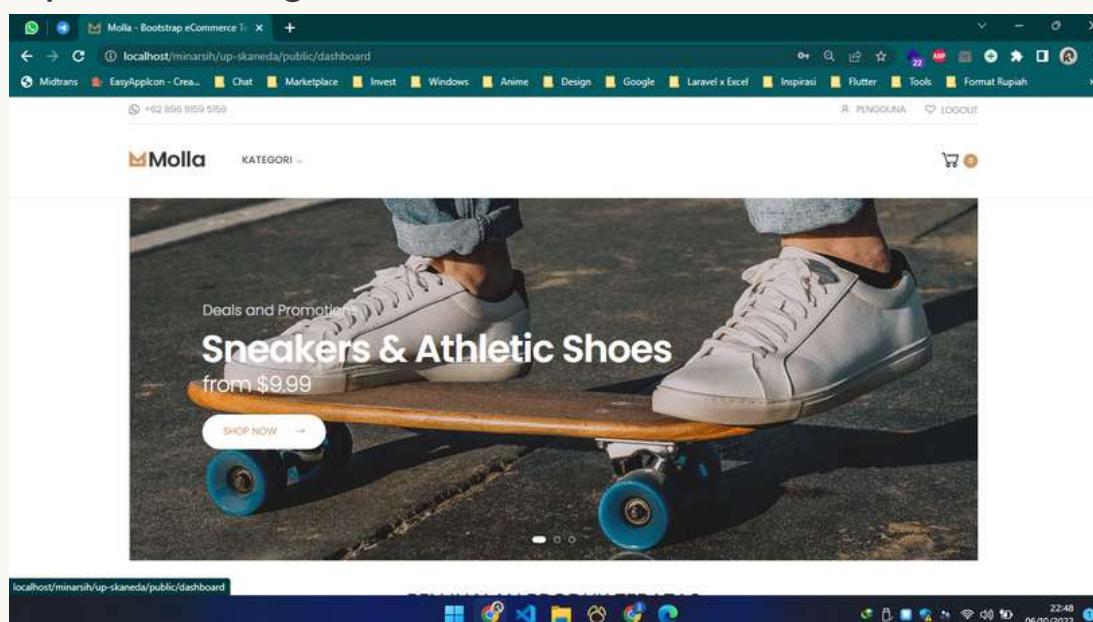


Kira-kira seperti ini kalau logonya dipencet.

Ubah main.blade.php yang ada di dalam folder produk, sedemikian rupa.

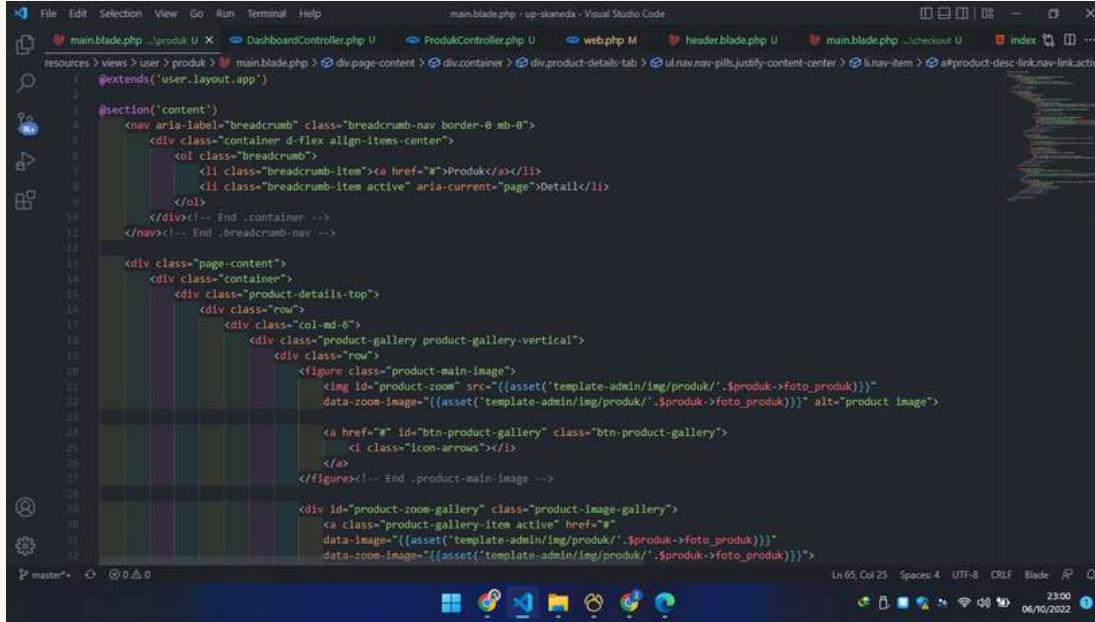


```
<!-- Extends user.layout.app -->
@section('content')
    <nav aria-label="breadcrumb" class="breadcrumb-nav border-0 mb-0">
        <div class="container d-flex align-items-center">
            <ol class="breadcrumb">
                <li class="breadcrumb-item"><a href="#">Produk</a></li>
                <li class="breadcrumb-item active" aria-current="page">Detail</li>
            </ol>
        </div><!-- End .container -->
    </nav><!-- End .breadcrumb-nav -->

    <div class="page-content">
        <div class="container">
            <div class="product-details-top">
                <div class="row">
                    <div class="col-md-6">
                        <div class="product-gallery product-gallery-vertical">
                            <div class="row">
                                <figure class="product-main-image">
                                    foto_produk)}}"/>
                                    <a href="#" id="btn-product-gallery" class="btn-product-gallery">
                                        <i class="icon-arrows"></i>
                                    </a>
                                </figure><!-- End .product-main-image -->
                                <div id="product-zoom-gallery" class="product-image-gallery">
                                    <a class="product-gallery-item active" href="#" data-image="{{asset('template-admin/img/produk/'.$produk->foto_produk)}}"
                                       data-zoom-image="{{asset('template-admin/img/produk/'.$produk->foto_produk)}}">
                                        
                                    </a>
                                </div><!-- End .product-image-gallery -->
                            </div><!-- End .row -->
                        </div><!-- End .product-gallery -->
                    </div><!-- End .col-md-6 -->
                </div><!-- End .row -->
            </div><!-- End .product-details-top -->
```

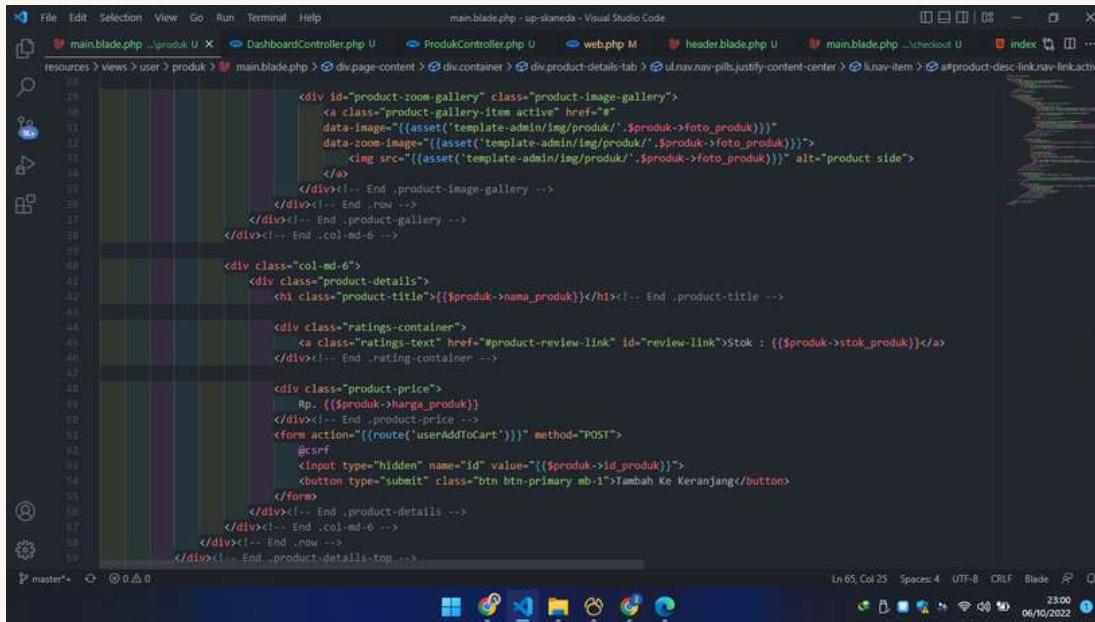

```
                <div class="product-details">
                    <h1 class="product-title">{{ $produk->nama_produk }}</h1><!-- End .product-title -->
                    <div class="ratings-container">
                        <a class="ratings-text" href="#product-review-link" id="review-link">Stok : {{ $produk->stok_produk }}</a>
                    </div><!-- End .rating-container -->
                    <div class="product-price">
                        Rp. {{ $produk->harga_produk }}
                    </div><!-- End .product-price -->
                    <form action="{{route('userAddToCart')}}" method="POST">
                        @csrf
                        <input type="hidden" name="id" value="{{ $produk->id_produk }}" />
                        <button type="submit" class="btn btn-primary mb-1">Tambah Ke Keranjang</button>
                    </form>
                </div><!-- End .product-details -->
            </div><!-- End .col-md-6 -->
        </div><!-- End .row -->
    </div><!-- End .product-details-top -->
```

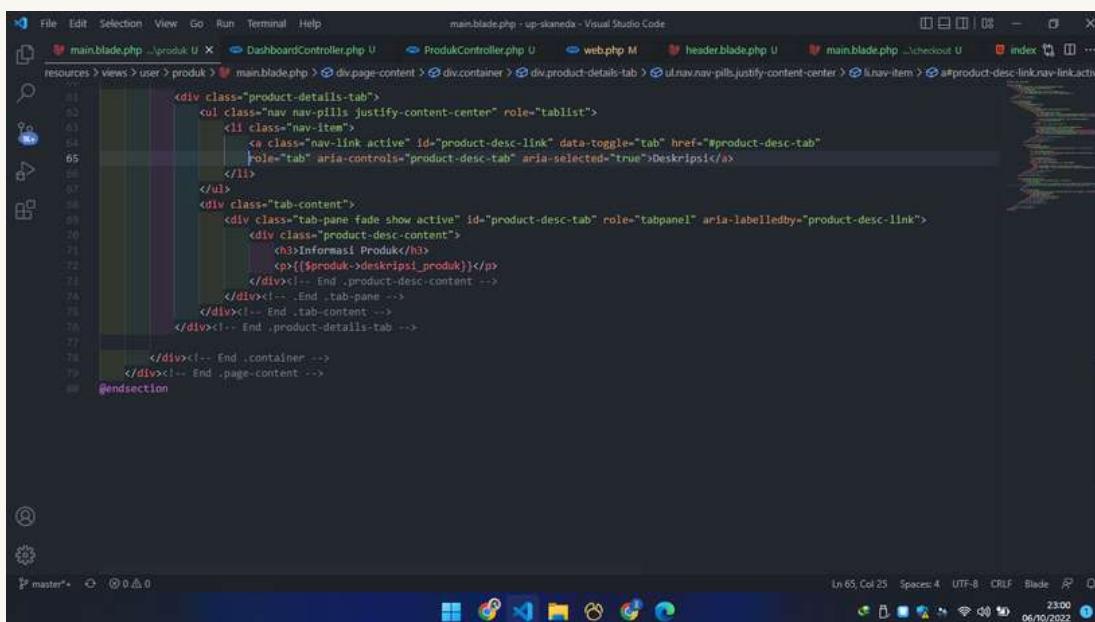

```
<div class="product-details-tab">
    <ul class="nav nav-pills justify-content-center" role="tablist">
        <li class="nav-item">
            <a class="nav-link active" id="product-desc-link" data-toggle="tab" href="#product-desc-tab"
               role="tab" aria-controls="product-desc-tab" aria-selected="true">Deskripsi</a>
        </li>
    </ul>
    <div class="tab-content">
        <div class="tab-pane fade show active" id="product-desc-tab" role="tabpanel" aria-labelledby="product-desc-link">
            <div class="product-desc-content">
                <h3>Informasi Produk</h3>
                <p>{{ $produk->deskripsi_produk }}</p>
            </div><!-- End .product-desc-content -->
        </div><!-- End .tab-pane -->
    </div><!-- End .tab-content -->
</div><!-- End .product-details-tab -->

```

A screenshot of a web browser displaying a product card on a website. The card features a small image of a black laptop with a green 'New' badge. Below the image is the text 'Aksesoris Laptop' and 'Hardisk Eksternal'. A price of 'Rp. 500000' is listed with a quantity selector set to '1'. Two buttons are visible: 'Tambah Ke Keranjang' (Add to Cart) in orange and 'Detail Produk' (Product Details) in green. At the bottom right of the card is a small upward arrow icon.


A screenshot of a Windows desktop environment. The taskbar at the bottom shows various pinned icons and the date/time '06/10/2022 23:00'. The system tray on the right side of the taskbar displays icons for battery level, signal strength, and other system status.

Kita coba buka dasboard user lalu coba kita tekan tombol Detail Produk

A screenshot of a web browser showing the product detail page for a 'Hardisk Eksternal'. The page includes a large image of two black t-shirts with a yellow graphic design. The product name 'Hardisk Eksternal' and price 'Rp. 500000' are displayed above a 'Tambah Ke Keranjang' button. Below the image, there's a section titled 'Deskripsi' (Description) which contains the text 'Informasi Produk' and 'Hardisk Eksternal 500 GB'. The interface is identical to the one shown in the first screenshot, with the same navigation bar and footer.

Maka Akan sepertiini tampilan detail produknya.

A screenshot of the website's footer area. It includes a logo with a stylized 'M', social media links for Facebook, Twitter, Instagram, YouTube, and LinkedIn, and a copyright notice: 'Præsent dapibus, neque id cursus uicibus; tortor neque egestas augue, eu vulputate magna eros eu erat.' Below the footer is a footer bar with icons for payment methods like Visa, Mastercard, and American Express, along with links for 'Payment Methods', 'Money-back guarantee!', 'Returns', 'Shipping', 'Terms and conditions', and 'Privacy Policy'. The footer also includes sections for 'Customer Service' (with links to 'Sign In', 'View Cart', '>Returns', 'Shipping', 'Terms and conditions', and 'Privacy Policy') and 'My Account' (with links to 'Sign In', 'View Cart', 'My Wishlist', 'Track My Order', and 'Help'). The footer bar also shows the date/time '06/10/2022 23:00'.

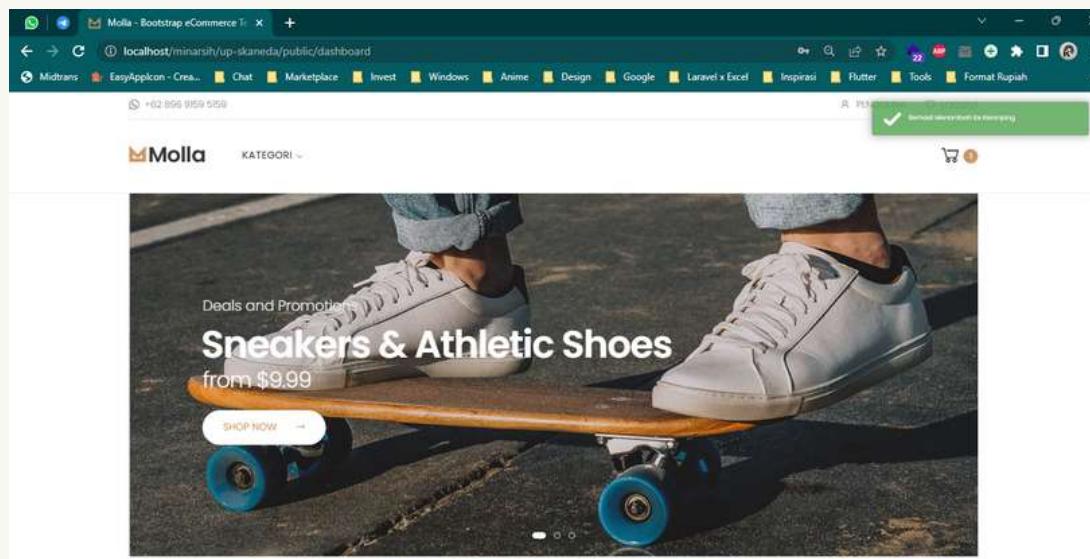


Jika kita pencet Tambah Ke Keranjang, maka keluar alert seperti ini.




# RIWAYAT CHECKOUT

Di dalam folder checkout, kita buat file history.blade.php

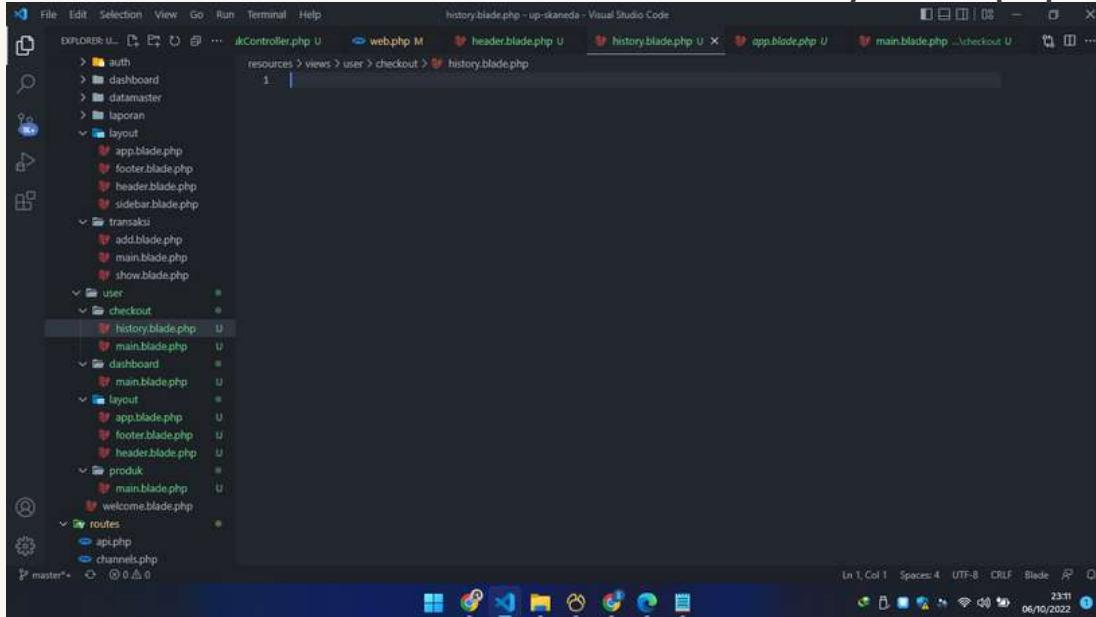

Jika sudah isi file history.blade.php dengan syntax seperti ini.

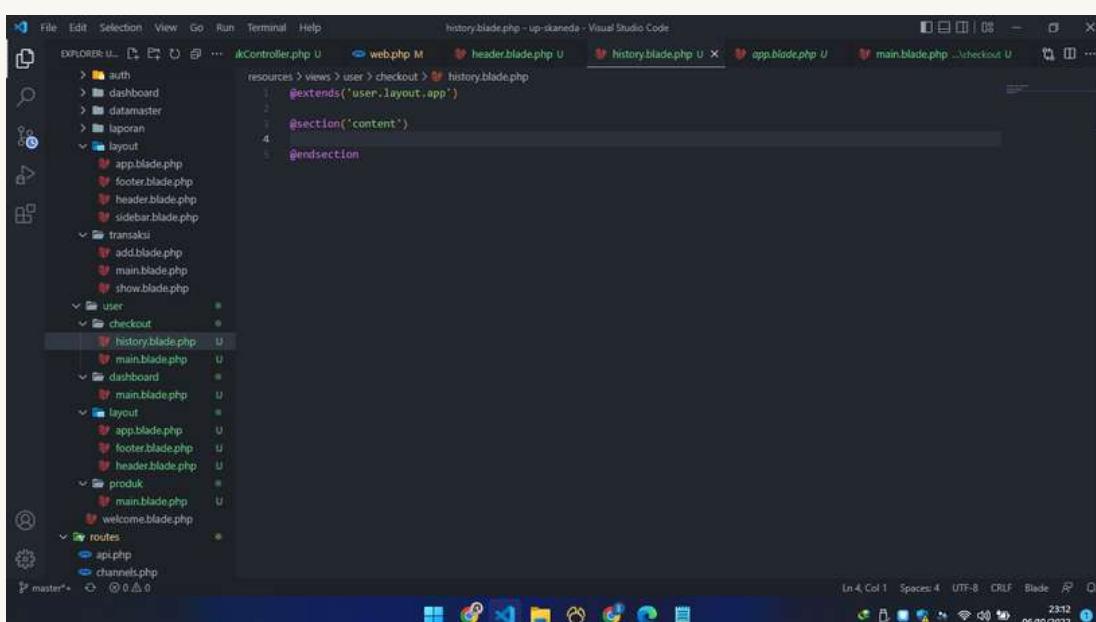

```
<main>
    <header>
        <a href="cart.html">main</a>
        <a href="checkout.html">Layanan</a>
        <a href="wishlist.html">WishList</a>
    </header>
    <div class="page-content">
        <div><!-- End .page-header -->
        <nav aria-label="breadcrumb" class="breadcrumb-nav">
            <ol><li>Home</li><li>Checkout</li><li>WishList</li></ol>
        </nav><!-- End .breadcrumb-nav -->
        <div><!-- End .page-content -->
    </main><!-- End .main -->
    <footer>
        <div><!-- End .page-footer -->
        <div><!-- End .page-middle -->
            <div><!-- End .container -->
                <div><!-- End .row -->
                    <div class="col-sm-6 col-lg-3">
                        <div><!-- End .widget-about -->
                            
                            <p>praesent dapibus, neque id cursus ucibus, tortor neque egestas augue, eu vulpo</p>
                        </div>
                    </div>
                    <div class="social-icons">
                        <a href="#" class="social-icon" target="_blank" title="Facebook"><i class="icon-facebook"></i>
                        <a href="#" class="social-icon" target="_blank" title="Twitter"><i class="icon-twitter"></i>
                        <a href="#" class="social-icon" target="_blank" title="Instagram"><i class="icon-instagram"></i>
                        <a href="#" class="social-icon" target="_blank" title="YouTube"><i class="icon-youtube"></i>
                        <a href="#" class="social-icon" target="_blank" title="Pinterest"><i class="icon-pinterest"></i>
                    </div>
                </div>
            </div>
        </div>
    </footer>

```

Buka file whishlist.html lalu copy isi di dalam tag main.

```
<div>
    <div><!-- End .product-title -->
        <div><!-- End .product-->
    </div>
    <td class="price-col">$52.00</td>
    <td class="stock-col"><span>Out of stock</span></td>
    <td class="action-col">
        <button class="btn btn-block btn-outline-primary-2 disabled">Out of Stock</button>
    </td>
    <td class="remove-col"><button class="btn-remove"><i class="icon-close"></i></button></td>
</tr>
</tbody>
</table><!-- End .table.table-wishlist -->
<div class="wishlist-share">
    <div class="social-icons social-icons-sm mb-2">
        <label class="social-label">Share on:</label>
        <a href="#" class="social-icon" title="Facebook" target="_blank"><i class="icon-facebook-f"></i>
        <a href="#" class="social-icon" title="Twitter" target="_blank"><i class="icon-twitter"></i>
        <a href="#" class="social-icon" title="Instagram" target="_blank"><i class="icon-instagram"></i>
        <a href="#" class="social-icon" title="YouTube" target="_blank"><i class="icon-youtube"></i>
        <a href="#" class="social-icon" title="Pinterest" target="_blank"><i class="icon-pinterest"></i>
    </div>
</div><!-- End .wishlist-share -->
</div><!-- End .page-content -->

```

Jika sudah pastekan di dalam section content file history.blade.php

```
public function history(Request $request)
{
    if(Auth::check()){
        $data['judul'] = $this->judul;
        $data['menu'] = $this->menu;
        $data['sub_menu'] = $this->sub_menu;

        $data['transaksi'] = Transaksi::with('users')
            ->with('provinsi')
            ->with('kabupaten')
            ->with('transaksi_detail')
            ->with('transaksi_detail.produk')
            ->where('user_id', Auth::id())
            ->get();

        return view($this->direktori.'history', $data);
    } else {
        return redirect()->route('userDashboard')
            ->with('status', 'error')
            ->with('message', 'Anda Belum Login!');
    }
}
```

Buka file CheckoutController.php lalu buat function history, dan isi dengan syntax sepertiini.

```


</ul>
</div><!-- End .top-menu -->
</div><!-- End .header-dropdown -->
</div><!-- End .header-left -->

<div class="header-right">
    <div class="header-dropdown">
        <ul class="top-menu">
            <li>
                <a href="#">Links</a>
            <ul>
                @if(Auth::check())
                    <li><a href="{{route('userCheckoutHistory')}}"><i class="icon-home"></i>Riwayat Checkout</a></li>
                    <li><a href="#"><i class="icon-user"></i>{{Auth::user()->nama_lengkap}}</a></li>
                    <li><a href="{{route('logout')}}"><i class="icon-heart-o"></i>Logout</a></li>
                @else
                    <li><a href="{{route('login')}}"><i class="icon-user"></i>Login</a></li>
                @endif
            </ul>
        </ul>
    </div><!-- End .top-menu -->
</div><!-- End .header-dropdown -->
</div><!-- End .header-right -->
</div><!-- End .container -->
</div><!-- End .header-top -->


<div class="header-middle sticky-header">
    <div class="container">
        <div class="header-left">
            <button class="mobile-menu-toggle">
                <span class="sr-only">Toggle mobile menu</span>
            </button>
        </div>
    </div>

```

Buka file header.blade.php lalu tambahkan a href ke riwayatCheckout

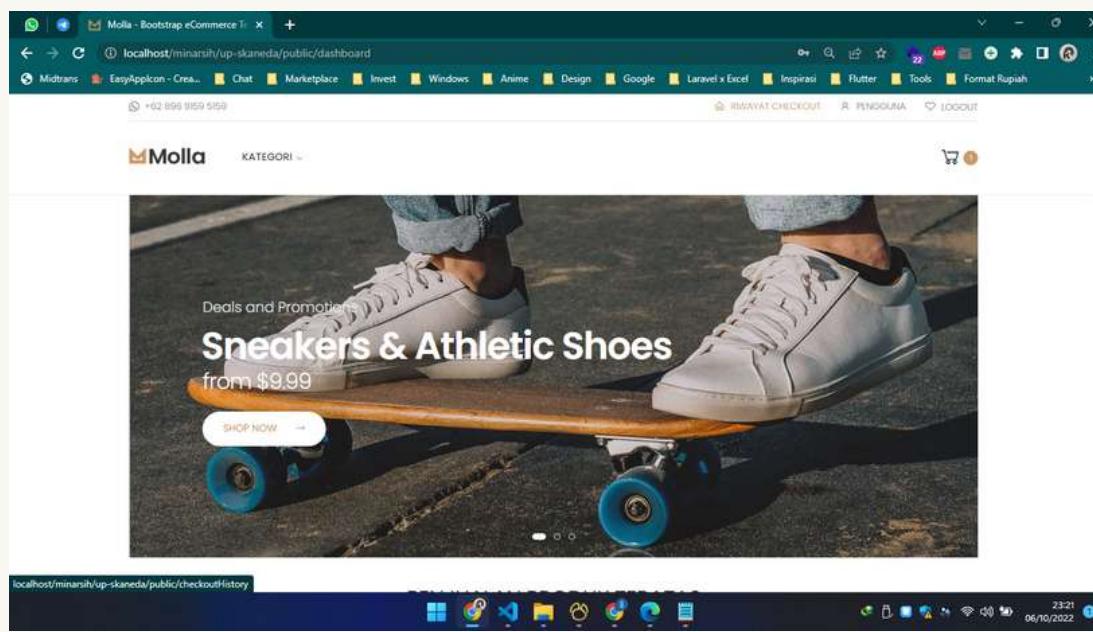

Kira-kira seperti ini tampilan web kita, mari kita coba klik RIWAYAT CHECKOUT.

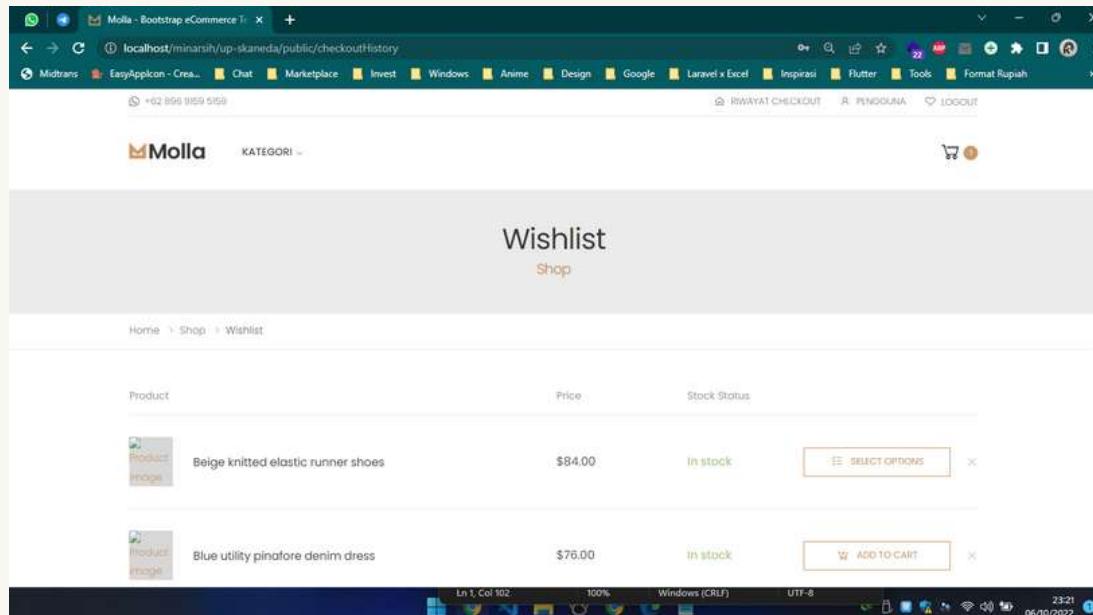

Maka akan seperti ini tampilannya.

## Ubah isi history.blade.php dengan syntax seperti ini.

```
File Edit Selection View Go Run Terminal Help
resources > views > user > checkout > history.blade.php > ...
history.blade.php - up-skandeda - Visual Studio Code
1 <extends("user.layout.app")>
2
3 <section("content")>
4   <div class="page-header text-center" style="background-image: url('{{asset('template-user/assets/Images/page-header-bg.jpg')}})">
5     <div class="container">
6       <h1 class="page-title">Riwayat<span>Checkout</span></h1>
7     </div><!-- End .container -->
8   </div><!-- End .page-header -->
9   <nav aria-label="breadcrumb" class="breadcrumb-nav">
10    <div class="container">
11      <ol class="breadcrumb">
12        <li class="breadcrumb-item"><a href="index.html">Home</a></li>
13        <li class="breadcrumb-item"><a href="#">Checkout</a></li>
14        <li class="breadcrumb-item active" aria-current="page">Riwayat Checkout</li>
15      </ol>
16    </div><!-- End .container -->
17  </nav><!-- End .breadcrumb-nav -->
18
19  <div class="page-content">
20    <div class="container">
21      <table class="table table-wishlist table-mobile">
22        <thead>
23          <tr>
24            <th>Produk</th>
25            <th>Total Harga</th>
26            <th>Status Checkout</th>
27            <th>Aksi</th>
28          </tr>
29        </thead>
30
31        <tbody>
32          @if(count($transaksi) > 0)
33            @foreach($transaksi as $t)
34              <tr>
35                <td class="product-col">
36                  <div class="product">
37                    <figure class="product-media">
38                      <a href="#">
39                        
40                      </a>
41                    </figure>
42
43                    <th class="product-title">
44                      <a href="#">({$t->transaksi_detail[0]->produk->nama_produk})</a>
45                    </th><!-- End .product-title -->
46
47                  </td>
48                  <td class="price-col">Rp. {{($t->transaksi_detail[0]->produk->harga_produk*$t->transaksi_detail[0]->qty)}}
49                  <td class="stock-col"><span class="in-stock">{{($t->status_transaksi)}}</span></td>
50                  <td class="action-col">
51                    @if($t->status_transaksi == 'Pengiriman')
52                      <button class="btn btn-block btn-outline-success">
53                        <i class="icon-check"></i>ubah Menjadi Selesai
54                      </button>
55                    @else
56                      Tidak Ada Aksi
57                    @endif
58                  </td>
59                </tr>
60              @endforeach
61            @else
62              <tr>
63                <td colspan="4">Tidak Ada Data</td>
64              </tr>
65            @endif
66          </tbody>
67        </table><!-- End .table.table-wishlist -->
68      </div><!-- End .page-content -->
69    </div>
70  </section>
```

```
File Edit Selection View Go Run Terminal Help
resources > views > user > checkout > history.blade.php > ...
history.blade.php - up-skandeda - Visual Studio Code
1 <tbody>
2   @if(count($transaksi) > 0)
3     @foreach($transaksi as $t)
4       <tr>
5         <td class="product-col">
6           <div class="product">
7             <figure class="product-media">
8               <a href="#">
9                 
10                </a>
11              </figure>
12
13              <th class="product-title">
14                <a href="#">({$t->transaksi_detail[0]->produk->nama_produk})</a>
15              </th><!-- End .product-title -->
16
17            </td>
18            <td class="price-col">Rp. {{($t->transaksi_detail[0]->produk->harga_produk*$t->transaksi_detail[0]->qty)}}
19            <td class="stock-col"><span class="in-stock">{{($t->status_transaksi)}}</span></td>
20            <td class="action-col">
21              @if($t->status_transaksi == 'Pengiriman')
22                <button class="btn btn-block btn-outline-success">
23                  <i class="icon-check"></i>ubah Menjadi Selesai
24                </button>
25              @else
26                Tidak Ada Aksi
27              @endif
28            </td>
29          </tr>
30        @endforeach
31      @else
32        <tr>
33          <td colspan="4">Tidak Ada Data</td>
34        </tr>
35      @endif
36    </tbody>
37  </table><!-- End .table.table-wishlist -->
38  </div><!-- End .page-content -->
39</div>
```

```
File Edit Selection View Go Run Terminal Help
resources > views > user > checkout > history.blade.php > ...
history.blade.php - up-skandeda - Visual Studio Code
1 </a>
2 </figure>
3
4 <th class="product-title">
5   <a href="#">({$t->transaksi_detail[0]->produk->nama_produk})</a>
6 </th><!-- End .product-title -->
7
8 </td>
9 <td class="price-col">Rp. {{($t->transaksi_detail[0]->produk->harga_produk*$t->transaksi_detail[0]->qty)}}
10 <td class="stock-col"><span class="in-stock">{{($t->status_transaksi)}}</span></td>
11 <td class="action-col">
12   @if($t->status_transaksi == 'Pengiriman')
13     <button class="btn btn-block btn-outline-success">
14       <i class="icon-check"></i>ubah Menjadi Selesai
15     </button>
16   @else
17     Tidak Ada Aksi
18   @endif
19 </td>
20 </tr>
21 </tbody>
22 </table><!-- End .table.table-wishlist -->
23 </div><!-- End .page-content -->
24 </div>
```

# Jika sudah akan seperti ini tampilan Riwayat Checkout kita.


Produk	Total Harga	Status Checkout	Aksi
Hardisk Eksternal	Rp. 500000	Selesai	Tidak Ada Aksi
Hardisk Eksternal	Rp. 500000	Pengiriman	<input checked="" type="button"/> UBAH MENJADI SELESAI
Hardisk Eksternal	Rp. 500000	Pending	Tidak Ada Aksi

Produk	Total Harga	Status Checkout	Aksi
Hardisk Eksternal	Rp. 500000	Selesai	Tidak Ada Aksi
Hardisk Eksternal	Rp. 500000	Pengiriman	<input checked="" type="button"/> UBAH MENJADI SELESAI
Hardisk Eksternal	Rp. 500000	Pending	Tidak Ada Aksi

Langkah selanjutnya yaitu membuat tombol UBAH MENJADI SELESAI berfungsi.

Produk	Total Harga	Status Checkout	Aksi
Hardisk Eksternal	Rp. 500000	Selesai	Tidak Ada Aksi
Hardisk Eksternal	Rp. 500000	Pengiriman	<input checked="" type="button"/> UBAH MENJADI SELESAI
Hardisk Eksternal	Rp. 500000	Pending	Tidak Ada Aksi

Kita buka file CheckoutController.php, lalu kita buat function complete, tirukan syntax sedemikian rupa.

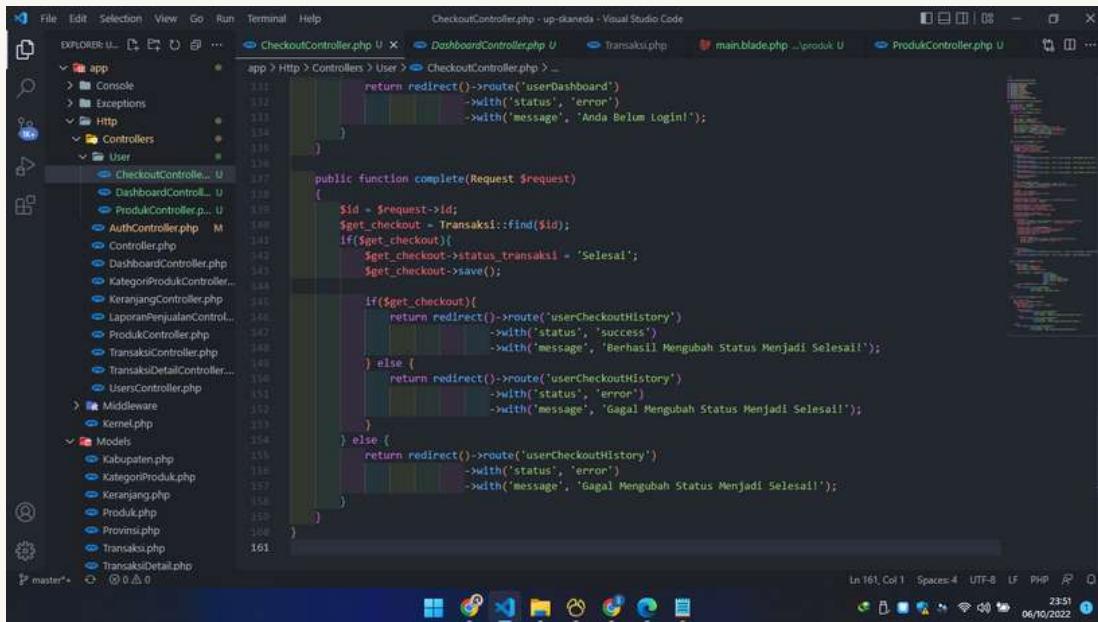


```
return redirect()->route('userDashboard')
->with('status', 'error')
->with('message', 'Anda Belum Login!');

public function complete(Request $request)
{
    $id = $request->id;
    $get_checkout = Transaksi::find($id);
    if($get_checkout){
        $get_checkout->status_transaksi = 'Selesai';
        $get_checkout->save();

        if($get_checkout)
            return redirect()->route('userCheckoutHistory')
            ->with('status', 'success')
            ->with('message', 'Berhasil Mengubah Status Menjadi Selesai!');
        } else {
            return redirect()->route('userCheckoutHistory')
            ->with('status', 'error')
            ->with('message', 'Gagal Mengubah Status Menjadi Selesai!');
        }
    } else {
        return redirect()->route('userCheckoutHistory')
        ->with('status', 'error')
        ->with('message', 'Gagal Mengubah Status Menjadi Selesai!');
    }
}
```

Buka file route web.php, kita tambahkan route checkoutComplete.

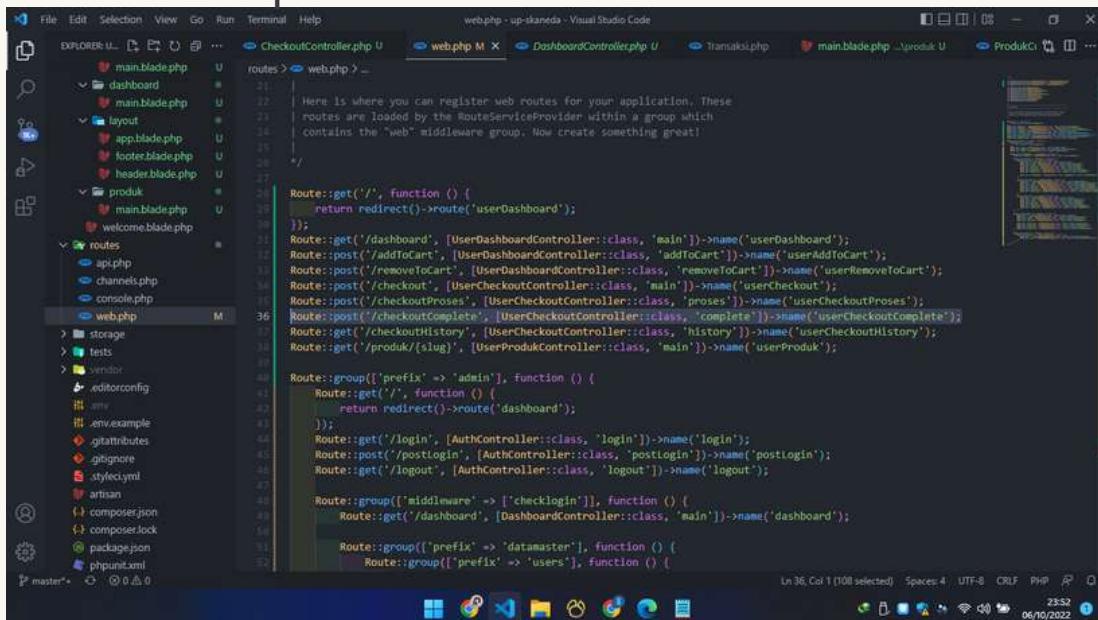

```
Route::get('/', function () {
    return redirect()->route('userDashboard');
});

Route::get('/dashboard', [UserDashboardController::class, 'main'])->name('userDashboard');


Route::post('/addToCart', [UserDashboardController::class, 'addToCart'])->name('userAddToCart');
Route::post('/removeFromCart', [UserDashboardController::class, 'removeFromCart'])->name('userRemoveFromCart');
Route::post('/checkout', [UserCheckoutController::class, 'main'])->name('userCheckout');
Route::post('/checkoutProses', [UserCheckoutController::class, 'proses'])->name('userCheckoutProses');
Route::post('/checkoutComplete', [UserCheckoutController::class, 'complete'])->name('userCheckoutComplete');
Route::get('/checkoutHistory', [UserCheckoutController::class, 'history'])->name('userCheckoutHistory');
Route::get('/produk/{slug}', [UserProdukController::class, 'main'])->name('userProduk');

Route::group(['prefix' => 'admin'], function () {
    Route::get('/', function () {
        return redirect()->route('dashboard');
    });
    Route::get('login', [AuthController::class, 'login'])->name('login');
    Route::post('postLogin', [AuthController::class, 'postLogin'])->name('postLogin');
    Route::get('logout', [AuthController::class, 'logout'])->name('logout');

    Route::group(['middleware' => ['checkLogin']], function () {
        Route::get('/dashboard', [DashboardController::class, 'main'])->name('dashboard');

        Route::group(['prefix' => 'datamaster'], function () {
            Route::group(['prefix' => 'users'], function () {
```

Jika sudah, buka file history.blade.php, tambahkan form yang mengarah ke checkoutComplete tadi.

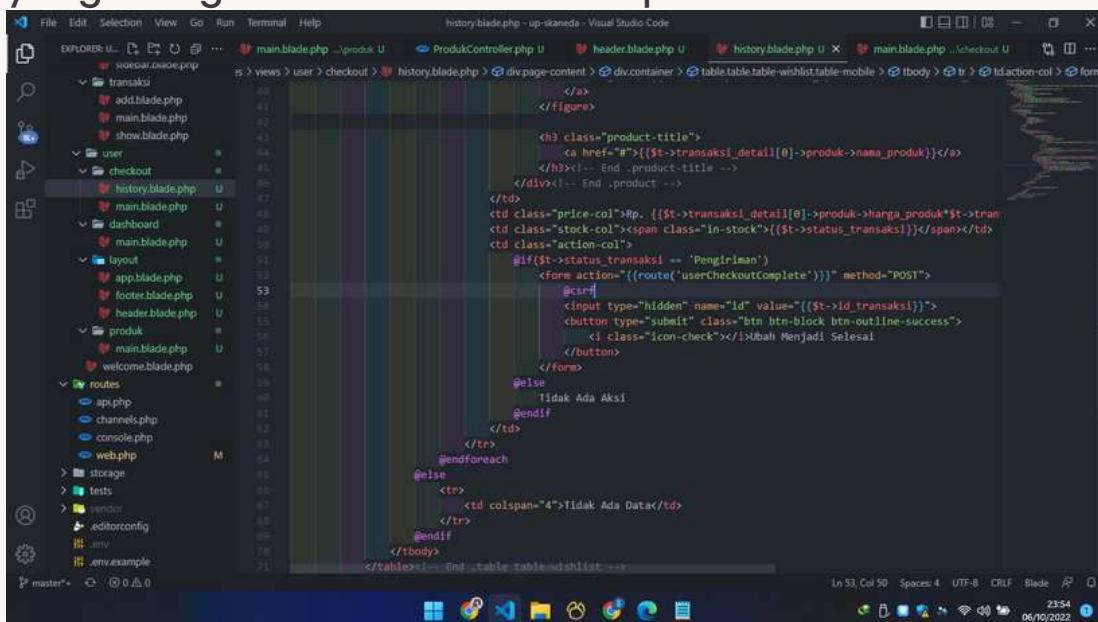

```
</td>
</td>
<td class="action-col">
@if($t->status_transaksi == "Pengiriman")
<form action="{{route('userCheckoutComplete')}}" method="POST">
@csrf

<button type="submit" class="btn btn-block btn-outline-success">
    <i class="icon-check"></i>Ubah Menjadi Selesai
</button>
@else
    Tidak Ada Aksi
@endif
</td>
</tr>
@endforeach
@else
<tr>
<td colspan="4">Tidak Ada Data</td>
</tr>
@endif
</tbody>
</table><!-- End table.table-wishlist-->
```

Produk Total Harga Status Checkout Aksi

	Hardisk Eksternal	Rp. 500000	Selesai	Tidak Ada Aksi
	Hardisk Eksternal	Rp. 500000	Pengiriman	<span style="background-color: green; color: white; padding: 2px;">✓ UBAH MENJADI SELESAI</span>
	Hardisk Eksternal	Rp. 500000	Pending	Tidak Ada Aksi

Mari kita coba tekan tombol UBAH MENJADI SELESAI.

Riwayat  
Checkout

Home > Checkout > Riwayat Checkout.

Produk Total Harga Status Checkout Aksi

	Hardisk Eksternal	Rp. 500000	Selesai	Tidak Ada Aksi
	Hardisk Eksternal	Rp. 500000	Selesai	Tidak Ada Aksi

Maka akan keluar alert seperti ini.

Kira-kira cukup sekian tutorial Template Usernya.