


Does student–teacher ES-disagreement – the signal that would drive targeted allocation – predict the error type that matters for camouflaged object detection (structure), or only pixel-average error?

SETUP

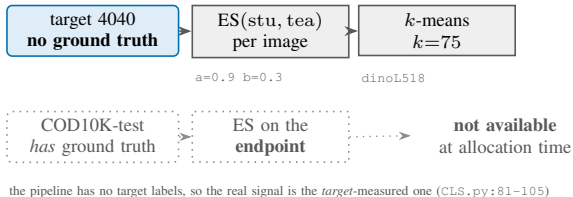

MEASUREMENT

per-cluster Spearman ρ of ES against each error type, over 50 clusters / 3428 target images:
 $\text{MAE} \cdot 1 - S_\alpha \cdot 1 - \text{IoU}$

and the same correlation computed from the *endpoint*-measured signal, to size how much that overstates it

OUTCOME

$\rho(\text{MAE})$ +0.8754 on the endpoint $\rightarrow$ +0.6284 where it is available (drop +0.2470)
 the two agree only at ρ +0.5732 per cluster
 ratio $\rho(1 - S_\alpha) / \rho(\text{MAE})$: 0.4352 $\rightarrow$ 0.5463 — it crosses B1's own declared 0.5 boundary, in the opposite direction

**the signal is materially weaker
 where the method can use it
 and the cluster structure it allocates
 over is weak: best silhouette 0.1600**