


B1 found that uncertainty predicts pixel error far better than structural error. Is that a property of ES, or of uncertainty signals for camouflaged object detection in general?

SETUP

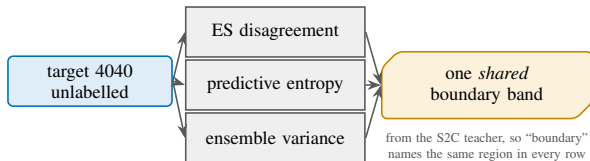

the pre-registered criterion, frozen before any T2-C number existed: each signal must keep $\rho(\text{MAE}) > \rho(1 - S_\alpha) > \rho(1 - \text{IoU})$ over B1's committed 50-cluster partition.

instrument check: the ES / SINet / whole cell reproduces B1's committed $\rho(\text{MAE})$ **+0.6284 bitwise**, before any new number is read.

MEASUREMENT

ordering held? (seed 0)

	WHOLE-IMAGE		BOUNDARY	
	SINet	v2	SINet	v2
ES	PASS	PASS	FAIL	FAIL
entropy	PASS	PASS	FAIL	PASS
ens. A0	PASS	PASS	PASS	FAIL
ens. CSHUF	PASS	PASS	FAIL	FAIL

whole-image 8/8, 7 of them at 10/10 k -means seeds. Boundary 2/8, and *four* rows go negative.

OUTCOME

The ordering is **not** a property of ES: it holds for predictive entropy and ensemble disagreement too. But the *strong* reading fails. $\rho(1 - S_\alpha)$ reaches **+0.5628** on SINet-v2, so “uncertainty carries no localisation information” is **false as stated**. The claim is **ordinal and comparative only**.

the gap generalises; the strong reading does not correlational, one endpoint — it cannot become “uncertainty guidance fails in training”