



(a) Method: CSRDA, with Stage C as an outer loop

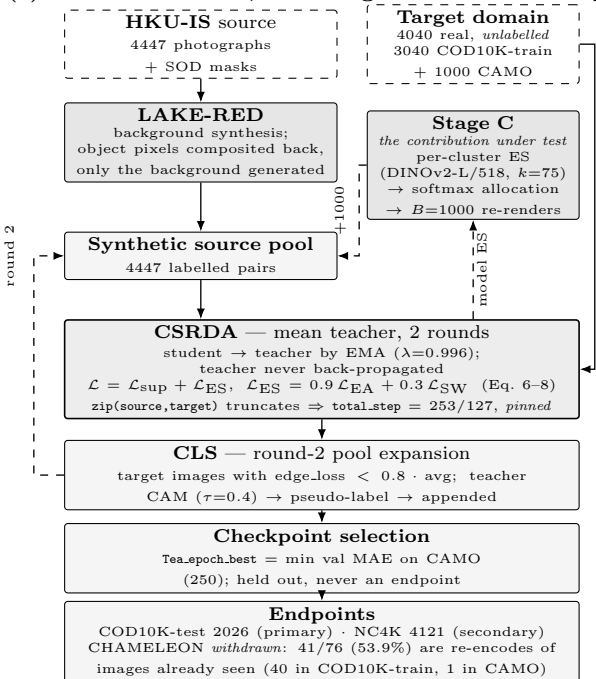

(b) Test design: what varies, what is held identical

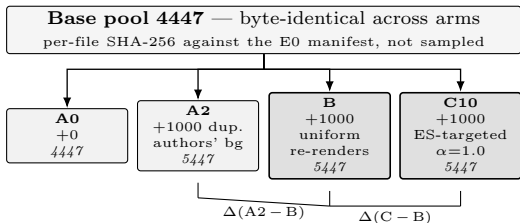

$\Delta(A2 - B)$ isolates the generated background; $\Delta(C - B)$ is the **pre-registered claim** — targeted vs. uniform at equal pool size, budget and mask provenance.

$\times \{\text{SINet, SINet-v2}\} \times \text{seeds } \{42, 43, 45\} = \mathbf{24 \text{ runs.}}$

A0 is *not* a clean control: with total_step pinned, its smaller pool gives each image 22% more exposure per epoch — which is why A2 exists. Added data *dilutes* per-epoch exposure; it can never extend the budget.