



SNS COLLEGE OF ENGINEERING

Kurumbapalayam (Po), Coimbatore - 641 107

AN AUTONOMOUS INSTITUTION

Accredited by NAAC - UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai



INTERNAL ASSESSMENT EXAMINATION

IAE	I	II	III
-----	---	----	-----

Register No.	7	1	3	3	2	3	T	S	0	2	5
--------------	---	---	---	---	---	---	---	---	---	---	---

S.No.	
-------	--

Degree / Branch / Section	BE Computer Science + Technology
Subject Code & Subject Title	23TST302. + Internet Programming.
Semester / Year	V th sem / III rd year.
Date & Session	08/9/25. + FN.
No. of Pages Used	
Chief Superintendent's Signature / Facsimile	The details of the candidate mentioned above are verified and found to be correct N. Rathina Kumar Name and Signature of Hall Invigilator with Date

PART A				Part B						Course Outcome Marks	
Q. No.	✓	CO Number from Q.P.	Total Marks (A)	Question No.	✓	CO Number from Q.P.	(I) Marks	✓	(II) Marks	Total Marks (B)	
1	✓	CO-2	1	6	a.	CO-2				10	CO-1
2	✓	CO-2	1	6	b.						CO-2
3	✓	CO-3	2	7	a.						CO-3
4	✓	CO-3	2	7	b.	CO-3				10	CO-4
5	✓	CO-3	1	8	a.						CO-5
6				8	b.	CO-3				11	
7											
TOTAL(A)			8	TOTAL(B)						31	Grand Total (A+B): 38

Student's Signature

Date	12/9/25
Name and Signature of the Examiner	S. Vijayalakshmi
Signature of HoD	
Declaration by the Examiner: Verified that all the Questions attended by the student are valued and the total is found to be correct	

PART D1] Form Validation and its usesform:-

Form in web development is used to get input from user such getting their name, email id, passwords, phone numbers and validating them properly for proper functioning.

use:-

It is used for validating the user details and directing them to the next page.

2]

OnClickFunction

OnClick is used in web development selecting something by clicking

use case

It is used in php for clicking and changing them.

OnChange

On change is used to note changes happening while or after entering.

It notes changes need to apply with user entry and notify them.

3] Built in Function in PHP:

Strtoupper (str) → makes the entered (str) String into upper case.

Strlen (str) → returns the length of the String.

Round (str) → return round value of String.

4] Purpose of PHP Cookies:

Cookies in PHP are used to provide a small of details that collected from the user to be stored so that future implementation and entry into the same webpage can be simplified.

eg:-

PHP

\$cookies (username, password, email)

\$start (/username)

5 Regular Expression :

Regular expression in php is a set of expression used in web page development for validation and helps to accept and revise the input and validate it.



PART B

6)

(a) User's Mail ID using expressions

In php regular expression are mainly used to validate input of the user by providing some conditions or parameters.

eg: -

For password validation

<? php

\$password = trim [password]

```

Regex $password {
    [A-Z a-z 0-9 _]{5,15}
}

```

}

```

if $password || Regex password
{

```

```

    echo ( " Password you entered
is between 5-15 words has
upper case, lower case, number )

```

else {

```

    echo ( " password is
invalid " / password )

```

}

So for the validation we need to provide some condition so that we can provide a validation for user's entered inputs.

Email Validation using javascript

<? php

<html>

<head>

<title>

Email validation

</title>

<style>

body

{
Bg color : red ;

form

{
Background color : yellow ;

margin : 10px ;

padding : 20 ;

font color : green ;

font size : 25px ;
}


```

</style>
<body> <center>
  <h1> Email Validation
  </h1> </center>
  <center>
    <form>
      <label><input type = "email" ;
        placeholder = "name @ gmail.com" ;/>
        email :
      </label>
      <label> password :
      <input type = "email password" ,
        placeholder = "email password" />
      </label>
    </form>
    <button type = "submit" >
    </button>
  </form>
</Script>
  if (em
    let emailid = [a-z A-Z 0-9 -10 /5-15]
    if [email === emailid]
    {
      get element by id # "email id is
        valid" )
    }
  else {

```



```

get Element by id ("email Id invalid")
}
</script>
</body>
</html>

```

How it works:-

- ① HTML code for getting the details from user:-

Initially we should write an html code for getting the email Id from the user.

- ② Creation of form:-

In the html we need create a form for getting input from user.

- ③ Style the form and body:-

we can style the form and body for getting email.

- ④ JS code for validation

In script we need provide email criteria and compare with entered email.

PART C8) Student Registration

(b)

Output-EMAIL VALIDATIONEMAIL ID : PASSWORD :

After entering:

Console X

Email id valid

8) Shudert Registration portal

(b)

In this we need to create an Shudert registration portal to develop a full php page that connects to my sql database.

How it works

① database & query:

First we retrieve data of my sql from my sql database before we need to create a data base with Shudert portal consists of name, Shudert id, dep, phone, email, Guardian name, Guardian phone.

Sql query:

```

Create table Shudert-portal : {
  insert into Shudert-portal value : {
    "name", "Shudert id", "dep", "phone", "email",
    "guardian name", "Guardian phone" )
  {
    name varchar(100) ;
  }

```


| | | |
|------------|----------------|--------------|
| Student Id | (Varchar(150)) | primary key; |
| dep | (Varchar(100)) | |
| phone | (Varchar(100)) | not null |
| Email | (Varchar(100)) | |
| Guardian | (Varchar(10)) | primary key; |

2.

Connecting database with PHP:-

<?php

```
$conn = db_connect('name',
    'Student Id', 'dep', 'phone', 'email',
    'Guardian');
```

```
$post = blind_param('name', 'Student Id',
    'dep', 'phone', 'email', 'guardian');
```

```
$name = $post["name"]
```

```
$StudentId = post$StudentId["Student Id"]
```

```
$dep = post$dep["dep"]
```

```
$phone = $email $post["phone"]
```

```
$email = $post["email"]
```

```
$guardian = $post["guardian"]
```


Validation details for each parameters.

① name:-

\$name = trim ("name")

Regex = \$name [A-Z a-z / 0-15]

② email:-

\$email = trim ("email")

Regex = \$email [a-zA-Z / 0-15],

If not validate.

name = 2.

Student Registration Portal

Create table student-portal {

insert into (Student name, Id, email,
phone, guardian, dep, guardian
name)

{

Create name (Varchar (100)) primary key

Id (Varchar (150)) not null

email (Varchar (100))

phone (Varchar (10))

guardian (Varchar (100)) Composite key

}


```
<?php*
```

```
$conn = db student-portal (name, Id, dep,  
email, phone, guardian)
```

```
$stmt = bluid param (name, Id, dep  
phone, email, guardian)
```

```
$post = $stmt (name, id, phone, email  
dep, guardian)
```

```
$name Regex = "[A-Z,a-z 0-10]"
```

```
if $name == $name Regex  
{
```

```
    echo ("name is valid")
```

```
}
```

```
else
```

```
{
```

```
    echo ("not valid")
```

```
}
```

```
$email Regex = "[A-Z,a-z 0-10]"
```

```
if $email == $email regex
```

```
{
```

```
    echo ("email is valid")
```

```
}
```

```
else {
```

```
    echo ("not valid")
```

```
}
```


HTML code

<html>

<head>

<title> Student Registration Portal

</title>

<style>

body {

background-color: red;

font-family: Arial;

</style>

<body>

<center>

<h1> Student Validation form </h1>

</center>

<hr>

<form>

<label>

name:

<input type="text" placeholder="enter your name" />

</label>

<label>

email:

<input type="text" name="email" placeholder="enter your email id" />

</label>

<label>

dep:

<input type = "text" , name = "dep" ,
placeholder = "enter your dep" >

</label>

<label>

Phone:

<input type = "text" , name = "phone number"
placeholder = "enter your phone
number" >

</label>

<label>

Guardian:

<input type = "text" , name = "Guardian"
placeholder = "enter your

</label>

</body>

</html>

Output ::

Student Registration Portal

Name :

Enter your name .

Email :

Enter your email .

Phone :

Enter phone number

Dep :

Enter dep

Guardian .

Enter guardian name .

7) (b) Validating a login form

Server side validation

Server side scripting used to store the data in database not only that server side also can be used to validate our user input by providing some criteria for entering the data.

Example

Passwords :-

For entering any web page there they ask us to enter a password which might have some criteria such as where you can enter only strong passwords such as where it should contain Alphabets, numbers and some symbols.

Passwords = "aBc1o.\$#!@"

How it provides security

* No malicious people who cannot access the webpage with your can account cause password restricts them.

* Also adding passwords can restrict others from viewing your page in any other devices.

Regular expression

Regular expressions in php where it is a set of large number of expression it is used modify and validate user input data.

Security features:

→ Regular expression has some criteria for users. while entering an. data. Only if it passes the criteria it can be used.

→ It can be connected with data base or cloud for secure storage.

people can access into your account only if they know the correct details or else it will be remained locked.

Code: for validation form login.

User side: (html)

```

<html>
<head>
<title>
    login form
</title>
</head>
<body>
<center> <h1> login page
</h1> </center>
<form>
<label>
    Name:
    <input type="text" , name="name"
        placeholder="enter your name" />
</label>
<label>
    Password:
    <input type="password" , name="password"
  
```



```

placeholder="enter your password" >
</label>
</body>
</html>

```

Server side (PHP)

~~<?php~~

```

$stmt = train [name, password]
$post = name ["name"]
$post = password ["password"]

```

<?php

```

$stmt = train blind password (name,
                                password)
$name = POST ["name"]
$password = POST ["password"]

```

```

$Request = name [a-zA-Z/5-15]

```

```

$Request = password [a-zA-Z # @ - / " 0-15]

```

```

if $name === $Request name
{

```

```

    echo "name valid"
}

```

```

else {

```

```

    echo "not valid"
}

```

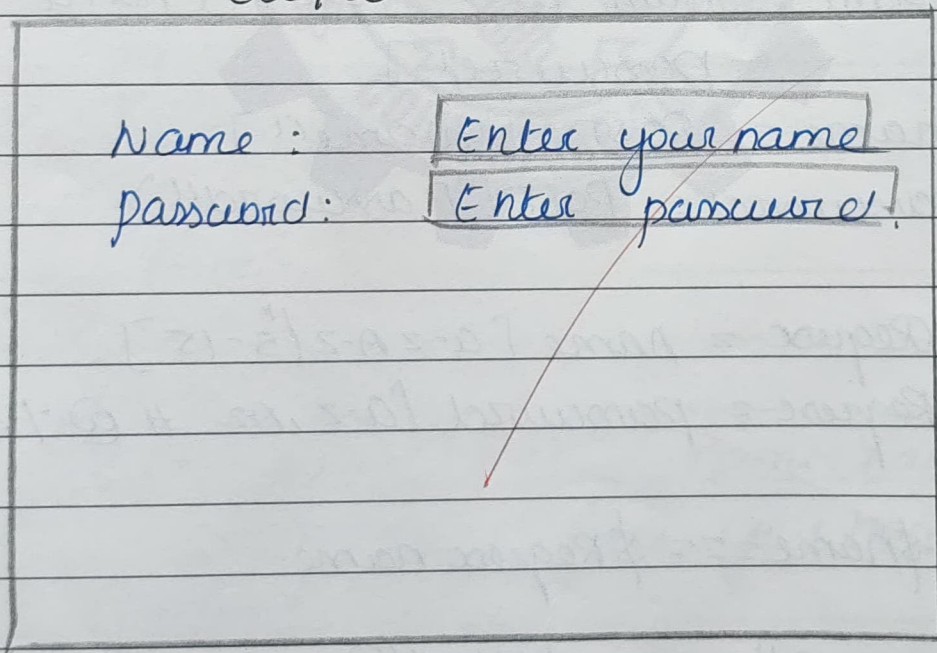

Explanation :-

→ User side we need to create html page for user to enter their data

→ name and password are collected in the form from the user

→ Server side we need to use the Regexp regular expression to validate name and password.

eg: Output



Name : Enter your name

password: Enter password!

Name:

password:

password
invalid

Console x |

password invalid