



Project 1 - CS6.401. Software Engineering

Members

- Adhiraj Anil Deshmukh (2021121012)
- Arjun Muraleedharan (2020101099)
- Pratham Gupta (2020101080)
- Keyur Ganesh Chaudhari (2020101100)
- Sambasai Reddy Andem (2020101014)

Specification 1: Mining the Repository

Prior Assumptions:

1. While the models for the mentioned classes do exist in the Music code with relevant attributes, we believe that the model classes by themselves do not sufficiently document the behavior of the system. Therefore, in order to represent the system as accurately as possible, we have chosen to include attributes and methods in the classes in the UML diagram that may not necessarily be bound to the classes in the

code, but certainly do involve the classes in question and can be associated with these classes for the purpose of explanation.

2. For the sake of convenience and avoiding redundancy, we have opted not to include getter and setter methods in the classes in the UML diagram.
3. We have also compressed some classes and chains of methods into single classes/methods so as to make the function and behavior of the system clearer and easier to understand.

1. User Management

This is the subsystem that is involved in managing user accounts for Music, taking care of features such as authentication, user creation and keeping track of albums and tracks associated with certain users.

Structure: The following are the classes associated with this subsystem.

- **User** : Represents a user in the system.
- **AuthenticationToken** : Stores details of authentication tokens used to keep users logged into Music.
- **UserTrack** : Represents a user's relationship with a track. Users can listen to tracks on Music and like/unlike them.
- **UserAlbum** : Represents a user's relationship with an album. Users can create albums and add tracks to them.

Functionality: This subsystem has the following features.

1. User creation, updation, deletion and authentication
2. Maintaining records of user-album and user-track relationships

Behavior: The behavior of the system would be explained in terms of the above features.

1. First, the user (assuming they have an account) logs in to the system. The process of authentication is performed via the `login()` function. It would verify the username and password of the user and create an authentication token on the server, which is represented by the `AuthenticationToken` class. The authentication token would include a reference to the user, which helps in checking privileges and obtaining user details if relevant. For logging out, the authentication token would be deleted.

2. For user creation, updation, and deletion, the privileges of the user have to be that of an admin. For the sake of abstraction, we have opted to mention the relevant classes and functioning of the administrative system in a separate section. Firstly, the subsystem checks if the role of the user is “admin” via the `roleId` attribute of the user and that they have the required privileges to create/update/delete a user. Then, a user object is created with the supplied details, or in the case of updation and deletion, the user is retrieved and updated/deleted.
3. Whenever, album and tracks are added, listened to or liked/unliked by the user, records of `UserTrack` and `UserAlbum` would be created to store the relationship between the user and these tracks.

Bearing the above points in mind, the following is our proposed UML diagram for the subsystem.



AuthenticationToken would have a one-one relationship with **User**, since a user can only have one authentication token stored at a particular time while logged in. However, since a user can like/unlike or listen to multiple tracks and create multiple albums, **UserAlbum** and **UserTrack** have many-one relationships with **User**. All of the relationships in this system are simple associations.

2. Administrator Features

This is the subsystem that handles the administrative features made available to certain users via their roles and privileges in the system. The system follows a role-based access control system, allowing for more security.

Structure: The following are the classes associated with this subsystem.

- **User** : Represents a user in the system.
- **Role** : Represents a particular role in the system. While the roles as we understand it currently are “user” and “admin”, having a dedicated class for roles opens up the possibility of adding differing degrees of role-based access control (such as allowing some advanced features for a certain kind of user, but not others).
- **Privilege** : Represents a particular privilege (like having admin permissions or having privileges to change password). Allows for greater flexibility in the mentioned role-based access control system as you can choose which roles get which privileges.
- **RolePrivilege** : Links roles and privileges.
- **Directory** : Represents a local directory where music is stored.
- **Transcoder** : Represents a transcoder entity.

The **Directory** and **Transcoder** classes do not directly play a role in the administrative system but are present merely because their features are controlled by the admins.

Functionality: The administrative subsystem permits certain users, called admins, to exercise certain privileges not available to other users.


1. They can create, update and delete user accounts.
2. They can add new directories, delete them or change the local directory to which music is stored.
3. They can add, delete or update transcoders.

Behavior: The behavior of the system would be explained in terms of the above features.

1. The details regarding user creation, updation, and deletion have been mentioned in the User Management section. However, it does not mention how privilege checking is done. In order to check if a user is an admin, one checks if the user’s role (via **roleId**) has the “ADMIN” privilege (via the **Privilege** class). The corresponding privileges for each role are obtained through the **RolePrivilege** class.
2. The creation, updation, and deletion of directories and transcoders occur in a very similar manner to that of users. First, the privileges of the user are checked, and if the user is an admin, the supplied details are validated (in the case of creation and

updatation). For directories, validation checks whether the supplied path is actually a valid and writable local path. If the user has the required privileges, the requested action is then performed.

Bearing the above points in mind, the following is our proposed UML diagram for the subsystem.

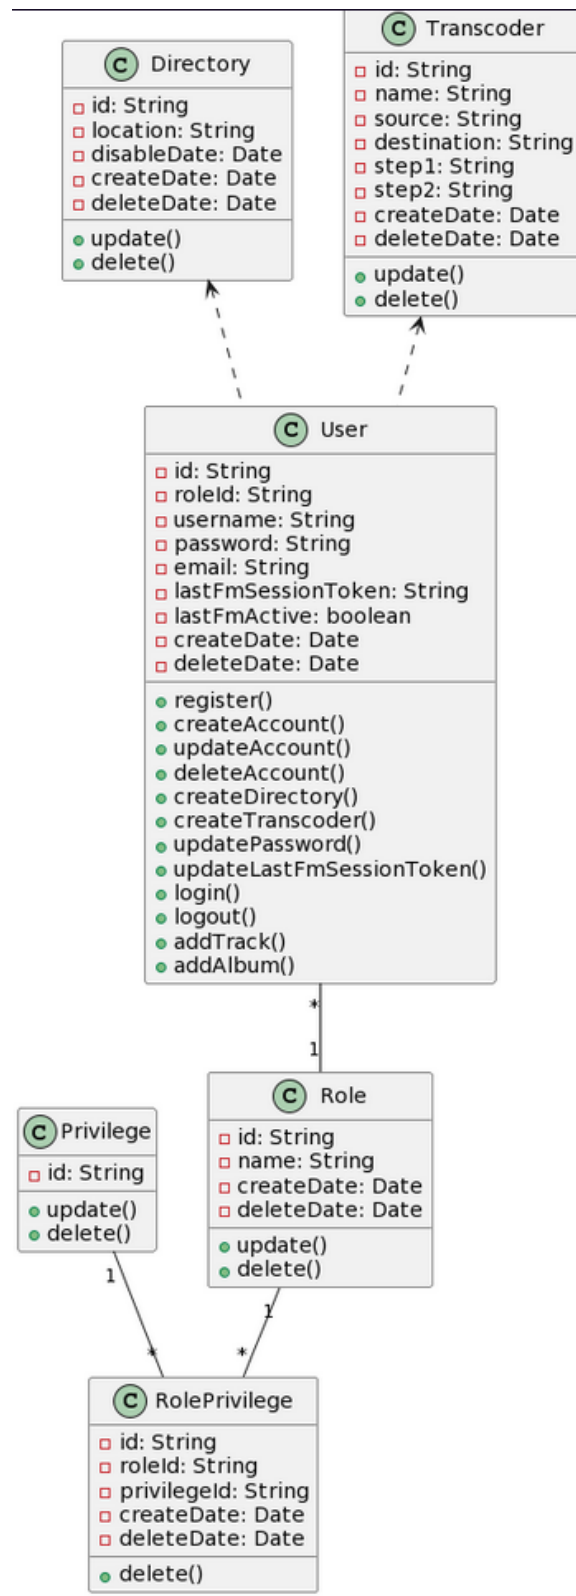

A user has a single role, but a single role could have multiple users under it, eg. There can be several admins in the system. Similarly, a role can be shared by many `RolePrivilege` objects, and so can a privilege, since a role can have multiple privileges, and a single privilege can be shared by multiple roles. The `User` class' (or specifically an admin account's) relationships with the `Directory` and `Transcoder` classes are slightly unconventional dependencies; they are of type `<<instantiate>>` since the `User` class cannot function without these classes in order to create objects of those classes. There is no conceptual or class link between them.

3. Last.fm Integration

This subsystem manages the Music system's integration with the Last.fm service. Music allows users to link their Last.fm profile, and sync their listening history with it in order to build a profile of the user's musical taste.

Structure: The following are the classes associated with this subsystem.

- `User` : Represents a user in the system. This class would store the Last.fm token of the user.
- `LastFmSession` : Represents a Last.fm session of a particular user. The session lasts for as long as the user has linked their credentials to Music, and would be destroyed when the user unlinks.
- `Track` : Represents a music track. Last.fm requires access to the listening history of the user and so would be related to the `Track` class.
- `UserTrack` : Represents a user's relationship with a track.

Functionality: The purpose of the subsystem is to do the following.

1. Enable the user to link their Last.fm account with their Music account.
2. Allow Last.fm access to user's listened tracks to analyze them.


Behavior: The behavior of the system would be explained in terms of the above features.

1. When the user enters their Last.fm credentials and submits them, a session is established with Last.fm via a token which would be stored in the `User` class. This is done via the `registerLastFm()` method. As long as this session lasts (until the user

unlinks their Last.fm account from Music), the Last.fm service would be integrated with Music. The `unregisterLastFm()` method would delete this session.

2. In order to have the Last.fm service perform analysis on the tracks listened to by the user, the `scrobbleTrack()` and `scrobbleList()` (for a list of tracks) methods are present. These take in the track(s) and have Last.fm perform analysis on them. These methods require access to both the track and the artist in order to perform its analysis, hence the presence of these two classes in the subsystem.

Bearing the above points in mind, the following is our proposed UML diagram for the subsystem.

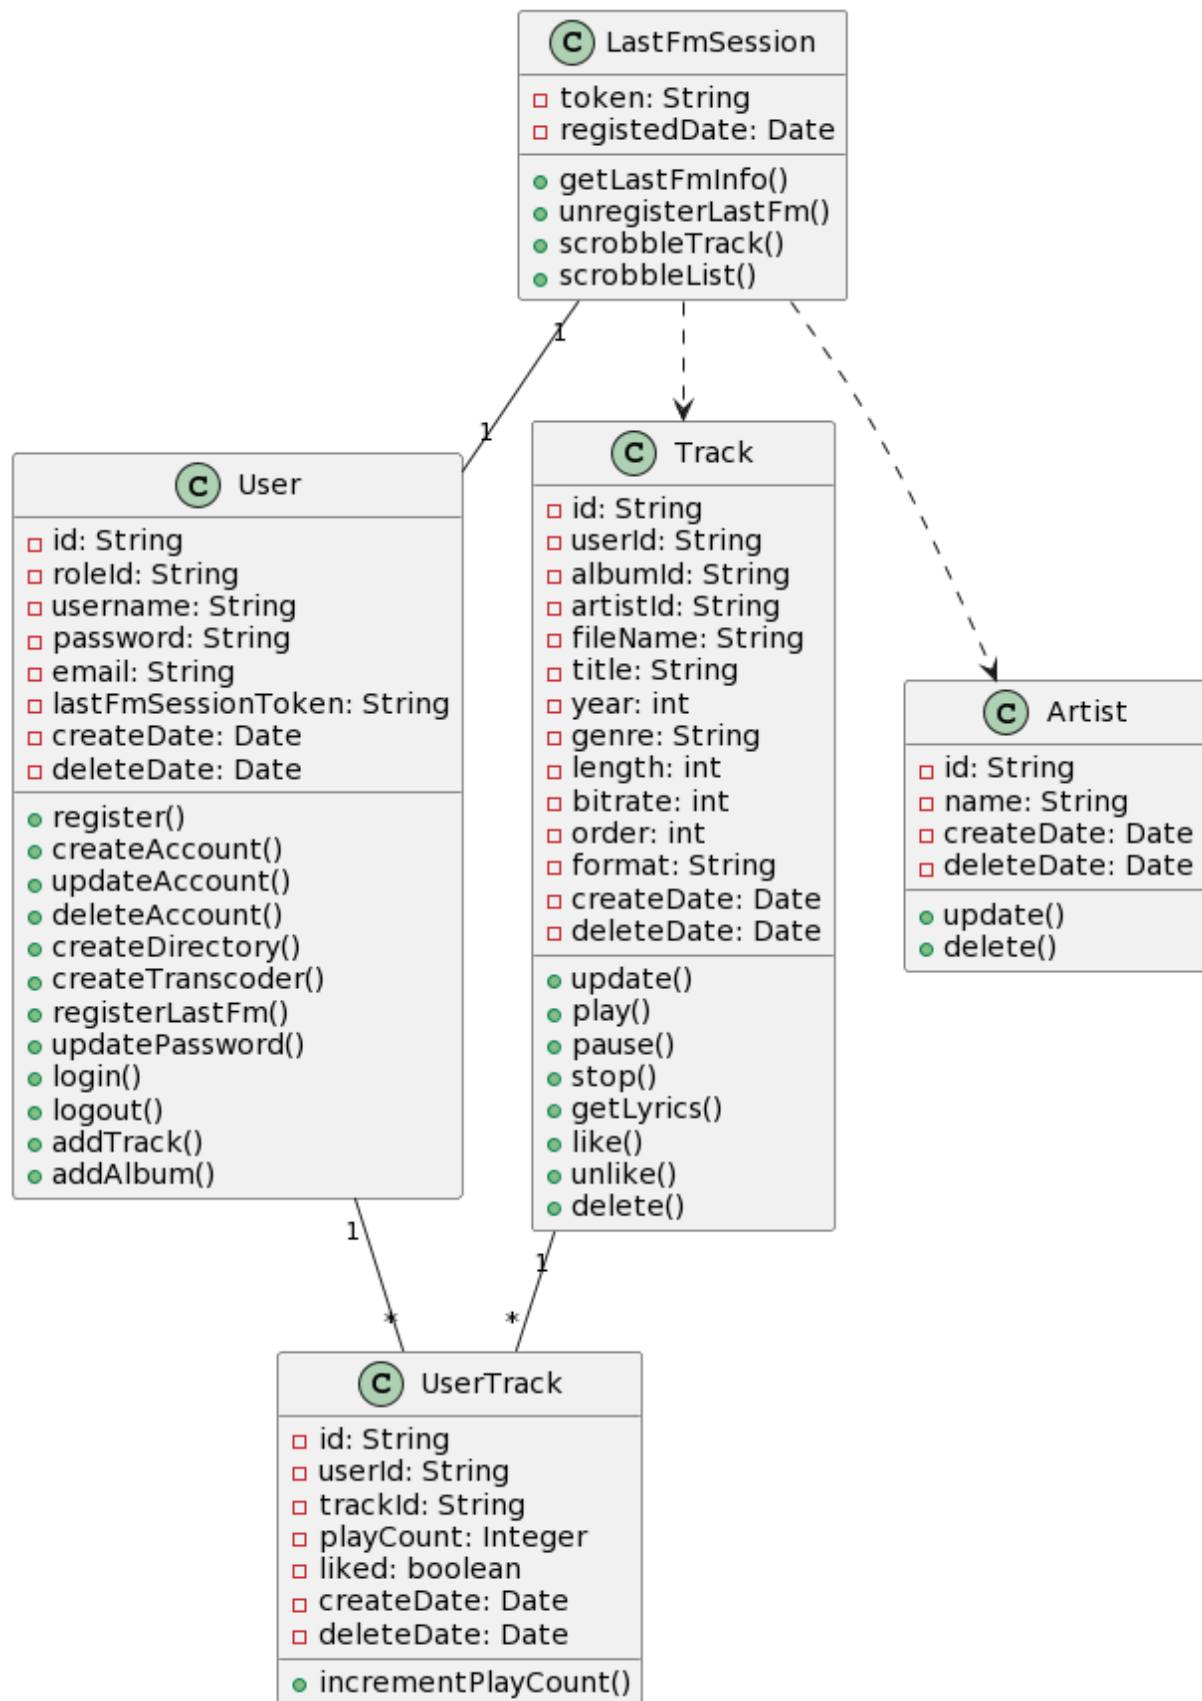

As mentioned in the User Management section, `User` would have a one-many association with `UserTrack` and so would `Track`, since one track could be interacted with by multiple users. Since `LastFmSession` uses the `Artist` and `Track` classes for scrobbling, it would have dependencies on those classes.

4. Library Management

This subsystem focuses on the main part of Music: playing, importing and managing of music libraries and albums. This is what makes Music a music application.

Structure: The following are the classes associated with this subsystem.

- `User` : Represents a user in the system.
- `Track` : Represents a music track.
- `UserTrack` : Represents a user's relationship with a track.
- `Artist` : Represents a music artist.
- `Album` : Represents an album of tracks by an artist.
- `UserAlbum` : Represents a user's relationship with an album. Users can create albums and add tracks to them.
- `Playlist` : Represents a user-created music playlist.
- `PlaylistTrack` : Represents the relationship between a playlist and a track.
- `Directory` : Represents a local directory where music is stored.
- `Transcoder` : Represents a transcoder entity.

Functionality: The purpose of the subsystem is to do the following.

1. To play, pause and stop a music stream.
2. To add, update and delete track, album, artist and playlist information.
3. To import music tracks from local directories or external sources.

Behaviour: Streaming is taken care of by the Transcoder and Track classes. Importing is done by the Directory and User classes. Management of playlists, tracks and albums is done by the respective classes for those entities.



Specification 2: Analysis

Design Smells:

▼ 1. Duplicate Abstraction

Classes `DirectoryCreatedAsyncEvent` and `DirectoryDeletedAsyncEvent` have the same definitions but have been utilized differently by the `DirectoryResource` and the `DirectoryCreatedAsyncListener`

2. Missing Hierarchy

The `DirectoryCreatedAsyncListener` and `DirectoryDeletedAsyncListener` classes contain very similar codes for processing directory events. We can simplify this code by extracting the common code into a new method and calling this method from both classes.

3. Insufficient Modularization

Certain functionality has not been included as class methods which can be refactored to make the code more modular.

4. Missing Hierarchy

An excessive number of switch statements have increased the cognitive complexity of code in many files viz, `TrackDao.java`, `CollectionService.java`, `WatchService.java`, `ImportAudioService.java`, `ImageUtil.java`, `ResourceUtil.java`, `SQLSplitter.java`, `TrackResource.java`. These can be refactored using inheritance/composition to reduce the number of conditional flows.

☐ Refactor this method to reduce its Cognitive Complexity from 31 to the 15 allowed. 26 days ago ▾ L81 🔗 ⚙️ ▾
🔗 Code Smell ▾ 🔴 Critical ▾ 🔵 Open ▾ Not assigned ▾ 21min effort Comment 🧠 brain-overload ▾

☐ Refactor this method to reduce its Cognitive Complexity from 19 to the 15 allowed. 26 days ago ▾ L25 🔗 ⚙️ ▾
🔗 Code Smell ▾ 🔴 Critical ▾ 🔵 Open ▾ Not assigned ▾ 9min effort Comment 🧠 brain-overload ▾

☐ Refactor this method to reduce its Cognitive Complexity from 18 to the 15 allowed. 26 days ago ▾ L187 🔗 ⚙️ ▾
🔗 Code Smell ▾ 🔴 Critical ▾ 🔵 Open ▾ Not assigned ▾ 8min effort Comment 🧠 brain-overload ▾

Specification 3: Refactoring

Mitigating Design Smells:

1. **Duplicate Abstraction:** A single class `DirectoryAsyncEvent` has been created to substitute two duplicate classes `DirectoryCreatedAsyncEvent` and `DirectoryDeletedAsyncEvent`
2. **Missing hierarchy:** An abstract class `DirectoryAsyncListener` has been created that has been extended to `DirectoryAsyncListener` and `DirectoryAsyncListener` since the two classes previously had very similar implementations. A Consumer functional interface has been implemented to enable this.
 -
 -