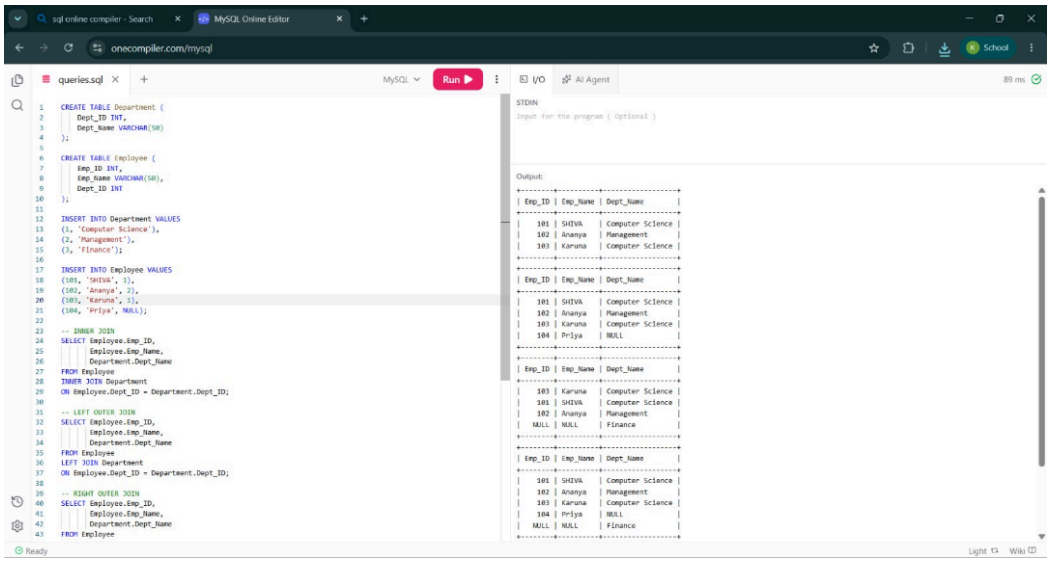
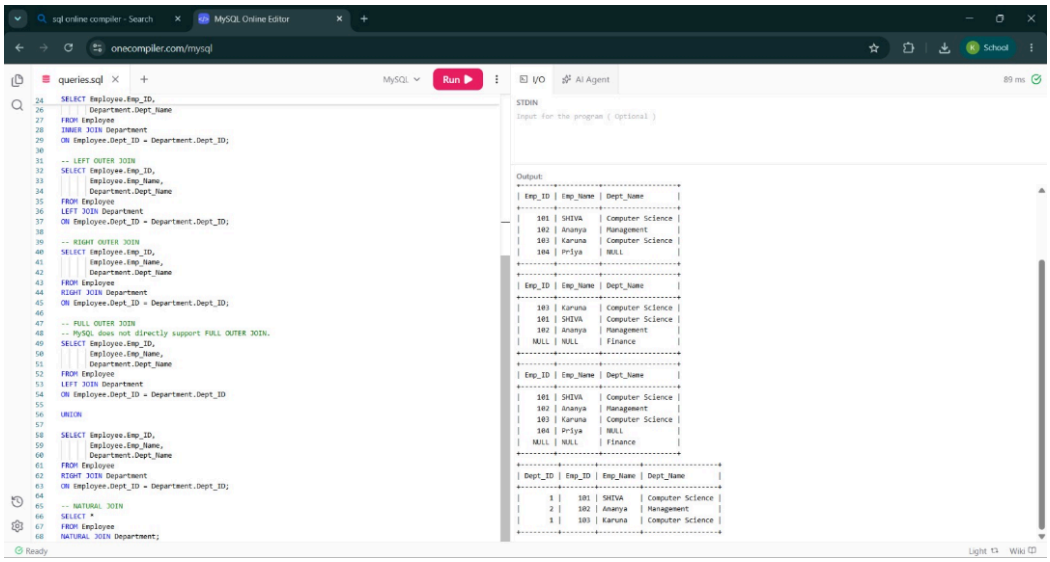
LAB 7:


sql online compiler - Search
MySQL Online Editor
onecompiler.com/mysql
School
queries.sql
MySQL
Run
I/O
AI Agent
89 ms
STDIN
Input for the program (Optional)
Output:
CREATE TABLE Department (
Dept_ID INT,
Dept_Name VARCHAR(50)
);
CREATE TABLE Employee (
Emp_ID INT,
Emp_Name VARCHAR(50),
Dept_ID INT
);
INSERT INTO Department VALUES
(1, 'Computer Science'),
(2, 'Management'),
(3, 'Finance');
INSERT INTO Employee VALUES
(101, 'SHIVA', 1),
(102, 'Ananya', 2),
(103, 'Karuna', 1),
(104, 'Priya', NULL);
-- INNER JOIN
SELECT Employee.Emp_ID,
Employee.Emp_Name,
Department.Dept_Name
FROM Employee
INNER JOIN Department
ON Employee.Dept_ID = Department.Dept_ID;
-- LEFT OUTER JOIN
SELECT Employee.Emp_ID,
Employee.Emp_Name,
Department.Dept_Name
FROM Employee
LEFT JOIN Department
ON Employee.Dept_ID = Department.Dept_ID;
-- RIGHT OUTER JOIN
SELECT Employee.Emp_ID,
Employee.Emp_Name,
Department.Dept_Name
FROM Employee
Ready
Light
Wiki


sql online compiler - Search
MySQL Online Editor
onecompiler.com/mysql
School
queries.sql
MySQL
Run
I/O
AI Agent
89 ms
STDIN
Input for the program (Optional)
Output:
SELECT Employee.Emp_ID,
Department.Dept_Name
FROM Employee
INNER JOIN Department
ON Employee.Dept_ID = Department.Dept_ID;
-- LEFT OUTER JOIN
SELECT Employee.Emp_ID,
Employee.Emp_Name,
Department.Dept_Name
FROM Employee
LEFT JOIN Department
ON Employee.Dept_ID = Department.Dept_ID;
-- RIGHT OUTER JOIN
SELECT Employee.Emp_ID,
Employee.Emp_Name,
Department.Dept_Name
FROM Employee
RIGHT JOIN Department
ON Employee.Dept_ID = Department.Dept_ID;
-- FULL OUTER JOIN
-- MySQL does not directly support FULL OUTER JOIN.
SELECT Employee.Emp_ID,
Employee.Emp_Name,
Department.Dept_Name
FROM Employee
LEFT JOIN Department
ON Employee.Dept_ID = Department.Dept_ID
UNION
SELECT Employee.Emp_ID,
Employee.Emp_Name,
Department.Dept_Name
FROM Employee
RIGHT JOIN Department
ON Employee.Dept_ID = Department.Dept_ID;
-- NATURAL JOIN
SELECT *
FROM Employee
NATURAL JOIN Department;
Ready
Light
Wiki

LAB 8: