

# Podium: An Open-Source Library for Rendezvous and Docking Guidance, Navigation, and Control with Integrated Formal Verification

Adi Oltean\*

July 2026

## Abstract

Podium is an open-source Python library for developing, testing, and formally validating guidance, navigation, and control (GNC) algorithms for spacecraft rendezvous, proximity operations, and docking (RPOD) in low- and medium-Earth orbit. It provides relative-motion models, convex and sequential-convex trajectory planners, a relative-navigation filter and controllers, a deterministic simulator, and a verification layer. The flight-algorithm core is written in a restricted, statically analyzable Python subset that translates to C, is shown alarm-free on contracted input ranges by the Frama-C Evolved Value Analysis (EVA) plug-in [1], a sound static analyzer, and is compiled with the CompCert verified compiler [2], with the emitted C checked against the Python reference on golden vectors. Several guarantees are re-verified in exact rational arithmetic in the trusted checker: tolerance-free barrier certificates for abort safety, Karush–Kuhn–Tucker (KKT) certificates that, when a valid Lagrangian dual point exists, give an exact rational bound on the suboptimality of an approximate online convex solve, and tolerance-free bounds on the global optimum of the nonconvex docking subproblem. This paper describes the architecture, the verification approach, and a reproducible end-to-end example.

## 1 Motivation and significance

Spacecraft rendezvous and docking place strong demands on software [3]. The maneuvers are safety-critical, and some unsafe commands or contact events cannot be corrected after the fact; they run convex and nonconvex optimization in the loop; and the flight code must be shown to be free of runtime errors and faithful to its specification. Mature simulation environments exist, including Basilisk [4], NASA’s 42 [5], Orekit [6], and the General Mission Analysis Tool (GMAT) [7], and Podium does not attempt to replace them for general astrodynamics. Its purpose is narrower: to organize development around spacecraft rendezvous, proximity operations, and docking (RPOD) rather than absolute orbit propagation, and to make formal validation part of ordinary development.

The library is motivated by three needs. Relative motion, approach corridors, keep-out zones, plume impingement, and docking contact are central to RPOD and are a modeling focus distinct from absolute orbit propagation. Convex trajectory optimization is now standard in guidance [8, 9, 10, 11], but a floating-point quadratic program (QP) or second-order cone program (SOCP) solver can return a nominally optimal solution that violates a constraint under rounding, so Podium re-checks such solver output with an exact-rational Karush–Kuhn–Tucker (KKT) checker that

---

\*Starcloud, Inc. Source and documentation: [github.com/adi-oltean/podium](https://github.com/adi-oltean/podium). Archived at <https://doi.org/10.5281/zenodo.21225268>.

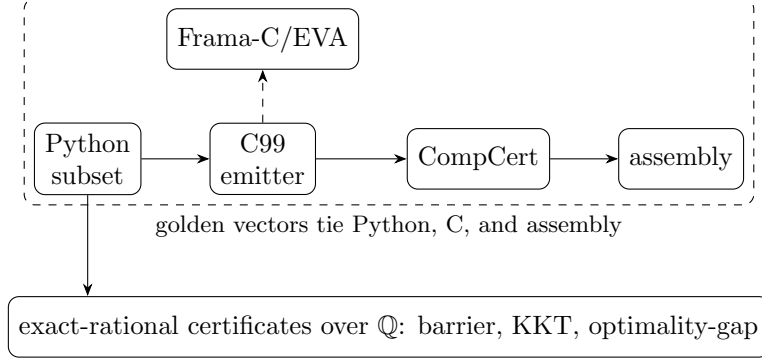


Figure 1: The flight-code path (top): a restricted Python subset is emitted to C99, shown alarm-free by Frama-C/EVA, and compiled by CompCert, with golden vectors tying the Python, C, and assembly on the tested inputs. A separate layer re-runs the exact-rational certificates (verified over  $\mathbb{Q}$ ) together with reachability checks on every change.

computes an exact rational bound on the solution’s suboptimality. The gap between a Python prototype and analyzable flight-target C, ordinarily crossed by hand, is here crossed mechanically, so that validation evidence applies to the same code path intended for deployment.

## 2 Software description

### 2.1 Architecture

Figure 1 shows the two paths this description follows: the restricted Python-to-C flight-code path (top) and the exact-rational certificate layer (bottom). Podium is organized as subpackages under `src/podium`. The `core` package holds the verifiable algorithm core: the Clohessy–Wiltshire dynamics and state-transition matrix [12], the Yamanaka–Ankersen matrix for elliptic orbits [13], relative orbital elements with Keplerian,  $J_2$ , and  $J_2$ -plus-drag state-transition matrices [14], a quaternion kernel, and fixed-step integrators. The `dynamics` package holds the truth models: nonlinear relative motion with  $J_2$  and differential drag over a seeded stochastic atmosphere, and rigid-body attitude with a suite of environmental torques (gravity gradient, aerodynamic, solar radiation pressure, and magnetic).

The `guidance` package implements convex and sequential-convex trajectory planners on the relative-motion discretizations. The `control` package provides discrete and continuous linear-quadratic regulators, quaternion attitude feedback, and a push-only thruster allocation. The `nav` package implements a relative-navigation extended Kalman filter with a Joseph-form (numerically stable) covariance update and sensor models for relative satellite navigation (relative Global Navigation Satellite System, GNSS), camera, and lidar. The `sim` package provides a deterministic fixed-step engine with bit-identical replays, Signal Temporal Logic (STL) specification oracles, and contact checking. The `verify` and `emit` packages provide the verification layer and the C code generator described below.

### 2.2 A verifiable algorithm core

Flight algorithms are written as pure step functions in a restricted subset of Python: statically shaped arrays, bounded loops, no dynamic allocation, and machine-readable contracts on input ranges and invariants. The subset is chosen so that a sound static analyzer can reason about it and

Table 1: Automated verification checks, re-run in continuous integration on the relevant path changes (and on scheduled drift checks where noted). QP: quadratic program. SOCP: second-order cone program. QCQP: quadratically constrained quadratic program. ISA: instruction-set architecture.

| Check                                         | Guarantee                                                                                                                  |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Closed-loop reachability<br>(JuliaReach [16]) | flowpipes avoid unsafe sets on the benchmark models [17]                                                                   |
| Exact-rational barrier certificates           | infinite-horizon abort safety, verified over $\mathbb{Q}$                                                                  |
| Exact-rational KKT certificates               | online QP solves given an exact rational suboptimality bound, SOCP solves re-verified against conic-KKT, over $\mathbb{Q}$ |
| Exact optimality-gap certificates             | bounds on a nonconvex QCQP optimum, verified over $\mathbb{Q}$                                                             |
| Sound static analysis<br>(Frama-C/EVA)        | emitted C alarm-free on contracted input ranges                                                                            |
| Verified compiler and cross-ISA               | golden vectors preserved through CompCert and a second ISA                                                                 |
| Independent physics oracle                    | translational truth model cross-validated against Orekit [6]                                                               |

so that it translates line-for-line to C. The `emit` package generates C99 from the subset, annotated with ACSL (ANSI/ISO C Specification Language) contracts, together with correctly rounded implementations of the transcendental functions from CORE-MATH [15]. The Frama-C/EVA abstract-interpretation analyzer [1] shows the emitted C free of runtime alarms (division by zero, overflow, invalid access) on the contracted input ranges. The generated C is checked against the Python reference on a suite of golden vectors: bit-exact for scalar arithmetic and square root, and, in the correctly-rounded (CORE-MATH) mode, for the transcendental functions as well; matrix products agree up to floating-point reassociation, since the emitted row-major loops and NumPy’s BLAS accumulate in a different order. The same vectors are replayed through the CompCert verified compiler [2], which machine-checks semantics preservation from C to assembly for the supported C subset and calling convention, and on a second instruction-set architecture (ISA). The golden vectors thus tie the Python reference, the emitted C, and the compiled assembly on the tested inputs.

**Software metadata.** Repository [github.com/adi-oltean/podium](https://github.com/adi-oltean/podium); language Python 3.11+; license MIT; principal dependencies NumPy, CVXPY, and Clarabel, with optional verification tooling (Frama-C, CompCert, JuliaReach). Continuous integration runs on GitHub Actions. The examples and the per-release audit bundle are the primary distribution channel; the library is in active development (v0.x).

### 3 Verification approach

Podium runs verification as a set of automated checks re-executed on every relevant change, rather than as a manual milestone; Table 1 summarizes them.

Two implementation choices support these guarantees. Several certificates are checked in exact rational arithmetic, with no floating point in the trusted checker: a barrier for abort safety [18, 19], KKT conditions for the online convex solves, and bounds on the global optimum of the nonconvex docking subproblem through the S-procedure [20, 21] and its trust-region special case [22]. The barrier and optimality-gap certificates are tolerance-free, their acceptance being an exact positive-semidefiniteness test together with exact feasibility; exact rational certificates of this kind build

on a body of work in sum-of-squares and polynomial optimization and in verified semidefinite programming [23, 24, 25, 26, 27]. The KKT check re-verifies an approximate solver’s output: it computes the optimality residuals exactly and, when a valid Lagrangian dual point exists, reports an exact rational bound on the point’s suboptimality. For a strictly convex quadratic program this bound accounts for the stationarity residual through the problem’s curvature; a small residual alone is not a suboptimality bound, since with a rank-deficient objective (an LP or minimum-fuel problem) an approximately stationary point can be arbitrarily suboptimal. For a second-order cone program, whose objective is linear, a rigorous bound instead requires exact conic-dual feasibility. In every case the checker itself introduces no rounding error. The emitted flight C is tied to the Python reference by the golden vectors (above) and carried to assembly by CompCert, so the validated algorithm and the compiled algorithm agree on the tested inputs. Every tagged release ships an audit bundle, produced by a build script that archives the continuous-integration receipts under a fixed seed, whose hash is reproducible across rebuilds.

## 4 Illustrative example

Two artifacts illustrate the library at different depths. A one-command demo, `examples/vbar_approach.py`, plans a one-kilometer approach along the target’s velocity axis (a V-bar approach, in the local-vertical/local-horizontal frame) on the Clohessy–Wiltshire discretization and propagates it under the linear Clohessy–Wiltshire dynamics; Figure 2 shows its trajectory. It is a readable entry point (Python 3.11+, dependencies in `pyproject.toml`, no other setup) and is not the verified pipeline.

The reference mission (`podium.sim.mission`, exercised by `test_mission.py` in continuous integration) composes the layers end to end: a convex planner produces the approach, the plan is propagated through the nonlinear truth model with  $J_2$  and differential drag, the closed-loop trajectory is checked against approach-corridor and keep-out Signal Temporal Logic specifications, and the passive-drift abort safety (the safe free-drift trajectory after a thruster cutoff) is certified in exact rational arithmetic by the barrier. The exact-rational KKT and conic-KKT checkers, which re-verify an online QP or SOCP solve against its own optimality conditions, run in continuous integration as part of the verification suite (`test_kkt.py`) rather than inside the reference-mission loop. An interactive playback of the same burn plan under the nonlinear truth model is hosted at <https://adi-oltean.github.io/podium/> as static HTML with no build step, and the emitted flight kernels are exercised in `examples/cfs_nav_app/`, a NASA Core Flight System (cFS) application, with build and run steps in its README.

## 5 Impact and comparison

Each ingredient of Podium is well covered by open prior art; the contribution is their coupling. Table 2 makes this precise against the closest tools on each axis.

On trajectory optimization, the open SCPToolbox.jl [28] and GuSTO.jl [29] implement the sequential-convex family with rendezvous and free-flyer examples, `ct-scvx` [30] adds continuous-time feasibility with in-house C generation, and `successive_rendezvous` [31] is a released 6-DoF Apollo transposition-and-docking implementation; further rendezvous-specific successive-convexification work includes factorization-free [39] and continuous-time temporal-logic [40] formulations. Prong (i) for RPOD is thus established open art, and none of these carries a certificate or verified-code layer. On certificates, RealCertify [32], the Coq-checked ValidSDP [33], and verified SDP [34] produce exact-rational or rigorously bounded certificates for general polynomial and conic

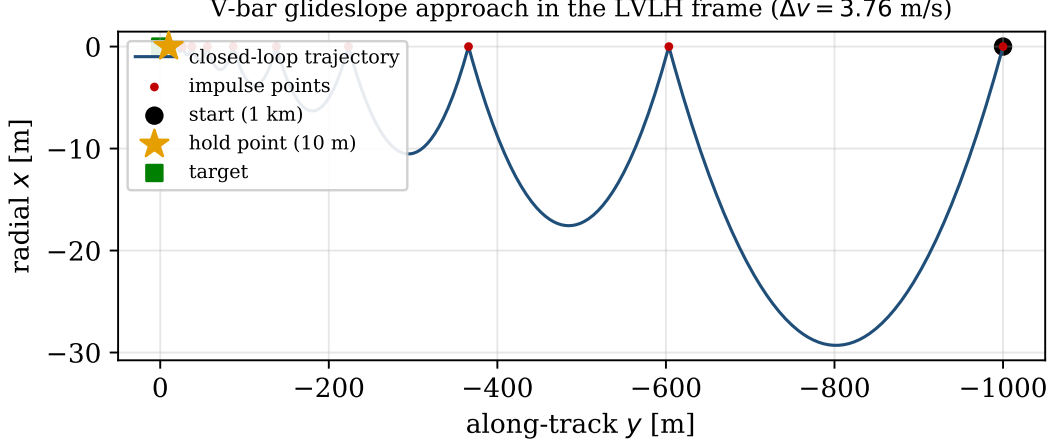


Figure 2: Trajectory of the `vbar_approach.py` demo: a one-kilometer V-bar glideslope approach to a 10 m hold point in the local-vertical/local-horizontal (LVLH) frame, planned on the Clohessy–Wiltshire discretization and propagated under the linear Clohessy–Wiltshire dynamics. The verified pipeline (nonlinear truth model, temporal-logic checks, and the exact barrier) is the reference mission, exercised in continuous integration rather than by this demo; the exact-rational KKT checker runs as a separate checker test.

problems, and certifiable trajectory optimization [41], certifiable perception [42], and exact SDP relaxations for QCQPs [43, 44] produce certified bounds by numerical semidefinite programming; but none is online, RPOD-specific, tolerance-free over  $\mathbb{Q}$ , and re-run in continuous integration. On verified code, the Copilot toolchain [35] couples a restricted high-level source with a C path, formal proof, and CI (for runtime monitors, not guidance); credible autocoding [36, 37] and verified model-predictive-control solvers [45] autocode convex-optimization solvers to contract-annotated C, and execution-time-certified embedded QP solvers [46] bound the online iteration count; verified spacecraft control programs [47] and verified optimization reductions in a proof assistant [48] certify code or problem transformations formally; and CVXPYgen [38] generates C from Python convex problems; none couples exact-rational per-solve certificates with an RPOD library. The simulators Basilisk [4] and NASA’s 42 [5] and the flight-dynamics systems Orekit [6] and GMAT [7] support proximity-operations modeling but no planner, certificate, or verified-code layer.

The novelty is therefore not any single prong but their integration. We are not aware of a publicly released, RPOD-focused library that, in one codebase, couples sequential-convex planners with exact-rational *per-solve* certificates re-run in continuous integration and a restricted Python-to-C flight-code path whose generated C is regression-checked by golden vectors, analyzed by Frama-C/EVA under stated input contracts, and compiled by CompCert over its supported subset. Podium is complementary to the tools above rather than a replacement. It is intended for researchers and engineers developing and validating RPOD guidance and control, and as a reproducible baseline: verification runs on every change and every release carries its evidence, so that results built on the library can be re-checked independently.

## 6 Conclusions

Podium is an open library that organizes guidance, navigation, and control around RPOD scenarios from the outset and treats formal validation as a continuous activity. Its verifiable algorithm core,

Table 2: Podium’s claim is a conjunction: each open tool covers at most one or two prongs. ✓ full, ~ partial, blank none. Prong (i): a sequential-convex planner; (ii): exact-rational per-solve certificates re-run in continuous integration; (iii): a restricted high-level-source-to-C path checked by golden vectors, Frama-C/EVA, and CompCert. RPOD marks a rendezvous/docking focus.

|                              | (i) SCP | (ii) cert/CI | (iii) verified C | RPOD |
|------------------------------|---------|--------------|------------------|------|
| SCPToolbox.jl [28]           | ✓       |              | ~                | ~    |
| GuSTO.jl [29]                | ✓       |              |                  | ~    |
| ct-scvx [30]                 | ✓       |              | ~                | ~    |
| successive_rendezvous [31]   | ✓       |              |                  | ✓    |
| RealCertify [32]             |         | ~            |                  |      |
| ValidSDP [33]                |         | ~            |                  |      |
| Verified SDP [34]            |         | ~            |                  |      |
| Copilot [35]                 |         |              | ✓                |      |
| Credible autocoding [36, 37] | ~       |              | ~                |      |
| CVXPYgen [38]                |         |              | ~                |      |
| Basilisk [4]                 |         |              |                  | ✓    |
| <b>Podium</b>                | ✓       | ✓            | ✓                | ✓    |

exact-arithmetic certificates, and verified flight-code path are designed so that validation evidence applies to the same code path intended for deployment, and so that its guarantees can be reproduced by any user. The exact-rational certificates are checked by an  $O(n^3)$  symmetric  $LDL^\top$  factorization, whose factors are themselves the nonnegativity witness; the open problem is to scale this from the per-primitive matrices to the block-banded matrices of a full trajectory, where a fraction-free elimination exploiting the bandedness would bound the certificate size in the horizon. Development continues toward broader mission coverage and such structure-exploiting exact certificates.

## References

- [1] Florent Kirchner, Nikolai Kosmatov, Virgile Prevosto, Julien Signoles, and Boris Yakobowski. Frama-C: A software analysis perspective. *Formal Aspects of Computing*, 27(3):573–609, 2015.
- [2] Xavier Leroy. Formal verification of a realistic compiler. *Communications of the ACM*, 52(7):107–115, 2009.
- [3] Wigbert Fehse. *Automated Rendezvous and Docking of Spacecraft*. Cambridge University Press, 2003.
- [4] Kenneth Alcorn, Hanspeter Schaub, and Scott Piggott. Simulating attitude actuation options using the Basilisk astrodynamics software architecture. *Acta Astronautica*, 2020.
- [5] Eric T. Stoneking. 42: A comprehensive general-purpose simulation of attitude and trajectory dynamics and control of multiple spacecraft. NASA Goddard Space Flight Center, open-source software, 2020. <https://github.com/ericstoneking/42>.
- [6] Luc Maisonobe, Véronique Pommier, and Pascal Parraud. Orekit: An open source library for operational flight dynamics applications. In *4th International Conference on Astrodynamics Tools and Techniques (ICATT)*, 2010.

- [7] NASA Goddard Space Flight Center. General mission analysis tool (GMAT). Open-source software, 2020. <https://gmatsfsc.nasa.gov>.
- [8] Behçet Açıkmeşe and Scott R. Ploen. Convex programming approach to powered descent guidance for Mars landing. *Journal of Guidance, Control, and Dynamics*, 30(5):1353–1366, 2007.
- [9] Behçet Açıkmeşe and Lars Blackmore. Lossless convexification of a class of optimal control problems with non-convex control constraints. *Automatica*, 47(2):341–347, 2011.
- [10] Michael Szmuk and Behçet Açıkmeşe. Successive convexification for 6-dof mars rocket powered landing with free-final-time. In *AIAA SciTech Forum*, 2018.
- [11] Danylo Malyuta, Taylor P. Reynolds, Michael Szmuk, Thomas Lew, Riccardo Bonalli, Marco Pavone, and Behçet Açıkmeşe. Convex optimization for trajectory generation. *IEEE Control Systems Magazine*, 42(5):40–113, 2022.
- [12] W. H. Clohessy and R. S. Wiltshire. Terminal guidance system for satellite rendezvous. *Journal of the Aerospace Sciences*, 27(9):653–658, 1960.
- [13] Koji Yamanaka and Finn Ankersen. New state transition matrix for relative motion on an arbitrary elliptical orbit. *Journal of Guidance, Control, and Dynamics*, 25(1):60–66, 2002.
- [14] Adam W. Koenig, Tommaso Guffanti, and Simone D’Amico. New state transition matrices for relative motion of spacecraft in perturbed orbits. *Journal of Guidance, Control, and Dynamics*, 40(7):1749–1768, 2017.
- [15] Alexei Sibidanov, Paul Zimmermann, and Stéphane Glondou. The CORE-MATH project. In *29th IEEE Symposium on Computer Arithmetic (ARITH)*, 2022.
- [16] Sergiy Bogomolov, Marcelo Forets, Goran Frehse, Kostiantyn Potomkin, and Christian Schilling. JuliaReach: A toolbox for set-based reachability. In *22nd ACM International Conference on Hybrid Systems: Computation and Control (HSCC)*, 2019.
- [17] Matthias Althoff et al. ARCH-COMP category report: Continuous and hybrid systems with linear continuous dynamics. In *ARCH Workshop*, 2023.
- [18] Stephen Prajna and Ali Jadbabaie. Safety verification of hybrid systems using barrier certificates. In *Hybrid Systems: Computation and Control (HSCC)*, 2004.
- [19] Aaron D. Ames, Xiangru Xu, Jessy W. Grizzle, and Paulo Tabuada. Control barrier function based quadratic programs for safety critical systems. *IEEE Transactions on Automatic Control*, 62(8):3861–3876, 2017.
- [20] V. A. Yakubovich. S-procedure in nonlinear control theory. *Vestnik Leningrad University*, 1:62–77, 1971.
- [21] Imre Pólik and Tamás Terlaky. A survey of the S-lemma. *SIAM Review*, 49(3):371–418, 2007.
- [22] Jorge J. Moré and D. C. Sorensen. Computing a trust region step. *SIAM Journal on Scientific and Statistical Computing*, 4(3):553–572, 1983.
- [23] Pablo A. Parrilo. Semidefinite programming relaxations for semialgebraic problems. *Mathematical Programming, Series B*, 96(2):293–320, 2003.

- [24] Jean B. Lasserre. Global optimization with polynomials and the problem of moments. *SIAM Journal on Optimization*, 11(3):796–817, 2001.
- [25] Erich L. Kaltofen, Bin Li, Zhengfeng Yang, and Lihong Zhi. Exact certification in global polynomial optimization via sums-of-squares of rational functions with rational coefficients. *Journal of Symbolic Computation*, 47(1):1–15, 2012.
- [26] Helfried Peyrl and Pablo A. Parrilo. Computing sum of squares decompositions with rational coefficients. *Theoretical Computer Science*, 409(2):269–281, 2008.
- [27] Maria M. Davis and Dávid Papp. Dual certificates and efficient rational sum-of-squares decompositions for polynomial optimization over compact sets. *SIAM Journal on Optimization*, 32(4):2461–2492, 2022.
- [28] University of Washington Autonomous Controls Laboratory. SCPToolbox.jl: Sequential convex programming toolbox. Open-source software, 2022. <https://github.com/UW-ACL/SCPToolbox.jl>; companion to [11].
- [29] Riccardo Bonalli, Abhishek Cauligi, Andrew Bylard, and Marco Pavone. GuSTO: Guaranteed sequential trajectory optimization via sequential convex programming. In *IEEE International Conference on Robotics and Automation (ICRA)*, 2019. <https://github.com/StanfordASL/GuSTO.jl>.
- [30] Purnanand Elango, Dayou Luo, Abhinav G. Kamath, Samet Uzun, Taewan Kim, and Behçet Açıkmeşe. Continuous-time successive convexification for constrained trajectory optimization. *Automatica*, 180:112464, 2025.
- [31] Danylo Malyuta, Taylor P. Reynolds, Michael Szmuk, and Behçet Açıkmeşe. Six-degree-of-freedom rendezvous trajectory generation via successive convexification with state-triggered constraints. Open-source research code, AIAA SciTech, 2020. [https://github.com/dmalyuta/successive\\_rendezvous](https://github.com/dmalyuta/successive_rendezvous).
- [32] Victor Magron and Mohab Safey El Din. RealCertify: A Maple package for certifying non-negativity. *ACM Communications in Computer Algebra*, 52(2):34–37, 2018.
- [33] Érik Martin-Dorel and Pierre Roux. ValidSDP: A Coq library for verified SDP-based positivity certificates. Coq library, 2017. <https://sourcesup.renater.fr/www/validsdp>.
- [34] Christian Jansson. On verified numerical computations in convex programming. *Japan Journal of Industrial and Applied Mathematics*, 26:337–363, 2009.
- [35] Ryan G. Scott, Mike Dodds, Ivan Perez, Alwyn E. Goodloe, and Robert Dockins. Trustworthy runtime verification via bisimulation (experience report). *Proceedings of the ACM on Programming Languages*, 7(ICFP):305–321, 2023.
- [36] Timothy Wang, Romain Jobredeaux, Heber Herencia-Zapana, Pierre-Loïc Garoche, Arnaud Dieumegard, Eric Feron, and Marc Pantel. From design to implementation: An automated, credible autocoding chain for control systems. In *Advances in Control System Technology for Aerospace Applications*, volume 460 of *Lecture Notes in Control and Information Sciences*. Springer, 2016. arXiv:1307.2641.



- [37] Raphaël Cohen, Eric Feron, and Pierre-Loïc Garoche. Verification and validation of convex optimization algorithms for model predictive control. *Journal of Aerospace Information Systems*, 17(5), 2020. arXiv:2005.12588.
- [38] Maximilian Schaller, Goran Banjac, Steven Diamond, Akshay Agrawal, Bartolomeo Stellato, and Stephen Boyd. Embedded code generation with CVXPY. *IEEE Control Systems Letters*, 6:2653–2658, 2022.
- [39] Govind M. Chari and Behçet Açıkmeşe. Spacecraft rendezvous guidance via factorization-free sequential convex programming. arXiv:2402.04561, 2024.
- [40] Samet Uzun and Behçet Açıkmeşe. Successive convexification for trajectory optimization with continuous-time satisfaction of signal temporal logic specifications. arXiv:2606.06896, 2026.
- [41] Shucheng Kang, Xiaoyang Xu, Jay Sarva, Ling Liang, and Heng Yang. Fast and certifiable trajectory optimization. arXiv:2406.05846, 2024.
- [42] Heng Yang and Luca Carlone. Certifiably optimal outlier-robust geometric perception: Semidefinite relaxations and scalable global optimization. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(3):2816–2834, 2023.
- [43] Masakazu Kojima, Sunyoung Kim, and Naohiko Arima. Local-to-global exactness of SDP relaxations for sparse QCQPs. arXiv:2606.21823, 2026.
- [44] Diego Cifuentes, Sameer Agarwal, Pablo A. Parrilo, and Rekha R. Thomas. On the local stability of semidefinite relaxations, 2022.
- [45] Guillaume Davy, Eric Feron, Marc Pantel, Pierre-Loïc Garoche, and Didier Henrion. Experiments in verification of linear model predictive control. arXiv:1801.03833, 2018.
- [46] Liang Wu, Wei Xiao, and Richard D. Braatz. EIQP: Execution-time-certified and infeasibility-detecting QP solver. arXiv:2502.07738, 2025.
- [47] Andrey Mokhov, Georgy Lukyanov, and Jakob Lechner. Formal verification of spacecraft control programs using a metalanguage for state transformers. arXiv:1802.01738, 2018.
- [48] Alexander Bentkamp, Ramón Fernández Mir, and Jeremy Avigad. Verified reductions for optimization. In *Tools and Algorithms for the Construction and Analysis of Systems (TACAS)*, 2023.