

WALLET SECURITY BEFORE APPROVAL

PlainSign


Understand every Ethereum transaction and signature before you sign it.

Wallet prompts expose data, not consequences


A button says **Free Mint.**

The wallet shows raw hex and asks for confirmation.

The hidden request grants permission to move an entire NFT collection.

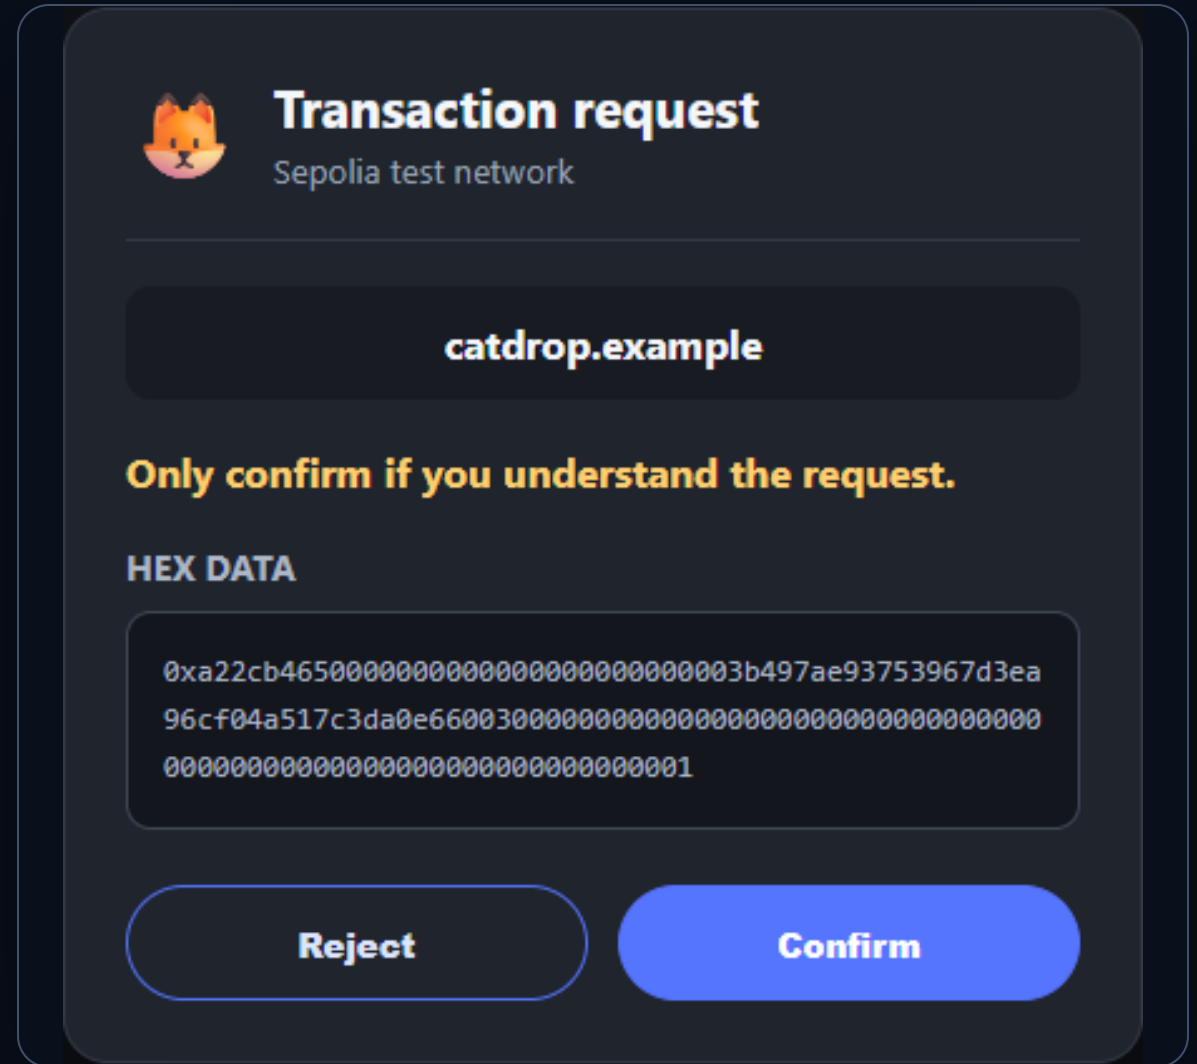

A plain-English checkpoint before the wallet

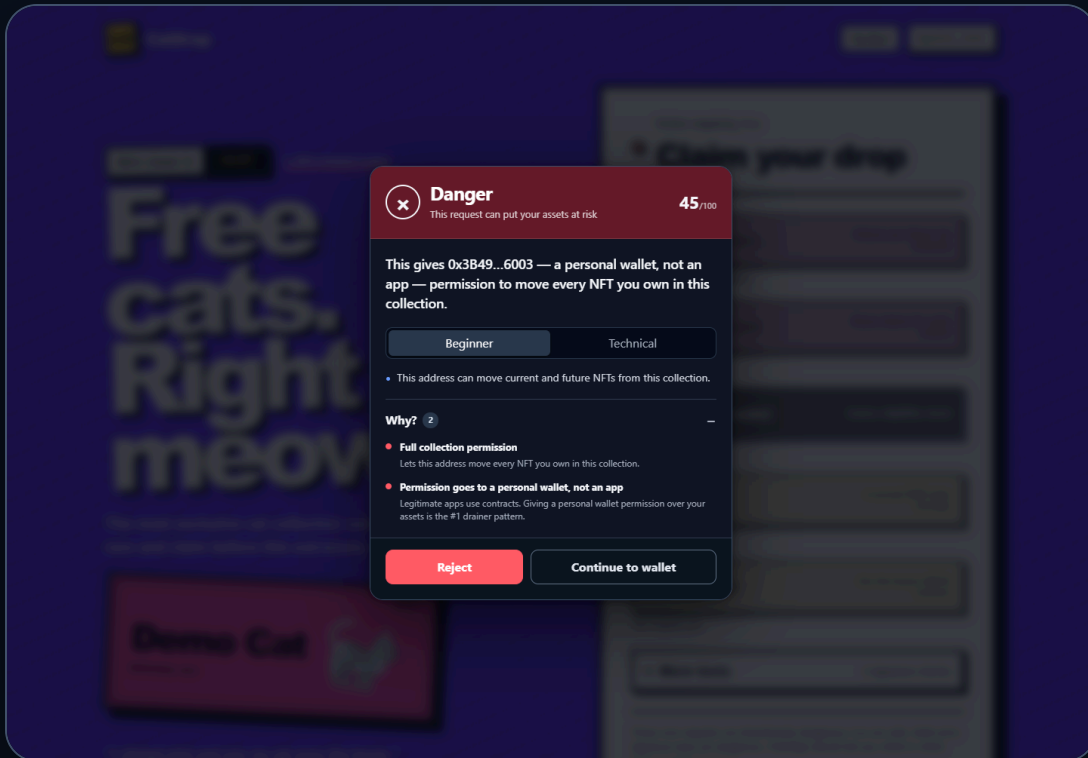

Danger appears before MetaMask.

The sentence names the real permission and the address receiving it.


Reject stops the request with standard wallet error 4001.

Live demo



Seven requests cover disguised approvals, Permit2, SIWE, WETH, opaque hashes, and Seaport.

The card explains the consequence before the real wallet receives the request.

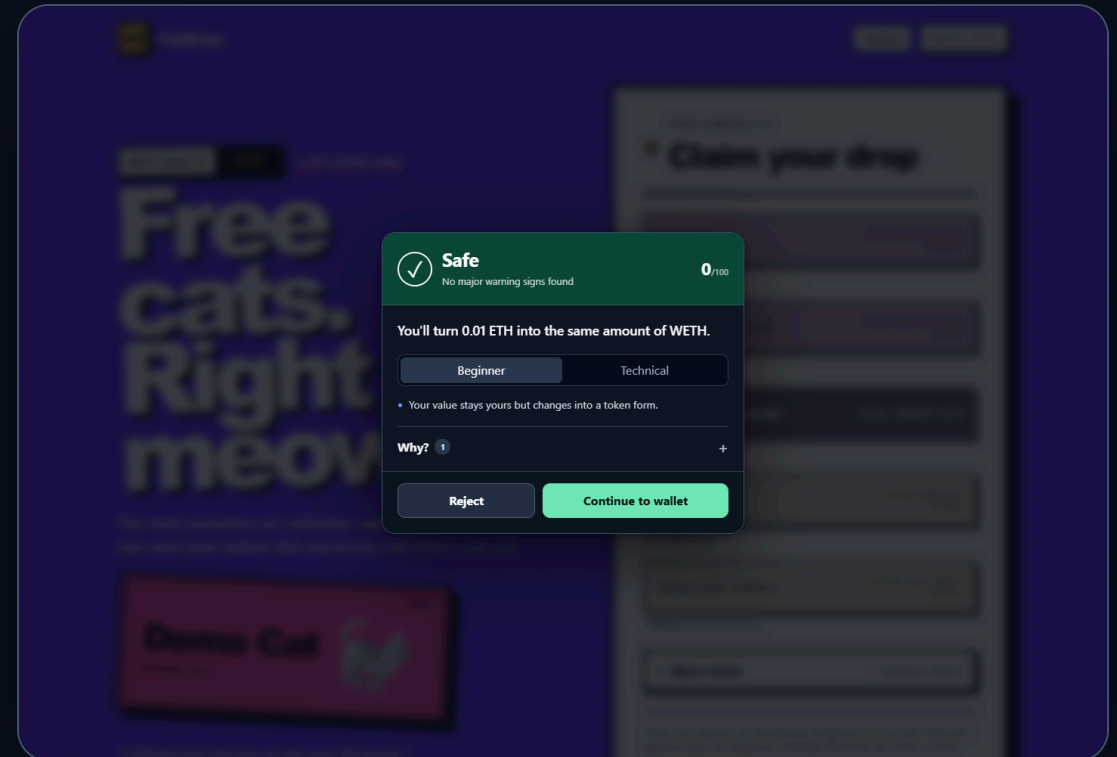

Technology



Continue forwards the untouched request. Reject returns error 4001. Optional Sepolia simulation adds expected balance changes.

Innovation

Signature-first


Permit2 and marketplace orders count as asset-risk events.

Meaning-first

The lead sentence describes what changes for the user.

Open rules

Every score and reason is auditable in `rules.json`.

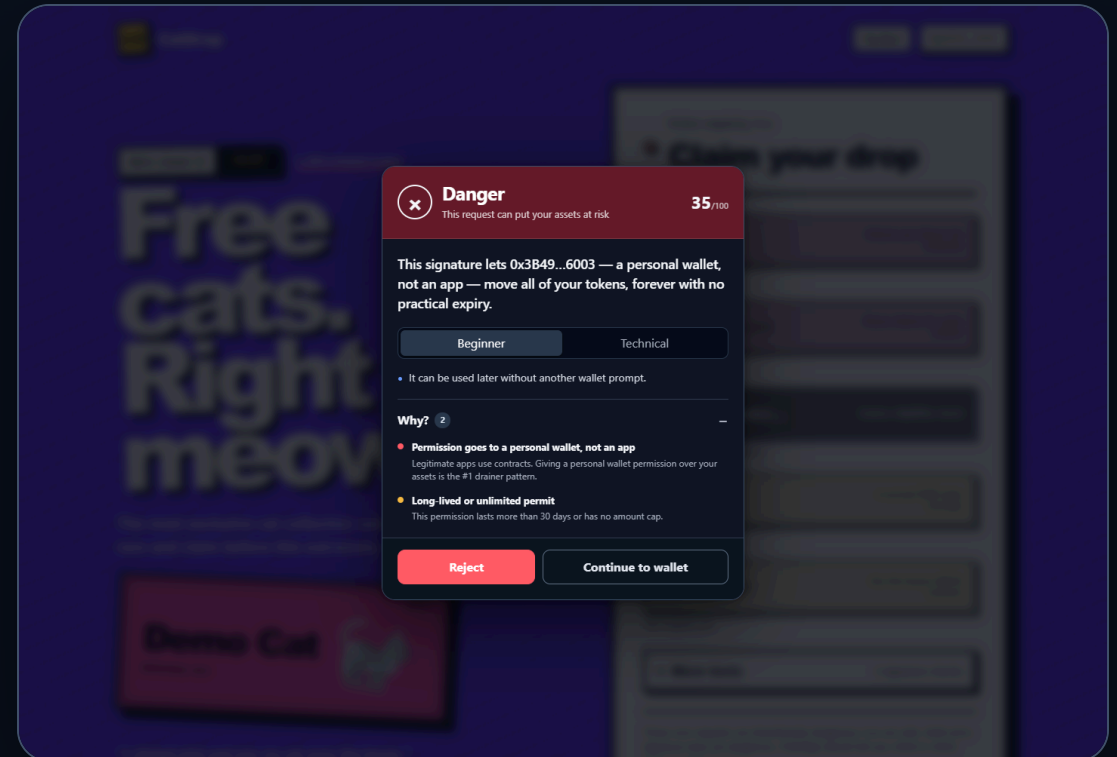

Impact and honest limits

Earlier decision

Users see the consequence before the wallet confirmation.

Clear reasons

Each verdict lists the rule that fired and what could go wrong.

Local by design

No backend, account, paid dependency, analytics, or telemetry.

PlainSign provides heuristics, not guarantees. Chrome and MetaMask are the primary path. EIP-6963 support is best-effort. Signatures are decoded rather than simulated. Unknown requests receive Caution.

Roadmap

Revoke dangerous permissions

Use community drainer lists with provenance

Expand to more EVM chains

github.com/adib-cyber007/plainsign

