CRYPTO WORLD'S FAIR 2026 · ETHEREUM L1

PlainSign


Understand wallet permissions before you sign them.

Wallet prompts expose data, not consequences


A button says **Free Mint**.

The wallet shows raw hex and asks for confirmation.

The hidden request grants permission to move an entire NFT collection.

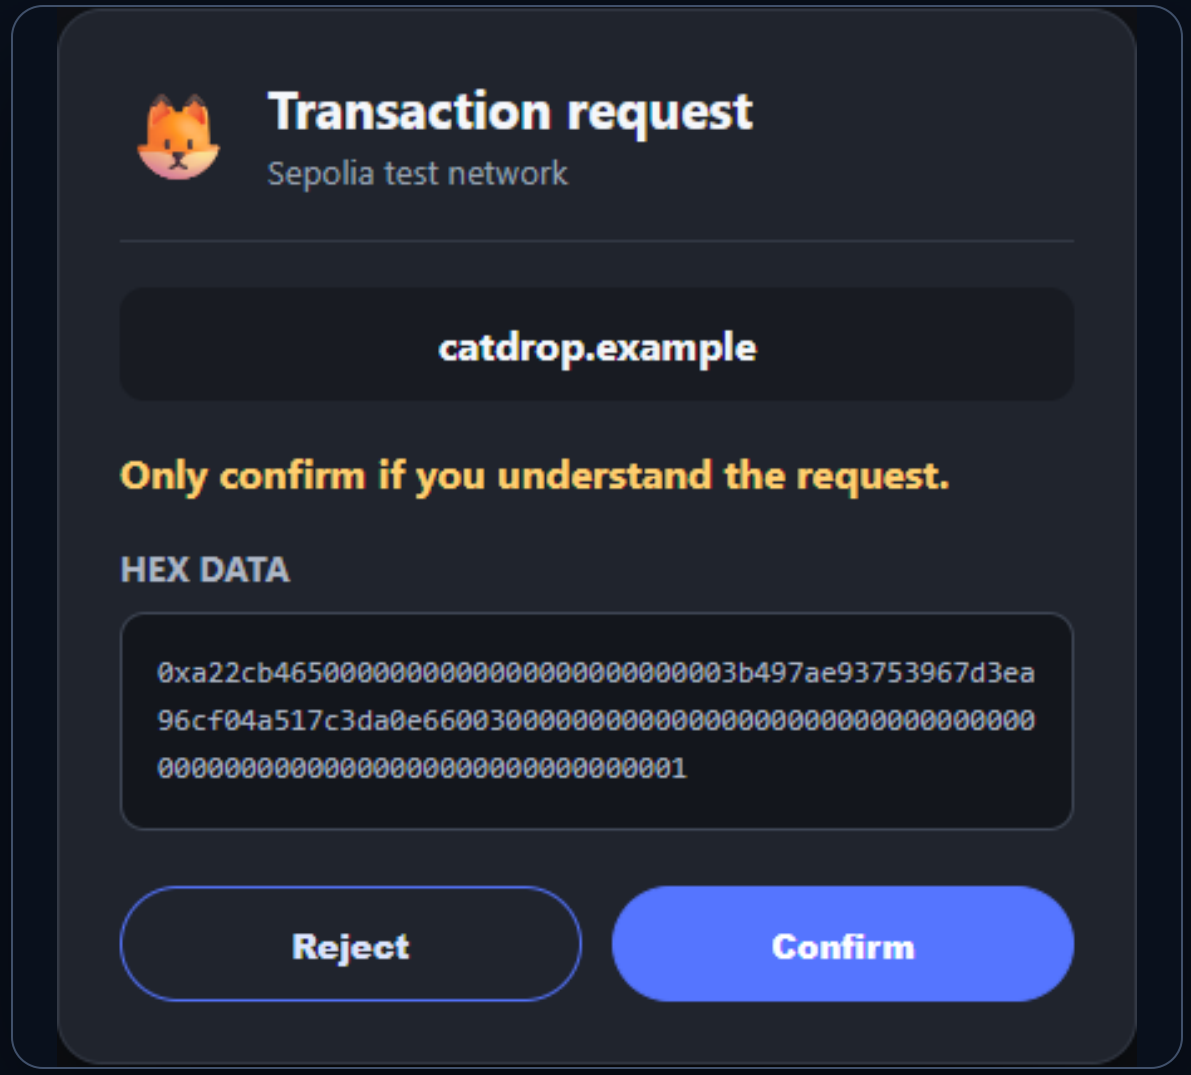

A plain-English checkpoint before the wallet

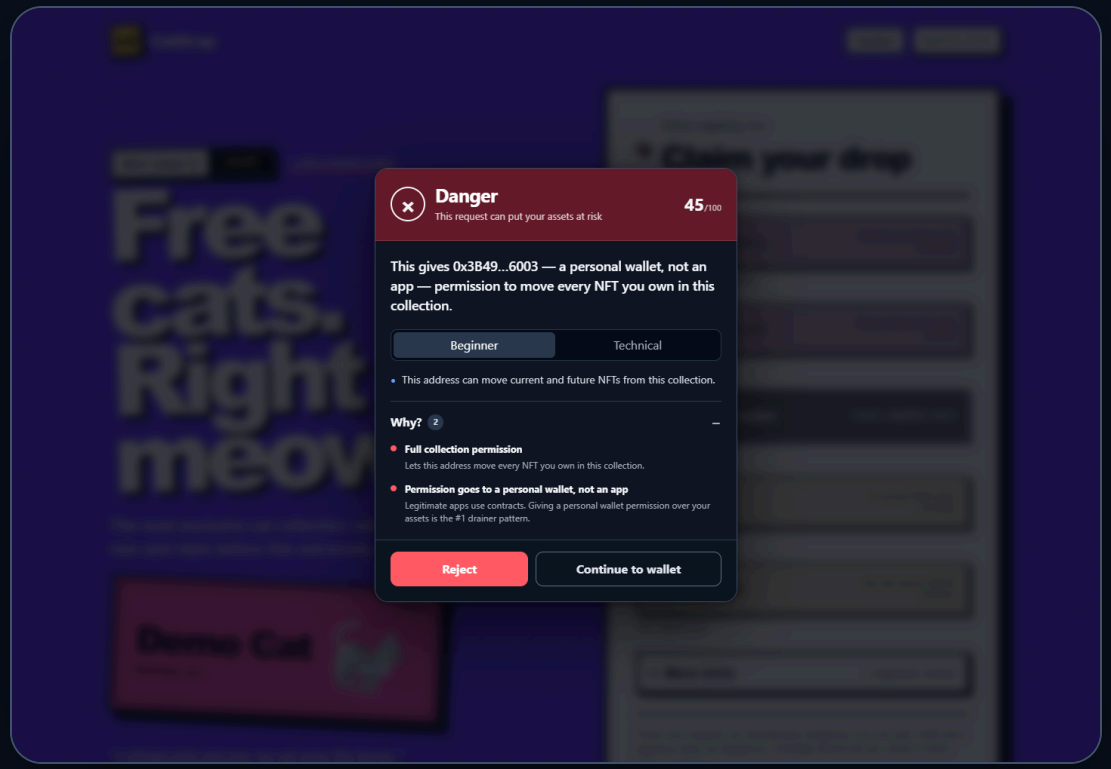

Danger appears before MetaMask.


The sentence names the real permission and the address receiving it.

Reject stops the request with standard wallet error `4001`.

Live demo

Seven requests cover disguised approvals, Permit2, SIWE, WETH, opaque hashes, and Seaport.

The card explains the consequence before the real wallet receives the request.

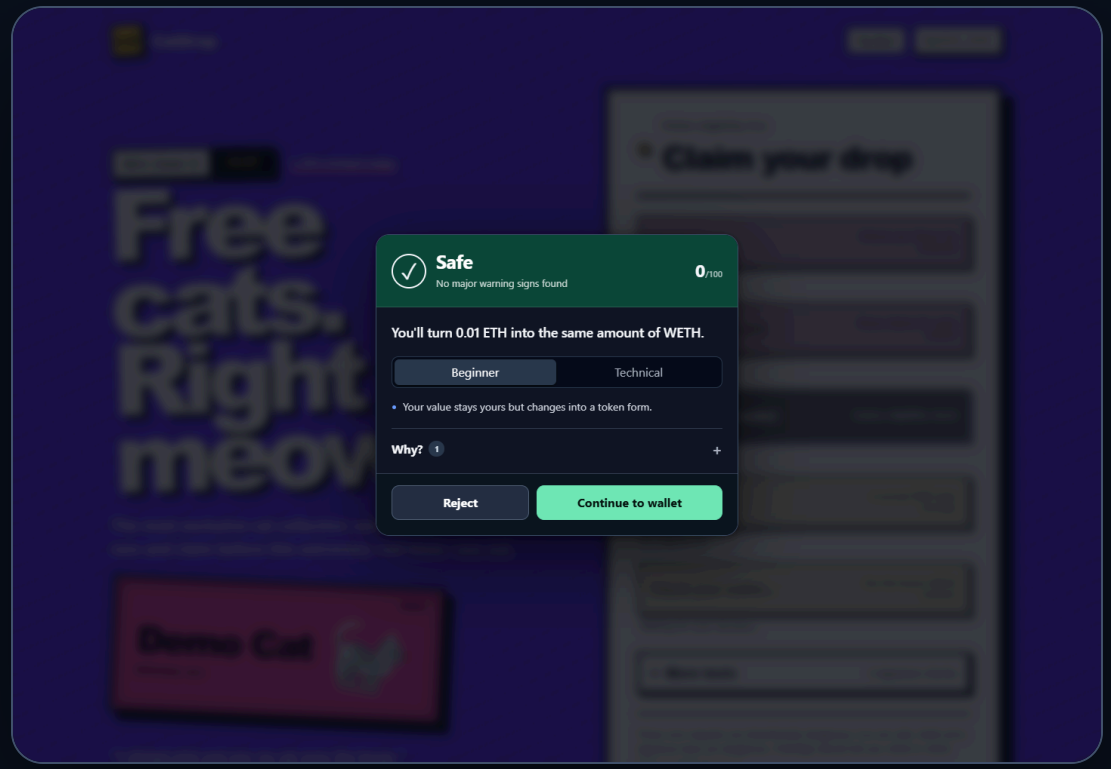

Technology



Continue forwards the untouched request. Reject returns error 4001. Optional Sepolia simulation adds expected balance changes.

Innovation

Signature-first


Permit2 and marketplace orders count as asset-risk events.

Meaning-first

The lead sentence describes what changes for the user.

Open rules

Every score and reason is auditable in `rules.json`.

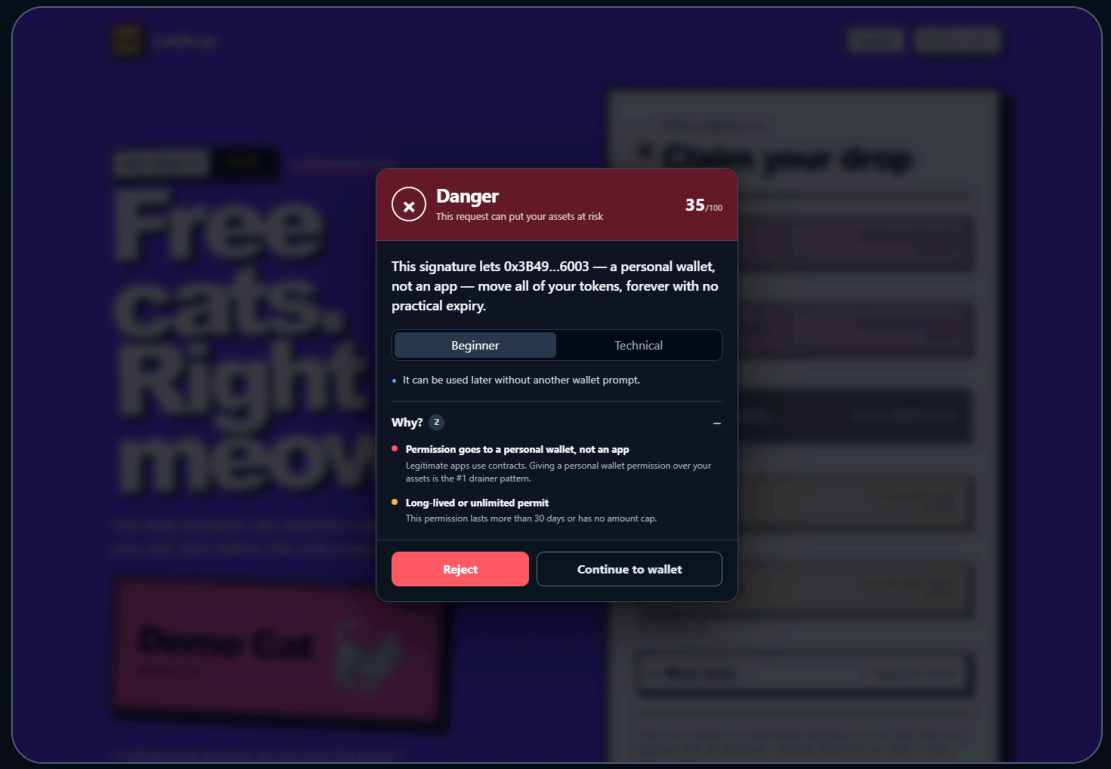

Impact and honest limits

Earlier decision

Users see the consequence before the wallet confirmation.

Clear reasons

Each verdict lists the rule that fired and what could go wrong.

Local by design

No backend, account, paid dependency, analytics, or telemetry.

PlainSign provides heuristics, not guarantees. Chrome and MetaMask are the primary path. EIP-6963 support is best-effort. Signatures are decoded rather than simulated. Unknown requests receive Caution.

New work for Crypto World's Fair

Ethereum L1 support

Mainnet RPC, contract metadata, and network-specific protocol addresses.

Warnings survive an RPC outage

Known-drainer evidence stays visible. Incomplete address checks receive Caution.

A demo judges can open immediately

Five sample requests run through the shipped decoder and rules without a wallet.

Earlier work, including the interceptor, Revoke instead and drainer feed, is disclosed separately. Sample metadata is simulated. Mainnet verification reads public chain data only.

A free extension with a paid integration path

Free for individuals

Open rules and a local warning layer lower the cost of trying PlainSign.

Proposed wallet and dApp SDK

Charge teams for integration support, maintained rule packages, and policy controls.

Validate before pricing

Interview wallet builders and test whether teams will pay for easier integration.

Business model is a hypothesis. No revenue, customer, or adoption claims are made.

Distribution starts with understandable evidence

First users

Ethereum wallet users and community educators who can test deceptive approvals.

First partners

Wallet and dApp teams that want an inspectable request-analysis module.

Next validation milestone

Observe five users trying the demo. Measure correct explanations, false alarms, and completion time. Seek two SDK design partners.

These are planned experiments. The sample walkthrough and automated tests demonstrate functionality, not market traction.

Team and the next milestone

Mohamed Adib

Student at Sri Venkateswara College of Engineering.

PlainSign · Solo entrant

Open source at github.com/adib-cyber007/plainsign.

Next product milestone

Independent security review, observed user tests, then a wallet SDK pilot.

github.com/adib-cyber007/plainsign

