

OCTO APM Demo - End-User Walkthrough

A public-safe LiveLab guide for running the buyer journey, payment simulation, support flow, admin simulations, OCI APM drilldowns, Log Analytics correlation, Availability Monitoring, Stack Monitoring discovery, and the simulated cyber-attack investigation.

Item	Value
Shop URL	\${OCTO_LIVE_SHOP_URL} or https://shop.example.test
Admin URL	\${OCTO_LIVE_ADMIN_URL} or https://admin.example.test
Synthetic identity domain	apex.example.test
Admin sign-in	Use the facilitator-provided local demo admin credentials from the deployment files.

Public copies must not include live domains, public IP addresses, OCIDs, tenancy names, wallet paths, passwords, or console account-header screenshots.

Before You Start

- Use only fictional demo users and dummy payment values.
- Keep one OCI Console time window around the demo so traces, logs, metrics, RUM, and monitor runs line up.
- Copy order ids, trace ids, payment gateway request ids, ticket ids, and attack ids when the UI shows them.
- Do not paste secret values into screenshots, chat, tickets, commits, or public documentation.
- If a live endpoint is required, load it locally from private deployment files and keep it out of this PDF.

Prebuilt Demo Users

Name	User e-mail	Persona
Alex Chen	alex.chen@apex.example.test	Fleet operations buyer
Maya Ionescu	maya.ionescu@apex.example.test	Field services buyer
Nora Patel	nora.patel@apex.example.test	Energy survey buyer
Daniel Rossi	daniel.rossi@apex.example.test	Infrastructure buyer
Irina Marin	irina.marin@apex.example.test	Public safety buyer
Samuel Wright	samuel.wright@apex.example.test	Logistics buyer
Elena Garcia	elena.garcia@apex.example.test	Agriculture buyer
Noah Kim	noah.kim@apex.example.test	Inspection buyer
Sofia Andersen	sofia.andersen@apex.example.test	Rail systems buyer
Matei Popa	matei.popa@apex.example.test	Utilities buyer
Lina Hoffman	lina.hoffman@apex.example.test	Emergency response buyer
Omar Saleh	omar.saleh@apex.example.test	Maritime buyer


For RUM demos, open the shop with one user at a time, for example:
\${OCTO_LIVE_SHOP_URL}/shop?synthetic_user=maya.ionescu@apex.example.test.

Lab 1 - Shop Order

- 1 Open the shop URL with synthetic_user=maya.ionescu@apex.example.test.
- 2 Confirm the catalog renders from the database and the page shows observability indicators when configured.
- 3 Open a drone product, add two drone products to the cart, and review the cart totals.
- 4 Fill checkout with the fictional buyer Maya Ionescu, maya.ionescu@apex.example.test, Apex Field Services, phone +1 555 0184, and a synthetic operations address.
- 5 Select Credit Card and use dummy VISA 4111111111111111 with future expiry, CVV 123, and postal code 10001.
- 6 Click Place Order once. Copy the order id, trace id, and payment gateway request id if shown.

Expected signals

- RUM page view and custom actions for catalog load, add to cart, checkout start, and checkout completion.
- Shop spans for storefront, product lookup, cart, checkout validation, and order creation.
- Payment spans for simulated authorization, risk scoring, wallet/card metadata, and status.
- Java app-server spans for quote, payment verification, or support-side validation when the sidecar is enabled.
- SQL spans for customer, order, order item, payment transaction, and CRM sync writes.
- Structured app logs carrying oracleApmTraceId, oracleApmSpanId, order id, payment status, and gateway request id.

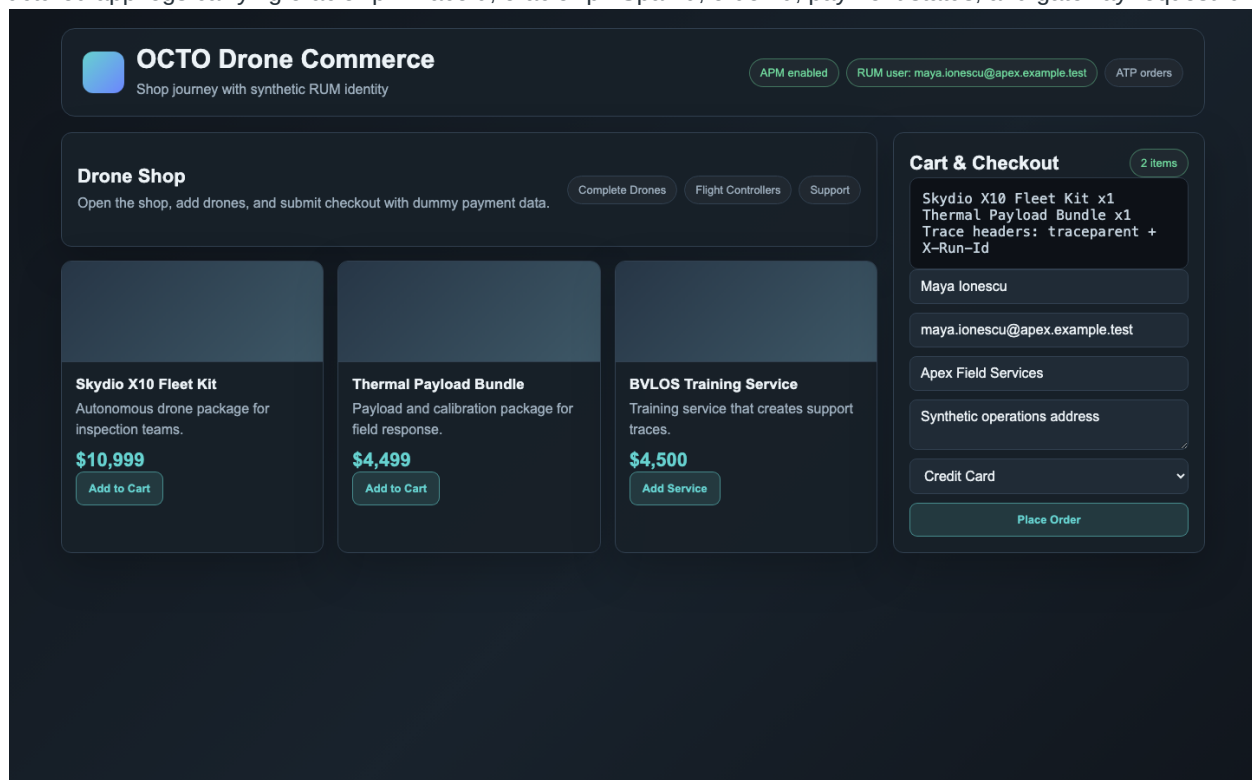

Lab 2 - Payment Variants

Repeat checkout with different users and payment methods to create useful APM, payment, SQL, and log diversity. The simulator records card brand, last four digits, expiry metadata, fingerprint, gateway status, risk score, and request id. It must not store or log full PAN or CVV.

Method	User	Dummy value	Expected result
Visa success	maya.ionescu@apex.example.test	4111111111111111	Authorized credit-card path.
Mastercard success	alex.chen@apex.example.test	5555555555554444	Authorized path with card_brand=mastercard.
Issuer decline	nora.patel@apex.example.test	4000000000000002	Declined or review path with same trace context.
Apple Pay	irina.marin@apex.example.test	Simulated wallet token	Tokenized wallet path with wallet_type=apple_pay.
Google Pay	samuel.wright@apex.example.test	Simulated wallet token	Tokenized wallet path with wallet_type=google_pay.
Bank transfer	daniel.rossi@apex.example.test	Net 30	Manual/offline path with method=bank_transfer.

Lab 3 - Support Ticket

- 1 Open the services page with the same fictional user.
 - 2 Book a service card if you want the support form pre-filled.
 - 3 Submit a ticket such as Need telemetry validation for order <order-id>.
 - 4 Confirm the ticket appears in the open-ticket list.
- RUM page view for the services path.
 - Service API spans for catalog and ticket creation.
 - CRM integration spans when the support path is linked to the admin/CRM app.
 - Logs with fictional user, request id, trace id, span id, ticket id, and order id.

Lab 4 - Admin Simulations

- 1 Open the admin login page and sign in with the facilitator-provided local demo admin account.
- 2 Open Settings or the Simulation area.
- 3 Run Java Health to validate the Java app-server component instrumented with the OCI APM Java agent.
- 4 Run Demo Storyboard to link shop, dummy payment, support, Java app-server, ATP SQL, and structured logs.
- 5 Run Synthetic Users when visible, or ask the facilitator to confirm the VM timer is active.
- 6 Run Generate Attack only when the room is ready to discuss the cyber investigation flow.
- 7 Copy the returned trace id, attack id, order id, payment id, and ticket id when shown.

Control	Backend route	Observability purpose
Java Health	/api/shop/app-server/health	Validates the Java APM agent path and app-server service.
Java scenario	/api/shop/app-server/simulate/{scenario}	Creates Java spans and app-server request evidence.
Payment scenario	/api/shop/payment/simulate/{scenario}	Creates payment gateway spans and logs.
Demo Storyboard	/api/shop/demo/storyboard	Creates an end-to-end buyer, payment, support, Java, SQL, and log path.
Attack Lab	/api/shop/attack/simulate	Creates MITRE, OSQuery, app log, trace, and metric evidence.
Synthetic Users	/api/synthetic/users/run	Creates fictional users and orders for RUM and APM Users.
360 Monitoring	/api/observability/360	Summarizes APM, logs, metrics, and availability evidence.

Enterprise CRM

Simulation lab

Dashboard
Customers
Orders
Simulation
360 Monitoring

Simulation

Generate buyer, Java app-server, payment, attack, and OSQuery evidence.

Shop linked
Java APM
Log Analytics route

Demo Storyboard

Shop -> Payment -> Support -> Java APM

Field operations buyer
4242424242424242

198.51.100.42
2

Run Story

storyboard ready
expected: order, ticket, payment, Java spans

Attack Lab

MITRE, OSQuery, app logs, spans.

203.0.113.77
C2 Callback 503

Generate Attack

security.attack.id=attack-<id>
mitre.technique_id=T1190,T1059,T1046...

Synthetic Users

Populate APM Users and ATP orders.

apex.example.test
12 users

6 orders
delete older than 7d

Generate Users

apmrum.username set from local storage
orders source=synthetic-user-cron

Availability Monitoring

Global readiness checks.

Phoenix
Ashburn
Frankfurt
Tokyo

Render CLI Command

Lab 5 - OCI APM Walkthrough

Open OCI Console, select the demo compartment and APM domain, then use the same time window as the frontend order.

OCI Console > Observability & Management > Application Performance Monitoring

APM Home and Service Monitoring

Widget	What to explain
Services	Active shop, admin/CRM, Java app-server, and database service names for the deployment.
Traces	Recent traces, error traces, slow traces, and the handoff into Trace Explorer.
Web applications	RUM web apps for the shop and admin frontend sessions.
Application servers	Java app-server resource health, JVM metrics, server requests, and process metrics.
Monitors	Availability percentage, failed runs, and selected global vantage points.
Alarms	Monitoring/APM alarms that fired inside the scenario time window.

Trace Explorer

- 1 Open Trace Explorer and set the time window around the checkout.
- 2 Search by the copied trace id, or filter for workflow.id = 'checkout' or payment.gateway.request_id.
- 3 Open the trace and walk the waterfall from browser/RUM to edge evidence, shop server, catalog/product lookup, checkout validation, payment, Java app-server, CRM sync, and ATP SQL spans.
- 4 On the payment span, show method, status, risk score, gateway request id, card-safe metadata, and wallet metadata where present.
- 5 On a SQL span, show db.system, db.operation, db.statement or preview, and DbOracleSqlId when present.
- 6 Use oracleApmTraceId to pivot into OCI Logging or Log Analytics.

App Servers

- Select the Java app-server resource for the deployment.
- Check heap used, heap utilization, process CPU usage, garbage collection activity, threads, server requests, errors, and response time.
- Open service requests from the app-server details page and pivot back to the checkout or attack trace.
- If the page is empty, regenerate Java Health and confirm the Java sidecar is running with OCI APM Java agent app-server settings.

RUM

- Open Real User Monitoring and select the shop web application.
- Review Apdex, page response time, page views, AJAX calls, JavaScript errors, operating systems, browsers, and geography widgets.
- Open Users, search for maya.ionescu@apex.example.test, and drill into the session timeline.
- Switch to the admin web application to show the Demo Storyboard or Attack Lab session.

Lab 6 - Availability, Logs, And Stack Monitoring

Availability Monitoring

- 1 Open Availability Monitoring and show availability percentage for the shop and admin readiness monitors.
- 2 Explain that selected global vantage points run the monitor and reveal regional failures or latency differences.
- 3 Click a monitor, review target URL, interval, timeout, SSL validation, DNS override status, and selected vantage points.
- 4 Open History, click a monitor run, and explain status, completion time, vantage point, waterfall/HAR, response headers, timings, screenshots, and trace details where available.
- 5 To create a scripted browser monitor, create a Playwright script using `tools/demo-guide/octo-availability-monitor.playwright.ts`, validate it, then create a Scripted Browser monitor from selected global vantage points.

Log Analytics Drilldown

- 1 Open Log Analytics Log Explorer for the order or attack time window.
- 2 Filter by `oracleApmTraceId = <trace-id>`, `security.attack.id = <attack-id>`, or `payment.gateway.request_id = <gateway-request-id>`.
- 3 Pin Trace ID, Span ID, Service, Host Name, User Name, Payment Method, Payment Status, Payment Gateway Request ID, MITRE Technique ID, OSQuery Finding, and Original Log Content.
- 4 Open an app log row and use the trace id to return to APM Trace Explorer.
- 5 For attack demos, open saved searches for attack timeline, detections, OSQuery findings, and edge detections.

Stack Monitoring Resource Discovery

- 1 Open Stack Monitoring Resource Discovery after the Management Agent is active.
- 2 Discover each app server as Resource Type Host.
- 3 Use the Management Agent installed on that host.
- 4 Select Stack Monitoring and Log Analytics so discovery sends resource context to both services.
- 5 Open the discovered host resource and verify CPU, memory, filesystem, process, and availability metrics.

Lab 7 - Cyber-Attack Investigation Story

- 1 Start from the critical simulated alert generated by the Admin Attack Lab.
- 2 Open the returned trace id in APM Trace Explorer and inspect the `security.attack.kill_chain` span group.
- 3 Explain entry point, client IP placeholder, server connection, Java sidecar behavior, payment or checkout side effects, and ATP access.
- 4 Pivot to Log Analytics with `security.attack.id` and `oracleApmTraceId`.
- 5 Show MITRE mappings such as Initial Access T1190, Command and Scripting Interpreter T1059, Discovery T1046, and Exfiltration T1041 when present.
- 6 Review OSQuery findings exported into OCI Logging and routed into Log Analytics.
- 7 Use Cloud Guard service logs, Instance Security findings, host metrics, Java app-server metrics, and availability failures to complete the evidence story.



Compromise Investigation

Alert pivot across APM, Log Analytics, OSQuery, and metrics

Critical alert

attack-<id>

trace-<id>

Attack Timeline

Initial access

Exploit public app path, source 203.0.113.77 to shop.example.test

T1190

Execution

LOTL shell and Java sidecar error spans linked by oracleApmTraceId

T1059

Discovery

OSQuery detects unexpected listeners and recent processes

T1046

Evidence

Log Analytics dashboard joins app logs, OSQuery findings, and APM span ids

Trace/log

APM Trace

Open 'security.attack.kill_chain', inspect Java and SQL spans.

Log Analytics

Filter 'security.attack.id' and 'oracleApmTraceId'.

Metrics

Confirm CPU, process, JVM, and checkout error spikes.

Operator Verdict

Severity: Critical
Status: Simulated compromise
Host evidence: OSQuery exported
Next action: containment runbook

Use this as the closing story: alert -> trace -> logs -> host evidence -> dashboard.

Closeout Checklist

- One successful order is visible in the shop/admin app and in APM Trace Explorer.
- Payment gateway spans and logs show safe payment attributes and gateway request id.
- SQL spans are visible for order, customer, payment transaction, and CRM sync operations.
- App logs correlate to the trace through oracleApmTraceId and oracleApmSpanId.
- The Java app-server appears in APM App Servers with heap, CPU, request, and error data.
- RUM shows the fictional user's browser session and action timeline.
- Availability Monitoring shows monitor status, vantage point evidence, HAR/waterfall, and screenshots where enabled.
- Log Analytics shows app, payment, security, OSQuery, and Cloud Guard evidence for the same scenario id.
- Stack Monitoring shows host CPU, memory, filesystem, process, and availability context.

Official OCI References

Topic	Reference
OCI Application Performance Monitoring	docs.oracle.com/en-us/iaas/application-performance-monitoring/home.htm
Trace Explorer	docs.oracle.com/en-us/iaas/application-performance-monitoring/doc/use-trace-explorer.html
APM Browser Agent and RUM	docs.oracle.com/en-us/iaas/application-performance-monitoring/doc/configure-browser-agent-real-user-monitoring.html
Availability Monitoring scripts	docs.oracle.com/en-us/iaas/application-performance-monitoring/doc/create-script.html
Availability Monitoring monitor history	docs.oracle.com/en-us/iaas/application-performance-monitoring/doc/view-monitor-history.html
OCI Log Analytics	docs.oracle.com/en-us/iaas/log-analytics/home.htm
Ingest OCI service logs into Log Analytics	docs.oracle.com/en-us/iaas/log-analytics/doc/ingest-logs-other-oci-services-using-service-connector.html
Stack Monitoring resource discovery	docs.oracle.com/en-us/iaas/stack-monitoring/doc/promotion-and-discovery.html