

	REG	REG	CFL	DEC.	REC.	P	NP	NPC
$L_1 \cup L_2$	no	✓	✓	✓	✓	✓	✓	no
$L_1 \cap L_2$	no	✓	no	✓	✓	✓	✓	no
\bar{L}	✓	✓	no	✓	no	✓	?	?
$L_1 \cdot L_2$	no	✓	✓	✓	✓	✓	✓	no
L^*	no	✓	✓	✓	✓	✓	✓	no
$L^{\mathcal{R}}$	✓	✓	✓	✓	✓	✓		
$L_1 \setminus L_2$	no	✓	no	✓	no	✓	?	
$L \cap R$	no	✓	✓	✓	✓	✓		

- **DFA:** $D = (Q, \Sigma, \delta, q_0, F)$, $\delta : Q \times \Sigma \rightarrow Q$.
- **NFA:** $N = (Q, \Sigma, \delta, q_0, F)$, $\delta : Q \times \Sigma \rightarrow \mathcal{P}(Q)$.
- **GNFA:** $(Q, \Sigma, \delta, q_0, q_a), \delta : Q \setminus \{q_a\} \times Q \setminus \{q_0\} \rightarrow \text{Reg}(\Sigma)$
- $\forall D_1, D_2, \exists D : |Q| = |Q_1| \cdot |Q_2|$, $L(D) = L(D_1) \Delta L(D_2)$.
- (DFA D) If $L(D) \neq \emptyset$ then $\exists s \in L(D)$ s.t. $|s| < |Q|$.

- $\forall \text{ NFA } \exists \text{ an equivalent NFA with 1 accept state.}$
- If $A = L(N_{\text{NFA}}), B = (L(M_{\text{DFA}}))^c$ then $A \cdot B \in \text{REG.}$

Regular Expressions: Examples

- $\{a^n w b^n : w \in \Sigma^*\} \equiv a(a \cup b)^* b$
- $\{w : \#_w(0) \geq 2 \vee \#_w(1) \leq 1\} \equiv (\Sigma^* 0 \Sigma^* 0 \Sigma^*) \cup (0^* (\varepsilon \cup 1) 0^*)$
- $\{w : |w| \bmod n = m\} \equiv (a \cup b)^m ((a \cup b)^n)^*$
- $\{w : \#_b(w) \bmod n = m\} \equiv (a^* b a^*)^m \cdot ((a^* b a^*)^n)^*$
- $\{w : |w| \text{ is odd}\} \equiv (a \cup b)^* ((a \cup b)(a \cup b)^*)^*$
- $\{w : \#_a(w) \text{ is odd}\} \equiv b^* a (a b^* a \cup b)^*$
- $\{w : \#_{ab}(w) = \#_{ba}(w)\} \equiv \varepsilon \cup a \cup b \cup a \Sigma^* a \cup b \Sigma^* b$
- $\{a^m b^n \mid m + n \text{ is odd}\} \equiv a(aa)^*(bb)^* \cup (aa)^* b(bb)^*$
- $\{aw : aba \not\subseteq w\} \equiv a(a \cup bb \cup bbb)^* (b \cup \varepsilon)$
- $\{w : bb \not\subseteq w\} \equiv (a \cup ba)^* (\varepsilon \cup b)$
- $\{w : \#_w(a), \#_w(b) \text{ are even}\} \equiv (aa \cup bb \cup (ab \cup ba)^2)^*$
- $\{w : |w| \bmod n \neq m\} \equiv \bigcup_{r=0, r \neq m}^{n-1} (\Sigma^n)^* \Sigma^r$

N	δ	a	b	ε
1	3	{}	{}	
2	1	{}	{}	
3	2	2, 3	{}	

NFA \rightarrow DFA


D	δ	a	b
1	3	{}	
2	1	2	{}
3	2	2, 3	
4	1, 2	1, 3, 2	{}
5	1, 3	2, 3	2, 3
6	2, 3	1, 2	2, 3
7	1, 2, 3	1, 2, 3	2, 3

DFA

4-GNFA



3-GNFA

RegEx



NFA → DFA

D	δ	a	b
1	3	{}	{}
2	1, 2	{}	{}
3	2	2, 3	
1, 2	1, 3, 2	{}	
1, 3	2, 3	2, 3	
2, 3	1, 2	2, 3	
1, 2, 3	1, 2, 3	2, 3	

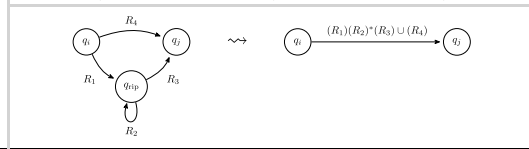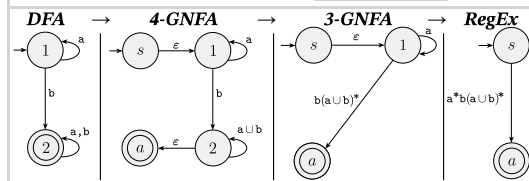

Pumping lemma for regular languages: $A \in \text{REGULAR} \implies \exists p : \forall s \in A, |s| \geq p, s = xyz, \text{ (i) } \forall i \geq 0, xy^i z \in A, \text{ (ii) } |y| > 0 \text{ and (iii) } |xy| \leq p.$

non-regular but CFL: Examples <ul style="list-style-type: none"> • $\{w = w^{\mathcal{R}}\}; s = 0^p 10^p = xyz$. but $xy^2 z = 0^{p+ y } 10^p \notin L$. • $\{a^n b^n\}; s = a^p b^p = xyz$, $xy^2 z = a^{p+ y } b^p \notin L$. • $\{w : \#_a(w) > \#_b(w)\}; s = a^p b^{p+1}, s = 2p + 1 \geq p$, $xy^2 z = a^{p+ y } b^{p+1} \notin L$. • $\{w : \#_a(w) = \#_b(w)\}; s = a^p b^p = xyz$ but $xy^2 z = a^{p+ y } b^p \notin L$. 	<ul style="list-style-type: none"> • $\{w : \#_w(a) \neq \#_w(b)\}; (pf. \text{ by 'complement-closure', } \bar{L} = \{w : \#_w(a) = \#_w(b)\})$ • $\{a^i b^j c^k : i < j \vee i > k\}; s = a^p b^{p+1} c^{2p} = xyz$, but $xy^2 z = a^{p+ y } b^{p+1} c^{2p}, p + y \geq p + 1, p + y \leq 2p$. non-CFL and non-regular: Examples <ul style="list-style-type: none"> • $\{w = a^{2^k}\}; k = \lfloor \log_2 w \rfloor, s = a^{2^k} = xyz$. $2^k = xyz < xy^2 z \leq xyz + xy \leq 2^k + p < 2^{k+1}$. 	<ul style="list-style-type: none"> • $\{a^p : p \text{ is prime}\}; s = a^t = xyz \text{ for prime } t \geq p$. $r := y > 0$ • $\{www : w \in \Sigma^*\}; s = a^p b a^p b a^p = xyz = a^{ x + y +m} b a^p b a^p b, m \geq 0$, but $xy^2 z = a^{ x +2 y +m} b a^p b a^p b \notin L$. • $\{a^{2n} b^{3n} a^n\}; s = a^{2p} b^{3p} a^p = xyz = a^{ x + y +m+p} b^{3p} a^p, m \geq 0$, but $xy^2 z = a^{2p+ y } b^{3p} a^p \notin L$.
--	---	---

(PDA) $M = (Q, \Sigma, \Gamma, \delta, q_0 \in Q, F \subseteq Q)$. $\delta : Q \times \Sigma_\varepsilon \times \Gamma_\varepsilon \rightarrow \mathcal{P}(Q \times \Gamma_\varepsilon)$. $L \in \text{CFL} \Leftrightarrow \exists G_{\text{CFG}} : L = L(G) \Leftrightarrow \exists P_{\text{PDA}} : L = L(P)$

<ul style="list-style-type: none"> • "a, b → c": reads a from the input (or read nothing if a = ε). pops b from the stack (or pops nothing if b = ε). pushes c onto the stack (or pushes nothing if c = ε) • If G ∈ CNF, and w ∈ L(G), then w ≤ 2^h − 1, where h is the height of the parse tree for w. • $\forall L \in \text{CFL}, \exists G \in \text{CNF} : L = L(G)$. 	<ul style="list-style-type: none"> • (derivation) $S \Rightarrow u_1 \Rightarrow u_2 \Rightarrow \dots \Rightarrow u_n = w$, where each u_i is in $(V \cup \Sigma)^*$. (in this case, G generates w (or S derives w), $S \xRightarrow{*} w$) • M accepts w ∈ Σ* if there is a seq. r₀, r₁, ..., r_m ∈ Q and s₀, s₁, ..., s_m ∈ Γ* s.t.: (1.) r₀ = q₀ and s₀ = ε; (2.) For i = 0, 1, ..., m − 1, we have (r_i, b) ∈ δ(r_i, w_{i+1}, a), 	<p>where $s_i = at$ and $s_{i+1} = bt$ for some $a, b \in \Gamma_\varepsilon$ and $t \in \Gamma^*$; (3.) $r_m \in F$.</p> <ul style="list-style-type: none"> • $R \in \text{REGULAR} \wedge C \in \text{CFL} \implies R \cap C \in \text{CFL. (pf. construct PDA } P' = P_C \times D_R.)$
---	---	--

(CFG) $G = (V, \Sigma, R, S)$, $A \rightarrow w, (A \in V, w \in (V \cup \Sigma)^*)$; **(CNF)** $A \rightarrow BC, A \rightarrow a, S \rightarrow \varepsilon, (A, B, C \in V, a \in \Sigma, B, C \neq S)$.

(CFG → CNF) (1.) Add a new start variable S_0 and a rule $S_0 \rightarrow S$. (2.) Remove ε-rules of the form $A \rightarrow \varepsilon$ (except for $S_0 \rightarrow \varepsilon$). and remove A's occurrences on the RH of a rule (e.g. $R \rightarrow uAvAw$ becomes $R \rightarrow uAvAw uAvw uvAw uvw$. where $u, v, w \in (V \cup \Sigma)^*$). (3.) Remove unit rules $A \rightarrow B$ then whenever $B \rightarrow u$ appears, add $A \rightarrow u$, unless this was a unit rule previously removed. ($u \in (V \cup \Sigma)^*$). (4.) Replace each rule $A \rightarrow u_1 u_2 \dots u_k$ where $k \geq 3$ and $u_i \in (V \cup \Sigma)$, with the rules $A \rightarrow u_1 A_1, A_1 \rightarrow u_2 A_2, \dots, A_{k-2} \rightarrow u_{k-1} u_k$, where A_i are new variables. Replace terminals u_i with $U_i \rightarrow u_i$.	<ul style="list-style-type: none"> • $\{wa^n w^{\mathcal{R}}\}; S \rightarrow aSa \mid bSb \mid M; M \rightarrow aM \mid \varepsilon$ • $\{w\#x : w^{\mathcal{R}} \subseteq x\}; S \rightarrow AX; A \rightarrow 0A0 \mid 1A1 \mid \#X; X \rightarrow 0X \mid 1X \mid \varepsilon$ • $\{w : \#_w(a) > \#_w(b)\}; S \rightarrow IaI; I \rightarrow II \mid aIb \mid bIa \mid a \mid \varepsilon$ • $\{w : \#_w(a) \geq \#_w(b)\}; S \rightarrow SS \mid aSb \mid bSa \mid a \mid \varepsilon$ • $\{w : \#_w(a) = \#_w(b)\}; S \rightarrow SS \mid aSb \mid bSa \mid \varepsilon$ • $\{w : \#_w(a) = 2 \cdot \#_w(b)\}; S \rightarrow SS \mid S_1 b S_1 \mid b S a a S b \mid \varepsilon; S_1 \rightarrow a S \mid S S_1$ • $\{w : \#_w(a) \neq \#_w(b)\} = \{\#_w(a) > \#_w(b)\} \cup \{\#_w(a) < \#_w(b)\}$ • $\{\overline{a^n b^n}\}; S \rightarrow XbXaX \mid A \mid B; A \rightarrow aAb \mid Ab \mid b; B \rightarrow aBb \mid aB \mid a; X \rightarrow aX \mid bX \mid \varepsilon$. • $\{a^n b^m \mid n \neq m\}; S \rightarrow aSb \mid AB; A \rightarrow aA \mid a; B \rightarrow bB \mid b$ • $\{x \mid x \neq ww\}; S \rightarrow A \mid B \mid AB \mid BA; A \rightarrow CAC \mid 0; B \rightarrow CBC \mid 1; C \rightarrow 0 \mid 1$ • $\{a^n b^m \mid m \leq n \leq 3m\}; S \rightarrow aSb \mid aaSb \mid aaaSb \mid \varepsilon;$ • $\{a^n b^n\}; S \rightarrow aSb \mid \varepsilon$ 	<ul style="list-style-type: none"> • $\{a^n b^m \mid n > m\}; S \rightarrow aSb \mid aS \mid a$ • $\{a^n b^m \mid n \geq m \geq 0\}; S \rightarrow aSb \mid aS \mid a \mid \varepsilon$ • $\{a^i b^j c^k \mid i + j = k\}; S \rightarrow aSc \mid X; X \rightarrow bXc \mid \varepsilon$ • $\{a^i b^j c^k \mid i \leq j \vee j \leq k\}; S \rightarrow S_1 C \mid AS_2; A \rightarrow Aa \mid \varepsilon; S_1 \rightarrow aS_1 b \mid S_1 b \mid \varepsilon; S_2 \rightarrow bS_2 c \mid S_2 c \mid \varepsilon; C \rightarrow Cc \mid \varepsilon$ • $\{a^i b^j c^k \mid i = j \vee j = k\}; S \rightarrow AX_1 \mid X_2 C; X_1 \rightarrow bX_1 c \mid \varepsilon; X_2 \rightarrow aX_2 b \mid \varepsilon; A \rightarrow aA \mid \varepsilon; C \rightarrow xy : x = y , x \neq y; S \rightarrow AB \mid BA; A \rightarrow a \mid aAa \mid aAb \mid bAa \mid bAb; B \rightarrow b \mid aBa \mid aBb \mid bBa \mid bBb;$ • $\{a^i b^j : i, j \geq 1, i \neq j, i < 2j\}; S \rightarrow aSb \mid XaaYb; Y \rightarrow aaYb \mid ab; X \rightarrow bX \mid abb$
--	---	---

CFL but non-regular: Examples <ul style="list-style-type: none"> • $\{w : w = w^{\mathcal{R}}\}; S \rightarrow aSa \mid bSb \mid a \mid b \mid \varepsilon$ • $\{w : w \neq w^{\mathcal{R}}\}; S \rightarrow aSa \mid bSb \mid aXb \mid bXa; X \rightarrow aX \mid bX \mid \varepsilon$ • $\{ww^{\mathcal{R}}\} = \{w : w = w^{\mathcal{R}} \wedge w \text{ is even}\}; S \rightarrow aSa \mid bSb \mid \varepsilon$ • $\{\overline{ww^{\mathcal{R}}}\}; S \rightarrow aSa \mid bSb \mid aXb \mid bXa \mid a \mid b; X \rightarrow aXa \mid bXb \mid bXa \mid aXb \mid a \mid b \mid \varepsilon$ 	<ul style="list-style-type: none"> • (more example of not CFL) • $\{a^i b^j c^k \mid 0 \leq i \leq j \leq k\}, \{a^n b^n c^n \mid n \in \mathbb{N}\}, \{ww \mid w \in \{a, b\}^*\}, \{a^{2^n} \mid n \geq 0\}, \{a^p \mid p \text{ is prime}\}, L = \{ww^{\mathcal{R}} w : w \in \{a, b\}^*\}$ 	CFL and regular: Examples <ul style="list-style-type: none"> • $\{w : \#_w(a) \geq 3\}; S \rightarrow XaXaXaX; X \rightarrow aX \mid bX \mid \varepsilon$ • $\{w : w \text{ is odd}\}; S \rightarrow aaS \mid abS \mid bbS \mid baS \mid a \mid b$ • $\{w : w \text{ is even}\}; S \rightarrow aaS \mid abS \mid bbS \mid baS \mid \varepsilon$ • $\emptyset; S \rightarrow S$
--	--	---

Pumping lemma for context-free languages: $L \in \text{CFL} \implies \exists p : \forall s \in L, |s| \geq p, s = uvxyz, \text{ (i) } \forall i \geq 0, uv^i xy^i z \in L, \text{ (ii) } |vxy| \leq p, \text{ and (iii) } |vy| > 0.$

<ul style="list-style-type: none"> • $\{w = a^n b^n c^n\}; s = a^p b^p b^p = uvxyz$. vxy can't contain all of a, b, c thus $uv^2 xy^2 z$ must pump one of them less than the others. • $\{ww : w \in \{a, b\}^*\};$ 	<ul style="list-style-type: none"> • $\{w \mid \#_w(a) = \#_w(b) = \#_w(c)\}$: (pf. since $\text{Regular} \cap \text{CFL} \in \text{CFL}$, but $\{a^* b^* c^*\} \cap L = \{a^n b^n c^n\} \notin \text{CFL}$)
--	--

Examples		
<ul style="list-style-type: none"> • $A \leq_m B, B \in \text{REGULAR}, A \notin \text{REGULAR} : A = \{0^n 1^n\}, B = \{1\}, f : A \rightarrow B, f(w) = 1 \text{ if } w \in A, 0 \text{ if } w \notin A$. • $L \in \text{CFL}, \bar{L} \notin \text{CFL} : L = \{x \mid x \neq ww\}, \bar{L} = \{ww\}$. • $L_1, L_2 \in \text{CFL}, L_1 \cap L_2 \notin \text{CFL} : L_1 = \{a^n b^n c^m\}, L_2 = \{a^m b^n c^n\}, L_1 \cap L_2 = \{a^n b^n c^n\}$. • $L_1, L_2 \notin \text{CFL}, L_1 \cap L_2 \in \text{CFL} : L_1 = \{a^n b^n c^n\}, L_2 = \{c^n b^n a^n\}, L_1 \cap L_2 = \{\varepsilon\}$ • $L_1 \in \text{CFL}, L_2, L_1 \cap L_2 \notin \text{CFL} : L_1 = \Sigma^*, L_2 = \{a^{i^2}\}$. • $L_1 \in \text{REGULAR}, L_2 \notin \text{CFL}, \text{ but } L_1 \cap L_2 \in \text{CFL} : L_1 = \{\varepsilon\}, L_2 = \{a^n b^n c^n \mid n \geq 0\}$. 	<ul style="list-style-type: none"> • $L_1 \in \text{CFL}, L_2$ is infinite, $L_1 \setminus L_2 \notin \text{REGULAR} : L_1 = \Sigma^*, L_2 = \{a^n b^n\}, L_1 \setminus L_2 = \{a^m b^n \mid m \neq n\}$. • $L_1, L_2 \in \text{REGULAR}, L_1 \not\subseteq L_2, L_2 \not\subseteq L_1$, but, $(L_1 \cup L_2)^* = L_1^* \cup L_2^* : L_1 = \{a, b, ab\}, L_2 = \{a, b, ba\}$. • $L_1, L_1 \cup L_2 \in \text{REGULAR}, L_2, L_1 \cap L_2 \notin \text{REGULAR}, L_1 = L(a^* b^*), L_2 = \{a^n b^n \mid n \geq 0\}$. • $L_1, L_2, \dots \in \text{REGULAR}, \bigcup_{i=1}^{\infty} L_i \notin \text{REGULAR} : L_i = \{a^i b^i\}, \bigcup_{i=1}^{\infty} L_i = \{a^n b^n \mid n \geq 0\}$. • $L_1 \cdot L_2 \in \text{REGULAR}, L_1 \not\subseteq \text{Reg} : L_1 = \{a^n b^n\}, L_2 = \Sigma^*$ • $L_2 \in \text{CFL}, \text{ and } L_1 \subseteq L_2, \text{ but } L_1 \notin \text{CFL} : \Sigma = \{a, b, c\}, L_1 = \{a^n b^n c^n \mid n \geq 0\}, L_2 = \Sigma^*$. 	<ul style="list-style-type: none"> • $L_1, L_2 \in \text{TD}$, and $L_1 \subseteq L \subseteq L_2$, but $L \notin \text{TD} : L_1 = \emptyset, L_2 = \Sigma^*, L$ is some undecidable language over Σ. • $L^* \in \text{REGULAR}$, but $L \notin \text{REGULAR} : L = \{a^p \mid p \text{ is prime}\}, L^* = \Sigma^* \setminus \{a\}$. • $A \not\leq_m \bar{A} : A = A_{\text{TM}} \in \text{TR}, \bar{A} = \bar{A}_{\text{TM}} \notin \text{TR}$ • $A \notin \text{DEC.}, A \leq_m \bar{A} : f(0x) = 1x, f(1y) = 0y, A = \{w \mid \exists x \in A_{\text{TM}} : w = 0x \vee \exists y \in \bar{A}_{\text{TM}} : w = 1y\}$ • $L \in \text{CFL}, L \cap L^{\mathcal{R}} \notin \text{CFL} : L = \{a^n b^n a^m\}$. • $A \leq_m B, B \not\leq_m A : A = \{a\}, B = \text{HALT}_{\text{TM}}, f(w) = \langle M \rangle, M = \text{"On } x, \text{ if } w \in A, \text{ (A); O/W, loop"}$

<ul style="list-style-type: none"> (TM) $M = (Q, \Sigma \subseteq \Gamma, \Gamma_{\text{tape}}, \delta, q_0, q_{\text{acc}}, q_{\text{rej}})$, where $\sqcup \in \Gamma$, $\sqcup \notin \Sigma, q_{\text{rej}} \neq q_{\text{acc}}, \delta: Q \times \Gamma \rightarrow Q \times \Gamma \times \{L, R\}$ (Turing-Recognizable (TR)) \mathbf{A} if $w \in L, \overline{R}/\text{loops}$ if $w \notin L$; A is co-recognizable if \overline{A} is recognizable. (Turing-Decidable (TD)) \mathbf{A} if $w \in L, \overline{R}$ if $w \notin L$. $L \in \text{TR} \iff L \subseteq_m A_{TM}$. $(A \in \text{TR} \wedge A = \infty) \Rightarrow \exists B \in \text{TD} : (B \subseteq L \wedge B = \infty)$ 	<ul style="list-style-type: none"> $L \in \text{TD} \iff L^R \in \text{TD}$. (decider) TM that halts on all inputs. (Rice) If $P = \{\langle M \rangle : L(M) \text{ has property } P\}$ s.t. (1) $\forall M_1, M_2 : L(M_1) = L(M_2) \Rightarrow (\langle M_1 \rangle \in P \iff \langle M_2 \rangle \in P)$. (2) P is nontrivial. Then $P \notin \text{TD}$. (e.g. $\text{INFINITE}_{TM}, \text{ALL}_{TM}, \text{E}_{TM}, \{\langle M_{TM} \rangle : 1 \in L(M)\}$) {all TMs} is count.; Σ^* is count. (finite Σ); {all lang.} is uncount.; {all infinite bin. seq.} is uncount. 	<ul style="list-style-type: none"> If $A \subseteq_m B$ and $B \in \text{TD}$, then $A \in \text{TD}$. If $A \subseteq_m B$ and $A \notin \text{TD}$, then $B \notin \text{TD}$. If $A \subseteq_m B$ and $B \in \text{TR}$, then $A \in \text{TR}$. If $A \subseteq_m B$ and $A \notin \text{TR}$, then $B \notin \text{TR}$. (transitivity) If $A \subseteq_m B$ and $B \subseteq_m C$, then $A \subseteq_m C$. $A \subseteq_m B \iff \overline{A} \subseteq_m \overline{B}$ (esp. $A \subseteq_m \overline{A} \iff \overline{A} \subseteq_m A$) If $A \subseteq_m \overline{A}$ and $A \in \text{TR}$, then $A \in \text{TD}$
--	--	---

$\text{FINITE} \subset \text{REGULAR} \subset \text{CFL} \subset \text{CSL} \subset \text{Turing-Decidable} \subset \text{Turing-Recognizable}$

<ul style="list-style-type: none"> (not TR) $\overline{A_{TM}}, \overline{EQ_{TM}}, EQ_{CFG}, \overline{HALT_{TM}}, REG_{TM}, E_{TM}, EQ_{TM}, ALL_{CFG}, EQ_{CFG}$ (TR, but not TD) $A_{TM}, \overline{HALT_{TM}}, \overline{EQ_{CFG}}, \overline{E_{TM}}, \{\langle M, k \rangle \mid \exists x (M(x) \text{ halts in } \geq k \text{ steps})\}$ (TD) $A_{DFA}, A_{NFA}, A_{REG}, E_{DFA}, EQ_{DFA}, A_{CFG}, E_{CFG}, A_{LBA}$ 	<ul style="list-style-type: none"> $\{(r, s) \mid r, s \in \text{Reg}(\Sigma), L(r) \subseteq L(s)\}$: "On $\langle r, s \rangle$: const. D s.t. $L(D) = L(r) \cap L(s)$; if $\langle D \rangle \in E_{DFA}, \mathbf{A}$; O/W, \overline{R}" $\{\langle D, r \rangle \mid L(D) = L(r)\}$: "On $\langle D, r \rangle$: convert r to DFA D_r; if $\langle D, D_r \rangle \in EQ_{DFA}, \mathbf{A}$; O/W, \overline{R}" $\{\langle D_{DFA} \rangle \mid L(D) = (L(D))^R\}$: "On $\langle D \rangle$: const. D^R s.t. $L(D^R) = (L(D))^R$; if $\langle D, D^R \rangle \in EQ_{DFA}, \mathbf{A}$; O/W, \overline{R}" $\{\langle r \rangle \mid \exists x, y \in \Sigma^* : w = x111y \in L(r)\}$: "On $\langle r \rangle$: const. D s.t. $L(D) \equiv \Sigma^*111\Sigma^*$; const. D_1 s.t. $L(D_1) = L(r) \cap L(D)$; if $L(D_1) \notin E_{DFA}, \mathbf{A}$; O/W \overline{R}" $\{\langle G, k \rangle \mid L(G) = k \in \mathbb{N} \cup \{\infty\}\}$: "On $\langle G, k \rangle$: run ; if $\langle G \rangle \in \text{INFINITE}_{CFG}$: (if $k = \infty, \mathbf{A}$; O/W, \overline{R}). if $\langle G \rangle \notin \text{INFINITE}_{CFG}$: (if $k = \infty, \overline{R}$; O/W, m counts each $w \in \Sigma^{\leq p}$ s.t. $w \in L(G)$, where p is the pump. len.; if $m = k, \mathbf{A}$; O/W, \overline{R}) 	<ul style="list-style-type: none"> $A \in E_{CFG}$: "On $\langle G \rangle$: If $\langle G, \varepsilon \rangle \in A_{CFG}, \mathbf{A}$; O/W, \overline{R}" INFINITE_{PDA}: "On $\langle P \rangle$: conv. P to G; $p :=$ p.l. of G; set $G' \equiv L(G') = L(G) \cap \Sigma^{>p}$; If $\langle G' \rangle \notin E_{CFG}, \mathbf{A}$; O/W \overline{R}" $\{\langle M, k \rangle \mid \exists x (M(x) \text{ runs for } \geq k \text{ steps})\}$: "On $\langle M, k \rangle$: ($\forall w \in \Sigma^{\leq k+1}$: if $M(w)$ not halt within k steps, \mathbf{A}); \overline{R}" $\{\langle M, k \rangle \mid \exists x (M(x) \text{ halts in } \leq k \text{ steps})\}$: "On $\langle M, k \rangle$: ($\forall w \in \Sigma^{\leq k+1}$: run $M(w)$ for $\leq k$ steps, if halts, \mathbf{A}); \overline{R}"
--	---	--

Deciders: Examples

- INFINITE_{DFA} : "On $\langle D \rangle$: $n := |Q_D|$; const. D_1 s.t. $L(D_1) = \Sigma^{\geq n}$; const. D_2 s.t. $L(D_2) = L(D) \cap L(D_1)$; if $\langle D_2 \rangle \notin E_{DFA}, \mathbf{A}$; O/W, \overline{R} "
- ALL_{DFA} : "On $\langle D \rangle$: const. D^0 s.t. $L(D^0) = L(D)^0$ (swap accept and non-accept); if $D^0 \in E_{DFA}, \mathbf{A}$; O/W \overline{R} "
- $\{\langle D \rangle \mid \nexists w \in L(D) : \#_1(w) \text{ is odd}\}$: "On $\langle D \rangle$: const. D_1 s.t. $L(D_1) = \{w \mid \#_1(w) \text{ is odd}\}$; const. D_2 s.t. $L(D_2) = L(D) \cap L(D_1)$; if $\langle D_2 \rangle \in E_{DFA}, \mathbf{A}$; O/W \overline{R} "

Recognizers: Examples

- $\overline{EQ_{CFG}}$: "On $\langle G_1, G_2 \rangle$: (for each $w \in \Sigma^*$ (lexico.): If $\langle G_1, w \rangle \in A_{CFG}$ and $\langle G_2, w \rangle \notin A_{CFG}$ (vice versa), \mathbf{A});"
- $\overline{E_{TM}}$: "On $\langle M \rangle$: $\Sigma^* = \{s_1, s_2, \dots\}$; $\forall i \in \mathbb{N} : \forall j \leq i$: Run $M(s_j)$ for i steps, if accepts, \mathbf{A} ;"

Mapping Reduction (from A to B): $A \subseteq_m B$ if $\exists f : \Sigma^* \rightarrow \Sigma^* : \forall w \in \Sigma^*, w \in A \iff f(w) \in B$ and f is computable.

<ul style="list-style-type: none"> $A_{TM} \subseteq_m \{\langle M_{TM} \rangle \mid L(M) = (L(M))^R\}$; $f(\langle M, w \rangle) = \langle M' \rangle$, where $M' =$ "On x, if $x \notin \{01, 10\}, \overline{R}$; if $x = 01$, return $M(x)$; if $x = 10, \mathbf{A}$;" $A_{TM} \subseteq_m \{\langle M_{TM} \rangle \mid \varepsilon \in L(M)\}$; $f(\langle M, w \rangle) = \langle M' \rangle$ where $M' =$ "On x, if $x \neq \varepsilon, \mathbf{A}$; O/W return $M(w)$" $A_{TM} \subseteq_m L = \{\langle M, D \rangle \mid L(M) = L(D)\}$; $f(\langle M, w \rangle) = \langle M', D \rangle$, where $M' =$ "On x: if $x = w$ return $M(x)$; O/W, \overline{R};" D is DFA s.t. $L(D) = \{w\}$. $A \subseteq_m \text{HALT}_{TM}$; $f(w) = \langle M, \varepsilon \rangle$, where $M =$ "On x: if $w \in A$, halt; if $w \notin A$, loop;" $A_{TM} \subseteq_m \{\langle M \rangle \mid L(M) \text{ is CFL}\}$; $f(\langle M, w \rangle) = \langle N \rangle$, where $N =$ "On x: if $x = a^n b^n c^n, \mathbf{A}$; O/W, return $M(w)$;" $A \subseteq_m B = \{0w : w \in A\} \cup \{1w : w \notin A\}$; $f(w) = 0w$. $A_{TM} \subseteq_m \text{HALT}_{TM}$; $f(\langle M, w \rangle) = \langle M', w \rangle$, where $M' =$ "On x: if $M(x)$ accepts, \mathbf{A}. If rejects, loop" $\text{HALT}_{TM} \subseteq_m A_{TM}$; $f(\langle M, w \rangle) = \langle M', \langle M, w \rangle \rangle$, where $M' =$ "On $\langle X, x \rangle$: if $X(x)$ halts, \mathbf{A};" 	<ul style="list-style-type: none"> $E_{TM} \subseteq_m \text{USELESS}_{TM}$; $f(\langle M \rangle) = \langle M, q_{\text{acc}} \rangle$ $E_{TM} \subseteq_m EQ_{TM}$; $f(\langle M \rangle) = \langle M, M' \rangle$, $M' =$ "On x: \overline{R}" $A_{TM} \subseteq_m \text{REGULAR}_{TM}$; $f(\langle M, w \rangle) = \langle M' \rangle$, $M' =$ "On $x \in \{0, 1\}^*$: if $x = 0^n 1^n, \mathbf{A}$; O/W, return $M(w)$;" $A_{TM} \subseteq_m EQ_{TM}$; $f(\langle M, w \rangle) = \langle M_1, M_2 \rangle$, where $M_1 =$ "\mathbf{A} all"; $M_2 =$ "On x: return $M(w)$;" $A_{TM} \subseteq_m \overline{EQ_{TM}}$; $f(\langle M, w \rangle) = \langle M_1, M_2 \rangle$, where $M_1 =$ "\overline{R} all"; $M_2 =$ "On x: return $M(w)$;" $A_{TM} \subseteq_m \{\langle M \rangle : M \text{ halts on } \langle M \rangle\}$; $f(\langle M, w \rangle) = \langle M' \rangle$, where $M' =$ "On x: if $M(w)$ accepts, \mathbf{A}; if rejects, loop;" $\text{ALL}_{CFG} \subseteq_m EQ_{CFG}$; $f(\langle G \rangle) = \langle G, H \rangle$, s.t. $L(H) = \Sigma^*$. $A_{TM} \subseteq_m \{\langle M_{TM} \rangle : L(M) = 1\}$; $f(\langle M, w \rangle) = \langle M' \rangle$, where $M' =$ "On x: if $x = x_0$, return $M(w)$; O/W, \overline{R};" (where $x_0 \in \Sigma^*$ is fixed). $\overline{A_{TM}} \subseteq_m E_{TM}$; $f(\langle M, w \rangle) = \langle M' \rangle$, where $M' =$ "On x: if $x \neq w, \overline{R}$; O/W, return $M(w)$;" 	<ul style="list-style-type: none"> $\text{HALT}_{TM} \subseteq_m \{\langle M_{TM} \rangle : L(M) \leq 3\}$; $f(\langle M, w \rangle) = \langle M' \rangle$, where $M' =$ "On x: \mathbf{A} if $M(w)$ halts" $\text{HALT}_{TM} \subseteq_m \{\langle M_{TM} \rangle : L(M) \geq 3\}$; $f(\langle M, w \rangle) = \langle M' \rangle$, where $M' =$ "On x: \mathbf{A} if $M(w)$ halts" $\text{HALT}_{TM} \subseteq_m \{\langle M \rangle : M \mathbf{A} \text{ even num.}\}$; $f(\langle M, w \rangle) = \langle M' \rangle$, $M' =$ "On x: \overline{R} if $M(w)$ halts within x. O/W, \mathbf{A}" $\text{HALT}_{TM} \subseteq_m \{\langle M_{TM} \rangle : L(M) \text{ is finite}\}$; $f(\langle M, w \rangle) = \langle M' \rangle$, where $M' =$ "On x: \mathbf{A} if $M(w)$ halts" $\text{HALT}_{TM} \subseteq_m \{\langle M_{TM} \rangle : L(M) \text{ is infinite}\}$; $f(\langle M, w \rangle) = \langle M' \rangle$, where $M' =$ "On x: \overline{R} if $M(w)$ halts within x steps. O/W, \mathbf{A}" $\text{HALT}_{TM} \subseteq_m \{\langle M_1, M_2 \rangle : \varepsilon \in L(M_1) \cup L(M_2)\}$; $f(\langle M, w \rangle) = \langle M', M' \rangle$, $M' =$ "On x: \mathbf{A} if $M(w)$ halts" $\text{HALT}_{TM} \subseteq_m \overline{E_{TM}}$; $f(\langle M, w \rangle) = \langle M' \rangle$, where $M' =$ "On x: if $x \neq w, \overline{R}$; else, \mathbf{A} if $M(w)$ halts" $\text{HALT}_{TM} \subseteq_m \{\langle M_{TM} \rangle \mid \exists x : M(x) \text{ halts in } > M \text{ steps}\}$; $f(\langle M, w \rangle) = \langle M' \rangle$, where $M' =$ "On x: if $M(w)$ halts, make $M + 1$ steps and then halt; O/W, loop"
---	---	---

$\mathbf{P} = \bigcup_{k \in \mathbb{N}} \text{TIME}(n^k) \subseteq \mathbf{NP} = \bigcup_{k \in \mathbb{N}} \mathbf{NTIME}(n^k) = \{L \mid L \text{ is decidable by a PT verifier}\} \supseteq \mathbf{NP-complete} = \{B \mid B \in \mathbf{NP}, \forall A \in \mathbf{NP}, A \leq_P B\}.$

<ul style="list-style-type: none"> If $A \leq_P B$ and $B \in \mathbf{P}$, then $A \in \mathbf{P}$. $A \equiv_P B$ if $A \leq_P B$ and $B \leq_P A$. \equiv_P is an equiv. relation on \mathbf{NP}. $\mathbf{P} \setminus \{\emptyset, \Sigma^*\}$ is an equiv. class of \equiv_P. $\text{ALL}_{DFA}, \text{CONNECTED}, \text{TRIANGLE}, L(G_{CFG}), \text{PATH} \in \mathbf{P}$ ^{directed $s \rightarrow t$} 	<ul style="list-style-type: none"> $\text{CNF}_2 \in \mathbf{P}$: (algo. $\forall x \in \phi$: (1) If x occurs 1-2 times in same clause \rightarrow remove cl.; (2) If x is twice in 2 cl. \rightarrow remove both cl.; (3) Similar to (2) for \overline{x}; (4) Replace any $(x \vee y), (\neg x \vee z)$ with $(y \vee z)$; (y, z may be ε); (5) If $(x) \wedge (\neg x)$ found, \overline{R}. (6) If $\phi = \varepsilon, \mathbf{A}$;)) 	<ul style="list-style-type: none"> $\text{CLIQUE}, \text{SUBSET-SUM}, \text{SAT}, \text{3SAT}, \text{COVER}, \text{HAMPATH}, \text{UHAMATH}, \text{3COLOR} \in \mathbf{NP-complete}$. ^{VERTEX} $\emptyset, \Sigma^* \notin \mathbf{NP-complete}$. If $B \in \mathbf{NP-complete}$ and $B \in \mathbf{P}$, then $\mathbf{P} = \mathbf{NP}$. If $B \in \mathbf{NPC}$ and $C \in \mathbf{NP}$ s.t. $B \leq_P C$, then $C \in \mathbf{NPC}$. If $\mathbf{P} = \mathbf{NP}$, then $\forall A \in \mathbf{P} \setminus \{\emptyset, \Sigma^*\}, A \in \mathbf{NP-complete}$.
---	--	---

Polytime Reduction (from A to B): $A \leq_P B$ if $\exists f : \Sigma^* \rightarrow \Sigma^* : \forall w \in \Sigma^*, w \in A \iff f(w) \in B$ and f is polytime computable.

<ul style="list-style-type: none"> $\text{SAT} \leq_P \text{DOUBLE-SAT}$; $f(\phi) = \phi \wedge (x \vee \neg x)$ $\text{3SAT} \leq_P \text{4SAT}$; $f(\phi) = \phi'$, where ϕ' is obtained from the 3cnf ϕ by adding a new var. x to each clause, and adding a new clause $(\neg x \vee \neg x \vee \neg x \vee \neg x)$. $\text{3SAT} \leq_P \text{CNF}_3$; $f(\langle \phi \rangle) = \phi'$. If $\#_{\phi}(x) = k > 3$, replace x with x_1, \dots, x_k, and add $(\overline{x_1} \vee \overline{x_2}) \wedge \dots \wedge (\overline{x_k} \vee x_1)$. $\text{3SAT} \leq_P \text{CLIQUE}$; $f(\phi) = \langle G, k \rangle$. where ϕ is 3cnf with k clauses. Nodes represent literals. Edges connect all pairs except those 'from the same clause' or 'contradictory literals'. $\text{SUBSET-SUM} \leq_P \text{SET-PARTITION}$; $f(\langle x_1, \dots, x_m, t \rangle) = \langle x_1, \dots, x_m, S - 2t \rangle$, where S sum of x_1, \dots, x_m, and t is the target subset-sum. $\text{3SAT} \leq_P \text{3SAT}$; $f(\phi) = \phi' = \phi \wedge (x \vee x \vee x) \wedge (\overline{x} \vee \overline{x} \vee \overline{x})$ ^{almost} $\text{3COLOR} \leq_P \text{3COLOR}$; $f(\langle G \rangle) = \langle G' \rangle$, $G' = G \cup K_4$ ^{almost} $\text{COVER}_k \leq_P \text{WVC}$; $f(\langle G, k \rangle) = \langle G, w, k \rangle, \forall v \in V, w(v) = 1$ ^{VERTEX} (dir.) $\text{HAM-PATH} \leq_P \text{2HAM-PATH}$; $f(\langle G, s, t \rangle) = \langle G', s', t' \rangle, V' = V \cup \{s', t', a, b, c, d\}$, 	<ul style="list-style-type: none"> $E' = E \cup \{(s', a), (a, b), (b, s)\} \cup \{(s', b), (b, a), (a, s)\} \cup \{(t, c), (c, d), (d, t')\} \cup \{(t, d), (d, c), (c, t')\}$. (undir.) $\text{CLIQUE}_k \leq_P \text{HALF-CLIQUE}$ ^{$V /2$-clique}; $f(\langle G = (V, E), k \rangle) = \langle G' = (V', E') \rangle$, if $k = \frac{ V }{2}, E = E', V' = V$. if $k > \frac{ V }{2}, V' = V \cup \{j = 2k - V \text{ new nodes}\}$. if $k < \frac{ V }{2}, V' = V \cup \{j = V - 2k \text{ new nodes}\}$ and $E' = E \cup \{\text{edges for new nodes}\}$ $\text{HAM-PATH} \leq_P \text{HAM-CYCLE}$; $f(\langle G, s, t \rangle) = \langle G', s', t' \rangle$, $V' = V \cup \{x\}, E' = E \cup \{(t, x), (x, s)\}$ $\text{HAM-CYCLE} \leq_P \text{UHAMCYCLE}$; $f(\langle G \rangle) = \langle G' \rangle$. For each $u, v \in V$: u is replaced by $u_{\text{in}}, u_{\text{mid}}, u_{\text{out}}$; ($v, u$) replaced by $\{v_{\text{out}}, u_{\text{in}}\}, \{u_{\text{in}}, u_{\text{mid}}\}$; and (u, v) by $\{u_{\text{out}}, v_{\text{in}}\}, \{u_{\text{mid}}, u_{\text{out}}\}$. $\text{UHAMPATH} \leq_P \text{PATH}_{\geq k}$; $f(\langle G, a, b \rangle) = \langle G, a, b, k = V - 1 \rangle$ ^{VERTEX} $\text{COVER} \leq_P \text{CLIQUE}$; $f(\langle G, k \rangle) = \langle G^C = (V, E^C), V - k \rangle$ ^{VERTEX} $\text{CLIQUE}_k \leq_P \{\langle G, t \rangle : G \text{ has } 2t\text{-clique}\}$; $f(\langle G, k \rangle) = \langle G', t = \lceil k/2 \rceil \rangle, G' = G$ if k is even; $G' = G \cup \{v\}$ (v connected to all G nodes) if k is odd. 	<ul style="list-style-type: none"> $\text{CLIQUE}_k \leq_P \text{CLIQUE}_k$; $f(\langle G, k \rangle) = \langle G', k + 2 \rangle$, $G' = G \cup \{v_{n+1}, v_{n+2}\}$; v_{n+1}, v_{n+2} are con. to all V ^{almost} $\text{COVER}_k \leq_P \text{DOMINATING-SET}_k$ ^{VERTEX}; $f(\langle G, k \rangle) = \langle G', k \rangle$, where $V' = \{\text{non-isolated nodes in } V\} \cup \{v_e : e \in E\}, E' = E \cup \{(v_e, u), (v_e, w) : e = (u, w) \in E\}$. $\text{CLIQUE} \leq_P \text{INDEP-SET}$; $f(\langle G, k \rangle) = \langle G^C, k \rangle$ $\text{COVER} \leq_P \text{COVER}$ ^{SET} $= \{\exists C \subseteq S, C \leq k, \bigcup_{A \in C} A = S\}$; $f(\langle G, k \rangle) = \langle U = E, S = \{S_1, \dots, S_n\}, k \rangle$, where $n = V$, $S_u = \{\text{edges incident to } u \in V\}$. $\text{INDEP-SET} \leq_P \text{COVER}$ ^{VERTEX}; $f(\langle G, k \rangle) = \langle G, V - k \rangle$ $\text{HAM-CYCLE} \leq_P \{\langle G, w, k \rangle : \exists \text{ hamcycle of weight } \leq k\}$; $f(\langle G \rangle) = \langle G', w, 0 \rangle$, where $G' = (V, E')$, $E' = \{(u, v) \in E : u \neq v, w(u, v) = 1 \text{ if } (u, v) \in E, w(u, v) = 0 \text{ if } (u, v) \notin E\}$. $\text{3COLOR} \leq_P \text{SCHEDULE}$; $f(\langle G \rangle) = \langle F = V, S = E, h = 3 \rangle$
--	---	---