


Linux

Awk

1 *1st routine is executed once before any input is read.*

2 *2nd routine (main input loop) is executed for each line of input.*

3 *3rd routine is executed once after all input is read.*

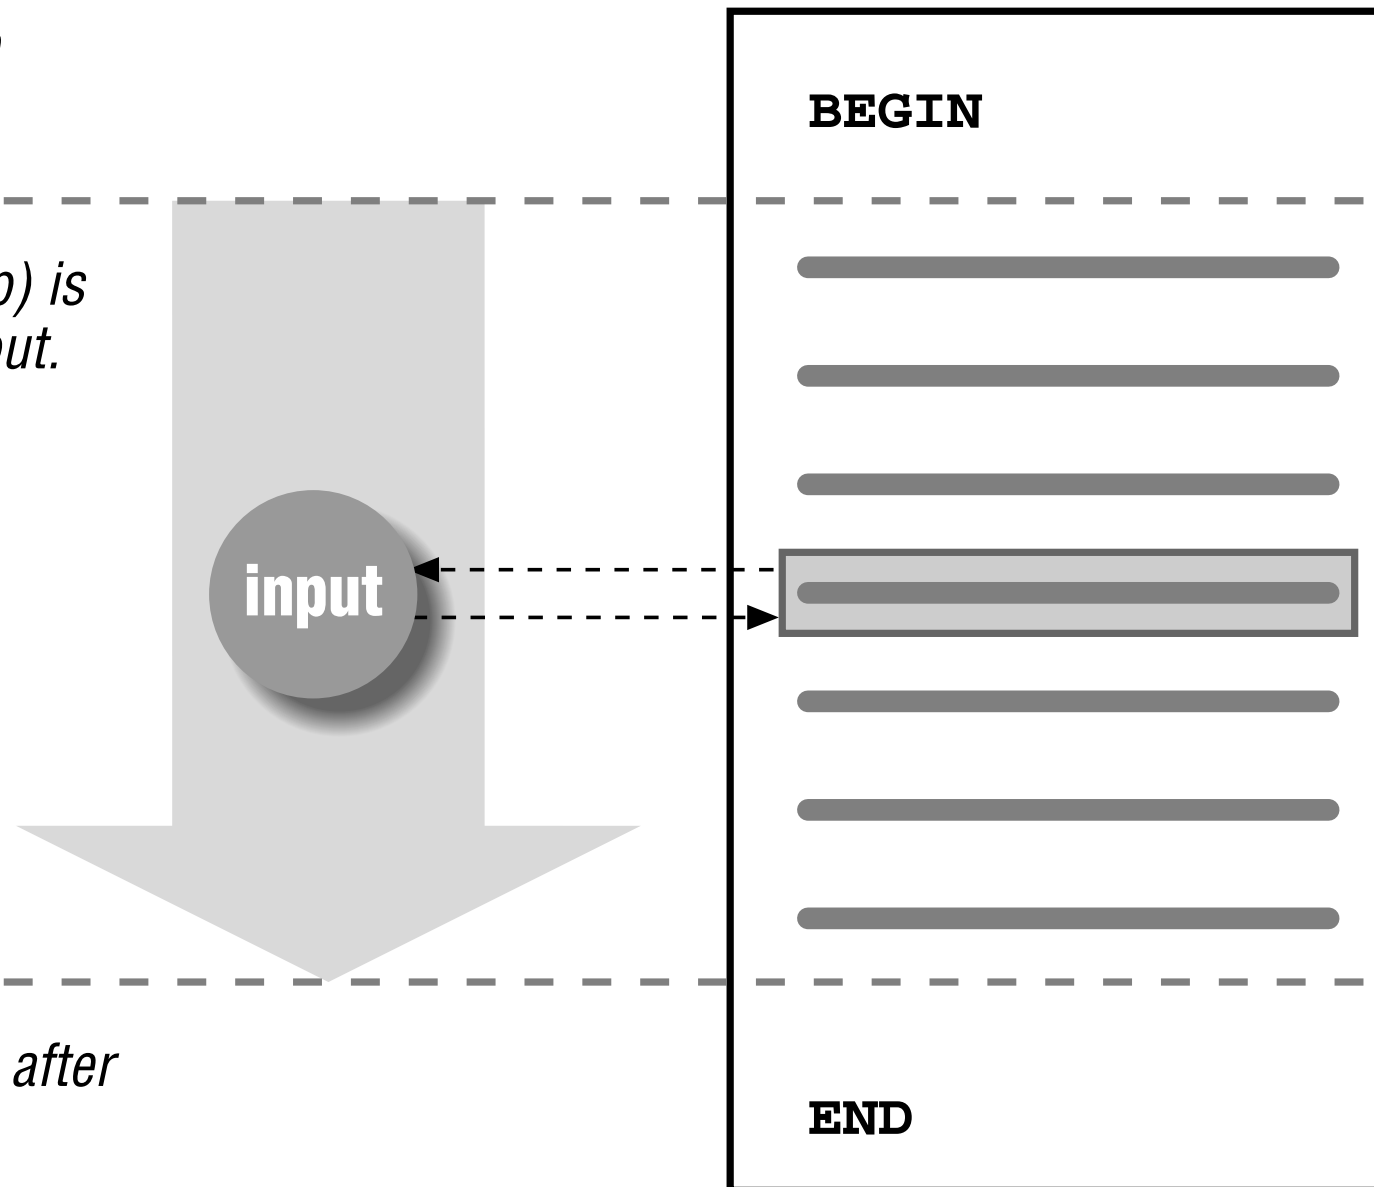

Linux

Awk

- `if ( expression ) action1; [else action2]`

`expr ? action1 : action2`

`grade = (avg >= 65) ? "Pass" : "Fail"`