

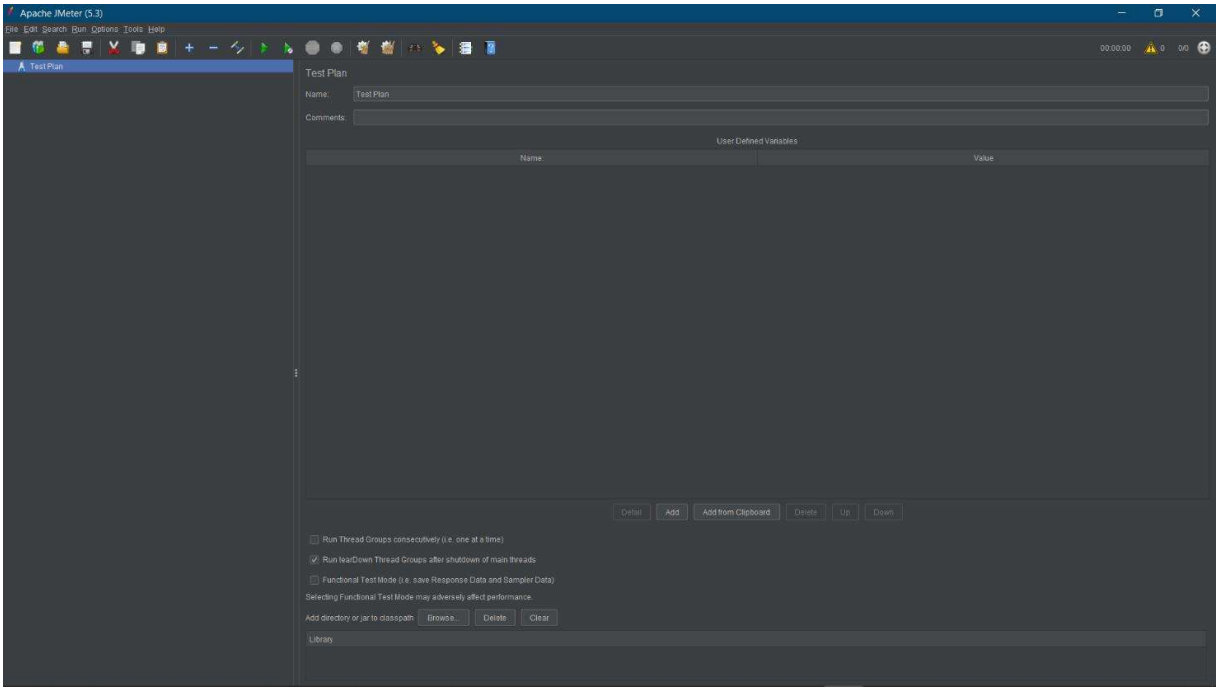



2. Created test thread

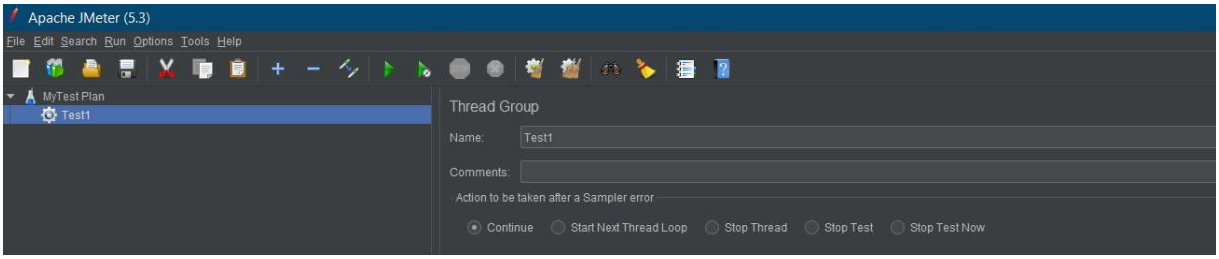


3. Added Sampler HTTP Request

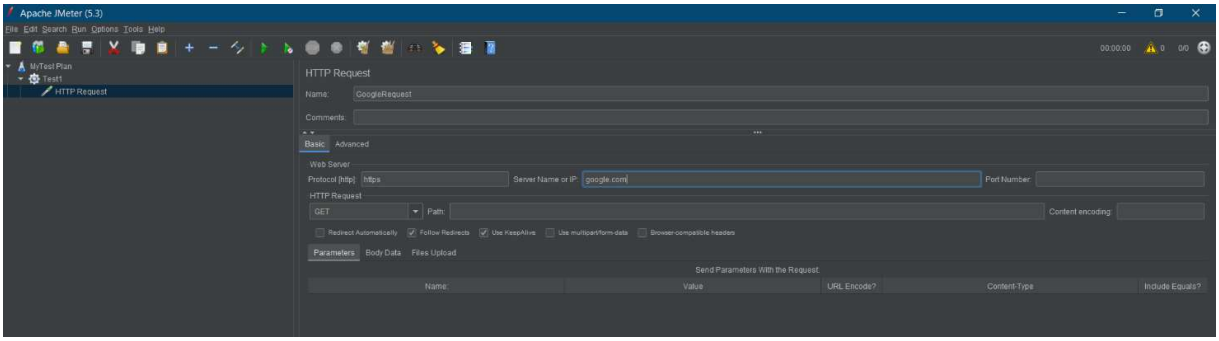


4. Added constant timer of 3 seconds

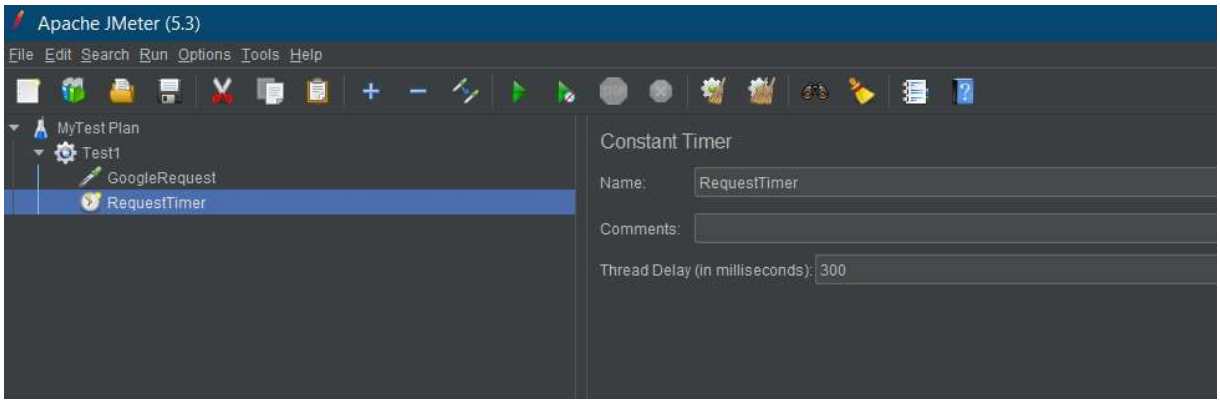


5. Added Result listener table

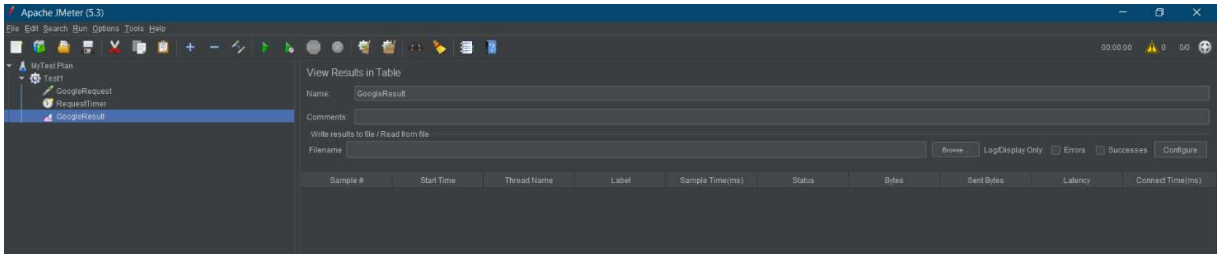


6. Added second HTTP request

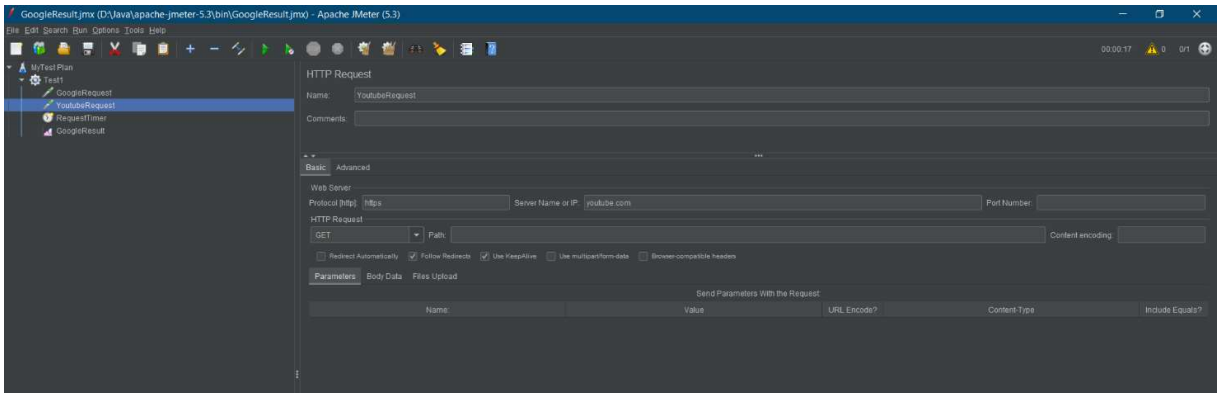


7. Ran test for 5 requests each
8. Created test thread

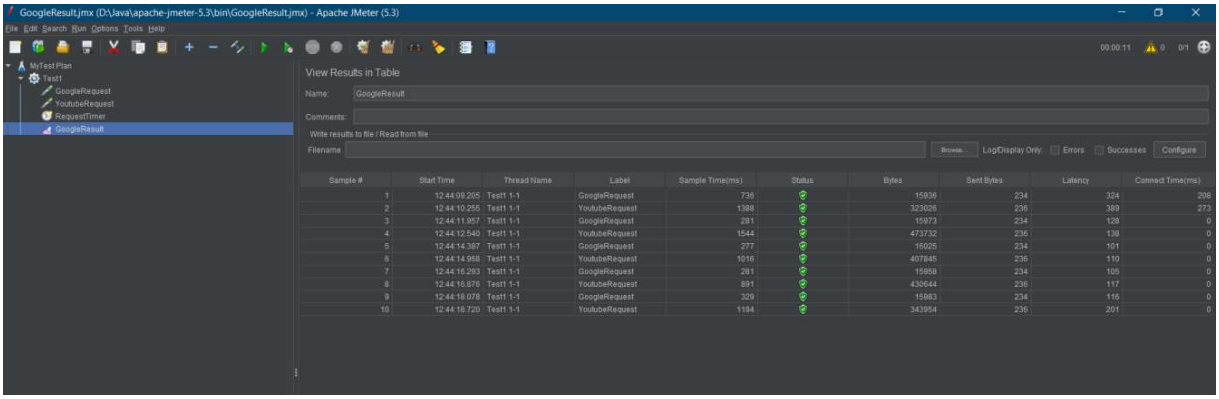


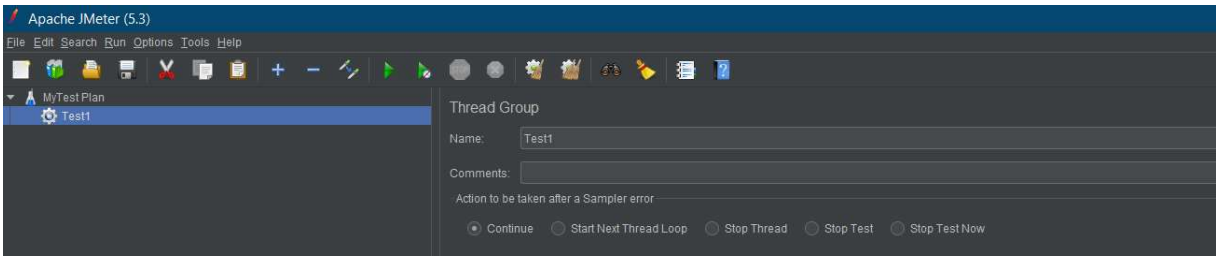


9. Added Sampler HTTP Request

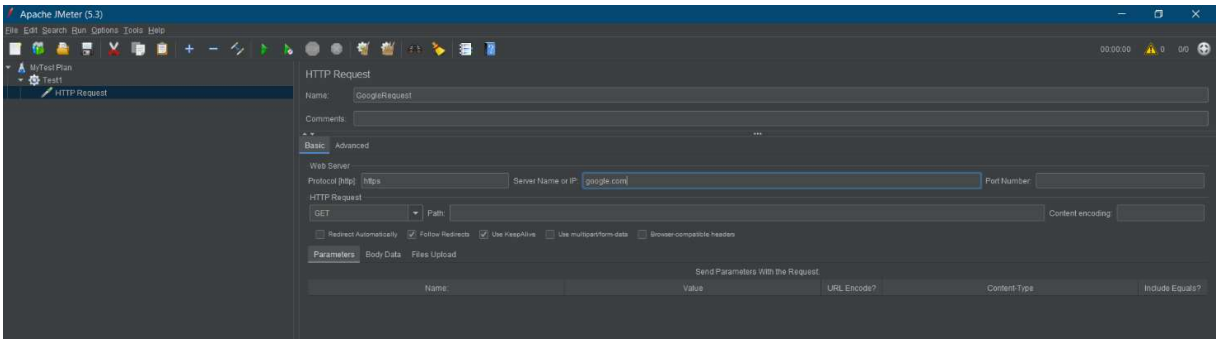


10. Added constant timer of 10 seconds

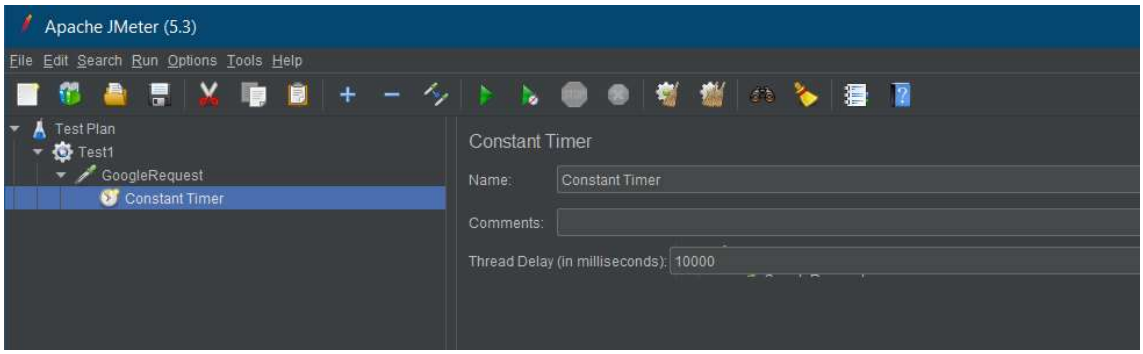


11. Added Result listener table

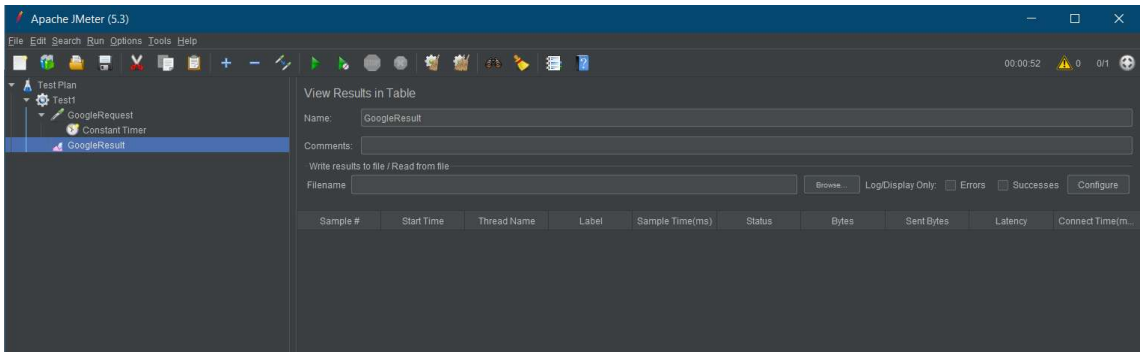


12. Ran test for 5 iterations

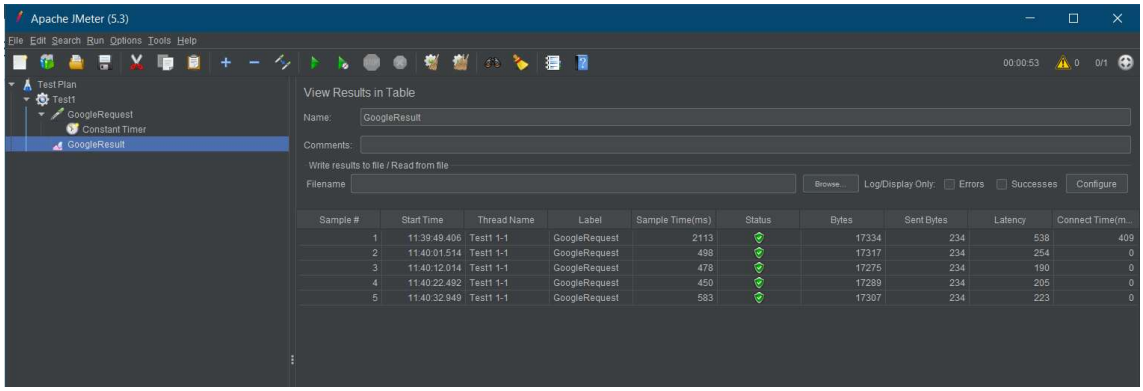


13. Added Assertions for Response Code

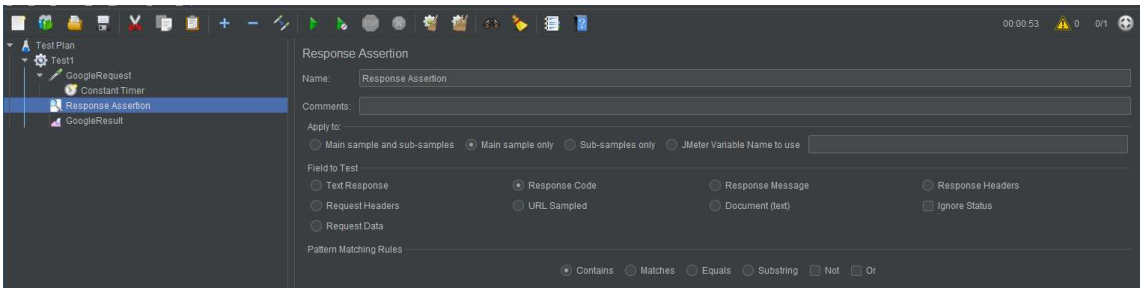


14. Added the pattern code “302” to assert the response code.

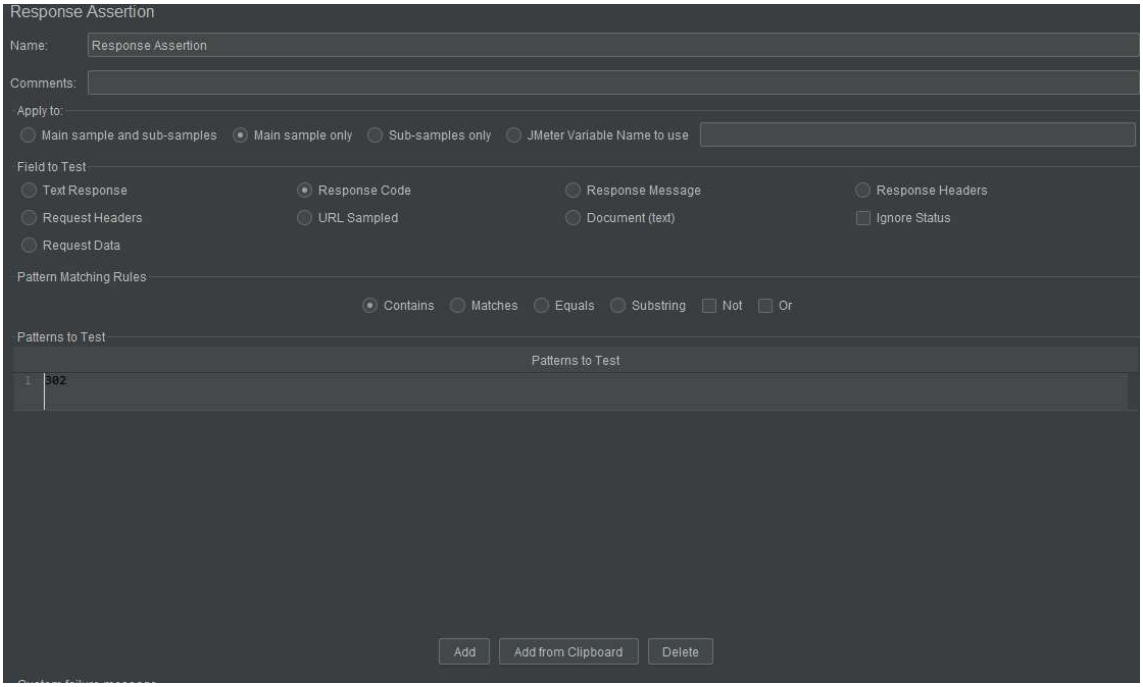


15. Added Assert Response Listener

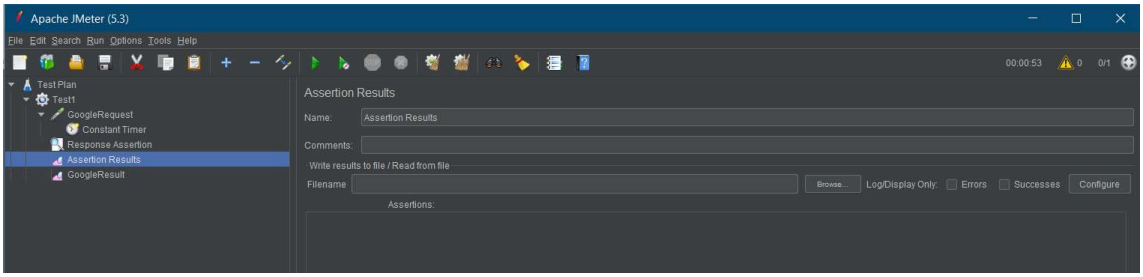

16. Ran the test to observe assert command

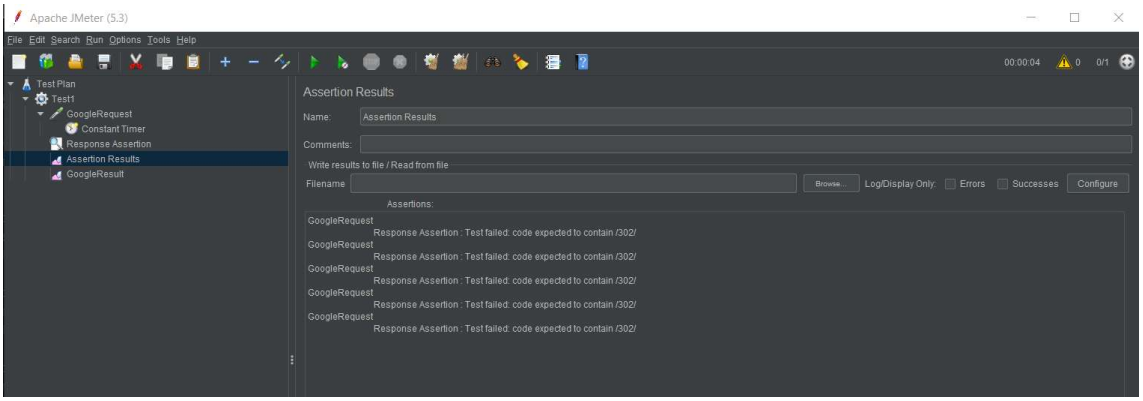


17. As 302 was code for redirection and it failed as there was no site redirection, now we will test code 200.

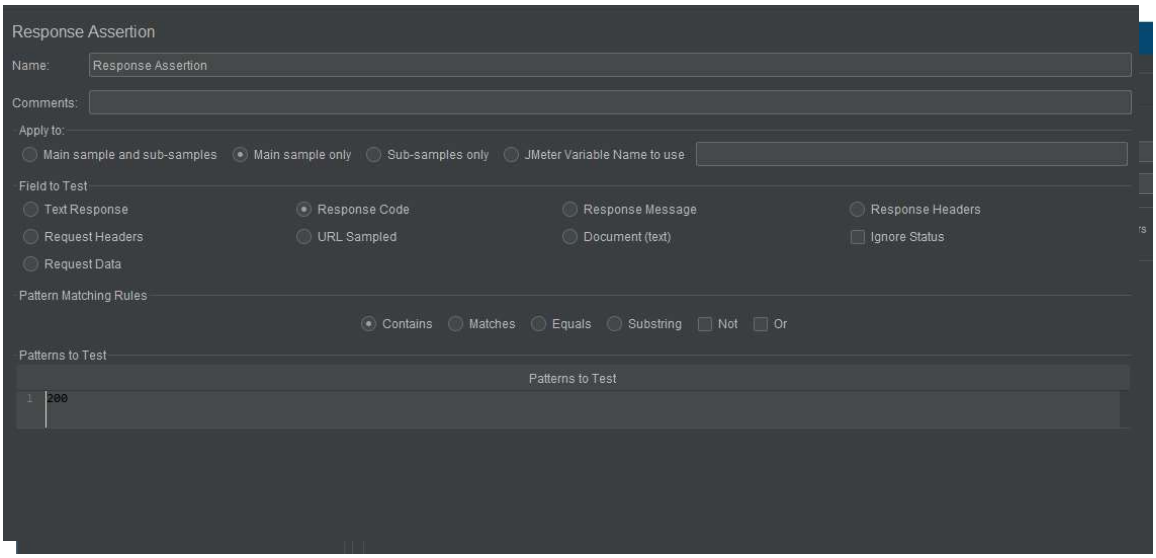


Here Code 200 has passed the assertion test.


Add thread group and set loop count as 2.

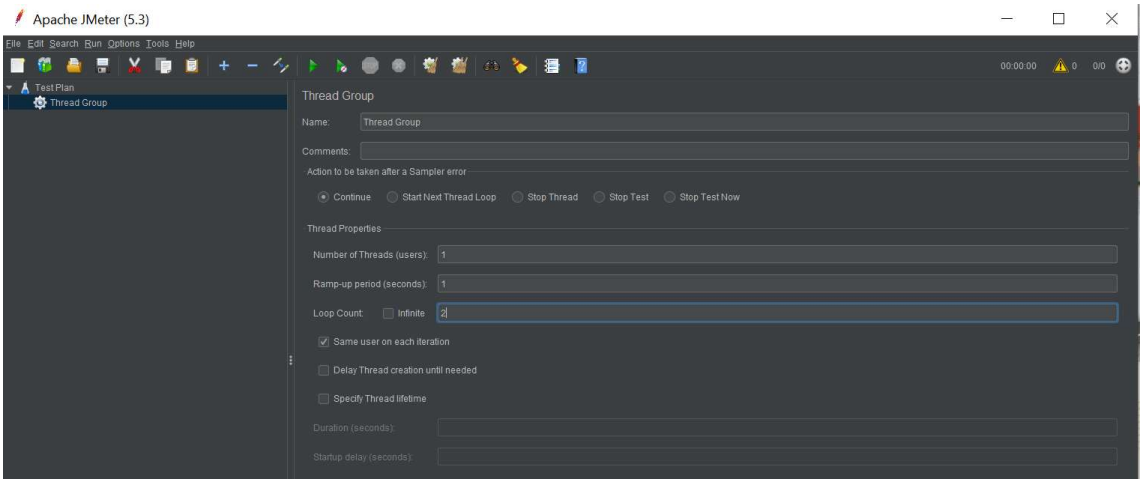


Step 2: After adding Http Request Default, add loop controller and set the loop count as 50.

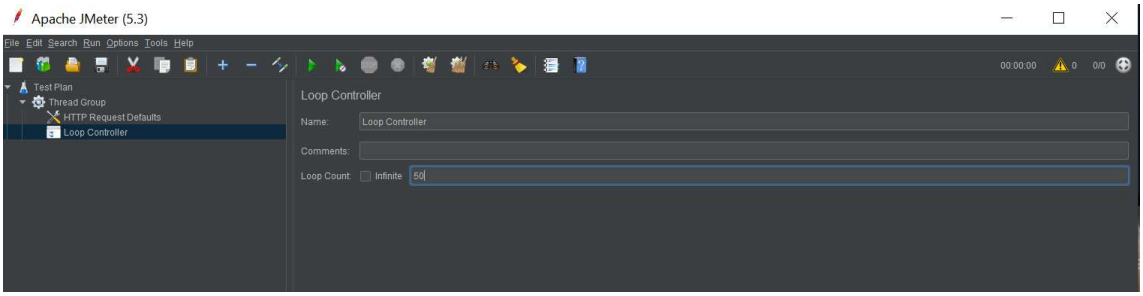

Step 3: Since the value of Loop Count field is 50, it will make **one** user request to the web server google.com run it **50** times, in addition to the loop value =2, you specified for the Thread Group above.So JMeter will send a total of **2 * 50 = 100** HTTP Requests.

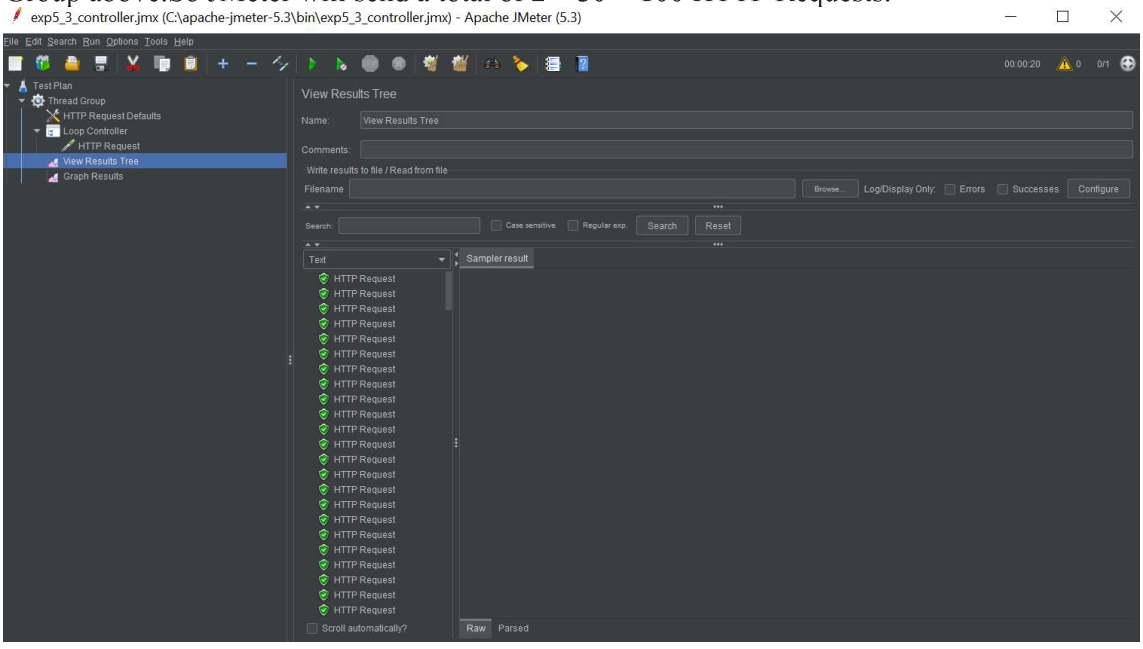


The graph result below shows 100 samples of http request.

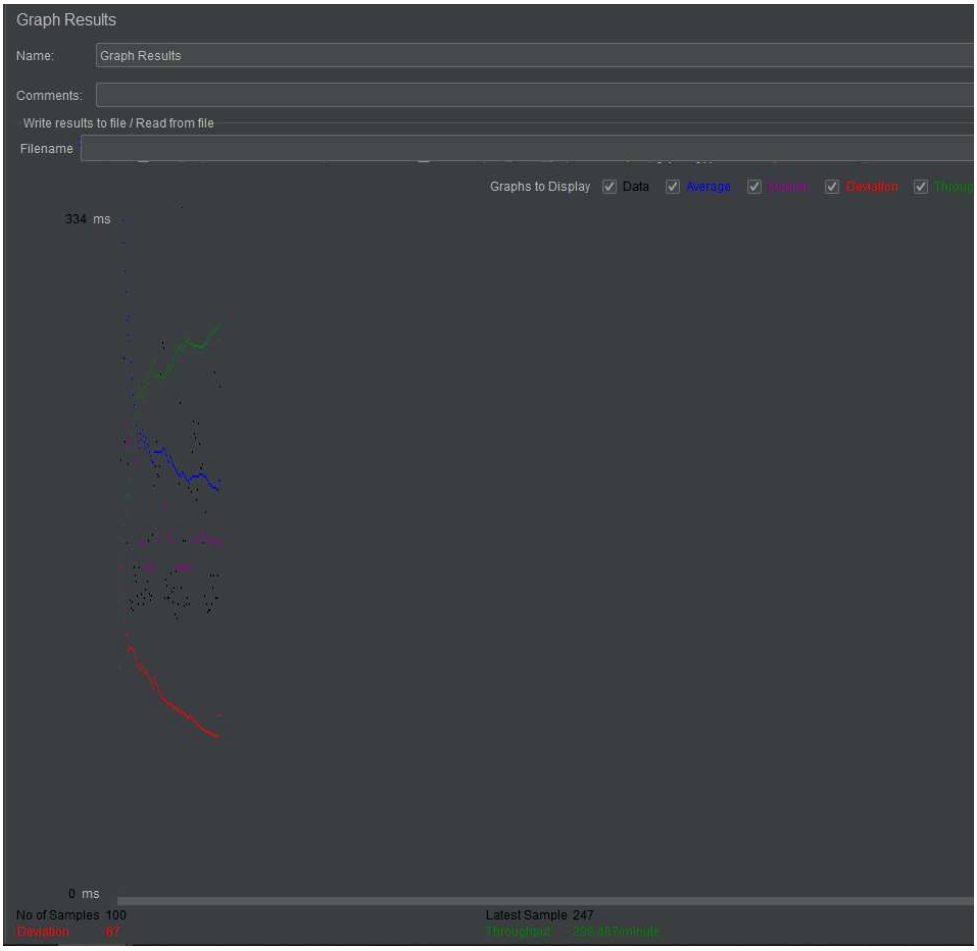


Random controller:

Step 1: We are using blazedemo.com as our testing website. Add the admin login, user login, flight booking and registration http requests sampler.

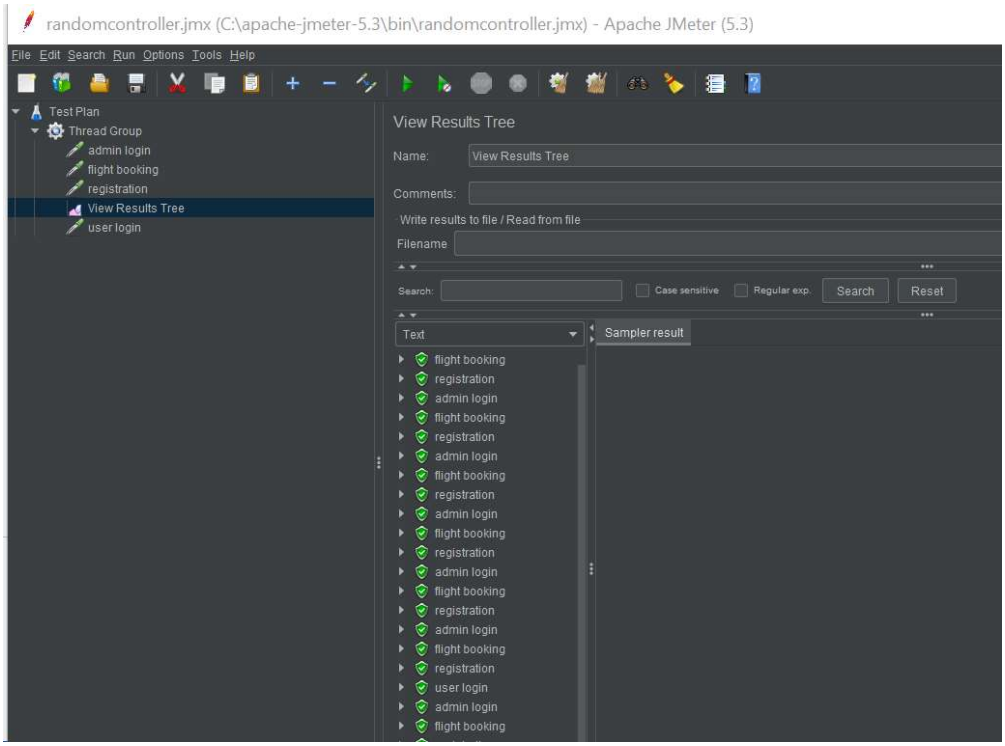

Step 2: Add the random controller and add admin login and user login.
When we run for the first time the Random controller will choose User Login request and for the second time, the Random Controller will choose the Admin login, and the rest of the requests will execute following them.

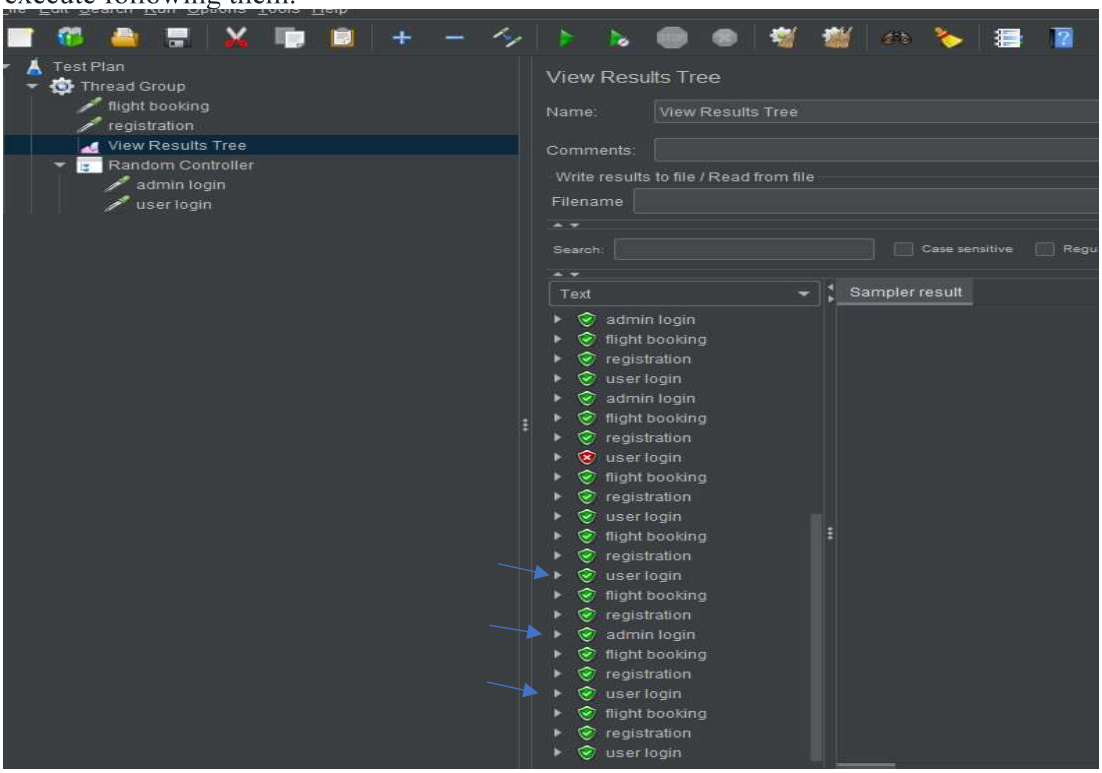

Processors

A processor is used to modify the Samplers in their scope.


There are 2 Types of processors:

1. Pre-processor
2. Post-processor

Pre-processor:

Pre-processor executes some action **before** making Sampler Request.


Consider a simple example: let's say you wanted JMeter to "spider" through the website under test, **parse** link(check all links on the page) and **return** the HTML. You would add some action such as "HTML link parser" to your controller before creating an HTTP request.

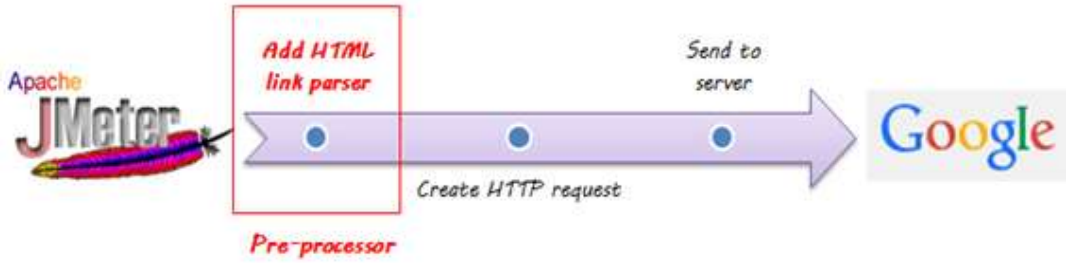

Post-processor:


Post-processor executes some action after making a Sampler Request.

Consider a simple example: JMeter sends an HTTP request to the web server under test (etc www.google.com) and get the response. You want JMeter to stop the testif the server response is an error. You can use the post-processor to do above task as follows:

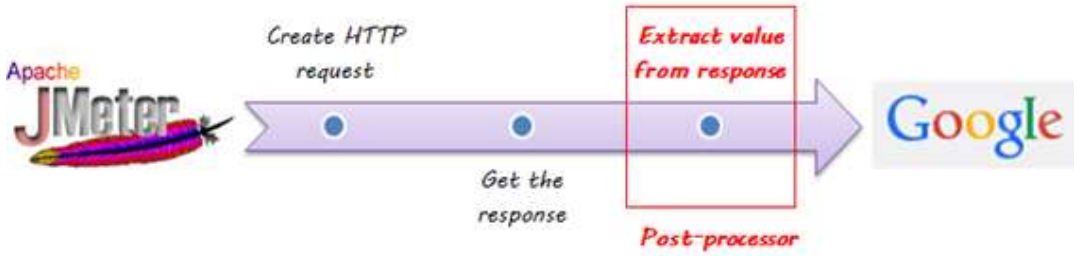

Post Processor


Add a Thread Group and make the following changes mentioned

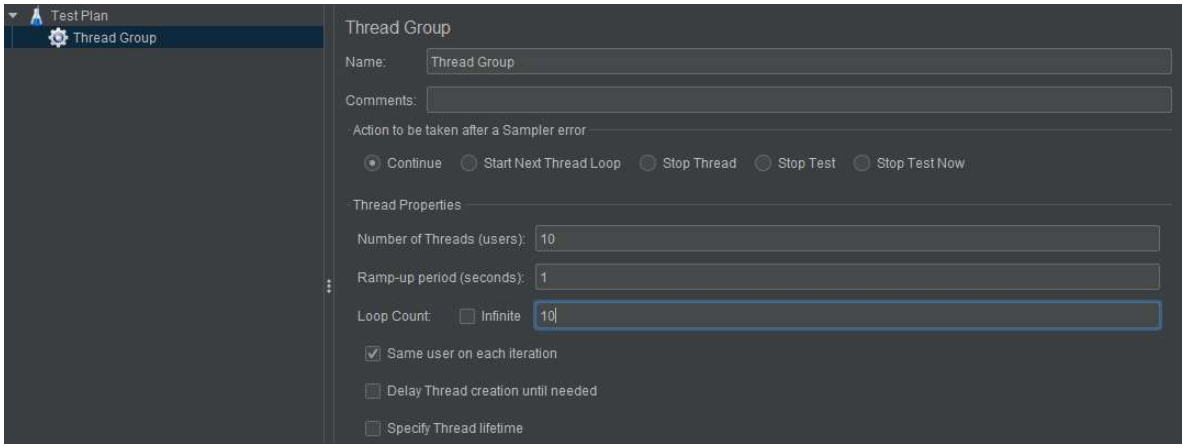

This setting lets JMeter create **10** user request to http://www.google.com **10** times.


Add JMeter Elements


HTTP Request Defaults
HTTP Requests

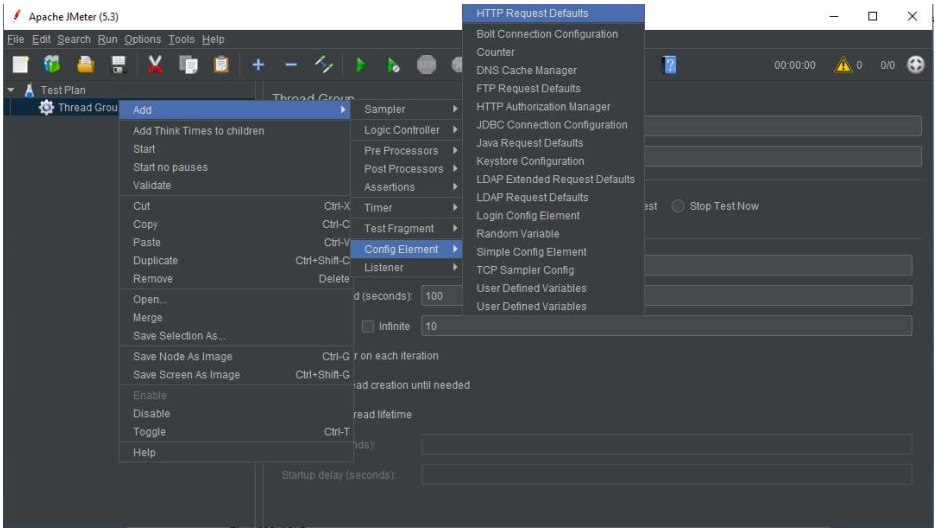




Create a HTTP Request

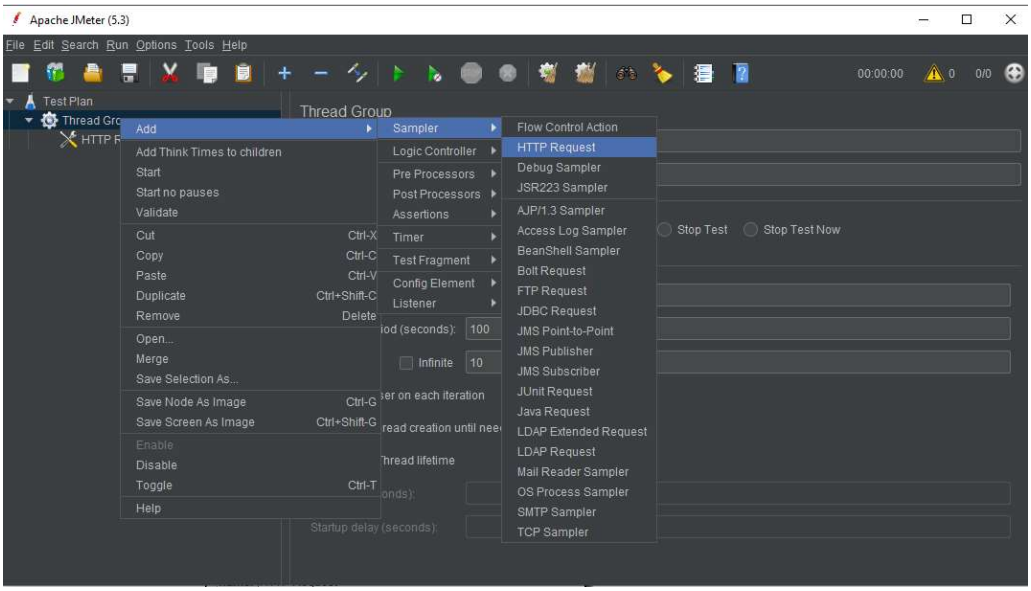


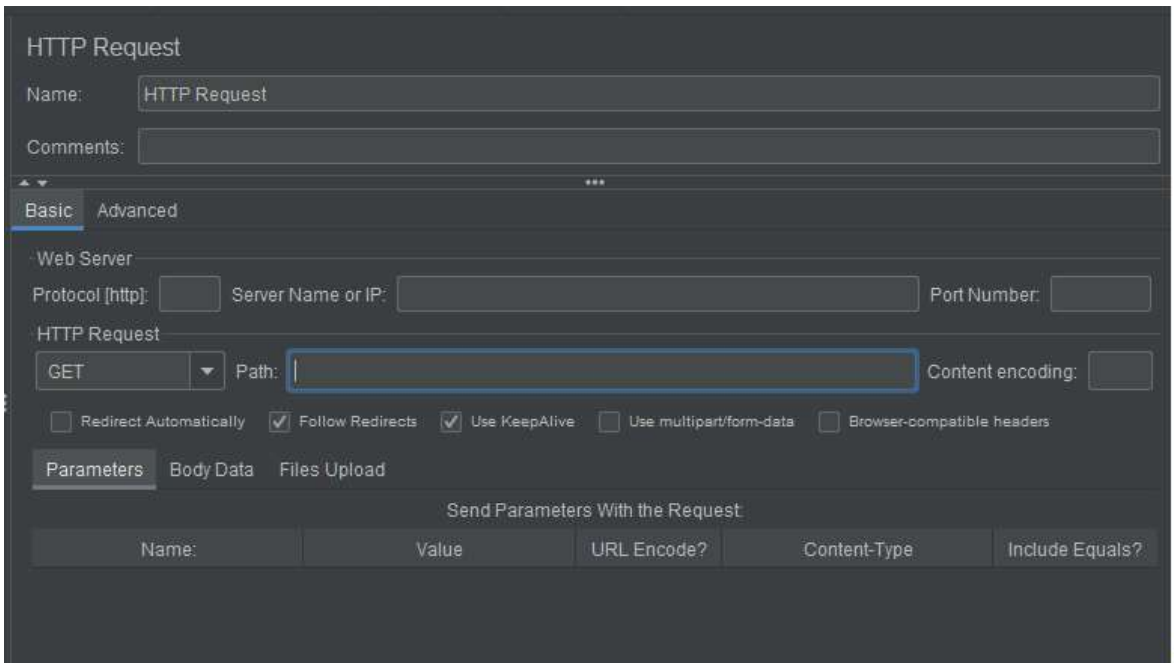


Add Post Processor Elements

Result Status Action Handler allows the user to stop the thread or the whole test if the user request failed.

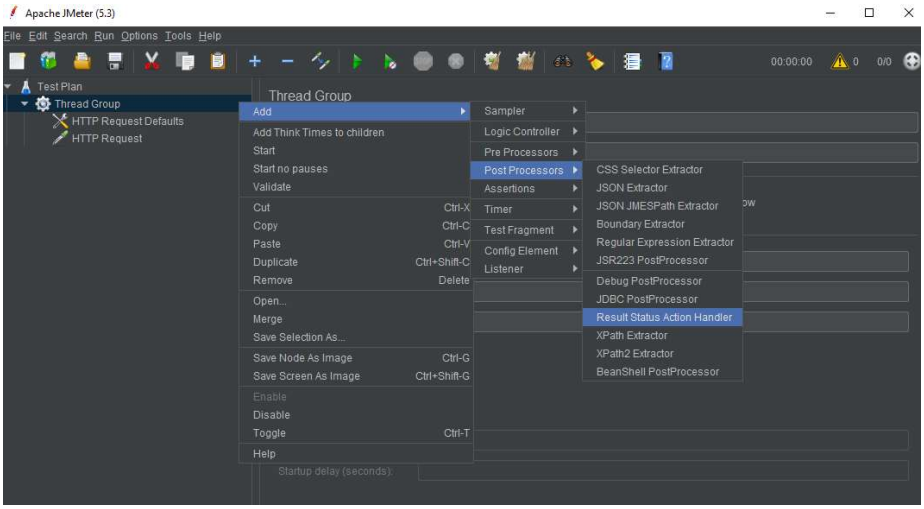

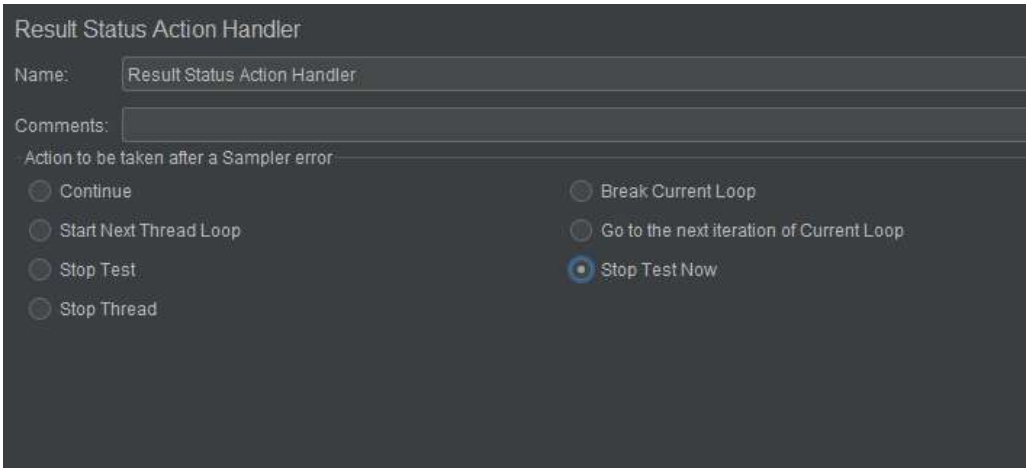


Edit the Path in HTTP Request

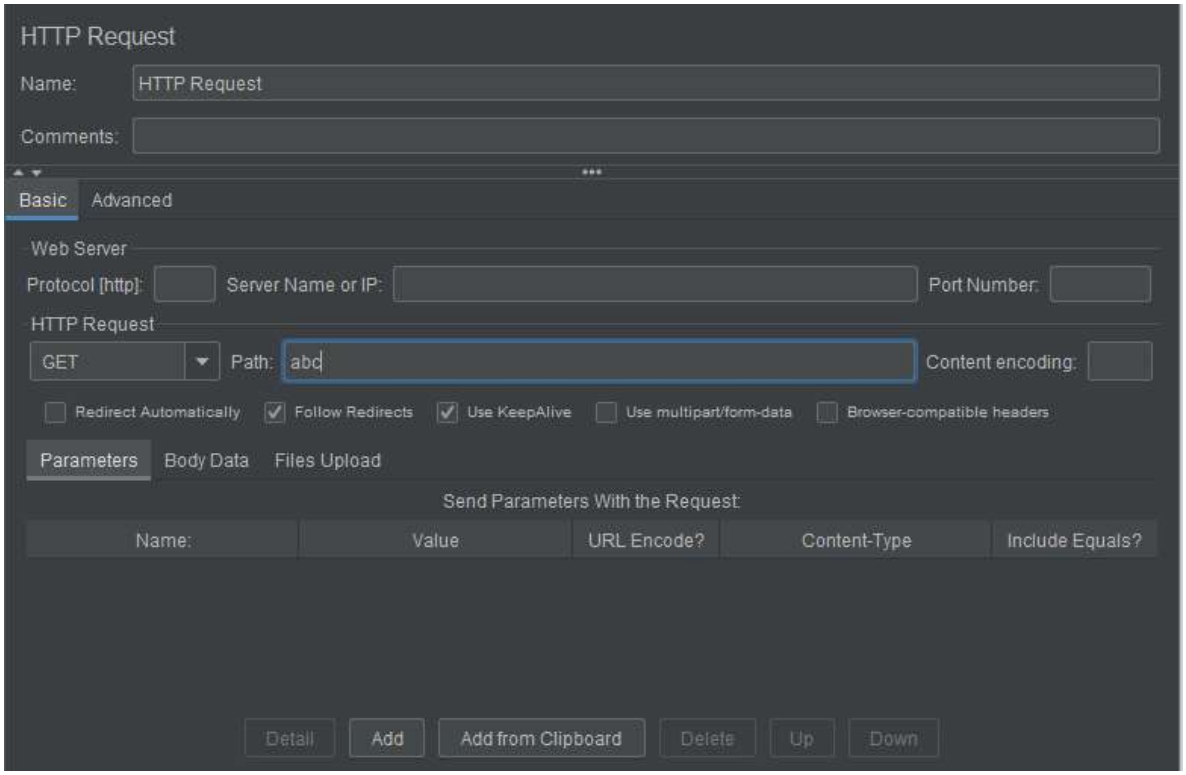


When you enter **"abc"** to the path, JMeter will create a URL request to Google server: http://www.google.com/abc. This URL doesn't exist on Google server. It is **wrong** URL request so Google server will return an error.


Add View Result Tree

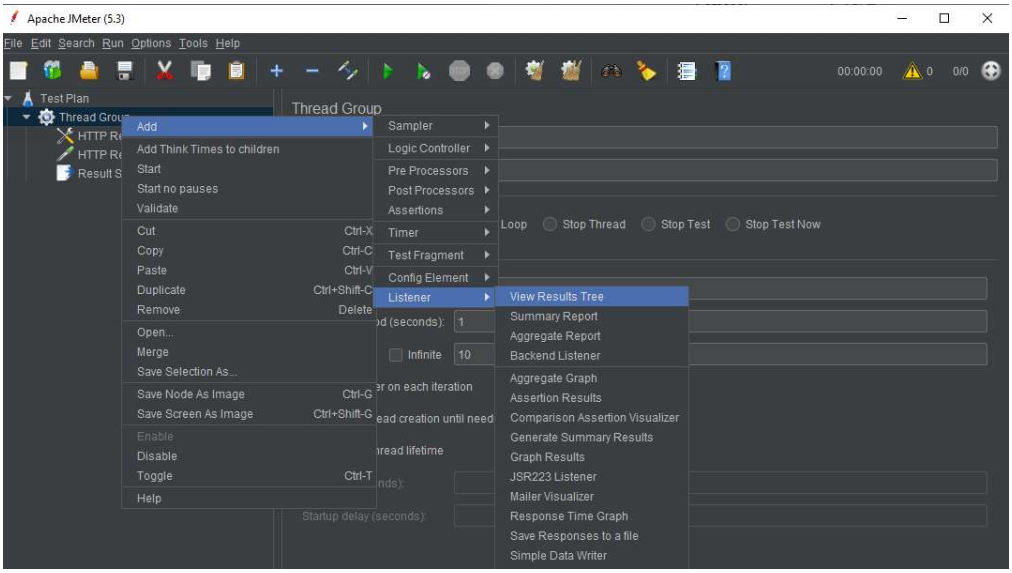

Test count will stop before 100 because the path is incorrect

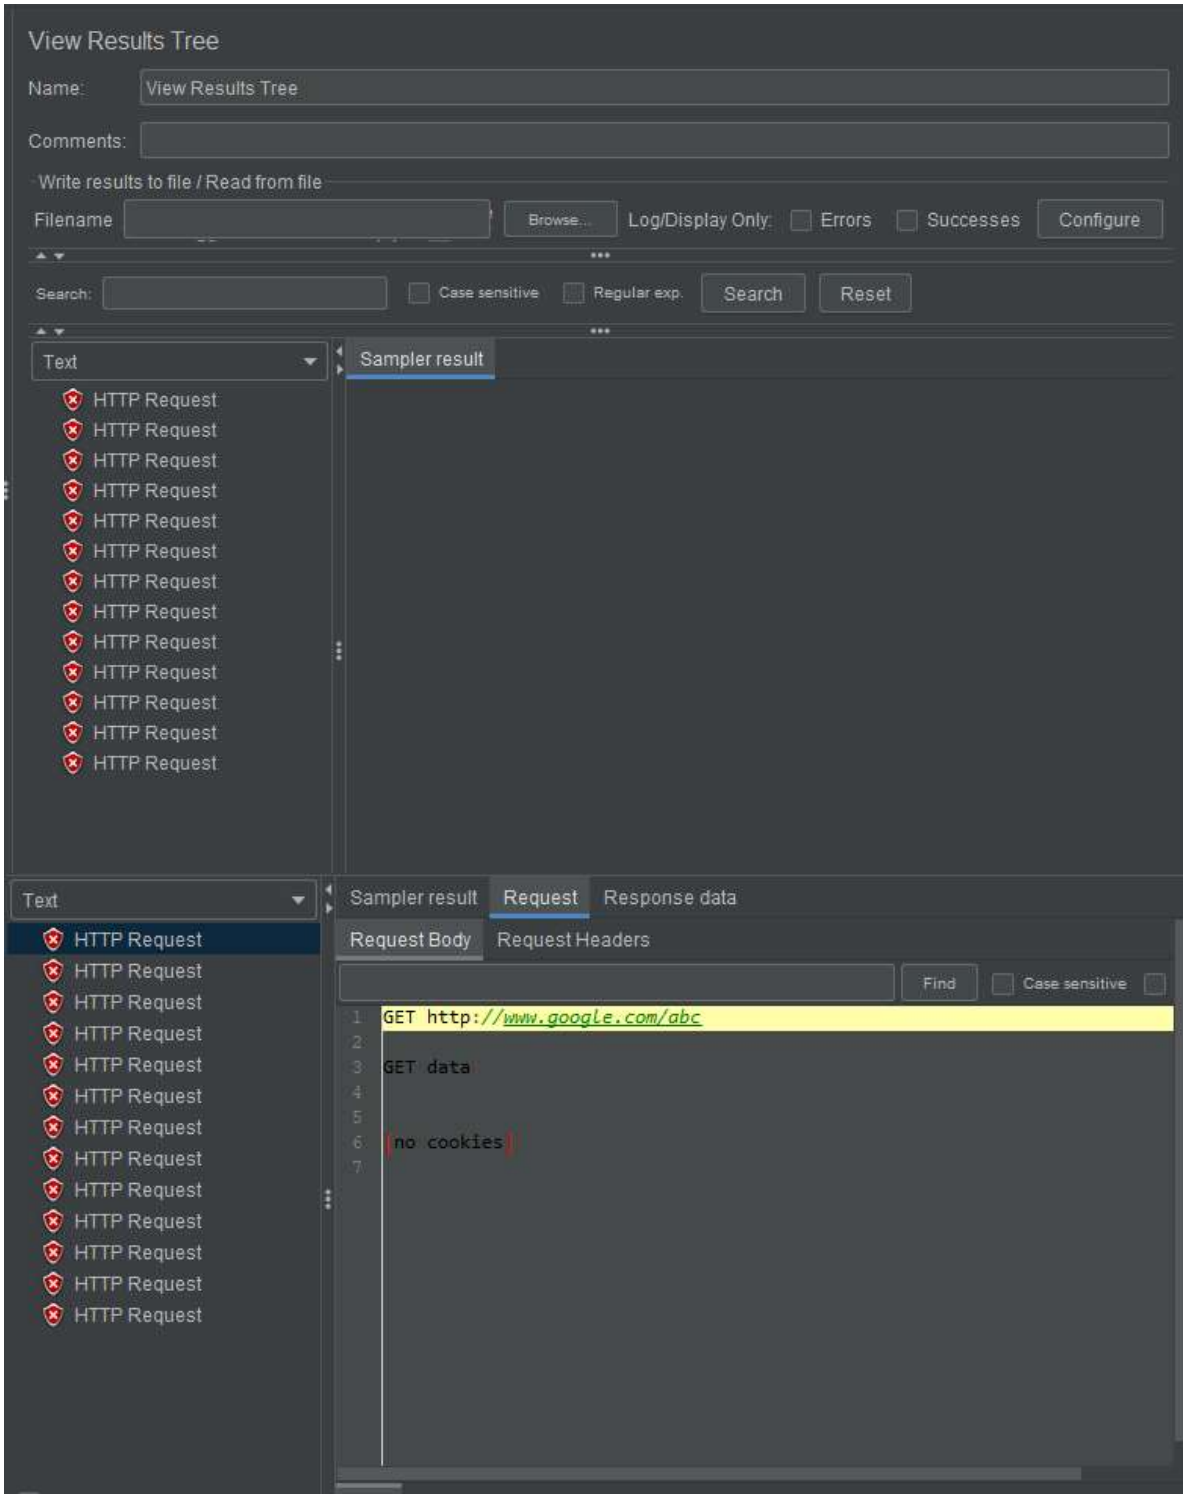


We see the error code 404

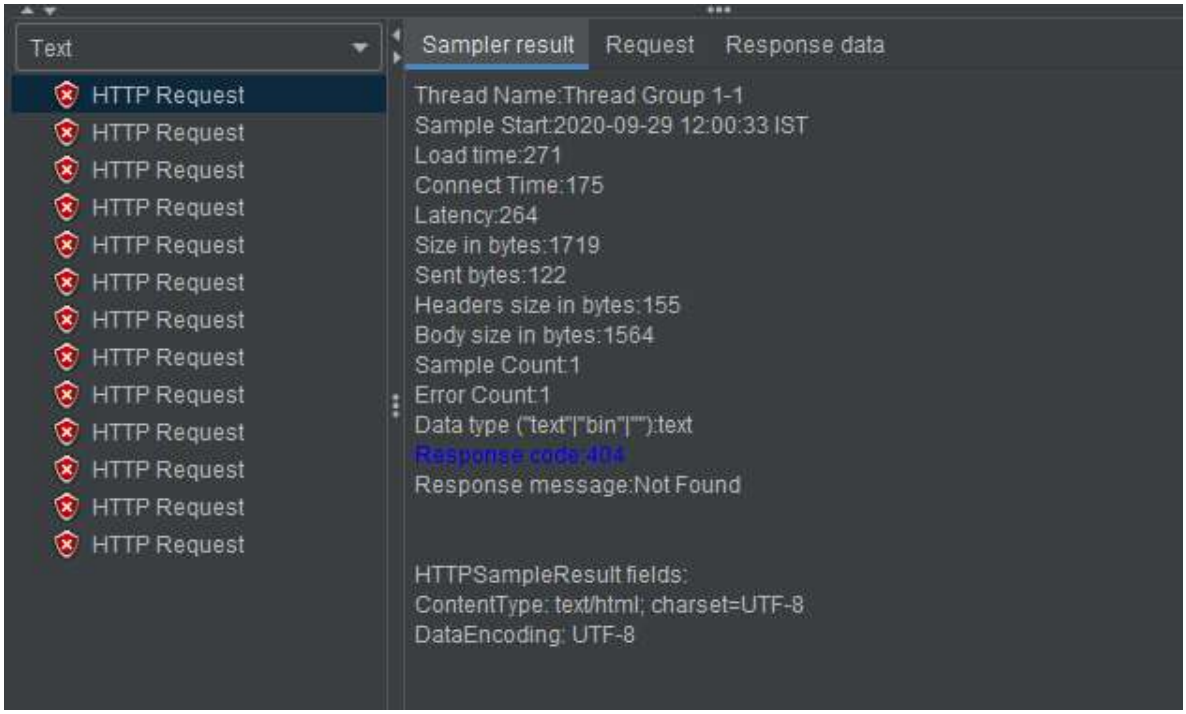


Now we go back to step 4 and enter valid details and analyse the change in output

We change the Path of HTTP Request to ‘calendar’ as shown below.

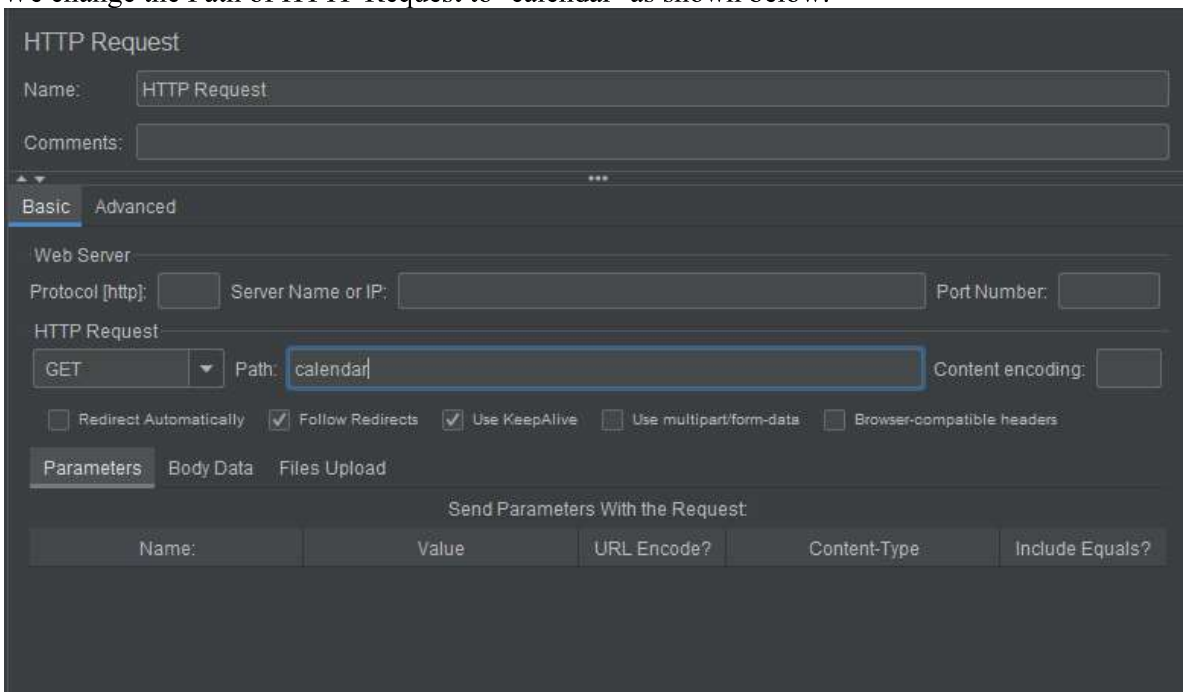

And now run the test again!

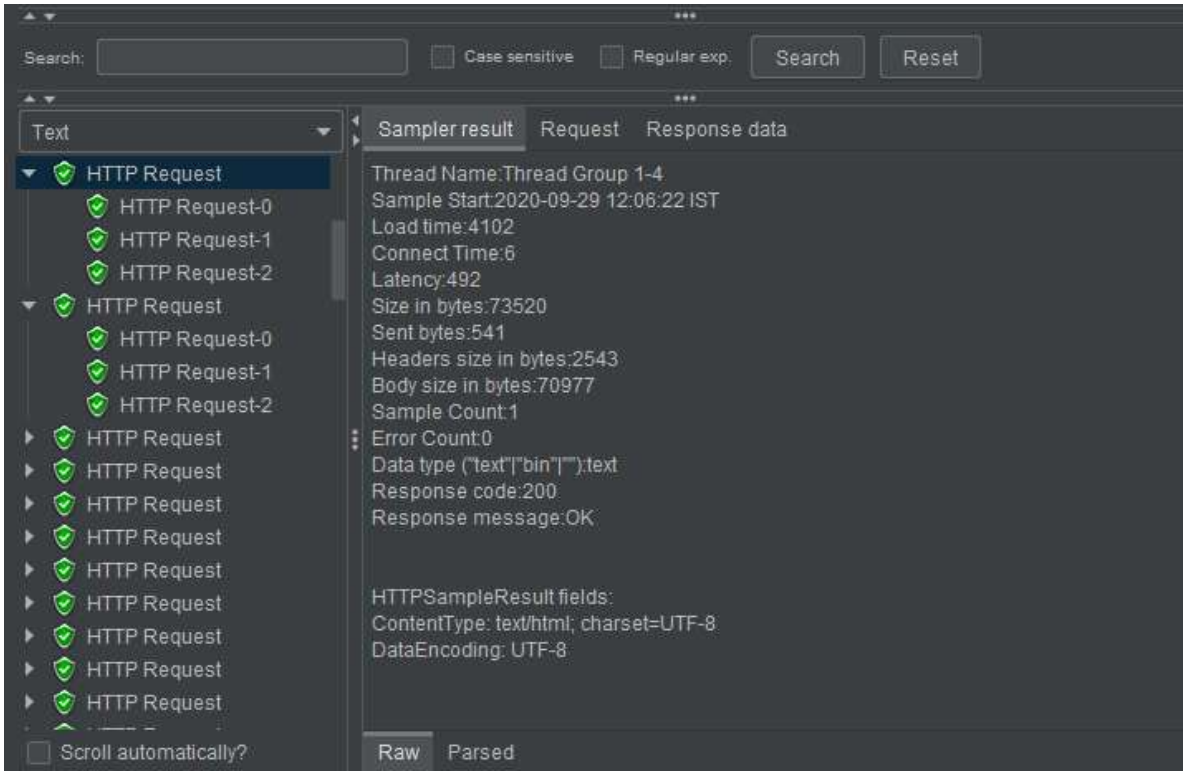


Test will continue until all 100 threads are complete.

Pre Processor


Sample Pre Processor

Add a Thread Group

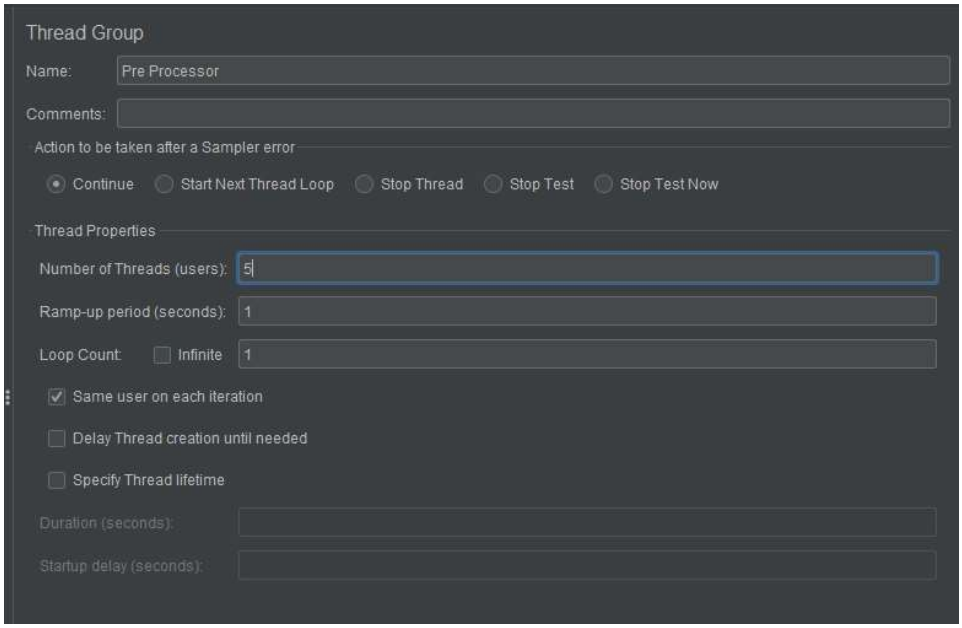


Create JMeter Elements, HTTP Request


Enter the following details

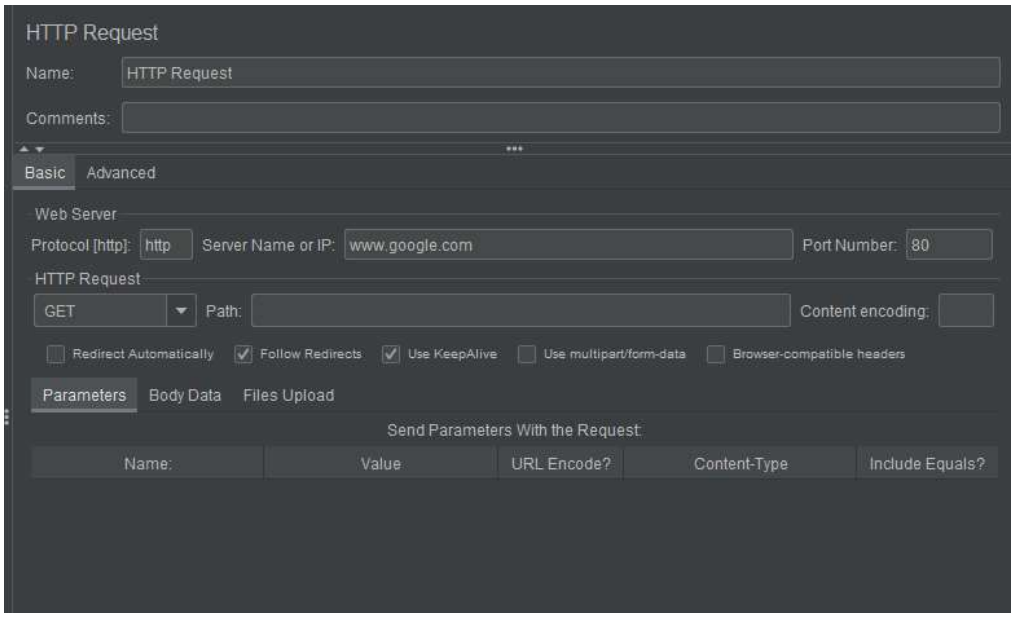

Add View Results in Table under HTTP Request

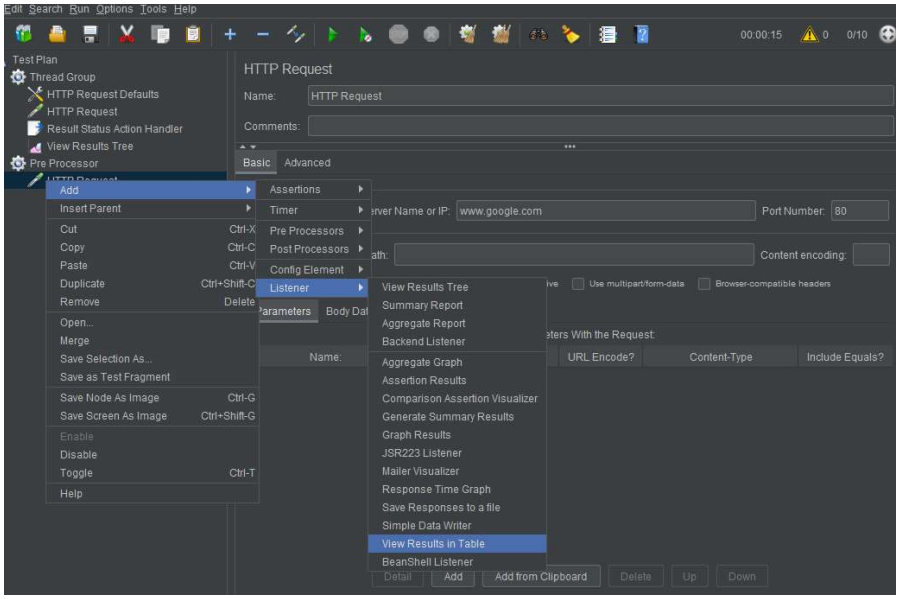


We run the Test and observe the following Result

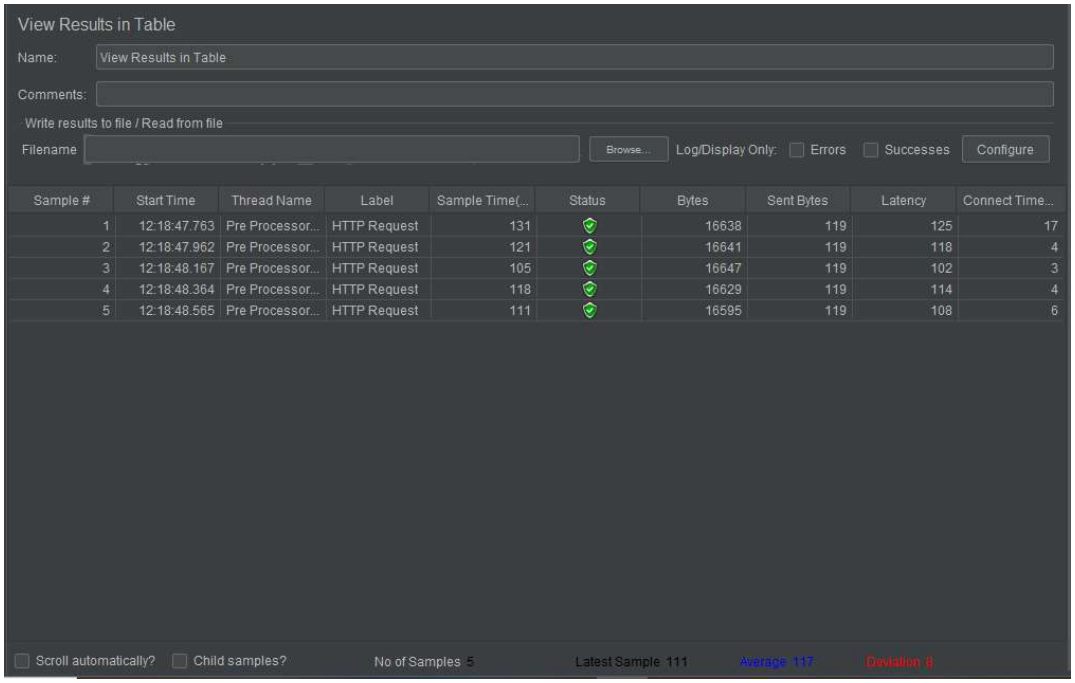

Here we observe the Sample TimeOut and we can make the changes.

Add Pre Processor Sample TimeOut as Shown Below

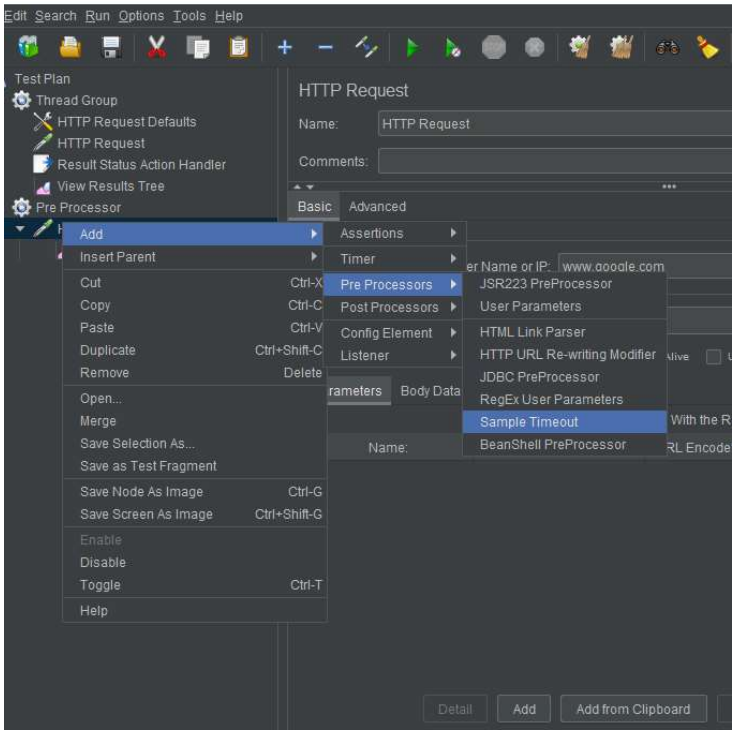


Based on the output received we set the Sample time out to 110, this says that any time that exceeds this value will fail

Now we test the output again!



Output after adding the Sample Timeout

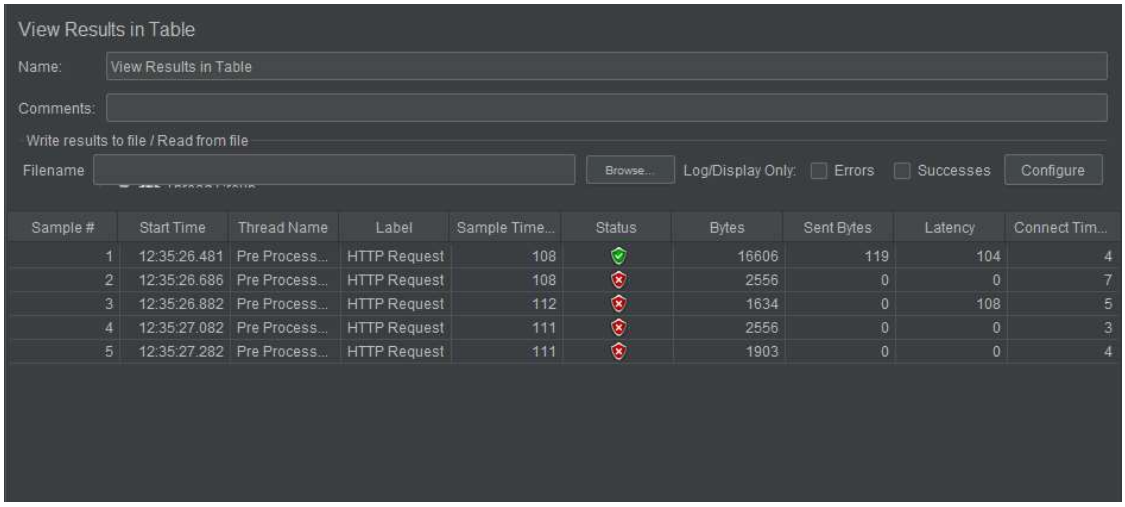

Users Parameter

If you have a Login Application you can use this to allow only some users with specific username and Password , we see the procedure below :

Add Users Parameter as shown below