



# Git-Learning

By: Adip Rijal

git-repo link: <https://github.com/adiprijal/git-learning.git>

## Command Line (Terminal / PowerShell)

<code>ls</code>	List the files and folders in the <u>current</u> folder
<code>cd ~/Desktop/folder</code>	Change the folder that the command line is running in

**Note:** git commands must be run inside the folder that contains all the code.

---

## Creating Commits

In Git, version = commit

Version history = commit history

<code>git init</code>	Git will start tracking all changes in the current folder
<code>git status</code>	Show all changes since the previous commit
<code>git add &lt;file folder&gt;</code>	Pick changes to go into next commit
<code>git add file</code>	Pick individual file
<code>git add folder/</code>	Pick all files inside a folder (and subfolders)
<code>git add .</code>	Pick all files (in folder command line is running in)
<code>git commit -m "message"</code>	Creates a commit with a message attached
<code>git commit -m "message" --amend</code>	Update previous commit instead of creating new one
<code>git log</code>	View the commit history
<code>git log --all</code>	Show all commits (not just current branch)
<code>git log --all --graph</code>	Show branching visually in the command line

## Configure Name & Email for Commits

```
git config --global user.name "Your Name"
git config --global user.email "email@example.com"
```

---

**Working Area** = contains changes start in the working area

**Staging Area** = contains changes that will go into the next commit

<code>git add .</code>	working => staging
<code>git commit -m "message"</code>	staging => commit history

<code>git reset &lt;file folder&gt;</code>	staging => working
<code>git reset file</code>	
<code>git reset folder/</code>	
<code>git reset .</code>	

<code>git checkout -- &lt;file folder&gt;</code>	working => remove the changes
<code>git checkout -- file</code>	
<code>git checkout -- folder/</code>	
<code>git checkout -- .</code>	

---

## Viewing Previous Commits

<code>git checkout &lt;commit_hash branch_name&gt;</code>	View a previous commit
---	------------------------

```
PS C:\Users\admin\Desktop\git-learning> git log --all --graph
* commit f8a1ea71e36250eff0a0550699a177101cceaabd (master)
  Author: Adip Rijal <rizalaryan2@gmail.com>
  Date:   Mon Dec 2 16:47:30 2024 +0545

    commit 9

* commit 30cbe2a8daaca91408fdf09f852f61a2bf180750
  Author: Adip Rijal <rizalaryan2@gmail.com>
  Date:   Mon Dec 2 15:58:49 2024 +0545

    commit 8

* commit 1bfa796ec54c711a308d07fd4ad0bcc9eb12b2d6 (HEAD)
  Author: Adip Rijal <rizalaryan2@gmail.com>
  Date:   Mon Dec 2 15:55:05 2024 +0545

    commit 7
```

**master** = branch name

1. You can `git checkout branch`
2. Always points to latest commit on the branch.

**HEAD** = indicates which commit you are currently viewing

## Restoring to a Previous Commit

<code>git checkout &lt;hash branch&gt; &lt;file folder&gt;</code>	Restore the contents of files back to a previous commit
<code>git checkout &lt;hash branch&gt; file</code>	Restore a file
<code>git checkout &lt;hash branch&gt; folder/</code>	Restore all files in folder (& subfolders)
<code>git checkout &lt;hash branch&gt; .</code>	Restore all files in project

---

## Other Features of Git

<code>git config --global alias.shortcut &lt;command&gt;</code>	Creates an alias (a shortcut)
<code>git config --global alias.s "status"</code>	<code>git s = git status</code>

<code>.gitignore</code>	Tell git which files/folders it SHOULD NOT track
<code>rm -rf .git</code>	Remove git from project

## GitHub

Repository = a folder containing code where any changes to the code are tracked by git.  
(To create a repository, we create a new folder on our computer, and then run `git init`)

GitHub = a service that lets us save our git repositories online. It also helps us:

- backup our code in case we delete it on our computer
- see the history of our code changes more easily

Local repository = a git repository saved on our computer

Remote repository = a git repository saved online (for example on GitHub)

## Uploading Code to GitHub

<code>git remote add &lt;remote_name&gt; &lt;url&gt;</code>	Link a local repository to a remote repository and give a name for this link
---	--

```
git remote add origin https://github.com/adipriyal/git-learning.git
^
```

The above command links a local repository to a GitHub repository (located at the url `https://github.com/adipriyal/git-learning.git` ) and gives it a name "origin"

<code>git remote</code>	List all remote repositories that are linked
<code>git remote -v</code>	List all remote repositories (but with more detail)
<code>git remote remove &lt;remote_name&gt;</code>	Removes a link to a remote repository
<code>git remote remove origin</code>	Removes the link to the remote repository named "origin"
<code>git config --global credential.username &lt;username&gt;</code>	Configure your GitHub username so you can get access to your Github repository
<code>git push &lt;remote_name&gt; &lt;branch&gt;</code>	Upload a branch of your git version history to your remote repository
<code>git branch</code>	Shows a list of available branches
<code>git log --all --graph</code>	Shows the branches visually in the history

<code>git push origin main</code>	Upload the branch "main" to the remote repository named "origin"
<code>git push &lt;remote_name&gt; &lt;branch&gt; --set-upstream</code>	Sets up a shortcut for this branch and remote repository
<code>git push origin main --set-upstream</code>	Next time you are on the <code>main</code> branch and you run <code>git push</code> , it will automatically push the <code>main</code> branch to <code>origin</code>
<code>git push &lt;remote_name&gt; &lt;branch&gt; -f</code>	Force-push the branch to the remote repository (it will overwrite what's on the remote repository)

## Downloading Code from GitHub

<code>git clone &lt;url&gt;</code> <code>git clone https://github.com/adipriyal/git-learning.git</code>	Download a remote repository from a <code>url</code>
<code>git clone &lt;url&gt; &lt;folder_name&gt;</code>	Download the repository and give it a different folder name
<code>git fetch</code>	Updates all remote tracking branches. Remote tracking branches (like <code>origin/main</code> ) show what the branch looks like in the remote repository
<code>git pull &lt;remote_name&gt; &lt;branch&gt;</code> <code>git pull origin main</code>	Update the local branch with any updates from the remote repository (on GitHub) Downloads any new commits from the <code>main</code> branch on <code>origin</code> , and updates the local <code>main</code> branch with those new commits
<code>git pull origin main --set-upstream</code> ^	Sets up a shortcut so that the next time you are on the <code>main</code> branch and run <code>git pull</code> , it will automatically <code>git pull origin main</code>

## Branching

Branching = create a copy of the version history that we can work on without affecting the original version history. This lets us work on multiple things (features + fixes) at the same time.

<code>git branch &lt;branch_name&gt;</code> <code>git branch feature1</code>	Creates a new branch Create a new branch named <code>feature1</code>
<code>git checkout &lt;branch_name&gt;</code> <code>git checkout feature1</code>	Switch to a different branch and start working on that branch Switch to the <code>feature1</code> branch. New commits will now be added to the <code>feature1</code> branch

```

PS C:\Users\admin\Desktop\New folder> git log --all --graph
* commit ebd2e2f39a71a82c2c11f54718b37891d03fe46a (HEAD -> feature1, master)
  Author: Adip Rijal <rizalaryan2@gmail.com>
  Date: Thu Dec 19 08:38:25 2024 +0545

    commit 3

* commit ac75bee62fda73757b020d04242a1234d1c39ff4
  Author: Adip Rijal <rizalaryan2@gmail.com>
  Date: Thu Dec 19 08:37:45 2024 +0545

    commit 2

* commit 71d3e319d28c784a7f73c2d5928489e4bdc0c554
  Author: Adip Rijal <rizalaryan2@gmail.com>
  Date: Thu Dec 19 08:36:55 2024 +0545

    commit 1
PS C:\Users\admin\Desktop\New folder> |

```

**HEAD** = points to which branch we are currently working on

**HEAD -> feature1** = we are currently working on the **feature1** branch. Any new commits will be added to the **feature1** branch

```

git branch -D <branch_name>
git branch -D feature1

```

Deletes a branch

Deletes the **feature1** branch

## Merging

```
git merge <branch_name> -m "message"
```

Merge the current branch (indicated by **HEAD ->**) with another branch (**<branch\_name>**). Saves the result of the merge as a commit on the current branch

```

git checkout main
git merge feature1 -m "message"

```

1. First switch to the **main** branch
2. Then merge the **main** branch with the **feature1** branch. The result of the merge will be added to **main** as a commit (a "merge commit")

## Merge Conflicts

```

<<<<<< HEAD
code1
=====
code2
>>>>>> branch

```

If there is a merge conflict (git doesn't know what the final code should be), it will add this in your code.

(This is just for your convenience, the **<<<<<<** and **>>>>>>** don't have special meaning)

```

<<<<<<< HEAD
...          <-- Code in the current branch (indicated by HEAD ->)
=====
...          <-- Code in the branch that is being merged into HEAD
>>>>>>> branch

```

### To resolve a merge conflict:

1. Delete all the extra code and just leave the final code that you want.

```

<<<<<<< HEAD
code1
=====
=> code2
code2
>>>>>>> branch

```

2. If there are conflicts in multiple places in your code, repeat step 1 for all those places.

3. Create a commit.

```

git add .
git commit -m "message"

```

### Feature Branch Workflow

A popular process that companies use when adding new features to their software.

1. Create a branch for the new feature (called a "feature branch").

```

git branch new-feature
git checkout new-feature
Make some changes to the code...
git add .
git commit -m "new feature message"

```


2. Upload the feature branch to GitHub.

```


git push origin new-feature

```

3. Create a pull request on GitHub (a pull request lets teammates do code reviews and add comments).

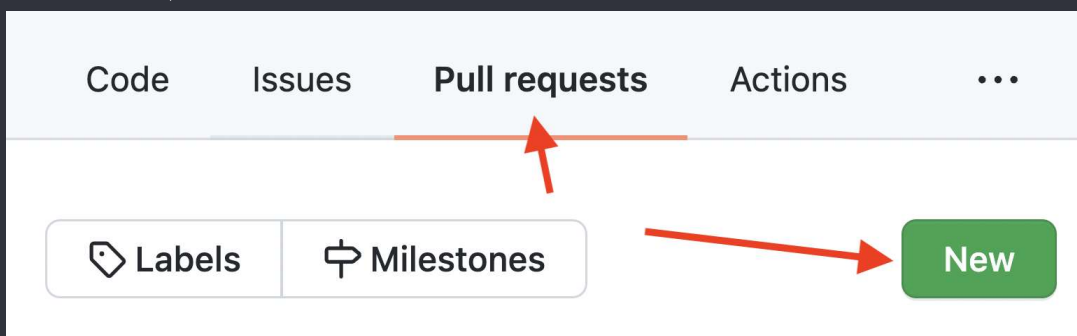

4. Merge the feature branch into the main branch (by opening the pull request in the browser and clicking "Merge pull request")

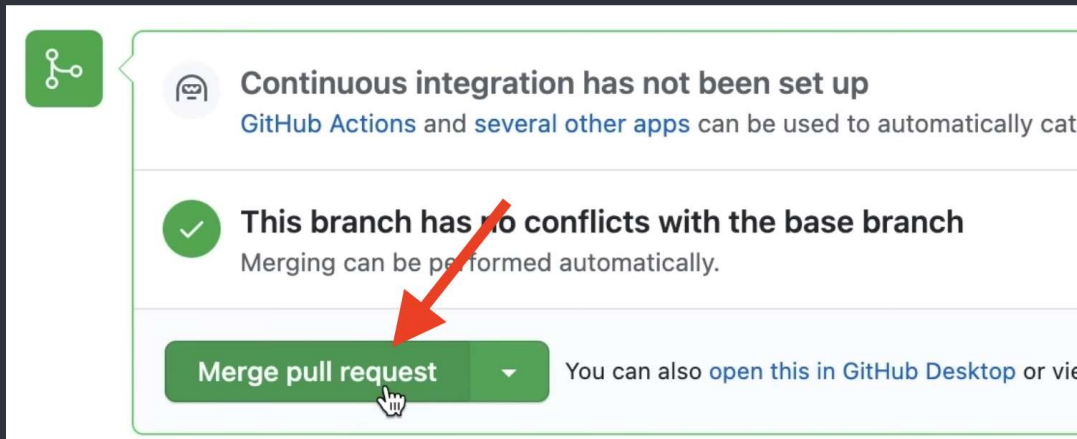

5. After merging, update the local repository (so that it stays in sync with the remote repository on GitHub).


```
git checkout main
git pull origin main
```

### Merge Conflicts in the Feature Branch Workflow

A merge conflict can happen if 2 or more pull requests change the same file and the same line.

We can either:

1. Resolve the merge conflict on GitHub.

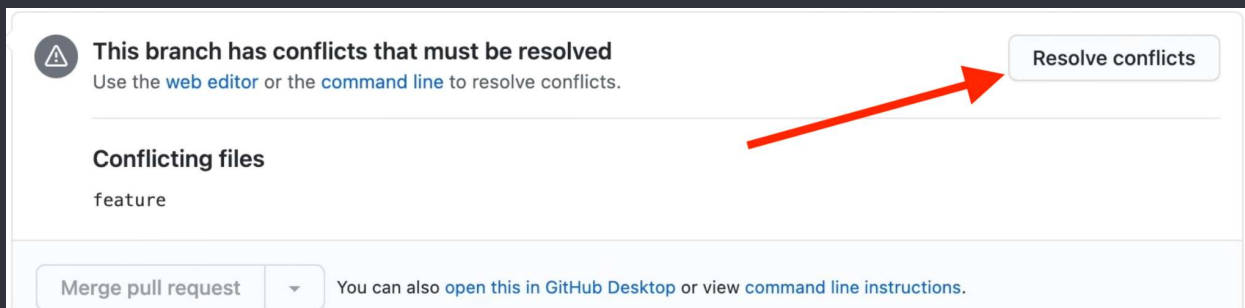

2. Resolve the merge conflict on our computer.

1) Get the latest updates from main

```
git checkout main
git pull origin main
```

2) Get the latest updates from the feature branch.

```
git checkout feature4
git pull origin feature4
```

3) Merge main into the feature branch (feature4). Notice the direction of the merge: we want the merge commit to stay on the feature branch so our teammates can review it.

```
git checkout feature4  
git merge master
```

4) Push the resolved feature branch to GitHub.

```
git push origin feature4
```

Now the pull request should be ready to merge again.

