

1. Tuliskan pernyataan R untuk membuat deret bilangan berikut:

a=[5 6 7 8 9 10]

b=[10 8 6 4 2]

c=[0.0 0.2 0.4 0.6 0.8 1.0]

d=[3 3 3 7 7 7 9 9]

e=[1 2 1 2 1 2 1 2]

jawab:

```
Console Terminal Background Jobs
R 4.5.2 ~ /
> a <- 5:10
> a
[1] 5 6 7 8 9 10
> b <- seq (from=10, to=2, by=-2 )
> b
[1] 10 8 6 4 2
> c <- seq(from=0, to=1, by=0.2)
> c
[1] 0.0 0.2 0.4 0.6 0.8 1.0
> d <- c(rep(3,3), rep(7,3), rep(9,2))
> d
[1] 3 3 3 7 7 7 9 9
> e <- rep(c(1, 2), length.out=8)
> e
[1] 1 2 1 2 1 2 1 2
>
```


- 2.

```
Console Terminal Background Jobs
R 4.5.2 ~ /
> expand.grid(jurusan=c("Statistika", "Matematika", "fisika"), kota=c("Jakarta",
"Bandung", "Surabaya"), angkatan=c(2021, 2022, 2023, 2024))
  jurusan kota angkatan
1 Statistika Jakarta 2021
2 Matematika Jakarta 2021
3 fisika Jakarta 2021
4 Statistika Bandung 2021
5 Matematika Bandung 2021
6 fisika Bandung 2021
7 Statistika Surabaya 2021
8 Matematika Surabaya 2021
9 fisika Surabaya 2021
10 Statistika Jakarta 2022
11 Matematika Jakarta 2022
12 fisika Jakarta 2022
13 Statistika Bandung 2022
14 Matematika Bandung 2022
15 fisika Bandung 2022
16 Statistika Surabaya 2022
17 Matematika Surabaya 2022
18 fisika Surabaya 2022
19 Statistika Jakarta 2023
20 Matematika Jakarta 2023
21 fisika Jakarta 2023
22 Statistika Bandung 2023
23 Matematika Bandung 2023
24 fisika Bandung 2023
25 Statistika Surabaya 2023
26 Matematika Surabaya 2023
27 fisika Surabaya 2023
28 Statistika Jakarta 2024
29 Matematika Jakarta 2024
30 fisika Jakarta 2024
```

```
31 Statistika Bandung 2024
32 Matematika Bandung 2024
33 fisika Bandung 2024
34 Statistika Surabaya 2024
35 Matematika Surabaya 2024
36 fisika Surabaya 2024
> |
```


3.

- Menampilkan a= [5, 10, 15, 20, 25, 30, 35, 40, 45, 50]

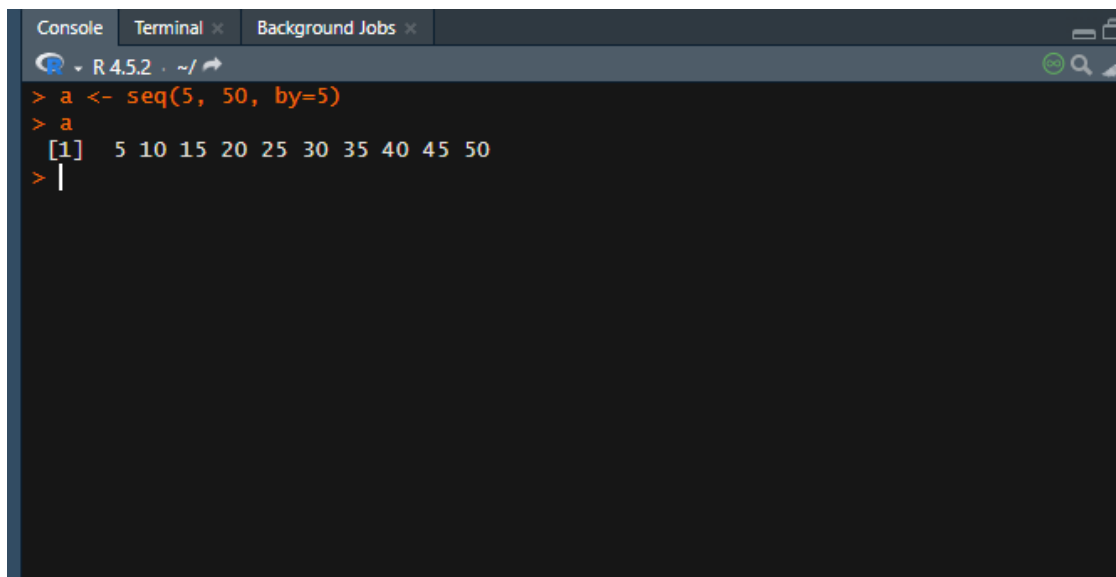

```
Console Terminal Background Jobs
R 4.5.2 ~/
> a <- seq(5, 50, by=5)
> a
[1] 5 10 15 20 25 30 35 40 45 50
> |
```

- mencari nilai mean, median, maksimum, min, panjang, dan jumlah dari a= [5, 10, 15, 20, 25, 30, 35, 40, 45, 50]

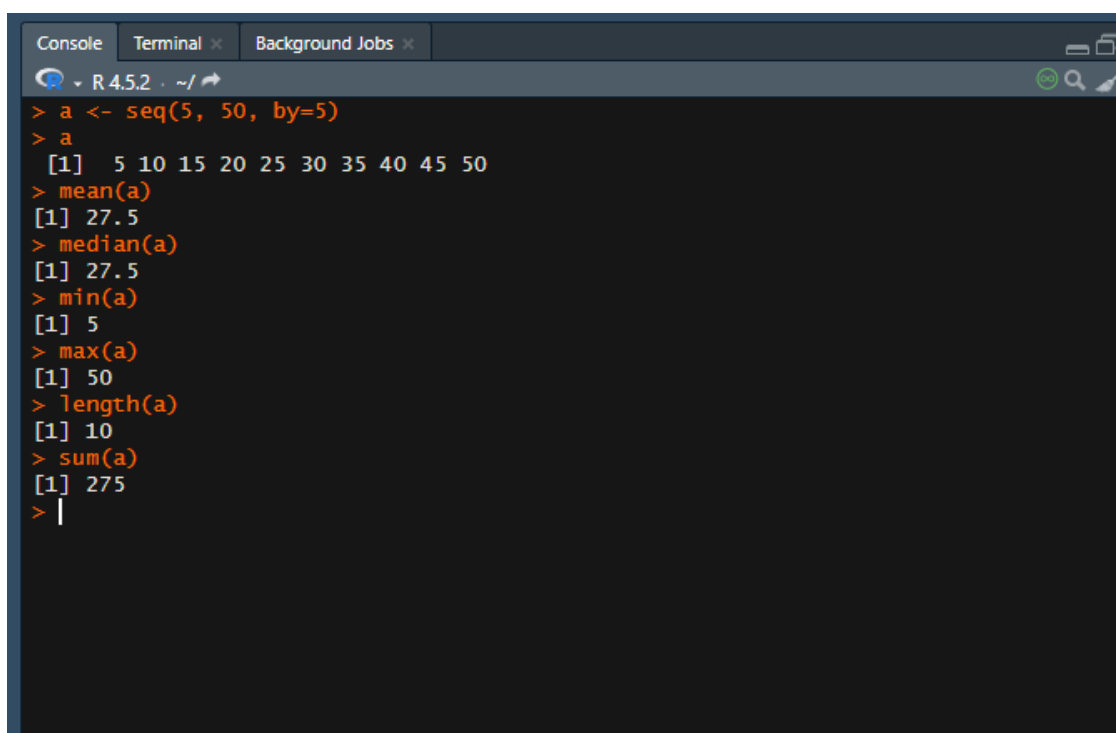

```
Console Terminal Background Jobs
R 4.5.2 ~/
> a <- seq(5, 50, by=5)
> a
[1] 5 10 15 20 25 30 35 40 45 50
> mean(a)
[1] 27.5
> median(a)
[1] 27.5
> min(a)
[1] 5
> max(a)
[1] 50
> length(a)
[1] 10
> sum(a)
[1] 275
> |
```