

Tugas 3

Nama : Adi Surya Fangidae

NIM : 055378839

PRAKTIKUM BASIS DATA TERDISTRIBUSI

Data konfigurasi di-paste pada file *my.ini* dalam aplikasi xampp, setelah itu restart layanan Apache dan Mysql:

```
File Edit View
# enable-named-pipe
key_buffer=16M
max_allowed_packet=1M
sort_buffer_size=512K
net_buffer_length=8K
read_buffer_size=256K
read_rnd_buffer_size=512K
myisam_sort_buffer_size=8M
log_error="mysql_error.log"

server-id=6346086
log_bin=mysql-bin
log_error=mysql-bin.err
binlog_do_db=tugas2baru

# Change here for bind listening
# bind-address="127.0.0.1"
# bind-address = ::1          # for ipv6

# Where do all the plugins live
plugin_dir="C:/xampp/mysql/lib/plugin/"
```

Data primary replication komputer1 windows:

Replikasi

Primary replication

This server is configured as primary in a replication process.

- Show primary status

Variabel	Nilai
File	mysql-bin.000002
Position	328
Binlog_Do_DB	tugas2baru
Binlog_Ignore_DB	

- Show connected replicas
- Add replica replication user

Buat *user account* baru pada menu awal phpmyadmin komputer1:

Add user account

Informasi Masuk

Nama pengguna: Gunakan text field ▼ aditya

Nama pemilik: Gunakan text field ▼ 192.168.1.13 ⓘ

Kata Sandi: Gunakan text field ▼ Strength: Bagus

Ketik ulang:

Authentication plugin Autentikasi asli MySQL ▼

Buatkan kata sandi: Buatkan

Database for user account

Ikhtisar akun pengguna

	Nama pengguna	Nama pemilik	Kata Sandi	Hak akses global ⓘ	Pemberi Izin	Tindakan
☐	Semua	%	Tidak ⓘ	USAGE	Tidak	Edit privileges Ekspor Lock
☐	aditya	192.168.1.13	Ya	REPLICATION SLAVE, REPLICATION CLIENT	Tidak	Edit privileges Ekspor Lock
☐	pma	localhost	Tidak	USAGE	Tidak	Edit privileges Ekspor Lock
☐	root	127.0.0.1	Tidak	ALL PRIVILEGES	Ya	Edit privileges Ekspor Lock
☐	root	:::1	Tidak	ALL PRIVILEGES	Ya	Edit privileges Ekspor Lock
☐	root	localhost	Tidak	ALL PRIVILEGES	Ya	Edit privileges Ekspor Lock

☐ Pilih Semua Dengan pilihan: Ekspor

Export database rumah sakit(tugas2baru) pada komputer1:

Mengekspor tabel dari basis data "tugas2baru"

Metode ekspor:


☒ Cepat - menampilkan opsi minimum
☐ Kustom - menampilkan semua opsi

Format:


SQL

Ekspor



Pada komputer2(ubuntu) buka terminal dan operasikan cd /opt/lampp untuk membuka xampp:

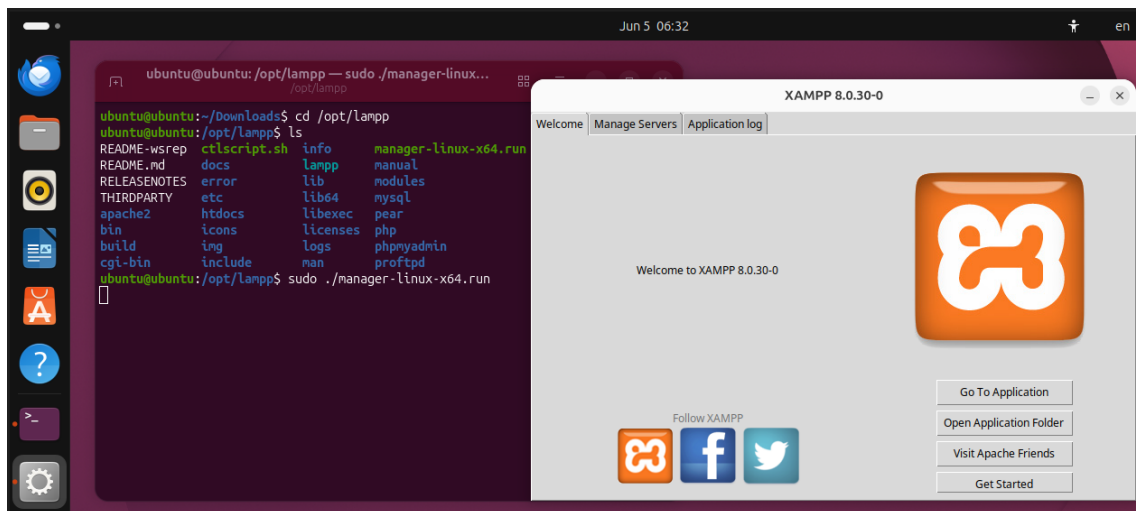

Start Apache dan Mysql pada komputer2 sambil mendownload/memindahkan file export komputer1:

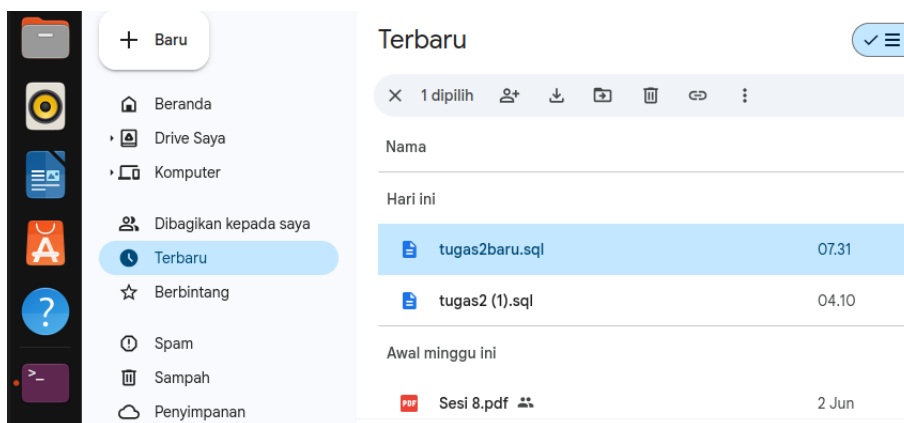


Buka phpmyadmin(komputer2) lalu import file *tugas2baru* yang disimpan dalam folder Downloads:

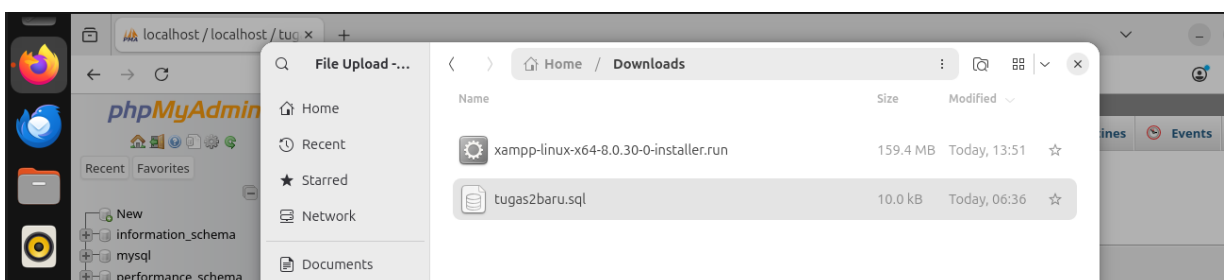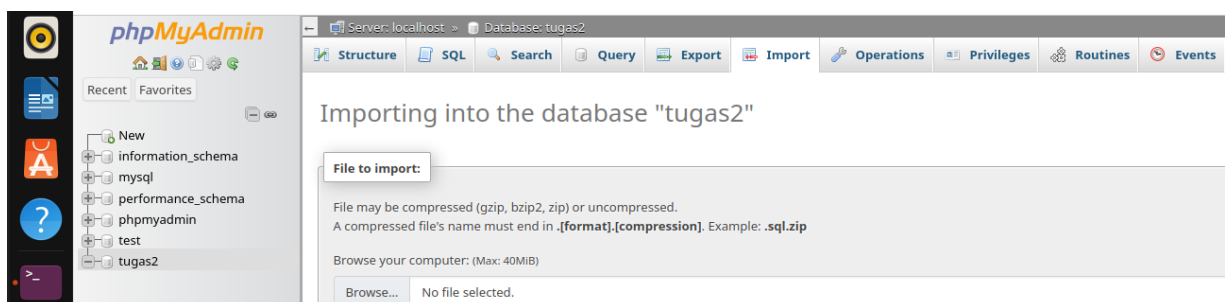


Karena import error, saya masukan perintah `sudo /opt/lampp/bin/mysql_upgrade -u root` pada terminal baru(komputer1). Dan import berhasil:




Masuk menu slave replication dan klik to *configure it?*, isi datanya:

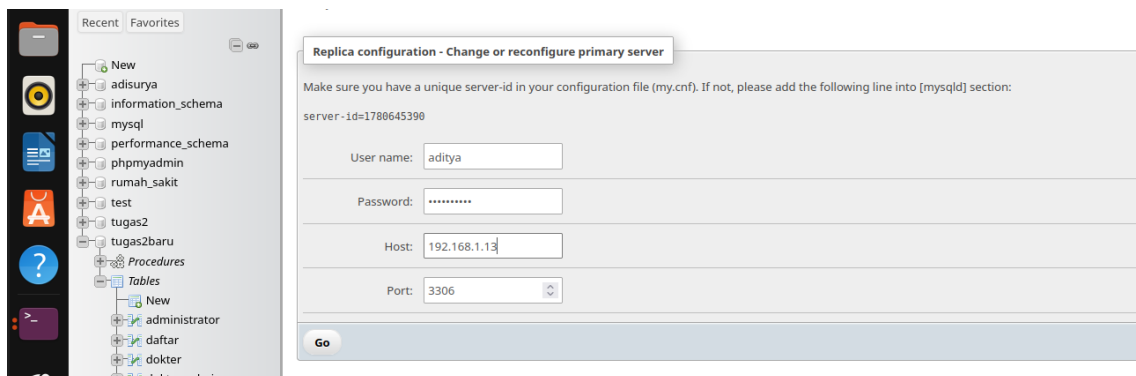


Buka file `my.cnf`, disini saya menggunakan terminal(komputer2):

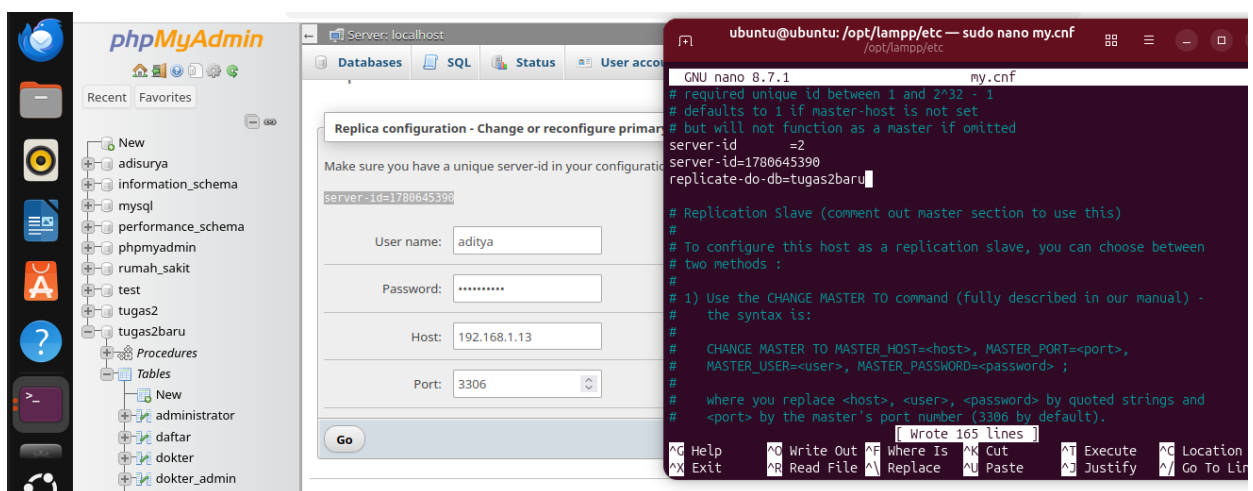


Setelah file *my.cnf* diedit, klik Go pada slave configuration:

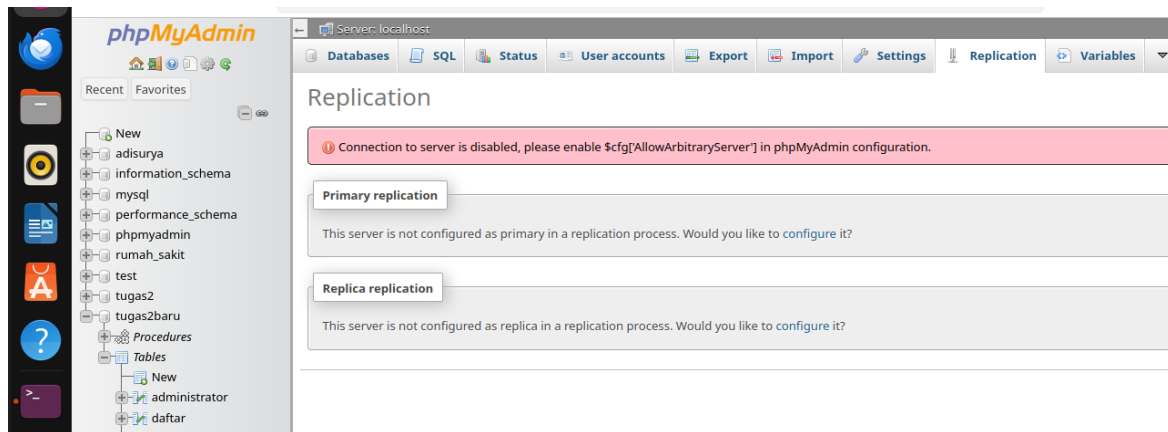


Karena muncul disabled, kita harus meng-enable pada file config.default di folder libraries(komputer2):

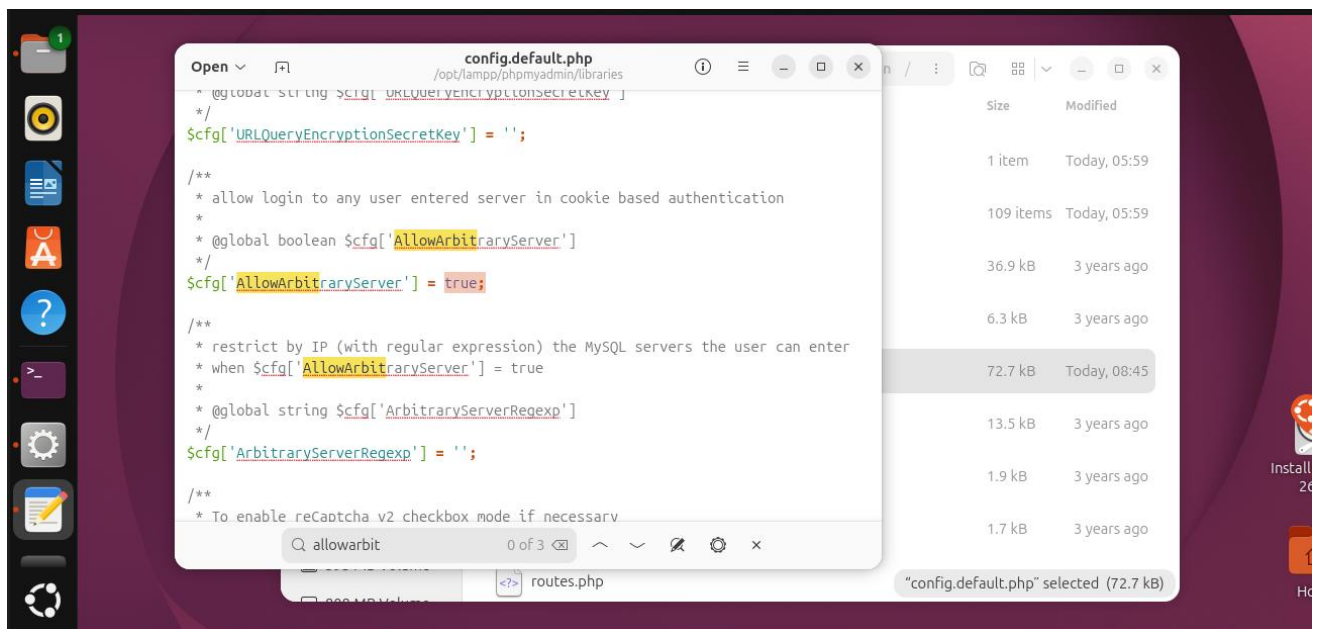

Setelah diubah menjadi *true*, save file lalu restart layanan Apache dan MySQL:

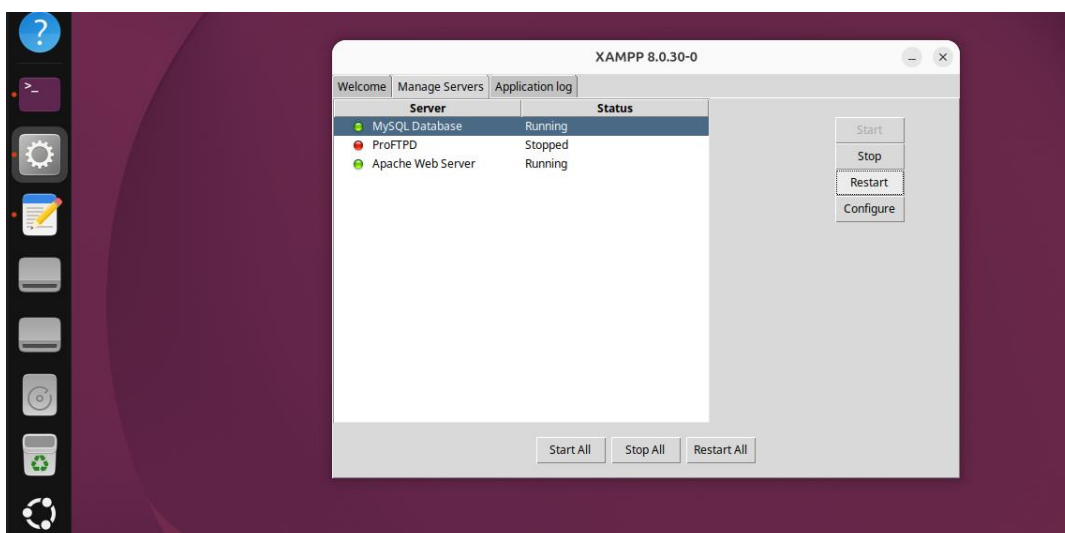

Pada terminal(komputer2), masuk ke Mysql/MariaDB:

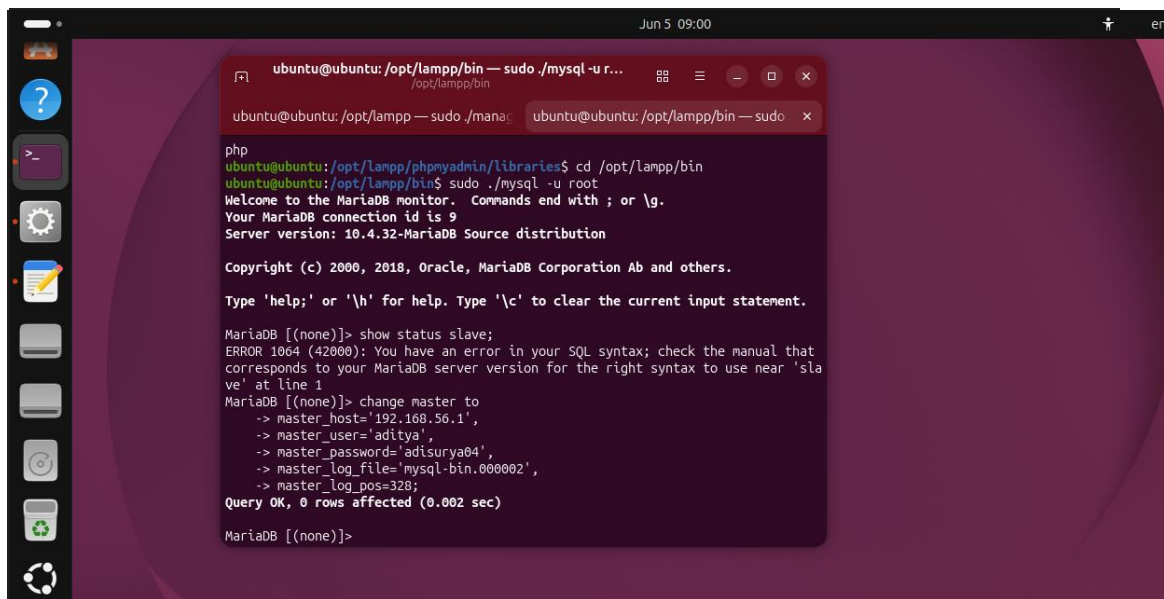

A terminal window on Ubuntu showing the process of connecting to MariaDB. The user runs `sudo ./mysql -u root` from `/opt/lampp/bin`. The terminal displays the MariaDB monitor welcome message and the server version 10.4.32. The user then runs `show status slave;`, which results in an error: `ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB server version for the right syntax to use near 'slave' at line 1`. Finally, the user runs `change master to` followed by several options, which executes successfully.

```
ubuntu@ubuntu: /opt/lanpp/bin — sudo ./mysql -u r...
/opt/lanpp/bin
ubuntu@ubuntu: /opt/lanpp — sudo ./mana:  ubuntu@ubuntu: /opt/lanpp/bin — sudo x

php
ubuntu@ubuntu: /opt/lanpp/phpmyadmin/libraries$ cd /opt/lanpp/bin
ubuntu@ubuntu: /opt/lanpp/bin$ sudo ./mysql -u root
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 9
Server version: 10.4.32-MariaDB Source distribution


Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show status slave;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that
corresponds to your MariaDB server version for the right syntax to use near 'sla
ve' at line 1
MariaDB [(none)]> change master to
-> master_host='192.168.56.1',
-> master_user='aditya',
-> master_password='adisurya04',
-> master_log_file='mysql-bin.000002',
-> master_log_pos=328;
Query OK, 0 rows affected (0.002 sec)

MariaDB [(none)]>
```

Ketik show status slave dan stop slave:

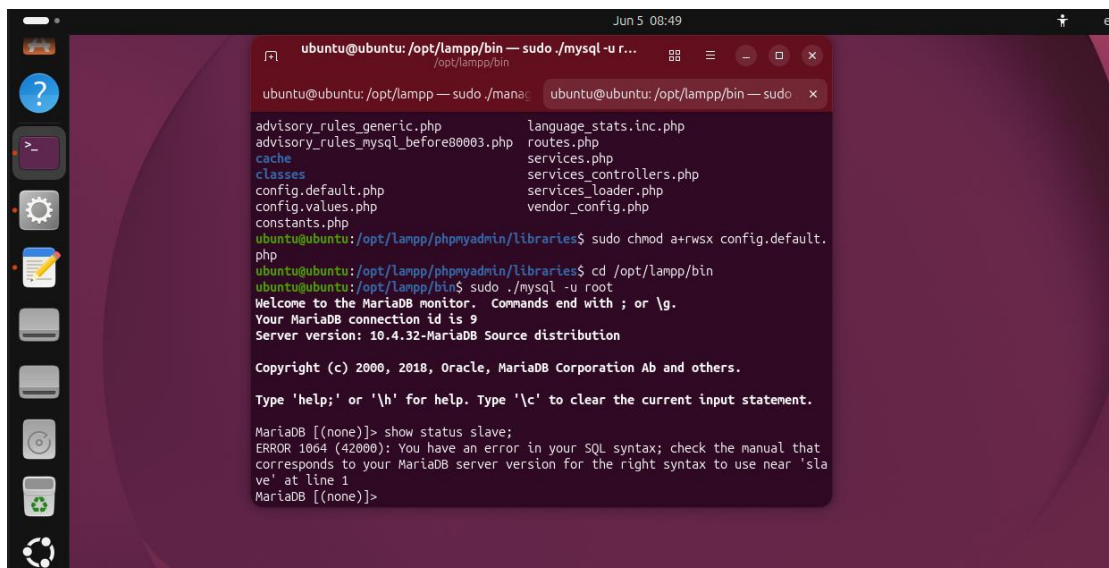

A terminal window showing a directory listing of files in `/opt/lanpp/phpmyadmin/libraries`. The files listed include `advisory_rules_generic.php`, `advisory_rules_mysql_before80003.php`, `cache`, `classes`, `config.default.php`, `config.values.php`, `constants.php`, `language_stats.inc.php`, `routes.php`, `services.php`, `services_controllers.php`, `services_loader.php`, and `vendor_config.php`. The user then runs `chmod a+wsx config.default.php`. After that, the user runs `cd /opt/lanpp/bin` and `sudo ./mysql -u root`, which opens the MariaDB monitor. The user then runs `show status slave;`, resulting in the same syntax error as in the previous screenshot.

```
ubuntu@ubuntu: /opt/lanpp/bin — sudo ./mysql -u r...
/opt/lanpp/bin
ubuntu@ubuntu: /opt/lanpp — sudo ./mana:  ubuntu@ubuntu: /opt/lanpp/bin — sudo x

advisory_rules_generic.php      language_stats.inc.php
advisory_rules_mysql_before80003.php  routes.php
cache                            services.php
classes                          services_controllers.php
config.default.php               services_loader.php
config.values.php                vendor_config.php
constants.php


ubuntu@ubuntu: /opt/lanpp/phpmyadmin/libraries$ sudo chmod a+wsx config.default.
php
ubuntu@ubuntu: /opt/lanpp/phpmyadmin/libraries$ cd /opt/lanpp/bin
ubuntu@ubuntu: /opt/lanpp/bin$ sudo ./mysql -u root
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 9
Server version: 10.4.32-MariaDB Source distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show status slave;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that
corresponds to your MariaDB server version for the right syntax to use near 'sla
ve' at line 1
MariaDB [(none)]>
```

Ketika slave tidak aktif, kita lakukan perubahan dengan perintah seperti digambar:

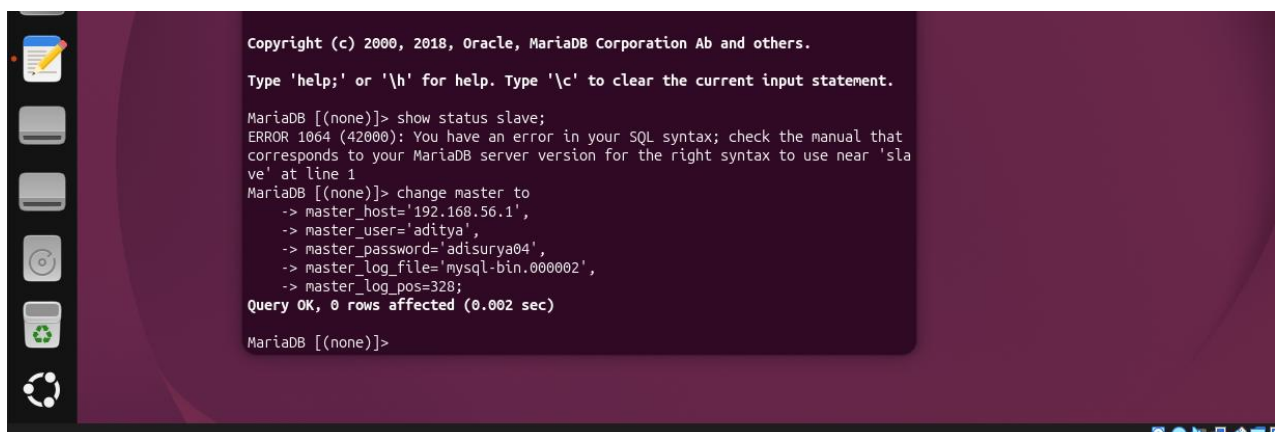

A terminal window showing the execution of the `change master to` command in the MariaDB monitor. The command is followed by the same options as in the previous screenshots: `master_host='192.168.56.1'`, `master_user='aditya'`, `master_password='adisurya04'`, `master_log_file='mysql-bin.000002'`, and `master_log_pos=328`. The command executes successfully, returning `Query OK, 0 rows affected (0.002 sec)`.


```
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show status slave;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that
corresponds to your MariaDB server version for the right syntax to use near 'sla
ve' at line 1
MariaDB [(none)]> change master to
-> master_host='192.168.56.1',
-> master_user='aditya',
-> master_password='adisurya04',
-> master_log_file='mysql-bin.000002',
-> master_log_pos=328;
Query OK, 0 rows affected (0.002 sec)

MariaDB [(none)]>
```

Setelah selesai change master, ketik start slave:

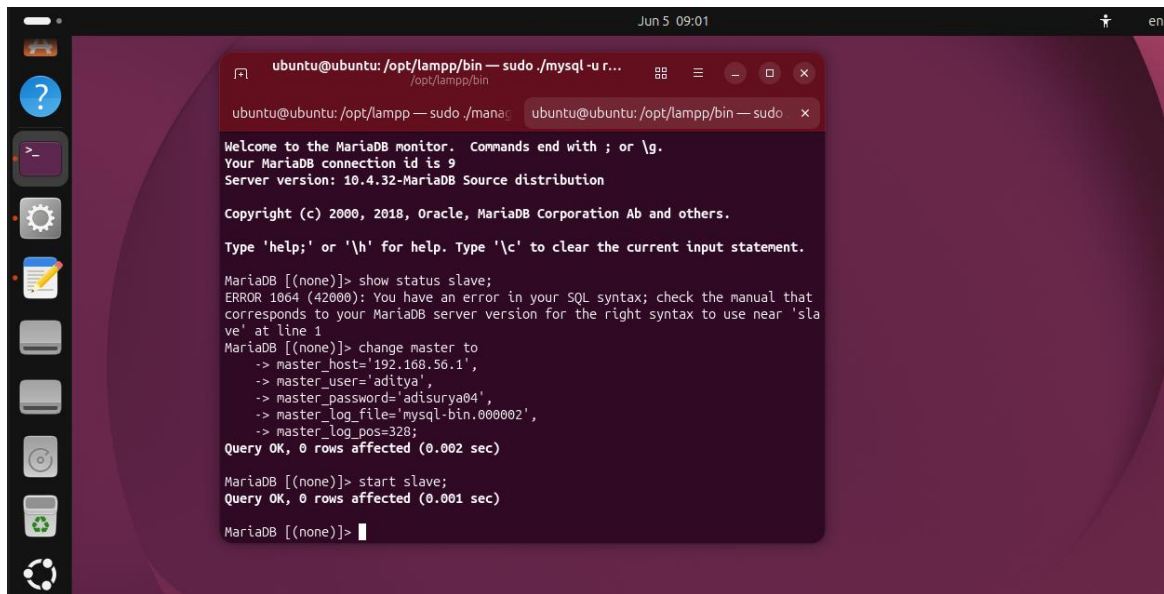

```
ubuntu@ubuntu: /opt/lampp/bin — sudo ./mysql -u r...
/opt/lampp/bin
ubuntu@ubuntu: /opt/lampp — sudo ./mana...
ubuntu@ubuntu: /opt/lampp/bin — sudo x

Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 9
Server version: 10.4.32-MariaDB Source distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.


Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show status slave;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that
corresponds to your MariaDB server version for the right syntax to use near 'sla
ve' at line 1
MariaDB [(none)]> change master to
-> master_host='192.168.56.1',
-> master_user='aditya',
-> master_password='adisurya04',
-> master_log_file='mysql-bin.000002',
-> master_log_pos=328;
Query OK, 0 rows affected (0.002 sec)

MariaDB [(none)]> start slave;
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> 
```

Ketik SHOW SLAVE STATUS\G untuk mengetahui status slave:

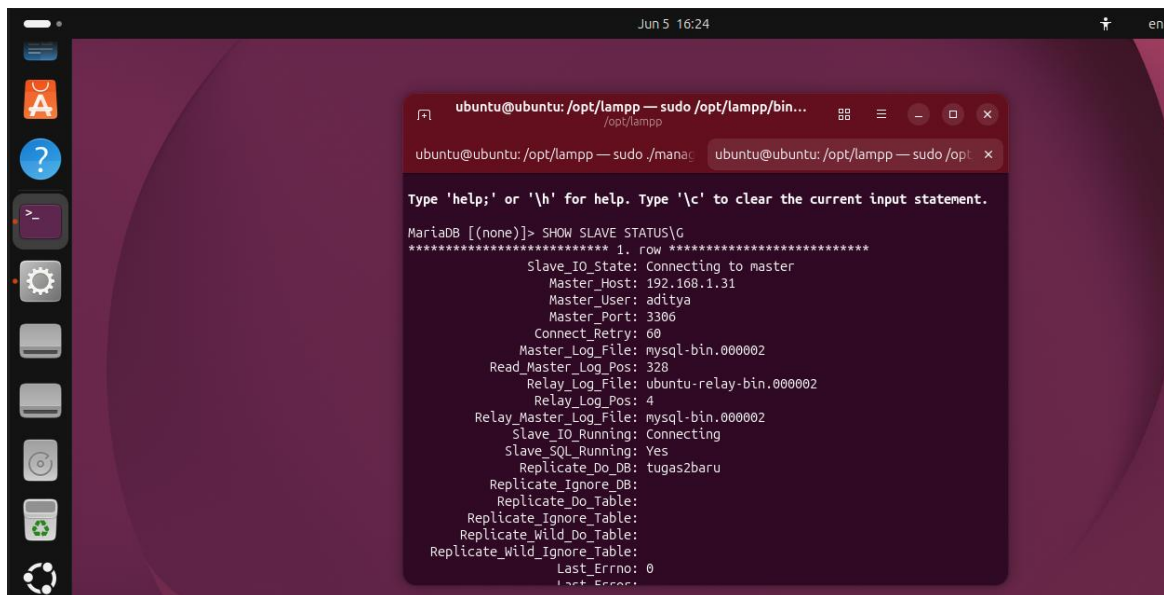

```
ubuntu@ubuntu: /opt/lampp — sudo /opt/lampp/bin...
/opt/lampp
ubuntu@ubuntu: /opt/lampp — sudo ./mana...
ubuntu@ubuntu: /opt/lampp — sudo /opt...

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> SHOW SLAVE STATUS\G
***** 1. row *****
Slave_IO_State: Connecting to master
Master_Host: 192.168.1.31
Master_User: aditya
Master_Port: 3306
Connect_Retry: 60
Master_Log_File: mysql-bin.000002
Read_Master_Log_Pos: 328
Relay_Log_File: ubuntu-relay-bin.000002
Relay_Log_Pos: 4
Relay_Master_Log_File: mysql-bin.000002
Slave_IO_Running: Connecting
Slave_SQL_Running: Yes
Replicate_Do_DB: tugas2baru
Replicate_Ignore_DB:
Replicate_Do_Table:
Replicate_Ignore_Table:
Replicate_Wild_Do_Table:
Replicate_Wild_Ignore_Table:
Last_Errno: 0
Last_Error:
```

Pada kasus saya **Slave_SQL_Running** sudah berstatus 'Yes', namun pada **Slave_IO_Running** berstatus 'Connecting'.