

# Audio Filter

EE23BTECH11016 - Aditi Dure\*

## I. DIGITAL FILTER

I.1 The sound file used for this code is obtained from the below link

try later!!!!!!!

I.2 A Python Code is written to achieve Audio Filtering

```
import soundfile as sf
import numpy as np
from scipy import signal
#read .wav file
input_signal,fs = sf.read('song.wav')

#sampling frequency of Input signal
sampl_freq=fs

#order of the filter
order=4

#cutoff frequency
cutoff_freq=1000.0

#digital frequency
Wn=2*cutoff_freq/sampl_freq

# b and a are numerator and denominator
  polynomials respectively
b, a = signal.butter(order, Wn, 'low')
print(b)
print(a)

#filter the input signal with butterworth filter
output_signal = signal.filtfilt(b, a,
    input_signal,padlen=1)
#output_signal = signal.lfilter(b, a,
    input_signal)

#write the output signal into .wav file
sf.write('Sound_With_ReducedNoise.wav',
    output_signal, fs)
```

I.3 The audio file is analyzed using spectrogram using the online platform <https://academo.org/demos/spectrum-analyzer>.

The darker areas are those where the frequencies have very low intensities, and the orange and yellow areas represent frequencies that have high intensities in the sound.

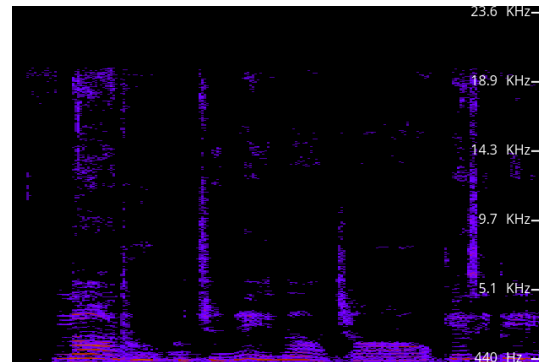


Fig. 1. Spectrogram of the audio file before Filtering

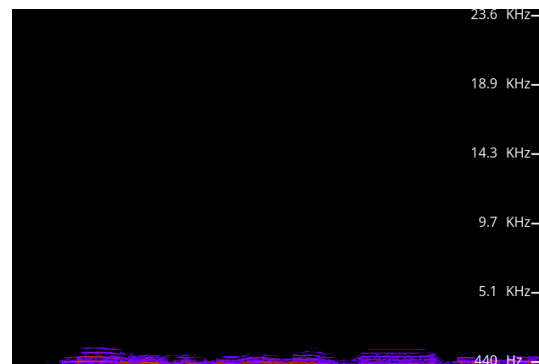


Fig. 2. Spectrogram of the audio file after Filtering

## II. DIFFERENCE EQUATION

II.1 Let

$$x(n) = \left\{ \underset{\uparrow}{1}, 2, 3, 4, 2, 1 \right\} \quad (1)$$

Sketch  $x(n)$ .



and show that the Z-transform of

$$u(n) = \begin{cases} 1 & n \geq 0 \\ 0 & \text{otherwise} \end{cases} \quad (21)$$

is

$$U(z) = \frac{1}{1 - z^{-1}}, \quad |z| > 1 \quad (22)$$

**Solution:**

$$Z\{\delta[n]\} = \sum_{n=-\infty}^{\infty} \delta[n] \cdot z^{-n} \quad (23)$$

$$= z^0 \quad (24)$$

$$= 1 \quad (25)$$

and from (21),

$$U(z) = \sum_{n=0}^{\infty} z^{-n} \quad (26)$$

$$= \frac{1}{1 - z^{-1}}, \quad |z| > 1 \quad (27)$$

using the formula for the sum of an infinite geometric progression.

III.4 Show that

$$a^n u(n) \xleftrightarrow{Z} \frac{1}{1 - az^{-1}} \quad |z| > |a| \quad (28)$$

**Solution:**

$$a^n u(n) \xleftrightarrow{Z} \sum_{n=0}^{\infty} (az^{-1})^n \quad (29)$$

$$= \frac{1}{1 - az^{-1}} \quad |z| > |a| \quad (30)$$

III.5 Let

$$H(e^{j\omega}) = H(z = e^{j\omega}). \quad (31)$$

Plot  $|H(e^{j\omega})|$ . Comment.  $H(e^{j\omega})$  is known as the *Discrete Time Fourier Transform* (DTFT) of  $x(n)$ .

**Solution:** The following code plots the magnitude of transfer function.

try later!!!!!!!!!!!!!!

Substituting  $z = e^{j\omega}$  in (19), we get

$$\left| H(e^{j\omega}) \right| = \left| \frac{1 + e^{-2j\omega}}{1 + \frac{1}{2}e^{-j\omega}} \right| \quad (32)$$

$$= \sqrt{\frac{(1 + \cos 2\omega)^2 + (\sin 2\omega)^2}{\left(1 + \frac{1}{2}\cos \omega\right)^2 + \left(\frac{1}{2}\sin \omega\right)^2}} \quad (33)$$

$$= \frac{4|\cos \omega|}{\sqrt{5 + 4\cos \omega}} \quad (34)$$

$$\left| H(e^{j(\omega+2\pi)}) \right| = \frac{4|\cos(\omega + 2\pi)|}{\sqrt{5 + 4\cos(\omega + 2\pi)}} \quad (35)$$

$$= \frac{4|\cos \omega|}{\sqrt{5 + 4\cos \omega}} \quad (36)$$

$$= \left| H(e^{j\omega}) \right| \quad (37)$$

Therefore its fundamental period is  $2\pi$ , which verifies that DTFT of a signal is always periodic.

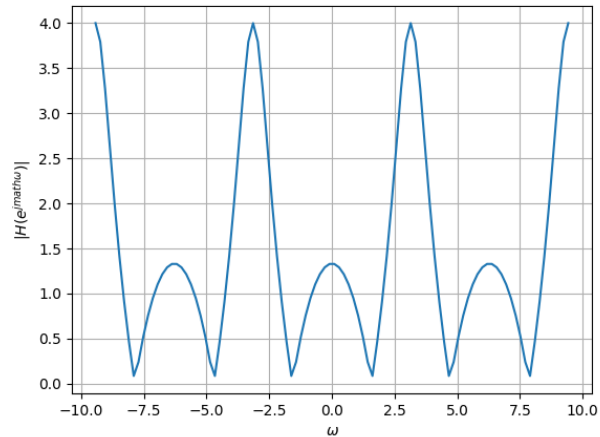


Fig. 4.  $|H(e^{j\omega})|$

## IV. IMPULSE RESPONSE

IV.1 Find an expression for  $h(n)$  using  $H(z)$ , given that

$$h(n) \xleftrightarrow{Z} H(z) \quad (38)$$

and there is a one to one relationship between  $h(n)$  and  $H(z)$ .  $h(n)$  is known as the *impulse response* of the system defined by (2).

**Solution:** From (19),

$$H(z) = \frac{1}{1 + \frac{1}{2}z^{-1}} + \frac{z^{-2}}{1 + \frac{1}{2}z^{-1}} \quad (39)$$

$$\Rightarrow h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (40)$$

using (28) and (16).

IV.2 Sketch  $h(n)$ . Is it bounded? Convergent?

**Solution:** The following code plots  $h(n)$

try later!!!!!!!!!!!!!!!!!!!!!!

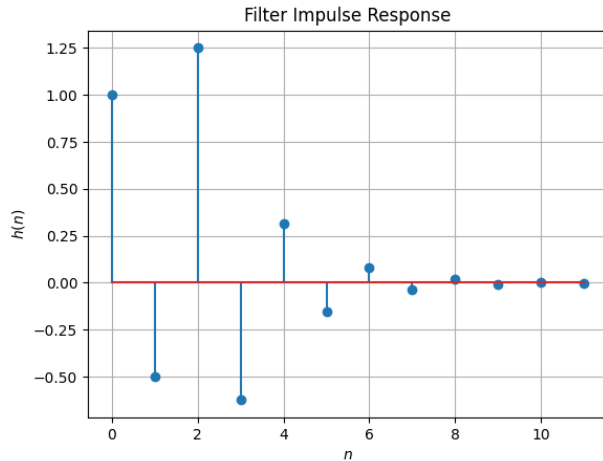


Fig. 5.  $h(n)$  as the inverse of  $H(z)$

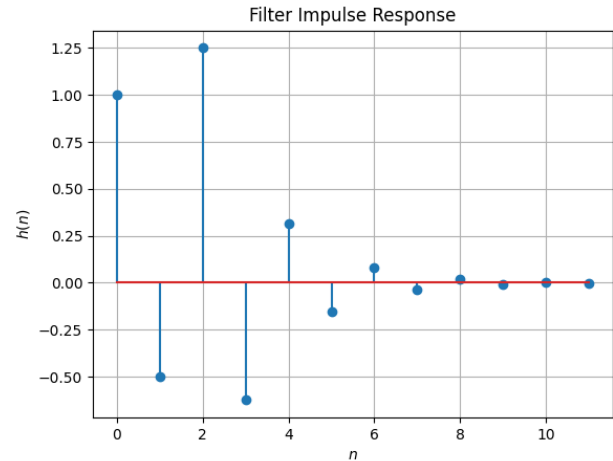


Fig. 6.  $h(n)$  from the definition is same as Fig. 5

IV.3 The system with  $h(n)$  is defined to be stable if

$$\sum_{n=-\infty}^{\infty} h(n) < \infty \quad (41)$$

Is the system defined by (2) stable for the impulse response in (38)?

**Solution:** For stable system (41) should converge.

By using ratio test

$$\lim_{n \rightarrow \infty} \left| \frac{h(n+1)}{h(n)} \right| < 1 \quad (42)$$

$$(43)$$

For large  $n$

$$u(n) = u(n-2) = 1 \quad (44)$$

$$\lim_{n \rightarrow \infty} \left( \frac{h(n+1)}{h(n)} \right) = 1/2 < 1 \quad (45)$$

Therefore it converges. Hence it is stable.

IV.4 Compute and sketch  $h(n)$  using

$$h(n) + \frac{1}{2}h(n-1) = \delta(n) + \delta(n-2), \quad (46)$$

This is the definition of  $h(n)$ .

**Solution:**

Definition of  $h(n)$ : The output of the system when  $\delta(n)$  is given as input.

The following code plots Fig. 6. Note that this is the same as Fig. 5.

try later!!!!!!!

IV.5 Compute

$$y(n) = x(n) * h(n) = \sum_{k=-\infty}^{\infty} x(k)h(n-k) \quad (47)$$

Comment. The operation in (47) is known as *convolution*.

**Solution:** The following code plots Fig. 7. Note that this is the same as  $y(n)$  in Fig. 3.

try later

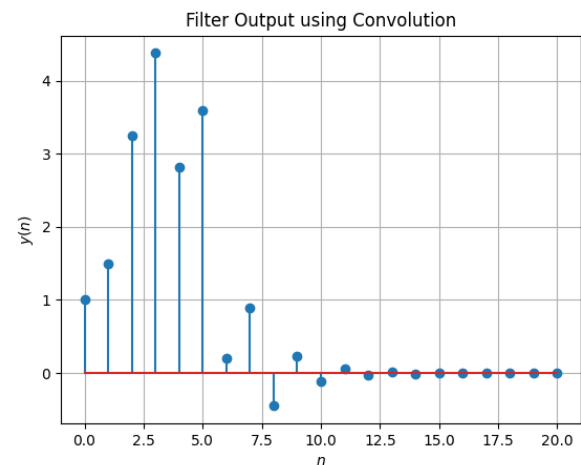


Fig. 7.  $y(n)$  from the definition of convolution

IV.6 Show that

$$y(n) = \sum_{k=-\infty}^{\infty} x(n-k)h(k) \quad (48)$$

**Solution:** In (47), we substitute  $k = n - k$  to get

$$y(n) = \sum_{k=-\infty}^{\infty} x(k) h(n-k) \quad (49)$$

$$= \sum_{n-k=-\infty}^{\infty} x(n-k) h(k) \quad (50)$$

$$= \sum_{k=-\infty}^{\infty} x(n-k) h(k) \quad (51)$$

## V. DFT AND FFT

### V.1 Compute

$$X(k) \triangleq \sum_{n=0}^{N-1} x(n) e^{-j2\pi kn/N}, \quad k = 0, 1, \dots, N-1 \quad (52)$$

and  $H(k)$  using  $h(n)$ .

### V.2 Compute

$$Y(k) = X(k)H(k) \quad (53)$$

### V.3 Compute

$$y(n) = \frac{1}{N} \sum_{k=0}^{N-1} Y(k) \cdot e^{j2\pi kn/N}, \quad n = 0, 1, \dots, N-1 \quad (54)$$

**Solution:** The above three questions are solved using the code below.

try later

### V.4 Repeat the previous exercise by computing $X(k)$ , $H(k)$ and $y(n)$ through FFT and IFFT.

**Solution:** The solution of this question can be found in the code below.

try later

This code verifies the result by plotting the obtained result with the result obtained by IDFT.

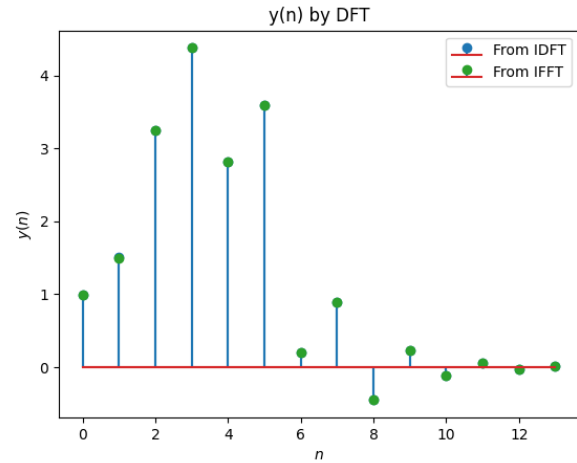


Fig. 8.  $y(n)$  obtained from IDFT and IFFT is plotted and verified

### V.5 Wherever possible, express all the above equations as matrix equations.

**Solution:** The DFT matrix is defined as :

$$\mathbf{W} = \begin{pmatrix} \omega^0 & \omega^0 & \dots & \omega^0 \\ \omega^0 & \omega^1 & \dots & \omega^{N-1} \\ \vdots & \vdots & \ddots & \vdots \\ \omega^0 & \omega^{N-1} & \dots & \omega^{(N-1)(N-1)} \end{pmatrix} \quad (55)$$

where  $\omega = e^{-j\frac{2\pi}{N}}$ . Now any DFT equation can be written as

$$\mathbf{X} = \mathbf{W}\mathbf{x} \quad (56)$$

where

$$\mathbf{x} = \begin{pmatrix} x(0) \\ x(1) \\ \vdots \\ x(n-1) \end{pmatrix} \quad (57)$$

$$\mathbf{X} = \begin{pmatrix} X(0) \\ X(1) \\ \vdots \\ X(n-1) \end{pmatrix} \quad (58)$$

Thus we can rewrite (53) as:

$$\mathbf{Y} = \mathbf{X} \odot \mathbf{H} = (\mathbf{W}\mathbf{x}) \odot (\mathbf{W}\mathbf{h}) \quad (59)$$

where the  $\odot$  represents the Hadamard product which performs element-wise multiplication.

The below code computes  $y(n)$  by DFT Matrix and then plots it.

try later



Fig. 9.  $y(n)$  obtained from DFT Matrix

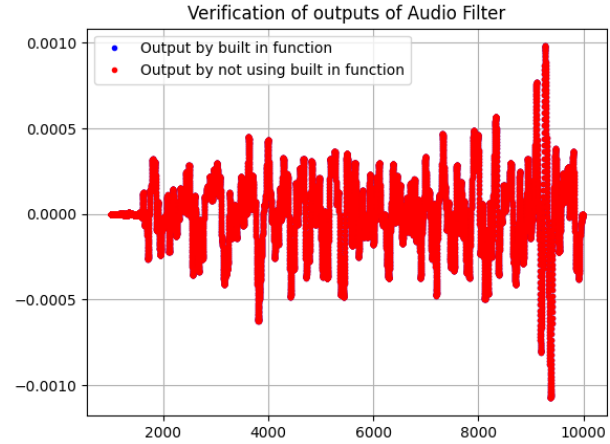


Fig. 10. Both the outputs using and without using function overlap

## VI. EXERCISES

Answer the following questions by looking at the python code in Problem I.2.

### VI.1 The command

```
output_signal = signal.lfilter(b, a,
                                input_signal)
```

in Problem I.2 is executed through the following difference equation

$$\sum_{m=0}^M a(m) y(n-m) = \sum_{k=0}^N b(k) x(n-k) \quad (60)$$

where the input signal is  $x(n)$  and the output signal is  $y(n)$  with initial values all 0. Replace **signal.filtfilt** with your own routine and verify.

**Solution:** The below code gives the output of an Audio Filter without using the built in function `signal.lfilter`.

try later!!

### VI.2 Repeat all the exercises in the previous sections for the above $a$ and $b$ .

**Solution:** The code in I.2 generates the values of  $a$  and  $b$  which can be used to generate a difference equation.

And,

$$M = 5 \quad (61)$$

$$N = 5 \quad (62)$$

From 60

$$a(0)y(n) + a(1)y(n-1) + a(2)y(n-2) + a(3)y(n-3) + a(4)y(n-4) = b(0)x(n) + b(1)x(n-1) + b(2)x(n-2) + b(3)x(n-3) + b(4)x(n-4) \quad (63)$$

$$y(n-3) + a(4)y(n-4) = b(0)x(n) + b(1)x(n-1) + b(2)x(n-2) + b(3)x(n-3) + b(4)x(n-4)$$

Difference Equation is given by :

$$\begin{aligned} & y(n) - (3.66)y(n-1) + (5.05)y(n-2) \\ & - (3.099)y(n-3) + (0.715)y(n-4) \\ & = (1.45 \times 10^{-5})x(n) + (5.74 \times 10^{-5})x(n-1) \\ & + (8.62 \times 10^{-5})x(n-2) + (5.74 \times 10^{-5})x(n-3) \\ & + (1.43 \times 10^{-5})x(n-4) \end{aligned} \quad (64)$$

From (60)

$$H(z) = \frac{b_0 + b_1z^{-1} + b_2z^{-2} + \dots + b_Mz^{-M}}{a_0 + a_1z^{-1} + a_2z^{-2} + \dots + a_Nz^{-N}} \quad (65)$$

$$H(z) = \frac{\sum_{k=0}^N b(k)z^{-k}}{\sum_{k=0}^M a(k)z^{-k}} \quad (66)$$

Partial fraction on (66) can be generalised as:

$$H(z) = \sum_i \frac{r(i)}{1 - p(i)z^{-1}} + \sum_j k(j)z^{-j} \quad (67)$$

Now,

$$a^n u(n) \xleftrightarrow{z} \frac{1}{1 - az^{-1}} \quad (68)$$

$$\delta(n - k) \xleftrightarrow{z} z^{-k} \quad (69)$$

Taking inverse z transform of (67) by using (68) and (69)

$$h(n) = \sum_i r(i)[p(i)]^n u(n) + \sum_j k(j)\delta(n - j) \quad (70)$$

The below code computes the values of  $r(i)$ ,  $p(i)$ ,  $k(i)$  and plots  $h(n)$

try later!!!

$r(i)$	$p(i)$	$k(i)$
$0.06558697 - 0.0.15997359j$	$0.87507075 + 0.0480371j$	$3.214014 \times 10^{-5}$
$0.06558697 - 0.0.15997359j$	$0.87507075 + 0.0480371j$	–
$-0.06558697 - 0.0.15997359j$	$0.93885135 + 0.12442455j$	–
$-0.06558697 - 0.0.15997359j$	$0.93885135 + 0.12442455j$	–

TABLE I  
VALUES OF  $r(i)$ ,  $p(i)$ ,  $k(i)$

**Stability of  $h(n)$ :**

According to (41)

$$H(z) = \sum_{n=0}^{\infty} h(n) z^{-n} \quad (71)$$

$$H(1) = \sum_{n=0}^{\infty} h(n) = \frac{\sum_{k=0}^N b(k)}{\sum_{k=0}^M a(k)} < \infty \quad (72)$$

As both  $a(k)$  and  $b(k)$  are finite length sequences they converge.

The below code plots Filter frequency response

try later!

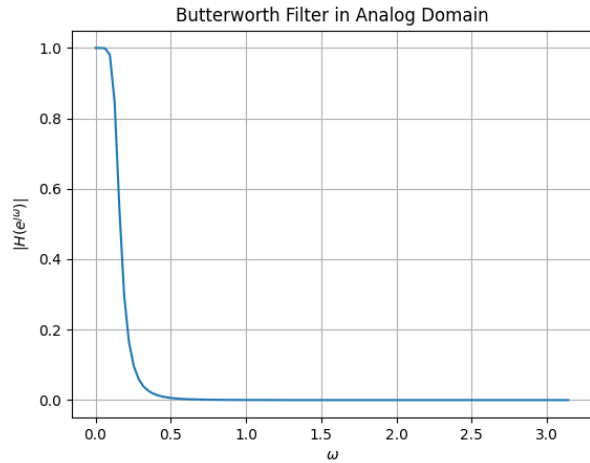


Fig. 11. Frequency Response of Audio Filter

The below code plots the Butterworth Filter in analog domain by using bilinear transform.

$$z = \frac{1 + sT/2}{1 - sT/2} \quad (73)$$

try later!

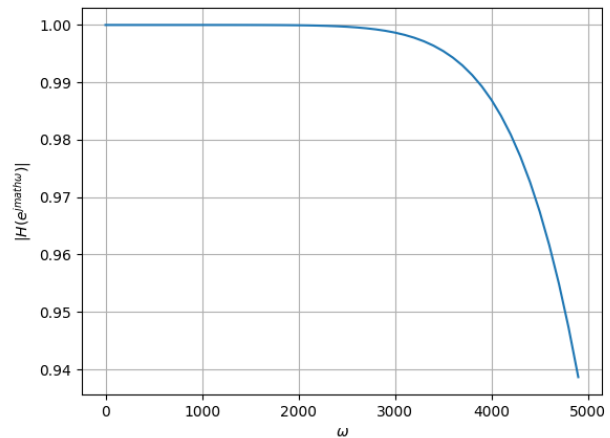


Fig. 12. Butterworth Filter Frequency response in analog domain

The below code plots the Pole-Zero Plot of the frequency response.

try later!

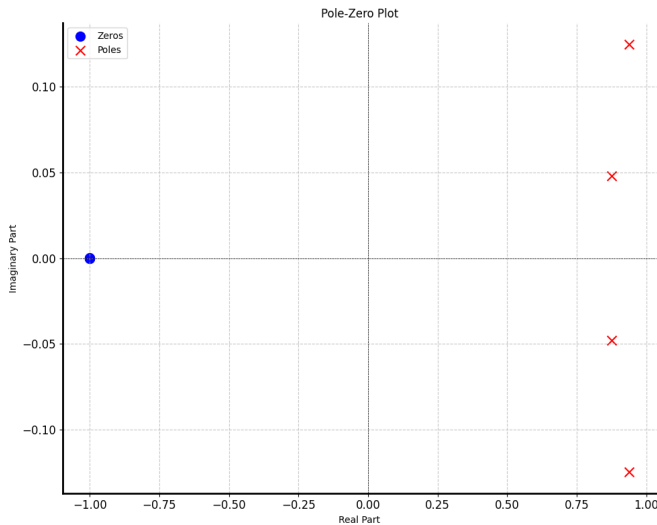


Fig. 13. There are complex poles. So  $h(n)$  should be damped sinusoid.

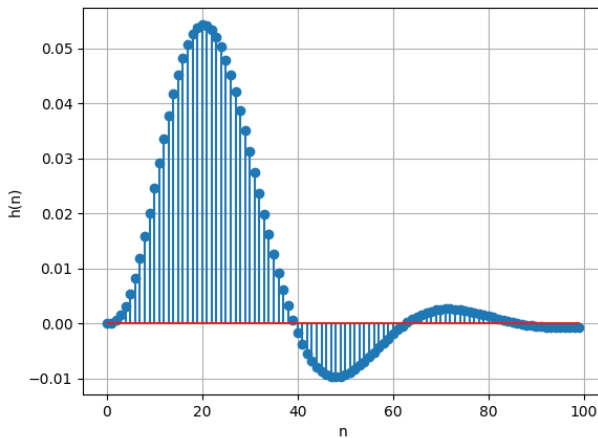


Fig. 14.  $h(n)$  of Audio Filter. It is a damped sinusoid.

VI.3 Implement your own fft routine in C and call this fft in python.

**Solution:** The below C code computes FFT of a given sequence.

[https://github.com/dhanushnayakh03/EE1205/tree/main/Audio\\_%20Filter/codes/fft.c](https://github.com/dhanushnayakh03/EE1205/tree/main/Audio_%20Filter/codes/fft.c)

The C function involved in computing the FFT is called in the below python code and the result is computed.

Before executing the python code. Execute the following command.

```
gcc -shared -o VI.3.so -fPIC VI.3.c
```

[https://github.com/dhanushnayakh03/EE1205/tree/main/Audio\\_%20Filter/codes/fft\\_python.py](https://github.com/dhanushnayakh03/EE1205/tree/main/Audio_%20Filter/codes/fft_python.py)

VI.4 Find the time complexities of computing  $y(n)$  using FFT/IFFT and convolution and Compare. **Solution:** The time required to compute  $y(n)$  using these two methods is calculated and the data is stored in a text file using the below C code.

[https://github.com/dhanushnayakh03/EE1205/tree/main/Audio\\_%20Filter/codes/6.4\\_time.c](https://github.com/dhanushnayakh03/EE1205/tree/main/Audio_%20Filter/codes/6.4_time.c)

The below python code extracts the data from these text files and plots Time vs  $n$  for comparison.

[https://github.com/dhanushnayakh03/EE1205/tree/main/Audio\\_%20Filter/codes/6.4\\_plot.py](https://github.com/dhanushnayakh03/EE1205/tree/main/Audio_%20Filter/codes/6.4_plot.py)

figs/Time Complexity Comparision.png

Fig. 15. The Complexity of FFT+IFFT method is  $O(n \log n)$  where as by convolution is  $O(n^2)$

VI.5 What is the sampling frequency of the input signal?

**Solution:** The Sampling Frequency is 44.1 KHz

VI.6 What is type, order and cutoff-frequency of the above butterworth filter



**Solution:** The given butterworth filter is low-pass with order=4 and cutoff-frequency=1kHz.

VI.7 Modify the code with different input parameters and get the best possible output.

**Solution:** A better filtering was found on setting the order of the filter to be 5.