

Output of JwtEmployee WebApi using Swagger

Generate JWT Token:

The screenshot shows the Swagger UI for the **Auth** endpoint (`/api/Auth`). The **Parameters** section is empty. The **Responses** section shows a **500** status code with the message **Error: Internal Server Error**. The **Response body** contains a detailed exception message: `System.ArgumentOutOfRangeException: 3258720: Unable to create KeyedHashAlgorithm for algorithm 'HS256', the key size must be greater than: '256' bits, key has '144' bits. (Parameter 'keyBytes')`. The **Response headers** include `content-type: text/plain; charset=utf-8`, `date: Thu, 42 Jul 2024 23:32:23 GMT`, `server: Kestrel`, and `transfer-encoding: chunked`. The **Responses** table at the bottom shows a **200** status code with the description **OK**.

Auth

GET `/api/Auth`

Parameters

No parameters

Execute **Clear**

Responses

500 **Error: Internal Server Error**

Response body

```
System.ArgumentOutOfRangeException: 3258720: Unable to create KeyedHashAlgorithm for algorithm 'HS256', the key size must be greater than: '256' bits, key has '144' bits. (Parameter 'keyBytes')
at Microsoft.IdentityModel.Tokens.CryptoProviderFactory.ValidateKeySize(Byte[] keyBytes, String algorithm, Int32 expectedNumberOFBytes)
at Microsoft.IdentityModel.Tokens.CryptoProviderFactory.CreateKeyedHashAlgorithm(Byte[] keyBytes, String algorithm)
at Microsoft.IdentityModel.Tokens.SymmetricSignatureProvider.CreateKeyedHashAlgorithm()
at Microsoft.IdentityModel.Tokens.SymmetricSignatureProvider.GetKeyedHashAlgorithm(Byte[] keyBytes, String algorithm)
at Microsoft.IdentityModel.Tokens.SymmetricSignatureProvider.Sign(Byte[] input)
at Microsoft.IdentityModel.Tokens.JwtTokenUtilities.CreateEncodedSignature(String input, SigningCredentials signingCredentials)
at JwtEmployeeWebApi.Controllers.AuthController.GenerateJWTToken(Int32 userId, String userRole) in C:\Users\Aditi\Desktop\Cognizant Assessment\Deep Skillig\WebApi\JwtEmployeeWebApi\Controllers\AuthController.cs:line 13
at JwtEmployeeWebApi.Controllers.AuthController.Login() in C:\Users\Aditi\Desktop\Cognizant Assessment\Deep Skillig\WebApi\JwtEmployeeWebApi\Controllers\AuthController.cs:line 13
at LambdaMethodClosures.Object.Object[]
at Microsoft.AspNetCore.Mvc.Infrastructure.ActionMethodExecutor.SyncActionResultExecutor.Execute(ActionContext actionContext, IActionResultTypeMapper mapper, ObjectMethodExecutor executor, Object controller, Object[] arguments)
at Microsoft.AspNetCore.Mvc.Infrastructure.ControllerActionInvoker.InvokeActionMethodAsync()
at Microsoft.AspNetCore.Mvc.Infrastructure.ControllerActionInvoker.Next(State& next, Scope& scope, Object& state, Boolean& isCompleted)
at Microsoft.AspNetCore.Mvc.Infrastructure.ControllerActionInvoker.InvokeNextActionFilterAsync()
--- End of stack trace from previous location ---
at Microsoft.AspNetCore.Mvc.Infrastructure.ControllerActionInvoker.Next(State& next, Scope& scope, Object& state, Boolean& isCompleted)
at Microsoft.AspNetCore.Mvc.Infrastructure.ControllerActionInvoker.InvokeNextActionFilterAsync()
--- End of stack trace from previous location ---
at Microsoft.AspNetCore.Mvc.Infrastructure.ResourceInvoker.

Response headers



```
content-type: text/plain; charset=utf-8
date: Thu, 42 Jul 2024 23:32:23 GMT
server: Kestrel
transfer-encoding: chunked
```



Responses



| Code | Description | Links    |
|------|-------------|----------|
| 200  | OK          | No links |


```

Test Employee API WITHOUT Token:

The screenshot shows the Swagger UI for the **Employee** endpoint (`/api/Employee`). The **Parameters** section is empty. The **Execute** and **Clear** buttons are visible.

Employee

GET `/api/Employee`

Parameters

No parameters

Execute **Clear**

Responses

Curl

```
curl -X 'GET' \
  'http://localhost:8080/api/Employee' \
  -H 'accept: */*' \
  -H 'authorization: Bearer ey3M6C12U1Dz13No1r7P5c11EDpWV73_ey7o9Mw016vc2NcDhcy5rwbYd3M2dQpY29c13dc13W6p40Vw4R10p4d4v72d4d0133449p013761p41311Vc2433D3161J1U1CT1e44p013100p4Wp107p4d1v13'
```

Request URL

http://localhost:8080/api/Employee

Server response

Code	Details
401	Error: Unauthorized
Response headers	
content-length: 0 date: Thu, 02 Jul 2016 15:38:27 GMT server: Kestrel www-authenticate: Bearer	

Responses

Code	Description	Links
200	OK	No links

Test WITH Token:

Employee

GET /api/Employee

Parameters

No parameters

Execute Clear

Responses

Curl

```
curl -X 'GET' \
  'http://localhost:8080/api/Employee' \
  -H 'accept: */*' \
  -H 'Authorization: Bearer ey3M6C12U1Dz13No1r7P5c11EDpWV73_ey7o9Mw016vc2NcDhcy5rwbYd3M2dQpY29c13dc13W6p40Vw4R10p4d4v72d4d0133449p013761p41311Vc2433D3161J1U1CT1e44p013100p4Wp107p4d1v13'
```

Request URL

http://localhost:8080/api/Employee

Server response


Code	Details
401	Error: Unauthorized
Response headers	
content-length: 0 date: Thu, 02 Jul 2016 15:40:17 GMT server: Kestrel www-authenticate: Bearer error="invalid_token",error_description="The signature key was not found"	

Responses


Code	Description	Links
200	OK	No links

Postman Testing

Generate Testing:

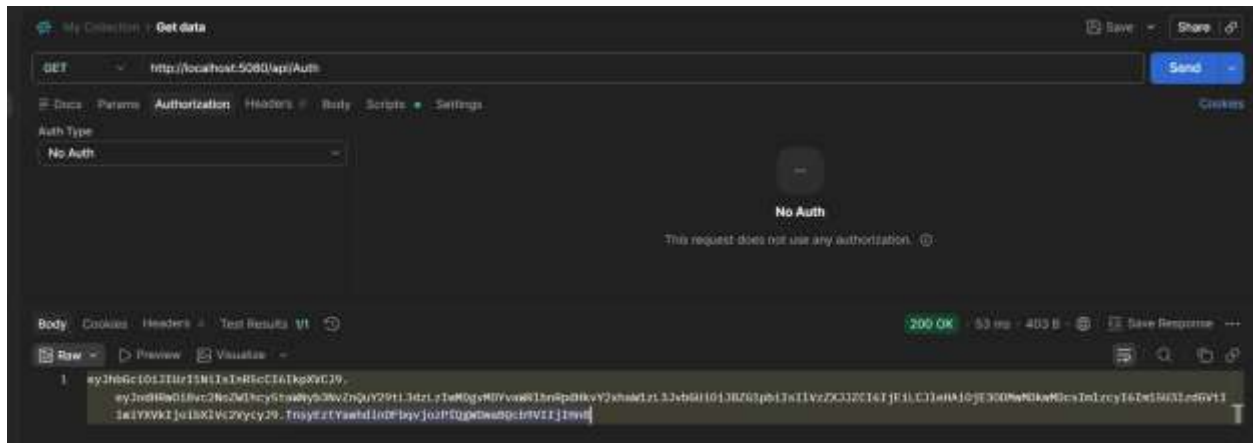

Test Without Token:

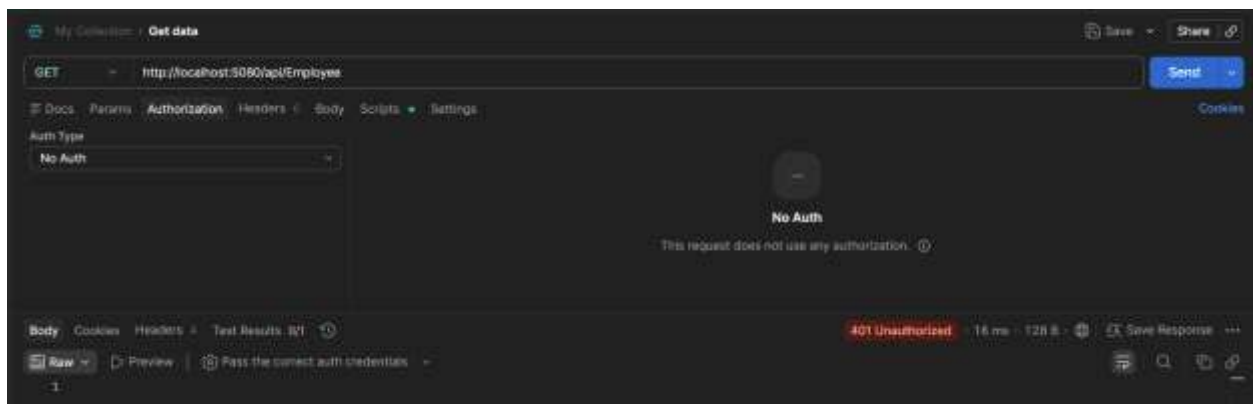

Test Unauthorized Access:



401

[Go to response](#)

Error: Unauthorized

Response headers

```
content-length: 0
date: Thu, 26 Jul 2024 17:15:23 GMT
server: Kestrel
www-authenticate: Bearer error="invalid_token",error_description="The signature key was not found"
```

Responses

Code	Description	Links
200	OK	No links