


Automation Deploy Prototype Website IIS using Jenkins

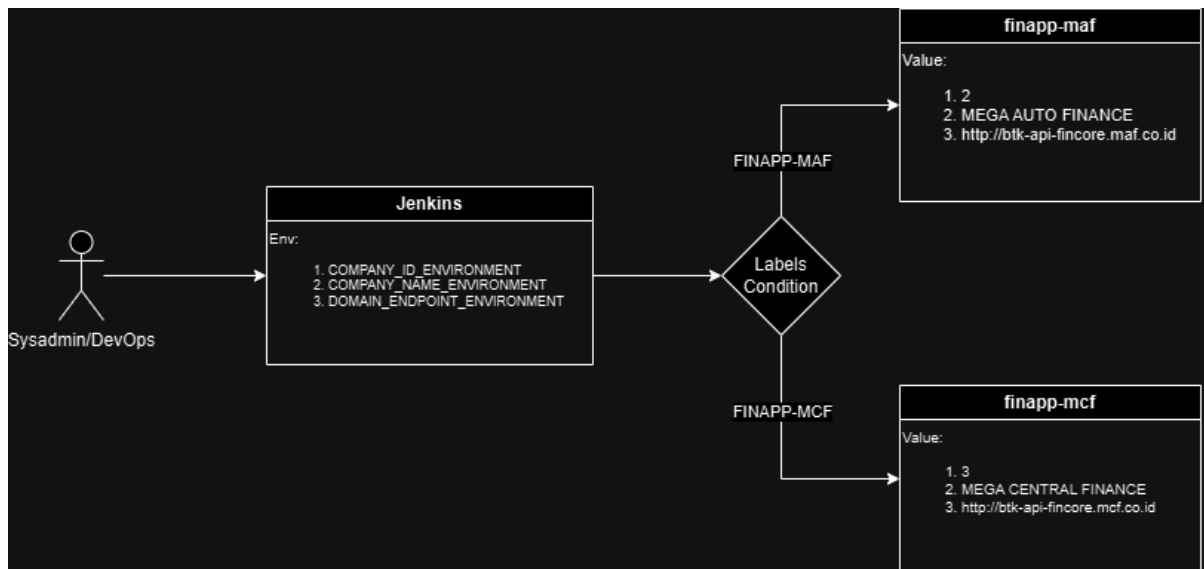

1. Open project *prod_automation_fincore-app*


The screenshot shows the Jenkins dashboard for the project **prod_automation_fincore-app**. The dashboard includes a sidebar with navigation options like Status, Configure, and Scan Multibranch Pipeline Now. The main area displays the project's automation for deployment to fincore-app-v2.mcf.co.id and fincore-app-v2.maf.co.id. A table shows the build history:

S	W	Name	Last Success	Last Failure	Last Duration	F
		Production-app	N/A	N/A	N/A	
		Production-R4-app	20 hr	20 hr	1 min 21 sec	

2. Choose branch and set value to ***NODE_LABELS***

The screenshot shows the Jenkins Pipeline configuration for **Pipeline Production-R4-app**. The configuration page includes a sidebar with navigation options like Status, Changes, and Build with Parameters. The main area displays the pipeline's parameters, including **NODE_LABELS**, which is set to "Enter the node label to use (FINAPP-MCF or FINAPP-MAF)". The **Build** button is highlighted.

3. Check progress from every steps on the pipeline overview

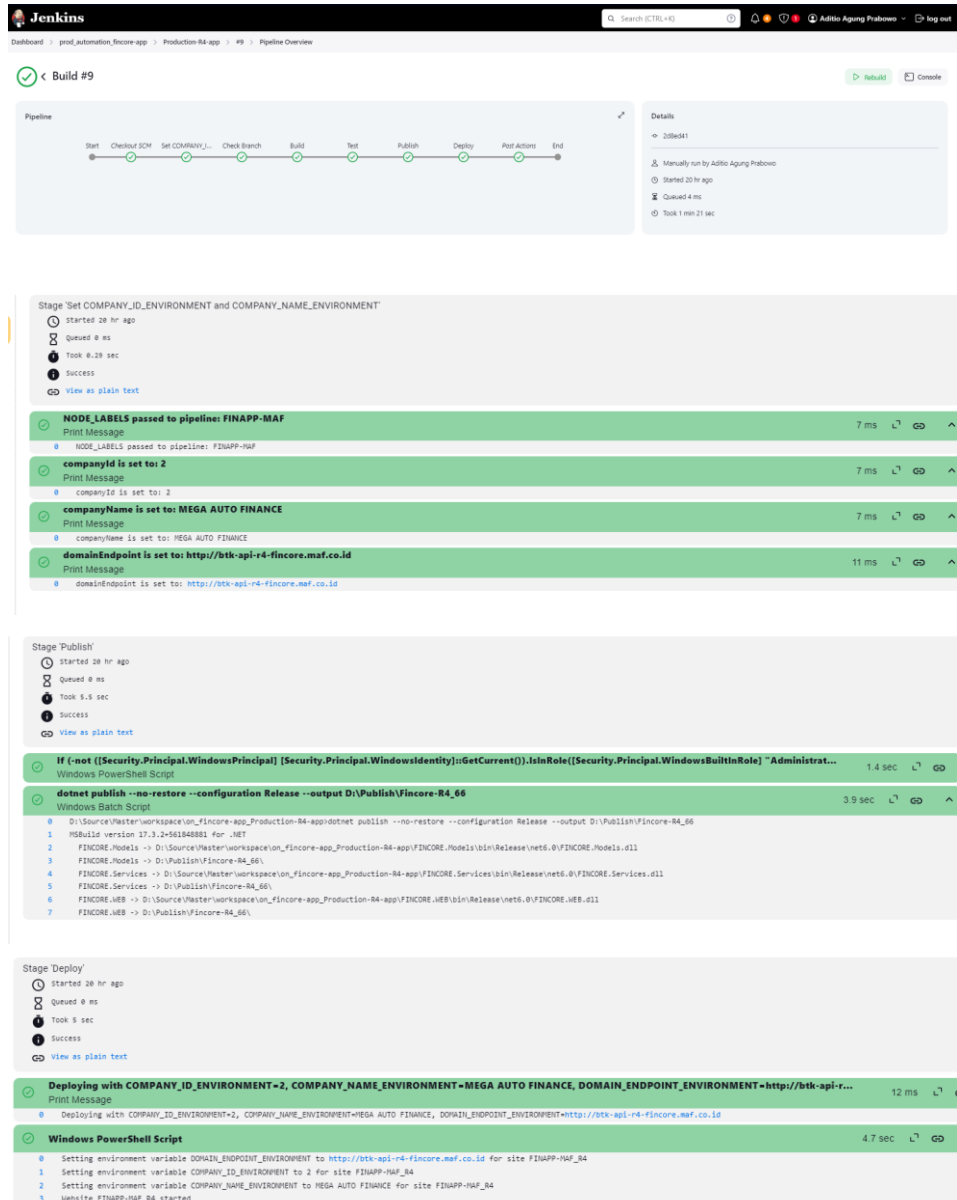

The image shows the Jenkins Pipeline Overview for 'Build #9'. The pipeline consists of the following stages: Start, Checkout SCM, Set COMPANY_ID_ENVIRONMENT, Check Branch, Build, Test, Publish, Deploy, Post Actions, and End. The 'Build' stage is currently selected, showing its details.

Stage 'Set COMPANY_ID_ENVIRONMENT and COMPANY_NAME_ENVIRONMENT'

- Started 20 hr ago
- Queued 0 ms
- Took 0.29 sec
- Success

Stage 'Publish'

- Started 20 hr ago
- Queued 0 ms
- Took 5.5 sec
- Success


Stage 'Deploy'

- Started 20 hr ago
- Queued 0 ms
- Took 5 sec
- Success

Stage Details (Build):

- Print Message:** NODE_LABELS passed to pipeline: FINAPP-MAF (7 ms)
- Print Message:** companyId is set to: 2 (7 ms)
- Print Message:** companyName is set to: MEGA AUTO FINANCE (7 ms)
- Print Message:** domainEndpoint is set to: http://btk-api-r4-fincore.maf.co.id (11 ms)
- Windows PowerShell Script:** If (-not ([Security.Principal.WindowsPrincipal] [Security.Principal.WindowsIdentity]::GetCurrent()).IsInRole([Security.Principal.WindowsBuiltInRole] "Administrat... (1.4 sec)
- Windows Batch Script:** dotnet publish --no-restore --configuration Release --output D:\Publish\Fincore-R4_66 (3.9 sec)
- Deploying with COMPANY_ID_ENVIRONMENT=2, COMPANY_NAME_ENVIRONMENT=MEGA AUTO FINANCE, DOMAIN_ENDPOINT_ENVIRONMENT=http://btk-api-r4-fincore.maf.co.id (12 ms)**
- Windows PowerShell Script:** Setting environment variable DOMAIN_ENDPOINT_ENVIRONMENT to http://btk-api-r4-fincore.maf.co.id for site FINAPP-MAF_R4 (4.7 sec)

4. Check environment variable on IIS site from destination Windows Server

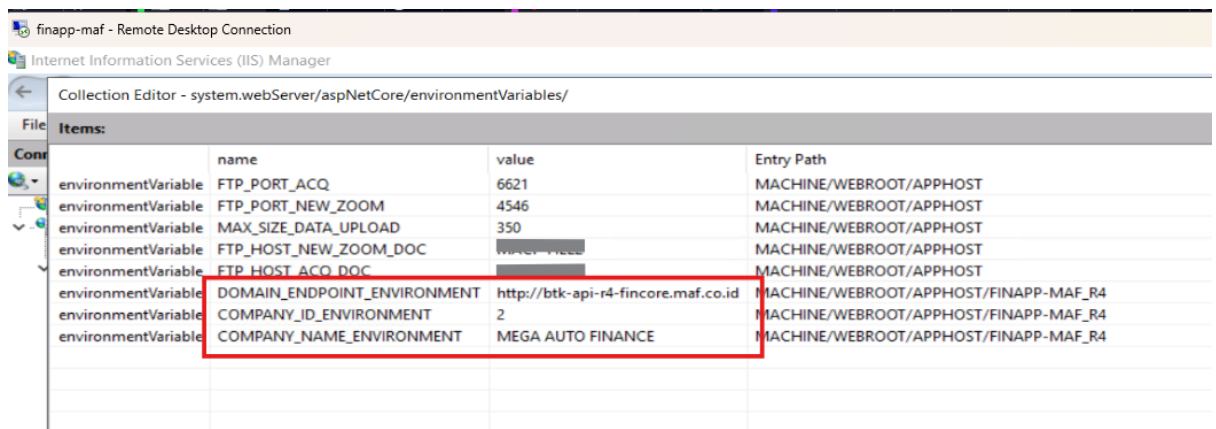

The image shows the 'Collection Editor - system.webServer/aspNetCore/environmentVariables/' in the Internet Information Services (IIS) Manager. The table below lists the environment variables configured for the site.

name	value	Entry Path
environmentVariable FTP_PORT_ACQ	6621	MACHINE/WEBROOT/APPHOST
environmentVariable FTP_PORT_NEW_ZOOM	4546	MACHINE/WEBROOT/APPHOST
environmentVariable MAX_SIZE_DATA_UPLOAD	350	MACHINE/WEBROOT/APPHOST
environmentVariable FTP_HOST_NEW_ZOOM_DOC	water-flood	MACHINE/WEBROOT/APPHOST
environmentVariable FTP_HOST_ACO_DOC		MACHINE/WEBROOT/APPHOST
environmentVariable DOMAIN_ENDPOINT_ENVIRONMENT	http://btk-api-r4-fincore.maf.co.id	MACHINE/WEBROOT/APPHOST/FINAPP-MAF_R4
environmentVariable COMPANY_ID_ENVIRONMENT	2	MACHINE/WEBROOT/APPHOST/FINAPP-MAF_R4
environmentVariable COMPANY_NAME_ENVIRONMENT	MEGA AUTO FINANCE	MACHINE/WEBROOT/APPHOST/FINAPP-MAF_R4