



# 8-Puzzle Problem


**Aditya Sudyana** (23222063)

Mata Kuliah Sistem Intelejen  
Institut Teknologi Bandung

# The Algorithm

Using heuristic function:  $f(n)$

$f(n)$ : total of Manhattan distance for every block

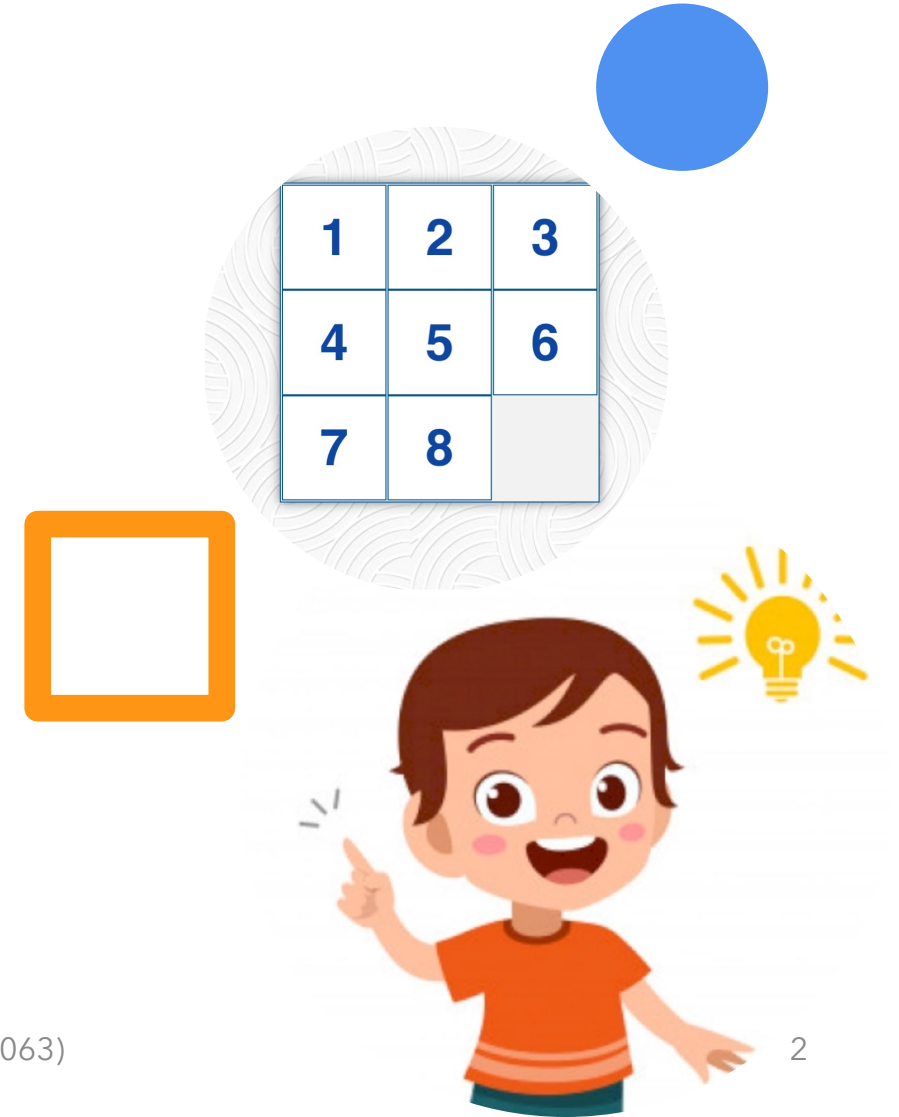

# The Algorithm Sequence

1. If `current_matrix == goal_matrix` then done
2. Check all possibility moves of empty block
3. Calculate heuristic function for every possibility movement
4. Move the empty block to the lowest value of heuristic function
5. If more than one possibility exists, than choose it randomly




# Example

Initial Matrix

1	2	3
4		5
7	8	6

Goal Matrix

1	2	3
4	5	6
7	8	

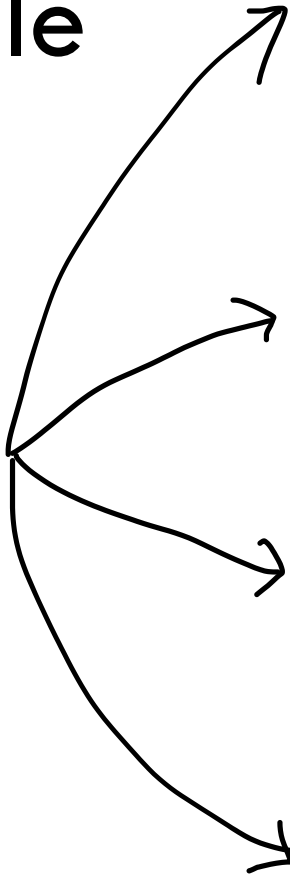

1		3
4	2	5
7	8	6

$h(n) = 3$

1	2	3
	4	5
7	8	6

$f(n) = 3$

1	2	3
4	8	5
7		6

$f(n) = 3$

1	2	3
4	5	
7	8	6

$f(n) = 1$



1	2	
4	5	3
7	8	6

$f(n) = 2$

1	2	3
4	5	6
7	8	

$f(n) = 0$



# Documentation

- Source Code: <https://github.com/aditsud/8-puzzle-vue>
- Demo Application: <https://eight-puzzle-solver.web.app/>

