8commerce

SCI API Document

Version: V1.0

Author: Aditya

Date:-

PT. CIPTA MAPAN LOGISTIK

The Bellezza Shopping Arcade, 2nd Floor # 217-222, 228-229 SA Jl. Letjend. Soepeno No. 34 Arteri Permata Hijau Jakarta Selatan 12210 – Indonesia

Username API Access: 8commerce-api-test

Password: 123456

1. Create Order

EndPoint Testing Environment:

https://oms.8commerce.com/sci/order/createTest

- a. Method POST
- b. Parameters request
 - 1. Headers
 - a. structure

PARAMETERS	NULL / NOT	DESCRIPTION
Authorization	Not	this is authenticated request

b. example in POSTMAN



Bulk Edit

Authorization:Bearer

OGNvbW1lcmNlLWFwaS10ZXN0OjEyMzQ1Ng==

2. Body

a. Structure

PARAMETERS	TYPE	NULL / NOT	DESCRIPTION
order_no	VARCHAR(255)	NOT	Ecommerce / onlineshop order ID
due_date	DATE	NOT	due date for order (format YYYY-MM-DD)
courier_id	VARCHAR (45)	NOT	For get courier_id read module 2. Get Courier
awb_no	VARCHAR (255)	NULL	Airway Bill number courier
insured	INT	NOT	Insured ? 0 = NO, 1= YES
cod	INT	NOT	Cash on delivery ? 0= NO , 1=YES
special_packaging	TEXT	NULL	Packaging intruction

dest_name	VARCHAR(255)	NOT	Recipient name
dest_address1	TEXT	NOT	Delivery address
dest_address2	TEXT	NULL	Delivery address Optional
dest_province	VARCHAR(255)	NOT	Delivery address province (ex DKI Jakarta)
dest_city	VARCHAR(255)	NOT	Delivery address city (ex Jakarta Utara)
dest_area	VARCHAR(255)	NULL	Delivery address area (ex Tanjung Priok)
dest_sub_area	VARCHAR(255)	NULL	Delivery address area (ex Warakas)
dest_postal_code	VARCHAR(255)	NULL	Delivery address postal code (ex 14340)
dest_village	VARCHAR(255)	NULL	Delivery address village
dest_remarks	TEXT	NULL	Delivery address remarks
dest_phone	VARCHAR(45)	NOT	Phone No. from Recipient
dest_phone2	VARCHAR(45)	NULL	Phone No. from Recipient optional
dest_mobile	VARCHAR(45)	NULL	Mobile No. from Recipient optional
dest_email	VARCHAR(255)	NULL	Email from Recipient optional
dest_country	VARCHAR(255)	NOT	Country from Recipient
promo_code	VARCHAR(255)	NULL	Ecommerce / onlineshop promo code
order_source	VARCHAR(45)	NOT	For get order_source read module 3. Get Order Source
order_amount	INT	NOT	Total order amount, default is 0
shipping_amount	INT	NOT	Shipping amount, default is 0
insurance_amount	INT	NOT	insurece amount, default is 0
details	TEXT	NOT	JSON format business data is stored in application-level parameters


PARAMETERS	TYPE	NOT / NULL	DESCRIPTION
sku_code	VARCHAR(45)	NOT	Stock Keeping Unit code must

			be register in system
qty_order	INT	NOT	Quantity order / sku
price	INT	NOT	Sku price , default is 0
remarks	TEXT	NULL	Sku remarks

Details json example :

```
[
    "sku_code":"20068201",
    "qty_order":1,
    "price":10000,
    "remarks":""
},
{
    "sku_code":"20068202",
    "qty_order":1,
    "price":12000,
    "remarks":""
}
]
```

b. example in POSTMAN

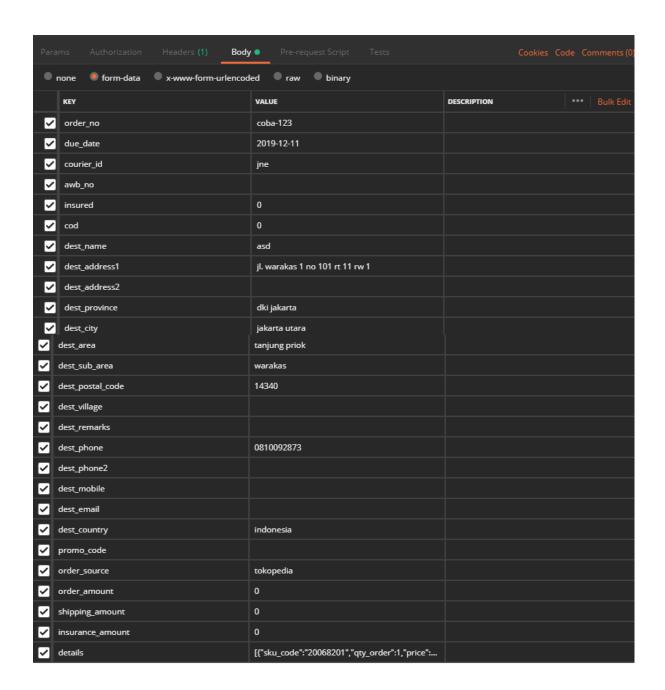

Bulk Edit

order_no:TEST-12345

due_date:2019-12-11

courier_id:jne

awb_no:

insured:0

cod:0

special_packaging:

```
dest_name:asd
dest_address1:jl. warakas 1 no 101 rt 11 rw 1
dest address2:
dest_province:dki jakarta
dest_city:jakarta utara
dest_area:tanjung priok
dest_sub_area:warakas
dest_postal_code:14340
dest_village:
dest_remarks:
dest_phone:0810092873
dest_phone2:
dest mobile:06765
dest_email:
dest_country:indonesia
promo_code:
order_source:tokopedia
order_amount:0
shipping_amount:0
insurance_amount:0
details:[{"sku_code":"20068201","qty_order":1,"price":10000,"remarks":
""},{"sku_code":"TWAX8836_twin","qty_order":1,"price":10000,"remarks
":""}]
```

c. How to signature in Header

```
    Go to <a href="https://www.base64encode.org/">base64encode.org</a>
    Generate base64 token for: _your_username_here:_your_password_here"
    For example, it generates: Y2xpZW50X2lkOmNsaWVudF9zZWNyZXQK
    Authorization: Bearer LSPr7x7sRGaewzwZE6IcuA
```

2. Get Courier

EndPoint Environment:

https://oms.8commerce.com/sci/getCouriers

- d. Method GET / POST
- e. Parameters request
 - 3. Headers
 - c. structure

PARAMETERS	NULL / NOT	DESCRIPTION
Authorization	Not	this is authenticated request

d. example in POSTMAN



3. Get Order Source

EndPoint Environment:

https://oms.8commerce.com/sci/getCouriers

- f. Method GET / POST
- g. Parameters request
 - 4. Headers
 - e. structure

PARAMETERS	NULL / NOT	DESCRIPTION
Authorization	Not	this is authenticated request

f. example in POSTMAN

