

230905232

Aditya Pankaj Mathpal

CSE C2 Roll No. 37

myproject/urls.py (for all projects):

```
"""
URL configuration for myproject project.

The `urlpatterns` list routes URLs to views. For more information please see:
    https://docs.djangoproject.com/en/5.2/topics/http/urls/
Examples:
Function views
    1. Add an import:  from my_app import views
    2. Add a URL to urlpatterns:  path('', views.home, name='home')
Class-based views
    1. Add an import:  from other_app.views import Home
    2. Add a URL to urlpatterns:  path('', Home.as_view(), name='home')
Including another URLconf
    1. Import the include() function: from django.urls import include, path
    2. Add a URL to urlpatterns:  path('blog/', include('blog.urls'))
"""
from django.contrib import admin
from django.urls import path, include

urlpatterns = [
    path('admin/', admin.site.urls),
    path('webapp/', include('webapp.urls')),
    path('formapp/', include('formapp.urls')),
    path('ex1app/', include('ex1app.urls')),
    path('ex2app/', include('ex2app.urls')),
    path('homeex1app/', include('homeex1app.urls')),
    path('basic_calc/', include('basic_calc.urls')),
    path('magazine/', include('magazine.urls')),
]
```

1) Develop a simple web page to perform basic arithmetic operations. Take two integer inputs from the user, select the operation to be performed using a dropdown. Include a button “Calculate” to perform the selected operation, and then display the result in the same web page.

basic_calc/urls.py:

```
from django.urls import path
from . import views

urlpatterns = [
    path('', views.index, name='index')
]
```

basic_calc/views.py:

```
from django.shortcuts import render

# Create your views here.

def index(request):
    return render(request, "basic_calc.html")
```

basic_calc/templates/basic_calc.html:

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Basic Calculator</title>
</head>
<body>
    <input type="number" id="num1" placeholder="First number">
    <input type="number" id="num2" placeholder="Second number">

    <select id="operation">
        <option value="add">Add</option>
        <option value="sub">Subtract</option>
        <option value="mul">Multiply</option>
        <option value="div">Divide</option>
    </select>

    <button onclick="calculate()">Calculate</button>

    <p id="result"></p>

    <script>
        function calculate() {
            let n1 = parseInt(document.getElementById("num1").value);
            let n2 = parseInt(document.getElementById("num2").value);
            let op = document.getElementById("operation").value;
            let res;


            if (op === "add") res = n1 + n2;
            if (op === "sub") res = n1 - n2;
            if (op === "mul") res = n1 * n2;
            if (op === "div") res = n2 !== 0 ? n1 / n2 : "Cannot divide by zero";
```

```

        document.getElementById("result").innerText = "Result: " + res;
    }
</script>
</body>
</html>

```

output:

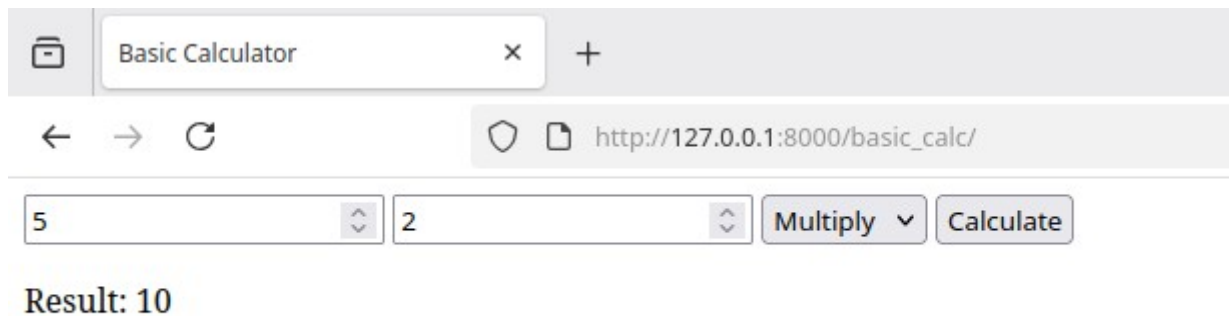

2) Develop a simple web form that generates the front cover for a magazine. The form should provide the options for selecting the image, background color, changing font size, color etc. Input messages must be taken from the user so as to display it on the front cover with legible font family and font size. The front cover developed should be proportionate to the web page size. Place the css files inside static folder.

magazine/urls.py:

```

from django.urls import path
from . import views

urlpatterns = [
    path('', views.index, name='index')
]

```

magazine/views.py:

```

from django.shortcuts import render

# Create your views here.

def index(request):
    return render(request, "magazine.html")

```

magazine/templates/magazine.html:

```
{% load static %}

<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="UTF-8">

    <meta name="viewport" content="width=device-width, initial-scale=1.0">

    <title>Magazine Cover</title>

    <link rel="stylesheet" href="{% static 'style.css' %}">

</head>

<body>

    <div class="container">


        <div class="form-section">

            <h2>Design Cover</h2>


            <label>Image</label>

            <input type="file" id="imageInput">


            <label>Background</label>

            <input type="color" id="bgColor" value="#ffffff">


            <label>Font Color</label>

            <input type="color" id="fontColor" value="#ffffff">


            <label>Font Size</label>

            <input type="number" id="fontSize" value="42" min="20" max="100">


            <label>Headline</label>

            <input type="text" id="headlineInput" placeholder="Main Headline">


            <label>Subtitle</label>
```

```
    <input type="text" id="subtitleInput" placeholder="Subtitle text">
  </div>
```

```
<div class="cover" id="cover">
  <img id="coverImage">
  <div class="overlay"></div>
  <div class="text">
    <h1 id="headline">MAGAZINE TITLE</h1>
    <p id="subtitle">Your subtitle appears here</p>
  </div>
</div>
```

```
</div>
```

```
<script>
```

```
const imageInput = document.getElementById("imageInput");
const bgColor = document.getElementById("bgColor");
const fontColor = document.getElementById("fontColor");
const fontSize = document.getElementById("fontSize");
const headlineInput = document.getElementById("headlineInput");
const subtitleInput = document.getElementById("subtitleInput");
```

```
const cover = document.getElementById("cover");
const coverImage = document.getElementById("coverImage");
const headline = document.getElementById("headline");
const subtitle = document.getElementById("subtitle");
```

```
bgColor.oninput = () => cover.style.backgroundColor = bgColor.value;
```

```
fontColor.oninput = () => {
  headline.style.color = fontColor.value;
  subtitle.style.color = fontColor.value;
```

```
};
```

```
fontSize.oninput = () => headline.style.fontSize = fontSize.value + "px";
```

```
headlineInput.oninput = () => headline.textContent = headlineInput.value;
```

```
subtitleInput.oninput = () => subtitle.textContent = subtitleInput.value;
```

```
imageInput.onChange = () => {
```

```
    const file = imageInput.files[0];
```

```
    if (file) {
```

```
        coverImage.src = URL.createObjectURL(file);
```

```
        coverImage.style.display = "block";
```

```
    }
```

```
};
```

```
</script>
```

```
</body>
```

```
</html>
```

magazine/static/style.css:

```
* {
```

```
    margin: 0;
```

```
    padding: 0;
```

```
    box-sizing: border-box;
```

```
    font-family: Georgia, serif;
```

```
}
```

```
body {
```

```
    background: #eaeaea;
```

```
}
```

```
.container {  
  display: flex;  
  justify-content: center;  
  gap: 60px;  
  padding: 40px;  
  flex-wrap: wrap;  
}
```

```
.form-section {  
  width: 300px;  
  display: flex;  
  flex-direction: column;  
  gap: 12px;  
}
```

```
.form-section input {  
  padding: 6px;  
}
```

```
.cover {  
  position: relative;  
  width: 350px;  
  aspect-ratio: 2 / 3;  
  background: white;  
  overflow: hidden;  
  box-shadow: 0 10px 25px rgba(0,0,0,0.2);  
}
```

```
.cover img {  
  position: absolute;  
  top: 50%;  
  left: 50%;
```

```
transform: translate(-50%, -50%);
width: 80%;
height: 65%;
object-fit: cover;
display: none;
border-radius: 8px;
}
```

```
.overlay {
  position: absolute;
  width: 100%;
  height: 100%;
  background: linear-gradient(to top, rgba(0,0,0,0.6), transparent 60%);
}
```

```
.text {
  position: absolute;
  bottom: 30px;
  left: 20px;
  right: 20px;
  color: white;
}
```

```
.text h1 {
  font-size: 42px;
  margin-bottom: 10px;
}
```

```
.text p {
  font-size: 18px;
}
```

output:

