

1. Design the student bio-data form using button, label, textbox, radio button, table and checkbox.

Code:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
  <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.4.1/jquery.min.js"></script>
  <script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.16.0/umd/popper.min.js"></script>
  <script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.4.1/js/bootstrap.min.js"></script>
  <title>Student Bio-Data</title>
</head>
<body>
  <div class="container mt-4">
    <h2>Student Bio-Data Form</h2>
    <form id="biodataForm">
      <div class="form-group">
        <label for="name">Name:</label>
        <input type="text" id="name" class="form-control" required>
      </div>
      <div class="form-group">
        <label>Gender:</label><br>
        <input type="radio" name="gender" value="Male" id="male" required>
        <label for="male">Male</label><br>
        <input type="radio" name="gender" value="Female" id="female">
        <label for="female">Female</label><br>
        <input type="radio" name="gender" value="Other" id="other">
        <label for="other">Other</label>
      </div>
      <div class="form-group">
        <label>Hobbies:</label><br>
        <input type="checkbox" id="reading" value="Reading">
        <label for="reading">Reading</label><br>
        <input type="checkbox" id="sports" value="Sports">
        <label for="sports">Sports</label><br>
        <input type="checkbox" id="music" value="Music">
        <label for="music">Music</label>
      </div>
      <button type="submit" class="btn btn-primary">Submit</button>
    </form>

    <h4 class="mt-4">Student Data</h4>
    <table class="table table-bordered" id="studentTable">
      <thead>
```

```

        <tr>
            <th>Name</th>
            <th>Gender</th>
            <th>Hobbies</th>
        </tr>
    </thead>
    <tbody>
    </tbody>
</table>
</div>

<script>
    $('#biodataForm').submit(function(event){
        event.preventDefault();
        var name = $('#name').val();
        var gender = $('input[name="gender"]:checked').val();
        var hobbies = [];
        $('input[type="checkbox"]:checked').each(function(){
            hobbies.push($(this).val());
        });
        var row = '<tr><td>' + name + '</td><td>' + gender + '</td><td>' + hobbies.join(', ') +
'</td></tr>';
        $('#studentTable tbody').append(row);
        this.reset();
    });
</script>
</body>
</html>

```

output:

The screenshot shows a web browser window with the title 'Student Bio-Data'. The page contains a form titled 'Student Bio-Data Form' with the following fields:

- Name:** A text input field.
- Gender:** Radio buttons for 'Male', 'Female', and 'Other'.
- Hobbies:** Checkboxes for 'Reading', 'Sports', and 'Music'.
- Submit:** A blue button.

Below the form is a table titled 'Student Data' with the following structure:

Name	Gender	Hobbies

2. Design a web page which shows the database-oriented CRUD operation. Consider Employee data.

Code:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
  <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.4.1/jquery.min.js"></script>
  <script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.16.0/umd/popper.min.js"></script>
  <script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.4.1/js/bootstrap.min.js"></script>
  <title>CRUD</title>
</head>
<body>
  <div class="container mt-4">
    <h2>Employee CRUD Form</h2>
    <form id="employeeForm">
      <div class="form-group">
        <label for="empName">Name:</label>
        <input type="text" id="empName" class="form-control" required>
      </div>
      <div class="form-group">
        <label for="empDept">Department:</label>
        <input type="text" id="empDept" class="form-control" required>
      </div>
      <div class="form-group">
        <label for="empSalary">Salary:</label>
        <input type="number" id="empSalary" class="form-control" required>
      </div>
      <button type="submit" class="btn btn-primary">Add / Update</button>
    </form>

    <h4 class="mt-4">Employee Data</h4>
    <table class="table table-bordered" id="employeeTable">
      <thead>
        <tr>
          <th>Name</th>
          <th>Department</th>
          <th>Salary</th>
          <th>Actions</th>
        </tr>
      </thead>
      <tbody>
      </tbody>
    </table>
  </div>

  <script>
    let editIndex = null;
```

```

$('#employeeForm').submit(function(event){
    event.preventDefault();

    var name = $('#empName').val();
    var dept = $('#empDept').val();
    var salary = $('#empSalary').val();

    if(editIndex === null){
        var row = '<tr><td>' + name + '</td><td>' + dept + '</td><td>' + salary + '</td>' +
            '<td><button class="btn btn-sm btn-info editBtn">Edit</button>' +
            '<button class="btn btn-sm btn-danger deleteBtn">Delete</button></td></tr>';
        $('#employeeTable tbody').append(row);
    } else {
        let row = $('#employeeTable tbody tr').eq(editIndex);
        row.find('td:eq(0)').text(name);
        row.find('td:eq(1)').text(dept);
        row.find('td:eq(2)').text(salary);
        editIndex = null;
    }

    this.reset();
});

$('#employeeTable').on('click', '.deleteBtn', function(){
    $(this).closest('tr').remove();
});

$('#employeeTable').on('click', '.editBtn', function(){
    let row = $(this).closest('tr');
    editIndex = row.index();
    $('#empName').val(row.find('td:eq(0)').text());
    $('#empDept').val(row.find('td:eq(1)').text());
    $('#empSalary').val(row.find('td:eq(2)').text());
});
</script>
</body>
</html>

```

output:

The screenshot shows a web browser window with a single tab titled 'CRUD'. The address bar shows the file path: file:///home/WPC2/230905232/WP-Lab/lab03-bootstrap2.html. The page content is titled 'Employee CRUD Form'. It features three input fields: 'Name:', 'Department:', and 'Salary:'. Below these fields is a blue button labeled 'Add / Update'. Underneath the button is a section titled 'Employee Data' which contains a table with four columns: 'Name', 'Department', 'Salary', and 'Actions'. The table is currently empty.

3. Create a web page using bootstrap as mentioned. Divide the page into 2 parts top and bottom, then divide the bottom into 3 parts and design each top and bottom part using different input groups, input, badges, buttons and button groups. Make the design more attractive.

Code:

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Balanced Split Layout</title>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
<script src="https://ajax.googleapis.com/ajax/libs/jquery/3.4.1/jquery.min.js"></script>
<script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.16.0/umd/popper.min.js"></script>
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.4.1/js/bootstrap.min.js"></script>
<style>
    .half-height {
        height: 50vh;
        display: flex;
        align-items: center;
    }
</style>
</head>
<body>

<div class="container-fluid vh-100 d-flex flex-column">

    <div class="row half-height px-lg-5">
```

```

<div class="col-12">
  <div class="p-4 bg-white border rounded shadow-sm">
    <h5 class="mb-3 text-primary">Top Half Container</h5>

    <div class="form-row align-items-center mb-3">
      <div class="col-md-5 mb-2 mb-md-0">
        <input type="search" class="form-control form-control-lg" placeholder="Search
something...">
      </div>
      <div class="col-md-3 mb-2 mb-md-0">
        <select class="custom-select custom-select-lg">
          <option selected>Category</option>
          <option>Files</option>
          <option>Users</option>
        </select>
      </div>
      <div class="col-md-4">
        <div class="btn-toolbar w-100">
          <button class="btn btn-primary btn-lg mr-2 flex-fill">Go</button>
          <button class="btn btn-outline-dark btn-lg flex-fill">Filters</button>
        </div>
      </div>
    </div>

    <div>
      <span class="badge badge-success badge-pill px-3 py-2">Active</span>
      <span class="badge badge-dark badge-pill px-3 py-2">Lab Node</span>
      <span class="badge badge-light border px-3 py-2">3 Alerts</span>
    </div>
  </div>
</div>

```

```

<hr class="m-0 border-primary" style="border-width:2px; opacity:.25;">

```

```

<div class="row flex-grow-1 px-lg-5 py-4">

```

```

  <div class="col-md-4 mb-4 mb-md-0">
    <div class="p-4 bg-white border h-100 rounded d-flex flex-column justify-content-center">
      <h6 class="font-weight-bold mb-3">Profile Info</h6>

      <div class="mb-3">
        <label class="small text-muted">Username</label>
        <input type="text" class="form-control form-control-lg" placeholder="@username">
        <small class="form-text text-muted">Public display name</small>
      </div>

      <button class="btn btn-primary btn-block mb-2">Update Profile</button>
      <button class="btn btn-outline-secondary btn-block">Clear</button>
    </div>
  </div>

```

```

<div class="col-md-4 mb-4 mb-md-0">
  <div class="p-4 bg-white border h-100 rounded d-flex flex-column justify-content-center">
    <h6 class="font-weight-bold mb-3">Financials</h6>

    <div class="form-row mb-3">
      <div class="col-8">
        <input type="number" class="form-control form-control-lg"
placeholder="Amount">
      </div>
      <div class="col-4">
        <select class="custom-select custom-select-lg">
          <option>USD</option>
          <option>EUR</option>
          <option>INR</option>
        </select>
      </div>
    </div>

    <div class="d-flex justify-content-between align-items-center">
      <button class="btn btn-outline-success btn-lg px-4">Proceed</button>

      <div class="btn-group btn-group-toggle" data-toggle="buttons">
        <label class="btn btn-secondary btn-sm active">
          <input type="radio" name="currency"> Card
        </label>
        <label class="btn btn-outline-secondary btn-sm">
          <input type="radio" name="currency"> Wallet
        </label>
      </div>
    </div>
  </div>
</div>

<div class="col-md-4">
  <div class="p-4 bg-white border h-100 rounded d-flex flex-column justify-content-center">
    <h6 class="font-weight-bold mb-3">System Updates</h6>

    <div class="form-row mb-4">
      <div class="col-7">
        <input type="text" class="form-control" placeholder="Recipient name">
      </div>
      <div class="col-5">
        <select class="custom-select">
          <option>@mail.com</option>
          <option>@work.org</option>
        </select>
      </div>
    </div>

    <div class="custom-control custom-switch mb-2">
      <input type="checkbox" class="custom-control-input" id="emailSwitch">
      <label class="custom-control-label" for="emailSwitch">Email Notifications</label>
    </div>
  </div>
</div>

```

```


    </div>
    <div class="custom-control custom-switch">
      <input type="checkbox" class="custom-control-input" id="smsSwitch">
      <label class="custom-control-label" for="smsSwitch">SMS Alerts</label>
    </div>
  </div>
</div>

</div>

</body>
</html>

```

output:

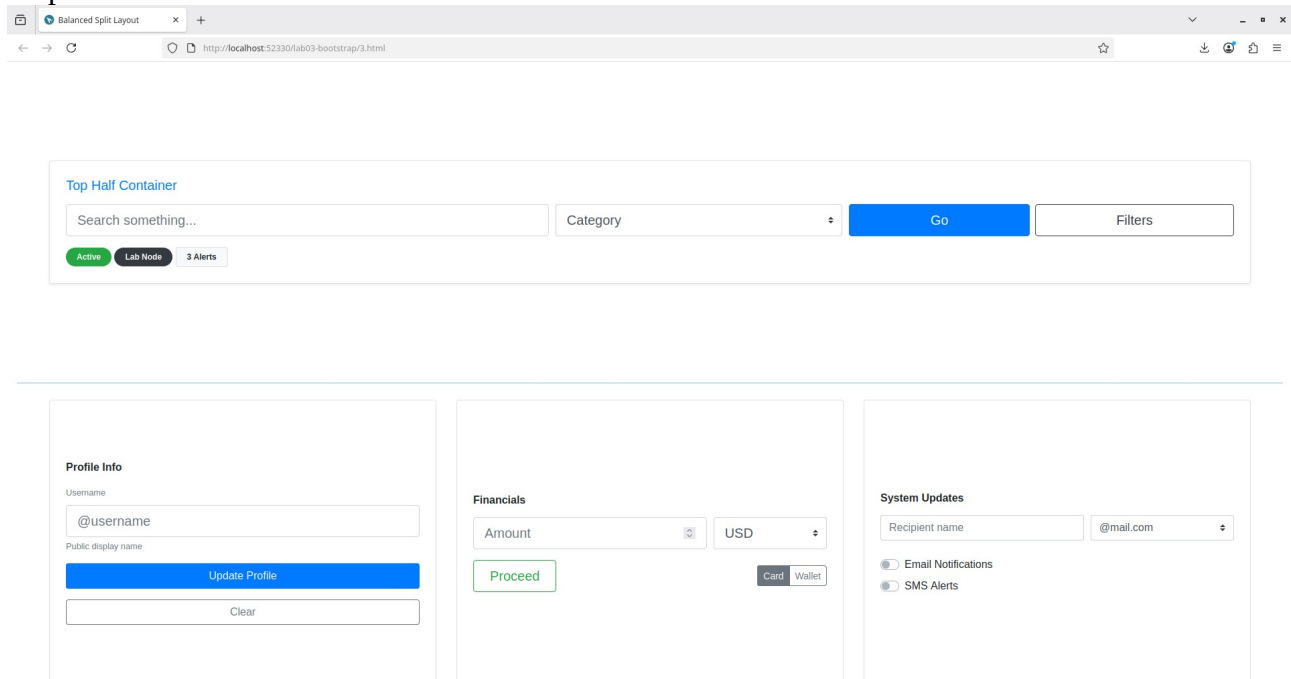

4. Design your class timetable using bootstrap table and carousel.

Code:

```

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
  <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.4.1/jquery.min.js"></script>

```

```

<script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.16.0/umd/popper.min.js"></script>
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.4.1/js/bootstrap.min.js"></script>
<title>Time Table</title>
</head>
<body>
  <div class="container mt-4">

    <style>
      table {
        table-layout: fixed;
        width: 100%;
      }

      .carousel-control-prev,
      .carousel-control-next { width: 5%; }

      .carousel-control-prev { left: -200px; }
      .carousel-control-next { right: -200px; }

      .carousel-control-prev-icon,
      .carousel-control-next-icon {
        background-color: black;
        border-radius: 50%;
        padding: 18px;
      }
    </style>

    <div id="timetableCarousel" class="carousel slide" data-interval="false">
      <div class="carousel-inner">

        <div class="carousel-item active">
          <h4 class="text-center">Monday</h4>
          <table class="table table-bordered text-center">
            <tr>
              <th>Time</th>
              <th>8-9</th><th>9-10</th><th>10-10:30</th><th>10:30-11:30</th>
              <th>11:30-12:30</th><th></th><th>1-2</th><th>2-3</th><th>3-3:30</th><th>3:30-4:30</th>
            </tr>
            <tr>
              <th>Class</th>
              <td>GT</td><td>PCAP</td><td></td><td>CD</td>
              <td>OR</td><td></td><td></td><td></td><td></td><td></td>
            </tr>
          </table>
        </div>

        <div class="carousel-item">
          <h4 class="text-center">Tuesday</h4>
          <table class="table table-bordered text-center">
            <tr>
              <th>Time</th>

```

```

<th>8-9</th><th>9-10</th><th>10-10:30</th><th>10:30-11:30</th>
<th>11:30-12:30</th><th></th><th>1-2</th><th>2-3</th><th>3-3:30</th><th>3:30-4:30</th>
</tr>
<tr>
  <th>Class</th>
  <td colspan="4">CDL (C1)</td>
  <td></td><td></td>
  <td>TSA</td>
  <td>EEFM</td>
  <td colspan="2">Placement</td>
</tr>
</table>
</div>

```

```

<div class="carousel-item">
  <h4 class="text-center">Wednesday</h4>
  <table class="table table-bordered text-center">
    <tr>
      <th>Time</th>
      <th>8-9</th><th>9-10</th><th>10-10:30</th><th>10:30-11:30</th>
      <th>11:30-12:30</th><th></th><th>1-2</th><th>2-3</th><th>3-3:30</th><th>3:30-4:30</th>
    </tr>
    <tr>
      <th>Class</th>
      <td>TSA</td><td>EEFM</td><td></td><td>GT</td>
      <td>PCAP</td><td></td><td></td>
      <td colspan="3">WPL (C1)</td>
    </tr>
  </table>
</div>

```

```

<div class="carousel-item">
  <h4 class="text-center">Thursday</h4>
  <table class="table table-bordered text-center">
    <tr>
      <th>Time</th>
      <th>8-9</th><th>9-10</th><th>10-10:30</th><th>10:30-11:30</th>
      <th>11:30-12:30</th><th></th><th>1-2</th><th>2-3</th><th>3-3:30</th><th>3:30-4:30</th>
    </tr>
    <tr>
      <th>Class</th>
      <td></td>
      <td colspan="3">PPL (C2)</td>
      <td></td><td></td>
      <td>CD</td>
      <td>OR</td>
      <td colspan="2">Placement</td>
    </tr>
  </table>

```

</div>

<div class="carousel-item">

<h4 class="text-center">Friday</h4>

<table class="table table-bordered text-center">

<tr>

<th>Time</th>

<th>8-9</th><th>9-10</th><th>10-10:30</th><th>10:30-11:30</th>

<th>11:30-12:30</th><th></th><th>1-2</th><th>2-3</th><th>3-3:30</th><th>3:30-4:30</th>

</tr>

<tr>

<th>Class</th>

<td>CD</td><td>OR</td>

<td></td>

<td>TSA</td>

<td>EEFM</td><td></td>

<td colspan="4">PPL (C1) | CDL (C2)</td>

</tr>

</table>

</div>

<div class="carousel-item">

<h4 class="text-center">Saturday</h4>

<table class="table table-bordered text-center">

<tr>

<th>Time</th>

<th>8-9</th><th>9-10</th><th>10-10:30</th><th>10:30-11:30</th>

<th>11:30-12:30</th><th></th><th>1-2</th><th>2-3</th><th>3-3:30</th><th>3:30-4:30</th>

</tr>

<tr>

<th>Class</th>

<td colspan="4">WPL (C2)</td>

<td></td><td></td>

<td>GT</td><td>PCAP</td><td></td><td></td>

</tr>

</table>

</div>

</div>

</div>

</div>

```
</body>
</html>
```

output:

Monday										
Time	8-9	9-10	10-10:30	10:30-11:30	11:30-12:30		1-2	2-3	3-3:30	3:30-4:30
Class	GT	PCAP		CD	OR					