

41) Among the following identify the one in which dimensionality reduction reduces.

- a) Performance
- b) statistics
- c) Entropy
- d) Collinearity

Answer-

- d) Collinearity

42) Which of the following machine learning algorithm is based upon the idea of bagging? a) Decision Tree

- b) Random Forest
- c) Classification
- d) SVM

Answer-

- b) Random Forest

43) Choose a disadvantage of decision trees among the following.

- a) Decision tree robust to outliers
- b) Factor analysis
- c) Decision Tree are prone to overfit
- d) all of the above

Answer-

- a) Decision tree are prone to overfit

44) What is the term known as on which the machine learning algorithms build a model based on sample data?

- a) Data Training
- b) Sample Data
- c) Training data
- d) None of the above

Answer-

- c) Training data

45) Which of the following machine learning techniques helps in detecting the outliers in data?

- a) Clustering
- b) Classification
- c) Anomaly detection
- d) All of the above

Answer-

- c) Anomaly detection

46) Identify the incorrect numerical functions in the various function representation of machine

learning.

- a) Support Vector
- b) Regression
- c) Case based
- d) Classification

Answer-

- a) Support Vector

47) Analysis of ML algorithm needs

- a) Statistical learning theory
- b) Computational learning theory
- c) None of the above
- d) Both a and b

Answer-

- d) Both a and b

48) Identify the difficulties with the k-nearest neighbor algorithm

- a) Curse of dimensionality
- b) Calculate the distance of test case for all training cases
- c) Both a and b
- d) None

Answer-

- d) Both a and b

49) The total types of the layer in radial basis function neural networks is \_\_\_\_\_

- a) 1
- b) 2
- c) 3
- d) 4

Answer-

- a) 1

50) Which of the following is not a supervised learning

- a) PCA
- b) Naïve bayes
- c) Linear regression
- d) Kmean

Answer-

- a) PCA

21) When implementing linear regression of some dependent variable  $y$  on the set of independent variables  $\mathbf{x} = (x_1, \dots, x_r)$ , where  $r$  is the number of predictors, which of the following statements will be true?

- a)  $\beta_0, \beta_1, \dots, \beta_r$  are the regression coefficients.
- b) Linear regression is about determining the best predicted weights by using the method of ordinary least squares.
- c)  $E$  is the random interval
- d) Both a and b

Answer-

a)  $\beta_0, \beta_1, \dots, \beta_r$  are the regression coefficients.

22 ) What indicates that you have a perfect fit in linear regression?

- a) The value  $R^2 < 1$ , which corresponds to  $SSR = 0$
- b) The value  $R^2 = 0$ , which corresponds to  $SSR = 1$
- c) The value  $R^2 > 0$ , which corresponds to  $SSR = 1$
- d) The value  $R^2 = 1$ , which corresponds to  $SSR = 0$

Answer-

d) The value  $R^2 = 1$ , which corresponds to  $SSR = 0$

23) In simple linear regression, the value of what shows the point where the estimated regression line crosses the y axis?


- a) Y
- b)  $B_0$
- c)  $B_1$
- d) F

Answer-

b)  $B_0$

24.

Check out these four linear regression plots

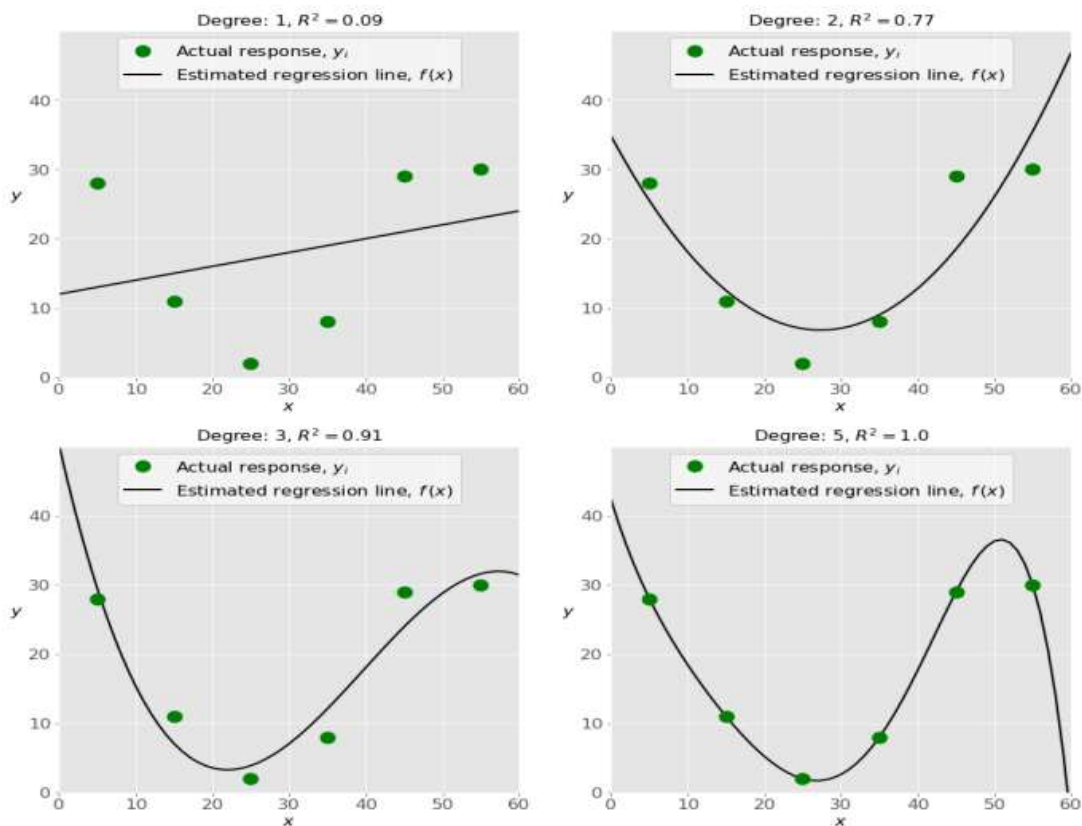

- Which one represents an underfitted model? a) The bottom-left plot  
b) The top-right plot  
c) The bottom-right plot  
d) The top-left plot

Answer-c. The bottom right plot

25) There are five basic steps when you're implementing linear regression:

- a. Check the results of model fitting to know whether the model is satisfactory.
- b. Provide data to work with, and eventually do appropriate transformations.
- c. Apply the model for predictions.
- d. Import the packages and classes that you need.
- e. Create a regression model and fit it with existing data. However, those steps are currently listed in the wrong order. What's the correct order

- a) e, c, a, b, d  
b) e, d, b, a, c  
c) d, e, c, b, a  
d) d, b, e, a, c

Answer- b) e, d, b, a, c

26 ) Which of the following are optional parameters to LinearRegression in scikit-learn?

- a) Fit  
b) fit\_intercept  
c) normalize  
d) copy\_X  
e) n\_jobs  
f) reshape

Answer-

All of them excluding a

27) While working with scikit-learn, in which type of regression do you need to transform the array of inputs to include nonlinear terms such as  $x^2$ ?

- a) Multiple linear regression  
b) Simple linear regression  
c) Polynomial regression

Answer-c. Polynomial regression

28) You should choose statsmodels over scikit-learn when:

- A) You want graphical representations of your data.  
b) You're working with nonlinear terms.  
c) You need more detailed results.  
d) You need to include optional parameters

Answer-c. You need more detailed results

29) \_\_\_\_\_ is a fundamental package for scientific computing with Python. It offers comprehensive mathematical functions, random number generators, linear algebra routines, Fourier transforms, and more. It provides a high-level syntax that makes it accessible and productive.

- a) Pandas
- b) Numpy
- c) Statsmodel
- d) scipy

Answer- b.Numpy

30 ) \_\_\_\_\_ is a Python data visualization library based on Matplotlib. It provides a high-level interface for drawing attractive and informative statistical graphics that allow you to explore and understand your data. It integrates closely with pandas data structures.

- a) Bokeh
- b) Seaborn
- c) Matplotlib
- d) Dash

Answer- B. seaborn