

[1]. Reading Data

Amazon Fine Food Reviews Analysis

Data Source: <https://www.kaggle.com/snap/amazon-fine-food-reviews>

EDA: <https://nycdatascience.com/blog/student-works/amazon-fine-foods-visualization/>

The Amazon Fine Food Reviews dataset consists of reviews of fine foods from Amazon.

Number of reviews: 568,454

Number of users: 256,059

Number of products: 74,258

Timespan: Oct 1999 - Oct 2012

Number of Attributes/Columns in data: 10

Attribute Information:

1. Id
2. ProductId - unique identifier for the product
3. UserId - unique identifier for the user
4. ProfileName
5. HelpfulnessNumerator - number of users who found the review helpful
6. HelpfulnessDenominator - number of users who indicated whether they found the review helpful or not
7. Score - rating between 1 and 5
8. Time - timestamp for the review
9. Summary - brief summary of the review
10. Text - text of the review

Objective:

Given a review, determine whether the review is positive (rating of 4 or 5) or negative (rating of 1 or 2).

[Q] How to determine if a review is positive or negative?

[Ans] We could use Score/Rating. A rating of 4 or 5 can be considered as a positive review. A rating of 1 or 2 can be considered as negative one. A review of rating 3 is considered neutral and such reviews are ignored from our analysis. This is an approximate and proxy way of determining the polarity (positivity/negativity) of a review.

[1.1] Loading the data

The dataset is available in two forms

1. .csv file
2. SQLite Database

In order to load the data, We have used the CSV dataset

Here as we only want to get the global sentiment of the recommendations (positive or negative), we will purposefully ignore all Scores equal to 3. If the score is above 3, then the recommendation will be set to "positive". Otherwise, it will be set to "negative".

In [11]:

```
%matplotlib inline
import warnings
warnings.filterwarnings("ignore")

import sqlite3
import pandas as pd
import numpy as np
import nltk
import string
import matplotlib.pyplot as plt
```

```

import seaborn as sns
from sklearn.feature_extraction.text import TfidfTransformer
from sklearn.feature_extraction.text import TfidfVectorizer

from sklearn.metrics import accuracy_score
import seaborn as sn
from sklearn.metrics import classification_report

from sklearn.feature_extraction.text import CountVectorizer
from sklearn.metrics import confusion_matrix
from sklearn import metrics
from sklearn.metrics import roc_curve, auc
from nltk.stem.porter import PorterStemmer

from sklearn.neighbors import KNeighborsClassifier
from sklearn.metrics import roc_auc_score
import matplotlib.pyplot as plt
from sklearn.model_selection import validation_curve

import re
# Tutorial about Python regular expressions: https://pymotw.com/2/re/
import string
from nltk.corpus import stopwords
from nltk.stem import PorterStemmer
from nltk.stem.wordnet import WordNetLemmatizer

from gensim.models import Word2Vec
from gensim.models import KeyedVectors
import pickle

from tqdm import tqdm
import os

```

C:\Users\Adarsh\Anaconda3\lib\site-packages\gensim\utils.py:1212: UserWarning: detected Windows; aliasing chunkize to chunkize_serial
 warnings.warn("detected Windows; aliasing chunkize to chunkize_serial")

In [12]:

```

#loading train and test and validation dataset

file=open("x_train.pkl","rb")
x_train=pickle.load(file) # loading 'train' dataset

file=open("x_cv.pkl",'rb')
x_cv=pickle.load(file) # loading 'validation' dataset

file=open("x_test.pkl",'rb')
x_test=pickle.load(file) # loading 'test' dataset

file=open("y_train.pkl","rb")
y_train=pickle.load(file) # loading 'train' dataset

file=open("y_cv.pkl",'rb')
y_cv=pickle.load(file) # loading 'validation' dataset

file=open("y_test.pkl",'rb')
y_test=pickle.load(file) # loading 'test' dataset

#loading train_bow and test_bow
file=open('x_train_bow.pkl','rb')
x_train_bow=pickle.load(file)

file=open('x_test_bow.pkl','rb')
x_test_bow=pickle.load(file)

file=open('x_cv_bow.pkl','rb')
x_cv_bow=pickle.load(file)

#loading train_tf_idf and test_tf_idf
file=open('train_tf_idf.pkl','rb')
train_tf_idf=pickle.load(file)

file=open('cv_tf_idf.pkl','rb')
cv_tf_idf=pickle.load(file)

```

```

file=open('test_tf_idf.pkl','rb')
test_tf_idf=pickle.load(file)

#loading train_w2v and test_w2v
file=open('train_w2v.pkl','rb')
train_w2v=pickle.load(file)

file=open('cv_w2v.pkl','rb')
cv_w2v=pickle.load(file)

file=open('test_w2v.pkl','rb')
test_w2v=pickle.load(file)

#loading train_tf_idf_w2v and test_tf_idf_w2v
file=open('train_tf_idf_w2v.pkl','rb')
train_tf_idf_w2v=pickle.load(file)

file=open('cv_tf_idf_w2v.pkl','rb')
cv_tf_idf_w2v=pickle.load(file)

file=open('test_tf_idf_w2v.pkl','rb')
test_tf_idf_w2v=pickle.load(file)

```

In [7]:

```

# using csv Table to read data.

dataset=pd.read_csv("Reviews.csv")

print(dataset.shape)
dataset.head(3)

```

(568454, 10)

Out[7]:

	Id	ProductId	UserId	ProfileName	HelpfulnessNumerator	HelpfulnessDenominator	Score	Time	Summary
0	1	B001E4KFG0	A3SGXH7AUHU8GW	delmartian	1	1	5	1303862400	Good Quality Dog Food
1	2	B00813GRG4	A1D87F6ZCVE5NK	dll pa	0	0	1	1346976000	Not as Advertised
2	3	B000LQOCH0	ABXLMWJIXXAIN	Natalia Corres "Natalia Corres"	1	1	4	1219017600	"Delight" says it all

In [8]:

```

# filtering only positive and negative reviews i.e.
# not taking into consideration those reviews with Score=3
# SELECT * FROM Reviews WHERE Score != 3 LIMIT 500000, will give top 500000 data points
# you can change the number to any other number based on your computing power

# filtered_data = pd.read_sql_query(""" SELECT * FROM Reviews WHERE Score != 3 LIMIT 500000""", co
n)

# taking reviews whose score is not equal to 3
filtered_dataset=dataset[dataset['Score']!=3]
filtered_dataset.shape

#creating a function to filter the reviews (if score>3 --> positive , if score<3 --> negative)
def partition(x):

```

```

if x>3:
    return 1
return 0

#changing reviews with score less than 3 to be positive and vice-versa
actualScore = filtered_dataset['Score']
positiveNegative = actualScore.map(partition)
filtered_dataset['Score'] = positiveNegative
print("Number of data points in our data", filtered_dataset.shape)
filtered_dataset.head(3)

```

Number of data points in our data (525814, 10)

Out[8]:

	Id	ProductId	UserId	ProfileName	HelpfulnessNumerator	HelpfulnessDenominator	Score	Time	Summary
0	1	B001E4KFG0	A3SGXH7AUHU8GW	delmartian	1	1	1	1303862400	Good Quality Dog Food
1	2	B00813GRG4	A1D87F6ZCVE5NK	dll pa	0	0	0	1346976000	Not as Advertised
2	3	B000LQOCH0	ABXLMWJIXXAIN	Natalia Corres "Natalia Corres"	1	1	1	1219017600	"Delight" says it all

[2] Exploratory Data Analysis

[2.1] Data Cleaning: Deduplication

It is observed (as shown in the table below) that the reviews data had many duplicate entries. Hence it was necessary to remove duplicates in order to get unbiased results for the analysis of the data. Following is an example:

observation:

As it can be seen above that same user has multiple reviews with same values for HelpfulnessNumerator, HelpfulnessDenominator, Score, Time, Summary and Text and on doing analysis it was found that

ProductId=B000HDOPZG was Loacker Quadratini Vanilla Wafer Cookies, 8.82-Ounce Packages (Pack of 8)

ProductId=B000HDL1RQ was Loacker Quadratini Lemon Wafer Cookies, 8.82-Ounce Packages (Pack of 8) and so on

It was inferred after analysis that reviews with same parameters other than ProductId belonged to the same product just having different flavour or quantity. Hence in order to reduce redundancy it was decided to eliminate the rows having same parameters.

The method used for the same was that we first sort the data according to ProductId and then just keep the first similar product review and delete the others. for eg. in the above just the review for ProductId=B000HDL1RQ remains. This method ensures that there is only one representative for each product and deduplication without sorting would lead to possibility of different representatives still existing for the same product.

In [9]:

```

# sorting the value
sorted_data=filtered_dataset.sort_values(by='Id',inplace=True )
#finding the duplicate values using 'df.duplicated'
filtered_dataset[filtered_dataset.duplicated(subset={'ProfileName','HelpfulnessNumerator','HelpfulnessDenominator','Score','Time'})].shape
#alternate way to drop duplicate values
dataset_no_dup=filtered_dataset.drop_duplicates(subset={'ProfileName','Score','Time','Summary'},kee

```

```
p='first')
print(f"before {dataset.shape}")
print(f"after removing duplicate values-->shape = {dataset_no_dup.shape}")
# %age of no. of review reamin in data set
print('percentage of data reamin after removing duplicate values and removing reviews with neutral
scores % .2f'
      %((dataset_no_dup.size/dataset.size)*100))
```

```
before (568454, 10)
after removing duplicate values-->shape = (363255, 10)
percentage of data reamin after removing duplicate values and removing reviews with neutral scores
63.90
```

Observation:- It was also seen that in two rows given below the value of HelpfulnessNumerator is greater than HelpfulnessDenominator which is not practically possible hence these two rows too are removed from calcuations

In [10]:

```
# removing reviews where "HelpfulnessNumerator>HelpfulnessDenominator"
final=dataset_no_dup[dataset_no_dup['HelpfulnessNumerator']<=dataset_no_dup['HelpfulnessDenominator']]
```

In [11]:

```
#Before starting the next phase of preprocessing lets see the number of entries left
print(final.shape)

#How many positive and negative reviews are present in our dataset?
final['Score'].value_counts()
```

```
(363253, 10)
```

Out[11]:

```
1    306222
0     57031
Name: Score, dtype: int64
```

[3] Preprocessing

[3.1]. Preprocessing Review Text

Now that we have finished deduplication our data requires some preprocessing before we go on further with analysis and making the prediction model.

Hence in the Preprocessing phase we do the following in the order below:-

1. Begin by removing the html tags
2. Remove any punctuations or limited set of special characters like , or . or # etc.
3. Check if the word is made up of english letters and is not alpha-numeric
4. Check to see if the length of the word is greater than 2 (as it was researched that there is no adjective in 2-letters)
5. Convert the word to lowercase
6. Remove Stopwords
7. Finally Snowball Stemming the word (it was obsereved to be better than Porter Stemming)

After which we collect the words used to describe positive and negative reviews

In [8]:

```
# https://stackoverflow.com/questions/16206380/python-beautifulsoup-how-to-remove-all-tags-from-an
-element
from bs4 import BeautifulSoup

# https://stackoverflow.com/a/47091490/4084039
import re

def decontracted(phrase):
```

```
# specific
phrase = re.sub(r"won't", "will not", phrase)
phrase = re.sub(r"can't", "can not", phrase)

# general
phrase = re.sub(r"\n't", " not", phrase)
phrase = re.sub(r"\ 're", " are", phrase)
phrase = re.sub(r"\ 's", " is", phrase)
phrase = re.sub(r"\ 'd", " would", phrase)
phrase = re.sub(r"\ 'll", " will", phrase)
phrase = re.sub(r"\ 't", " not", phrase)
phrase = re.sub(r"\ 've", " have", phrase)
phrase = re.sub(r"\ 'm", " am", phrase)
return phrase

# https://gist.github.com/sebleier/554280
# we are removing the words from the stop words list: 'no', 'nor', 'not'
# <br /><br /> ==> after the above steps, we are getting "br br"
# we are including them into stop words list
# instead of <br /> if we have <br/> these tags would have revmoved in the 1st step

stopwords= set(['br', 'the', 'i', 'me', 'my', 'myself', 'we', 'our', 'ours', 'ourselves', 'you', "y
ou're", "you've", \
'you'll', "you'd", 'your', 'yours', 'yourself', 'yourselves', 'he', 'him', 'his',
'himself', \
'she', "she's", 'her', 'hers', 'herself', 'it', "it's", 'its', 'itself', 'they', 'them',
'their', \
'theirs', 'themselves', 'what', 'which', 'who', 'whom', 'this', 'that', "that'll",
'these', 'those', \
'am', 'is', 'are', 'was', 'were', 'be', 'been', 'being', 'have', 'has', 'had', 'having',
'do', 'does', \
'did', 'doing', 'a', 'an', 'the', 'and', 'but', 'if', 'or', 'because', 'as', 'until', '
while', 'of', \
'at', 'by', 'for', 'with', 'about', 'against', 'between', 'into', 'through', 'during',
'before', 'after', \
'above', 'below', 'to', 'from', 'up', 'down', 'in', 'out', 'on', 'off', 'over', 'under'
, 'again', 'further', \
'then', 'once', 'here', 'there', 'when', 'where', 'why', 'how', 'all', 'any', 'both', 'e
ach', 'few', 'more', \
'most', 'other', 'some', 'such', 'only', 'own', 'same', 'so', 'than', 'too', 'very', \
's', 't', 'can', 'will', 'just', 'don', "don't", 'should', "should've", 'now', 'd', 'll'
, 'm', 'o', 're', \
've', 'y', 'ain', 'aren', "aren't", 'couldn', "couldn't", 'didn', "didn't", 'doesn', "dc
esn't", 'hadn', \
'hadn't', 'hasn', "hasn't", 'haven', "haven't", 'isn', "isn't", 'ma', 'mightn',
'mightn't', 'mustn', \
'mustn't', 'needn', "needn't", 'shan', "shan't", 'shouldn', "shouldn't", 'wasn',
'wasn't', 'weren', "weren't", \
'won', "won't", 'wouldn', "wouldn't"])
```

In [9]:

```
# Combining all the above students
from tqdm import tqdm
preprocessed_reviews = []
# tqdm is for printing the status bar
for sentence in tqdm(final['Text'].values):
    sentence = re.sub(r"http\S+", "", sentence)
    sentence = BeautifulSoup(sentence, 'lxml').get_text()
    sentence = decontracted(sentence)
    sentence = re.sub("\S*\d\S*", "", sentence).strip()
    sentence = re.sub('[^A-Za-z]+', ' ', sentence)
    # https://gist.github.com/sebleier/554280
    sentence = ' '.join(e.lower() for e in sentence.split() if e.lower() not in stopwords)
    preprocessed_reviews.append(sentence.strip())
```

```
100%|██████████████████████████████████████████████████████████████████████████████| 363253/363253  
[02:56<00:00, 2063.41it/s]
```

In [10]:

```
preprocessed_reviews[:5]
```

Out[10]:

```
['bought several vitality canned dog food products found good quality product looks like stew proc  
essed meat smells better labrador finicky appreciates product better',  
 'product arrived labeled jumbo salted peanuts peanuts actually small sized unsalted not sure erro  
r vendor intended represent product jumbo',  
 'confection around centuries light pillowy citrus gelatin nuts case filberts cut tiny squares lib  
erally coated powdered sugar tiny mouthful heaven not chewy flavorful highly recommend yummy treat  
familiar story c lewis lion witch wardrobe treat seduces edmund selling brother sisters witch',  
 'looking secret ingredient robituissin believe found got addition root beer extract ordered good m  
ade cherry soda flavor medicinal',  
 'great taffy great price wide assortment yummy taffy delivery quick taffy lover deal']
```

In [11]:

```
final['preprocessed_reviews']=preprocessed_reviews
```

In [12]:

```
# splitting the dataset in train , cv and test  
  
n=final.shape[0] #size of final dataset  
  
train=final.iloc[:round(0.60*n),:]  
cv=final.iloc[round(0.60*n):round(0.80*n),:]  
test=final.iloc[round(0.80*n):round(1.0*n),:]
```

In [13]:

```
from sklearn.model_selection import train_test_split  
x_training,x_test,y_training,y_test=train_test_split(preprocessed_reviews,final["Score"]  
,test_size=0.20, random_state=42)  
x_train,x_cv,y_train,y_cv=train_test_split(x_training,y_training, test_size=0.25, random_state=42)
```

In [48]:

```
len(x_train),len(y_train),len(x_test),len(y_test),len(x_cv),len(y_cv)
```

Out[48]:

```
(217951, 217951, 72651, 72651, 72651, 72651)
```

In [14]:

```
# saving train and test dataset using pickle for fututre use  
  
'''file=open("x_train.pkl","wb")  
pickle.dump(x_train,file)  
file.close()  
  
file=open('x_cv.pkl','wb')  
pickle.dump(x_cv,file)  
file.close  
  
file=open("x_test.pkl","wb")  
pickle.dump(x_test,file)  
file.close()  
  
file=open("y_train.pkl","wb")  
pickle.dump(y_train,file)  
file.close()  
  
file=open('y_cv.pkl','wb')  
pickle.dump(y_cv,file)  
file.close  
  
file=open("y_test.pkl","wb")  
pickle.dump(y_test,file)  
file.close()  
'''
```

In [2]:

```
#loading train and test and validation dataset

file=open("x_train.pkl","rb")
x_train=pickle.load(file) # loading 'train' dataset

file=open("x_cv.pkl","rb")
x_cv=pickle.load(file) # loading 'validation' dataset

file=open("x_test.pkl","rb")
x_test=pickle.load(file) # loading 'test' dataset

file=open("y_train.pkl","rb")
y_train=pickle.load(file) # loading 'train' dataset

file=open("y_cv.pkl","rb")
y_cv=pickle.load(file) # loading 'validation' dataset

file=open("y_test.pkl","rb")
y_test=pickle.load(file) # loading 'test' dataset
```

[4] Featurization

[4.1] BAG OF WORDS

In [20]:

```
#BoW

count_vect = CountVectorizer()#in scikit-learn

x_train_bow=count_vect.fit_transform(x_train)
print("some feature names ", count_vect.get_feature_names()[:10])
print('='*100)

# transform cv and test dataset
x_cv_bow=count_vect.transform(x_cv)
x_test_bow=count_vect.transform(x_test)
```

```
some feature names  ['aa', 'aaa', 'aaaa', 'aaaaa', 'aaaaaa', 'aaaaaaaa', 'aaaaaaaaaa', 'aaaaaaaaaa', 'aaa
aaaaaaaaaa', 'aaaaaaaaaaaaaaaa', 'aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa=====
```



In [15]:

```
x_train_bow.shape,x_test_bow.shape,x_cv_bow.shape
```

Out[15]:

```
((217951, 90000), (72651, 90000), (72651, 90000))
```

In [17]:

```
# saving train_bow and test_bow dataset using pickle for future use

'''file=open("x_train_bow.pkl","wb")
pickle.dump(x_train_bow,file)
file.close()

file=open("x_test_bow.pkl","wb")
pickle.dump(x_test_bow,file)
file.close()

file=open("x_cv_bow.pkl","wb")
pickle.dump(x_cv_bow,file)
```



```
file.close()
'''
```

In [15]:

```
#loading train_bow and test_bow
file=open('x_train_bow.pkl','rb')
x_train_bow=pickle.load(file)

file=open('x_test_bow.pkl','rb')
x_test_bow=pickle.load(file)

file=open('x_cv_bow.pkl','rb')
x_cv_bow=pickle.load(file)
```

[4.3] TF-IDF

In [68]:

```
# tf-idf "from sklearn.feature_extraction.text.TfidfVectorizer"
tf_idf=TfidfVectorizer()

train_tf_idf=tf_idf.fit_transform(x_train)
cv_tf_idf=tf_idf.transform(x_cv)
test_tf_idf=tf_idf.transform(x_test)
```

In [71]:

```
from sklearn.preprocessing import StandardScaler

sc=StandardScaler(with_mean=False)

train_tf_idf=sc.fit_transform(train_tf_idf)
cv_tf_idf=sc.transform(cv_tf_idf)
test_tf_idf=sc.transform(test_tf_idf)
```

In [21]:

```
# saving train_tf_idf and test_tf_idf dataset using pickle for fututre use

'''file=open("train_tf_idf.pkl","wb")
pickle.dump(train_tf_idf,file)
file.close()

file=open("cv_tf_idf.pkl","wb")
pickle.dump(cv_tf_idf,file)
file.close()

file=open("test_tf_idf.pkl","wb")
pickle.dump(test_tf_idf,file)
file.close()

'''
```

In [4]:

```
#loading train_tf_idf and test_tf_idf
file=open('train_tf_idf.pkl','rb')
train_tf_idf=pickle.load(file)

file=open('cv_tf_idf.pkl','rb')
cv_tf_idf=pickle.load(file)

file=open('test_tf_idf.pkl','rb')
test_tf_idf=pickle.load(file)
```

[4.4] Word2Vec

[4.4.1] Converting text into vectors using Avg W2V, TFIDF-W2V

[4.4.1.1] Avg W2v

In []:

```
# converting our text-->vector using w2v with 50-dim
# more the dimension of each word = better the semantic of word
# using lib from "gensim.models.Word2Vec"
# to run w2v we need list of list of the words as w2v covert each world into number of dim

# for train_w2v
list_of_sent_train=[]
for sent in x_train:
    list_of_sent_train.append((str(sent)).split())
w2v_model=Word2Vec(list_of_sent_train,min_count=5,size=50)

# vocabulary of w2v model of amazon dataset
vocab=w2v_model.wv.vocab
len(vocab)

#-----

# for test_w2v
list_of_sent_cv=[]
for sent in x_cv:
    list_of_sent_cv.append((str(sent)).split())

#-----

# for test_w2v
list_of_sent_test=[]
for sent in x_test:
    list_of_sent_test.append((str(sent)).split())
```

C:\Users\Adarsh\Anaconda3\lib\site-packages\gensim\models\base_any2vec.py:743: UserWarning: C extension not loaded, training will be slow. Install a C compiler and reinstall gensim for fast training.

"C extension not loaded, training will be slow. "

In [7]:

```
'''
    -->procedure to make avg w2v of each reviews
    1. find the w2v of each word
    2. sum-up w2v of each word in a sentence
    3. divide the total w2v of sentence by total no. of words in the sentence
'''

# average Word2Vec
# compute average word2vec for each review.
train_w2v = []; # the avg-w2v for each sentence/review in train dataset is stored in this list

for sent in list_of_sent_train: # for each review/sentence
    sent_vec = np.zeros(50) # as word vectors are of zero length
    cnt_words =0; # num of words with a valid vector in the sentence/review
    for word in sent: # for each word in a review/sentence
        if word in vocab:
            vec = w2v_model.wv[word]
            sent_vec += vec
            cnt_words += 1
    if cnt_words != 0:
        sent_vec /= cnt_words
    train_w2v.append(sent_vec)

print(len(train_w2v))

#-----

cv_w2v = []; # the avg-w2v for each sentence/review in test dataset is stored in this list

for sent in list_of_sent_cv: # for each review/sentence
```

```

sent_vec = np.zeros(50) # as word vectors are of zero length
cnt_words = 0; # num of words with a valid vector in the sentence/review
for word in sent: # for each word in a review/sentence
    if word in vocab:
        vec = w2v_model.wv[word]
        sent_vec += vec
        cnt_words += 1
if cnt_words != 0:
    sent_vec /= cnt_words
cv_w2v.append(sent_vec)

print(len(cv_w2v))

#-----

test_w2v = []; # the avg-w2v for each sentence/review in test dataset is stored in this list

for sent in list_of_sent_test: # for each review/sentence
    sent_vec = np.zeros(50) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sent: # for each word in a review/sentence
        if word in vocab:
            vec = w2v_model.wv[word]
            sent_vec += vec
            cnt_words += 1
    if cnt_words != 0:
        sent_vec /= cnt_words
    test_w2v.append(sent_vec)

print(len(test_w2v))

```

217951
72651
72651

In [9]:

```

from sklearn.preprocessing import StandardScaler
sc=StandardScaler(with_mean=True)

train_w2v=sc.fit_transform(train_w2v)
cv_w2v=sc.transform(cv_w2v)
test_w2v=sc.transform(test_w2v)

```

In [10]:

```

# saving train_w2v and test_w2v dataset using pickle for fututre use

'''file=open("train_w2v.pkl","wb")
pickle.dump(train_w2v,file)
file.close()

file=open("cv_w2v.pkl","wb")
pickle.dump(cv_w2v,file)
file.close()

file=open("test_w2v.pkl","wb")
pickle.dump(test_w2v,file)
file.close()
'''

```

In [5]:

```

#loading train_w2v and test_w2v
file=open('train_w2v.pkl','rb')
train_w2v=pickle.load(file)

file=open('cv_w2v.pkl','rb')
cv_w2v=pickle.load(file)

file=open('test_w2v.pkl','rb')
test_w2v=pickle.load(file)

```

In [21]:

```
train_w2v[0]
```

Out[21]:

```
array([-0.0080363 , -0.55650226, -2.24174777,  1.02574886,  0.12327979,
       -0.19916425, -1.06522974,  0.89144715, -1.13231167,  2.54008377,
         0.8032532 ,  0.3404576 ,  1.6792167 , -0.98081078,  1.08851643,
       -0.72007858, -0.65714762, -0.56007184,  0.01985994,  2.12137305,
       -0.09203752, -0.23671867, -1.63326771,  1.04496922,  0.45004579,
         0.3219116 ,  0.78335079,  0.54301334, -2.4968575 ,  0.35478244,
        1.46397278, -0.01982212, -0.1817636 ,  1.35729521, -0.61338792,
       -1.68822842, -0.84256537, -0.59978494,  0.40587478, -0.49775708,
         0.31289323,  0.34938107, -0.18756661, -2.25982333,  0.01440547,
       -0.97699964, -0.10107761,  0.28043456,  1.88480264, -0.81507891])
```

In [12]:

```
w2v_words = list(w2v_model.wv.vocab)
print("number of words that occurred minimum 5 times ", len(w2v_words))
print("sample words ", w2v_words[0:50])
```

number of words that occurred minimum 5 times 26749

sample words ['really', 'nice', 'seasoning', 'bought', 'product', 'sam', 'club', 'happy', 'able', 'purchase', 'cannot', 'get', 'anymore', 'use', 'meats', 'spaghetti', 'coffee', 'not', 'bad', 'defiantly', 'anything', 'special', 'price', 'could', 'ethical', 'fair', 'trade', 'organic', 'shade', 'grown', 'etc', 'taste', 'ok', 'stick', 'dean', 'beans', 'smooth', 'flavorful', 'medium', 'roast', 'pleasantly', 'surprised', 'k', 'cup', 'would', 'deal', 'drew', 'glad', 'dogs', 'love']

[4.4.1.2] TFIDF weighted W2v

In []:

```
# S = ["abc def pqr", "def def def abc", "pqr pqr def"]
model = TfidfVectorizer()
tf_idf_matrix = model.fit_transform(x_train)
# we are converting a dictionary with word as a key, and the idf as a value
dictionary = dict(zip(model.get_feature_names(), list(model.idf_)))
```

In []:

```
# TF-IDF weighted Word2Vec Train
tfidf_feat = model.get_feature_names() # tfidf words/col-names
# final_tf_idf is the sparse matrix with row= sentence, col=word and cell_val = tfidf

train_tf_idf_w2v = []; # the tfidf-w2v for each sentence/review is stored in this list
row=0;

#list_of_sentence_train=list_of_sent_train[:30000] # reducing the size of train list due to computational constrain

for sent in tqdm(list_of_sent_train): # for each review/sentence
    sent_vec = np.zeros(50) # as word vectors are of zero length
    weight_sum = 0; # num of words with a valid vector in the sentence/review
    for word in sent: # for each word in a review/sentence
        if word in w2v_words and word in tfidf_feat:
            vec = w2v_model.wv[word]
            # tf_idf = tf_idf_matrix[row, tfidf_feat.index(word)]
            # to reduce the computation we are
            # dictionary[word] = idf value of word in whole corpus
            # sent.count(word) = tf value of word in this review
            tf_idf = dictionary[word]*(sent.count(word)/len(sent))
            sent_vec += (vec * tf_idf)
            weight_sum += tf_idf
    if weight_sum != 0:
        sent_vec /= weight_sum
    train_tf_idf_w2v.append(sent_vec)
    row += 1
```

```
len(train_tf_idf_w2v)
```

In [15]:

```
# TF-IDF weighted Word2Vec cv
tfidf_feat = model.get_feature_names() # tfidf words/col-names
# final_tf_idf is the sparse matrix with row= sentence, col=word and cell_val = tfidf

cv_tf_idf_w2v = []; # the tfidf-w2v for each sentence/review is stored in this list
row=0;

#list_of_sentence_train=list_of_sent_train[:30000] # reducing the size of train list due to computational constrain

for sent in tqdm(list_of_sent_cv[:20000]): # for each review/sentence
    sent_vec = np.zeros(50) # as word vectors are of zero length
    weight_sum =0; # num of words with a valid vector in the sentence/review
    for word in sent: # for each word in a review/sentence
        if word in w2v_words and word in tfidf_feat:
            vec = w2v_model.wv[word]
            #
            tf_idf = tf_idf_matrix[row, tfidf_feat.index(word)]
            # to reduce the computation we are
            # dictionary[word] = idf value of word in whole corpus
            # sent.count(word) = tf value of word in this review
            tf_idf = dictionary[word]*(sent.count(word)/len(sent))
            sent_vec += (vec * tf_idf)
            weight_sum += tf_idf
    if weight_sum != 0:
        sent_vec /= weight_sum
    cv_tf_idf_w2v.append(sent_vec)
    row += 1

len(cv_tf_idf_w2v)
```

100%|██████████| 20000/20000 [17:19<00:00, 19.23it/s]

Out[15]:

20000

In [16]:

```
# TF-IDF weighted Word2Vec Test
tfidf_feat = model.get_feature_names() # tfidf words/col-names
# final_tf_idf is the sparse matrix with row= sentence, col=word and cell_val = tfidf

test_tf_idf_w2v = []; # the tfidf-w2v for each sentence/review is stored in this list
row=0;

#list_of_sentence_train=list_of_sent_train[:30000] # reducing the size of train list due to computational constrain

for sent in tqdm(list_of_sent_test[:20000]): # for each review/sentence
    sent_vec = np.zeros(50) # as word vectors are of zero length
    weight_sum =0; # num of words with a valid vector in the sentence/review
    for word in sent: # for each word in a review/sentence
        if word in w2v_words and word in tfidf_feat:
            vec = w2v_model.wv[word]
            #
            tf_idf = tf_idf_matrix[row, tfidf_feat.index(word)]
            # to reduce the computation we are
            # dictionary[word] = idf value of word in whole corpus
            # sent.count(word) = tf value of word in this review
            tf_idf = dictionary[word]*(sent.count(word)/len(sent))
            sent_vec += (vec * tf_idf)
            weight_sum += tf_idf
    if weight_sum != 0:
        sent_vec /= weight_sum
    test_tf_idf_w2v.append(sent_vec)
    row += 1

len(test_tf_idf_w2v)
```

100%|██████████| 20000/20000 [17:31<00:00, 19.03it/s]

```
Out[16]:
```

```
20000
```

```
In [15]:
```

```
from sklearn.preprocessing import StandardScaler
sc=StandardScaler(with_mean=True)

train_tf_idf_w2v=sc.fit_transform(train_tf_idf_w2v)
cv_tf_idf_w2v=sc.transform(cv_tf_idf_w2v)
test_tf_idf_w2v=sc.transform(test_tf_idf_w2v)
```

```
In [16]:
```

```
# saving train_tf_idf_w2v and test_tf_idf_w2v dataset using pickle for fututre use

'''file=open("train_tf_idf_w2v.pkl","wb")
pickle.dump(train_tf_idf_w2v,file)
file.close()

file=open("cv_tf_idf_w2v.pkl","wb")
pickle.dump(cv_tf_idf_w2v,file)
file.close()

file=open("test_tf_idf_w2v.pkl","wb")
pickle.dump(test_tf_idf_w2v,file)
file.close()

'''
```

```
In [6]:
```

```
#loading train_tf_idf_w2v and test_tf_idf_w2v
file=open('train_tf_idf_w2v.pkl','rb')
train_tf_idf_w2v=pickle.load(file)

file=open('cv_tf_idf_w2v.pkl','rb')
cv_tf_idf_w2v=pickle.load(file)

file=open('test_tf_idf_w2v.pkl','rb')
test_tf_idf_w2v=pickle.load(file)
```

[5] Assignment 7: SVM

1. Apply SVM on these feature sets

- **SET 1:** Review text, preprocessed one converted into vectors using (BOW)
- **SET 2:** Review text, preprocessed one converted into vectors using (TFIDF)
- **SET 3:** Review text, preprocessed one converted into vectors using (AVG W2v)
- **SET 4:** Review text, preprocessed one converted into vectors using (TFIDF W2v)

2. Procedure

- You need to work with 2 versions of SVM
 - Linear kernel
 - RBF kernel
- When you are working with linear kernel, use 'SGDClassifier' with hinge loss because it is computationally less expensive.
- When you are working with 'SGDClassifier' with hinge loss and trying to find the AUC score, you would have to use [CalibratedClassifierCV](#)
- Similarly, like kdtree or knn, when you are working with RBF kernel it's better to reduce the number of dimensions. You can put min_df = 10, max_features = 500 and consider a sample size of 40k points.

3. Hyper paramter tuning (find best alpha in range [10⁻⁴ to 10⁴], and the best penalty among 'l1', 'l2')

- Find the best hyper parameter which will give the maximum [AUC](#) value
- Find the best hyper paramter using k-fold cross validation or simple cross validation data

- Use gridsearch cv or randomsearch cv or you can also write your own for loops to do this task of hyperparameter tuning

4. Feature importance

- When you are working on the linear kernel with BOW or TFIDF please print the top 10 best features for each of the positive and negative classes.

5. Feature engineering

- To increase the performance of your model, you can also experiment with with feature engineering like :
 - Taking length of reviews as another feature.
 - Considering some features from review summary as well.

6. Representation of results

- You need to plot the performance of model both on train data and cross validation data for each hyper parameter, like shown in the figure.
- Once after you found the best hyper parameter, you need to train your model with it, and find the AUC on test data and plot the ROC curve on both train and test.
- Along with plotting ROC curve, you need to print the [confusion matrix](#) with predicted and original labels of test data points. Please visualize your confusion matrices using [seaborn heatmaps](#).

7. Conclusion

- [You need to summarize the results at the end of the notebook, summarize it in the table format. To print out a table please refer to this prettytable library link](#)

Applying SVM

[5.1] Linear SVM

[5.1.1] Applying Linear SVM on BOW, SET 1

L1 penalty

In [6]:

```
from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-7,10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]

for i in tqdm(alpha):

    # traing model with linear SVM
    lin_svm=SGDClassifier(loss='hinge',penalty='l1',alpha=i,class_weight='balanced')
    lin_svm.fit(x_train_bow,y_train)

    #calibrating model to get proba because svm doesn't explicitly give probability score
    calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
    calib.fit(x_train_bow,y_train)
    #print("succesfully trained")

    # ROC AUC score of 'x_train_bow' and 'x_cv_bow'
    y_train_predict_proba=calib.predict_proba(x_train_bow)[:,-1]
    y_cv_predict_proba=calib.predict_proba(x_cv_bow)[:,-1]
```



```


sns.heatmap(confusion_matrix(y_test,y_pred),annot=True,fmt='d',linewidths=1)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test,y_pred))

# ROC Curve (reference:stack overflow with little modification)
train_fpr, train_tpr, train_threshold =roc_curve(y_train, y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test, y_test_pred_proba)

#ploting ROC curve
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()

```

succesfully trained using optimum_alpha: 0.0001

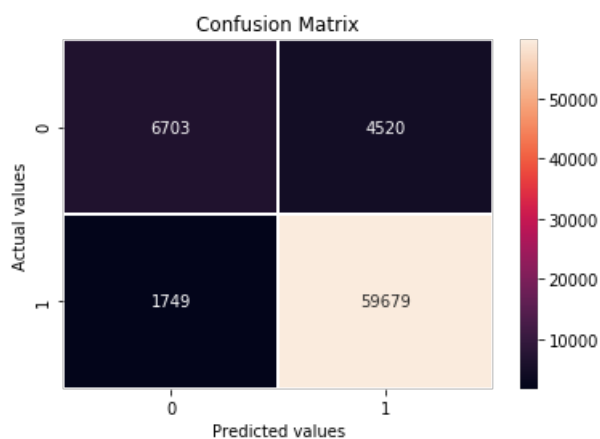


```

classification report:
              precision    recall  f1-score   support

    0       0.79         0.60         0.68       11223
    1       0.93         0.97         0.95       61428

 avg / total         0.91         0.91         0.91       72651

```

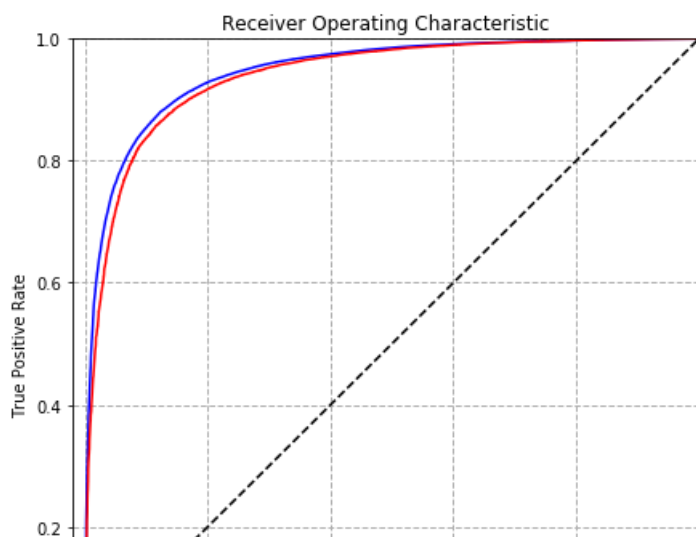



L2 penalty

In [56]:

```

from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-7,10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]

for i in tqdm(alpha):

    # traing model with linear SVM
    lin_svm=SGDClassifier(loss='hinge',penalty='l2',alpha=i,class_weight='balanced')
    lin_svm.fit(x_train_bow,y_train)

    #calibrating model to get proba because svm doesn't explicitly give probability score
    calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
    calib.fit(x_train_bow,y_train)

    # ROC AUC score of 'x_train_bow' and 'x_cv_bow'
    y_train_predict_proba=calib.predict_proba(x_train_bow)[: ,1]
    y_cv_predict_proba=calib.predict_proba(x_cv_bow)[: ,1]



    train_auc_score.append(roc_auc_score(y_train, y_train_predict_proba))
    cv_auc_score.append(roc_auc_score(y_cv,y_cv_predict_proba))


# plotting results
plt.figure(figsize=(7,5))

plt.plot(np.arange(1, (len(alpha)+1),1),train_auc_score,label='Train AUC')
plt.plot(np.arange(1, (len(alpha)+1),1),cv_auc_score,label='CV AUC ')

plt.xlabel(np.arange(1, (len(alpha)+1)))
plt.xticks(np.arange(1, (len(alpha)+1)), (alpha))
plt.legend()
plt.xlabel("alpha: hyperparameter")
plt.ylabel("AUC")
plt.title("hyperparameter V/S AUC: 'L2' penalty\n")
plt.grid()
plt.show()

```

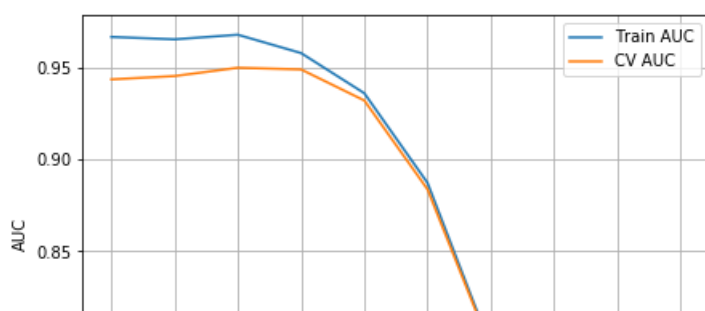[illegible]

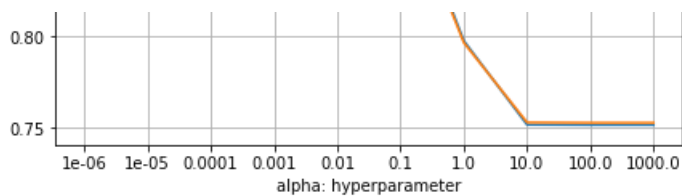

In [12]:

```
#Testing
from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score

optimum_alpha=0.001

# traing model with linear SVM using 'optimum_alpha'
lin_svm=SGDClassifier(loss='hinge', penalty='l2', alpha=optimum_alpha,class_weight='balanced')
lin_svm.fit(x_train_bow,y_train)

#calibrating model to get proba because svm doesn't explicitly give probability score
calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
calib.fit(x_train_bow,y_train)
print("succesfully trained using optimum_alpha:",optimum_alpha)

#probabilty score for ROC_AUC score
y_train_pred_proba=calib.predict_proba(x_train_bow)[:,-1]
y_test_pred_proba=calib.predict_proba(x_test_bow)[:,-1]


train_roc_score=roc_auc_score(y_train,y_train_pred_proba)
test_roc_score=roc_auc_score(y_test,y_test_pred_proba)


#ploting confusion matrix
y_pred=calib.predict(x_test_bow)
sn.heatmap(confusion_matrix(y_test,y_pred),annot=True, fmt="d",linewidths=.5)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test,y_pred))

# ROC Curve (reference:stack overflow with little modification)
train_fpr, train_tpr, train_threshold =roc_curve(y_train, y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test, y_test_pred_proba)

#ploting ROC curve
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()
```

succesfully trained using optimum_alpha: 0.001

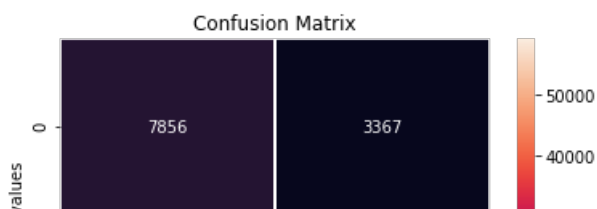

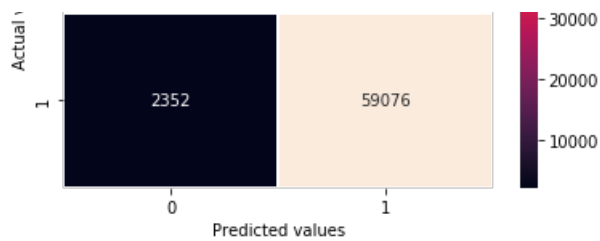


```

classification report:
              precision    recall  f1-score   support

     0       0.77       0.70       0.73       11223
     1       0.95       0.96       0.95       61428

 avg / total       0.92       0.92       0.92       72651
  
```

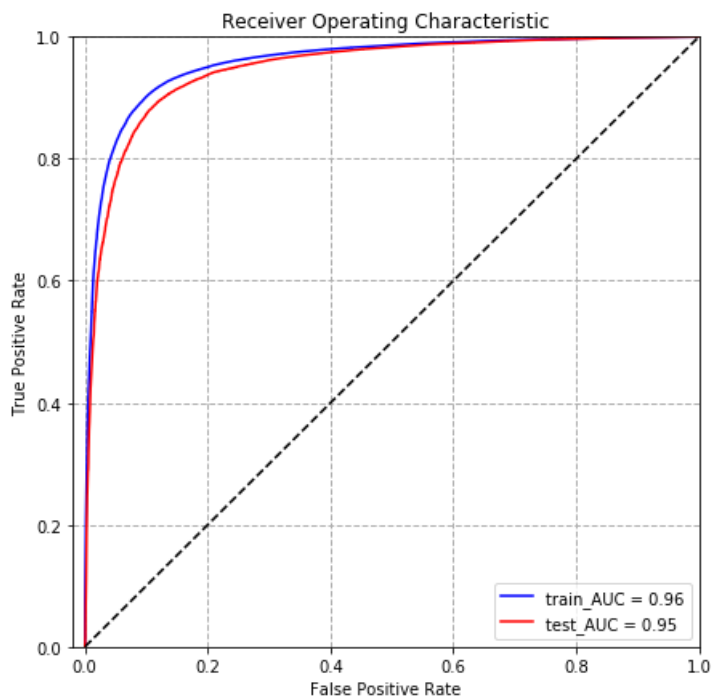

[5.1.2] Applying Linear SVM on TFIDF, SET 2

L1 Peanly

In [11]:

```

from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-7,10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]

for i in tqdm(alpha):

    # traing model with linear SVM
    lin_svm=SGDClassifier(loss='hinge',penalty='l1',alpha=i,class_weight='balanced')
    lin_svm.fit(train_tf_idf,y_train)

    #calibrating model to get proba because svm doesn't explicitly give probability score
  
```



```

y_test_pred_proba=calib.predict_proba(test_tf_idf)[:,-1]

train_roc_score=roc_auc_score(y_train,y_train_pred_proba)
test_roc_score=roc_auc_score(y_test,y_test_pred_proba)


#ploting confusion matrix
y_pred=calib.predict(test_tf_idf)
sn.heatmap(confusion_matrix(y_test,y_pred),annot=True, fmt="d",linewidths=.5)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test,y_pred))

# ROC Curve (reference:stack overflow with little modification)
train_fpr, train_tpr, train_threshold =roc_curve(y_train, y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test, y_test_pred_proba)

#ploting ROC curve
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()

```

succesfully trained using optimum_alpha: 0.001

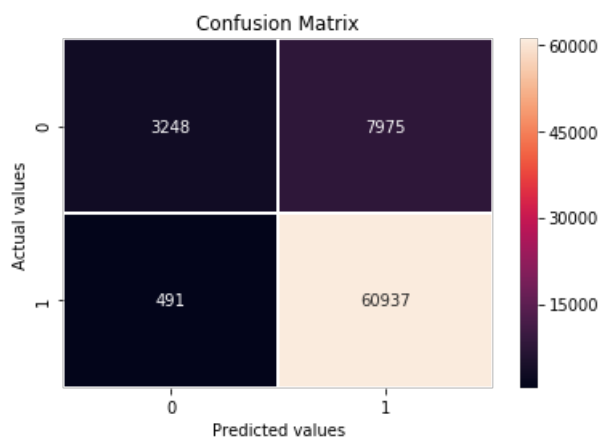


```


classification report:
              precision    recall  f1-score   support

     0       0.87         0.29         0.43       11223
     1       0.88         0.99         0.94       61428

 avg / total       0.88         0.88         0.86       72651

```

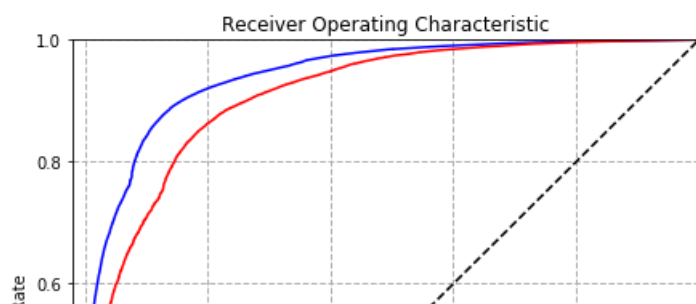

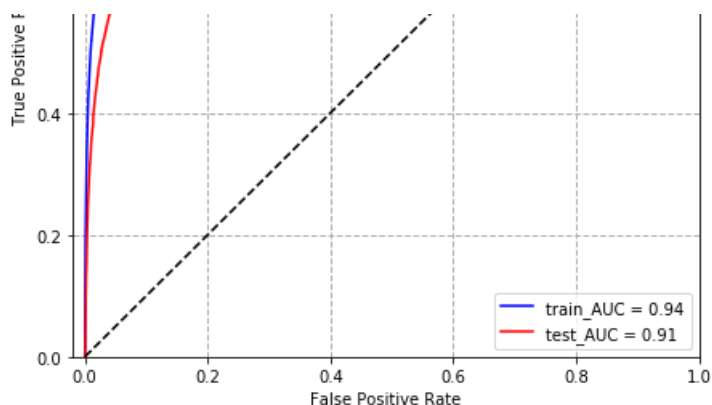

L2 penalty

In [8]:

```
from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-7,10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]

for i in tqdm(alpha):

    # training model with linear SVM
    lin_svm=SGDClassifier(loss='hinge',penalty='l2',alpha=i,class_weight='balanced')
    lin_svm.fit(train_tf_idf,y_train)

    #calibrating model to get proba because svm doesn't explicitly give probability score
    calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
    calib.fit(train_tf_idf,y_train)
    #print("succesfully trained")

    # ROC AUC score of 'x_train_bow' and 'x_cv_bow'
    y_train_predict_proba=calib.predict_proba(train_tf_idf)[:,-1]
    y_cv_predict_proba=calib.predict_proba(cv_tf_idf)[:,-1]

    train_auc_score.append(roc_auc_score(y_train, y_train_predict_proba))
    cv_auc_score.append(roc_auc_score(y_cv,y_cv_predict_proba))

#plotting result
plt.figure(figsize=(7,5))


plt.plot(np.arange(1,(len(alpha)+1),1),train_auc_score,label='Train AUC')
plt.plot(np.arange(1,(len(alpha)+1),1),cv_auc_score,label='CV AUC ')

plt.xlabel(np.arange(1,(len(alpha)+1)))
plt.xticks(np.arange(1,(len(alpha)+1)),(alpha))
plt.legend()
plt.xlabel("hyperparameter: alpha ")
plt.ylabel("AUC")
plt.title("hyperparameter V/S AUC : 'L2' penalty\n")
plt.grid()
plt.show()
```

100% | 10/10
[00:36<00:00, 3.79s/it]

hyperparameter V/S AUC : 'L2' penalty



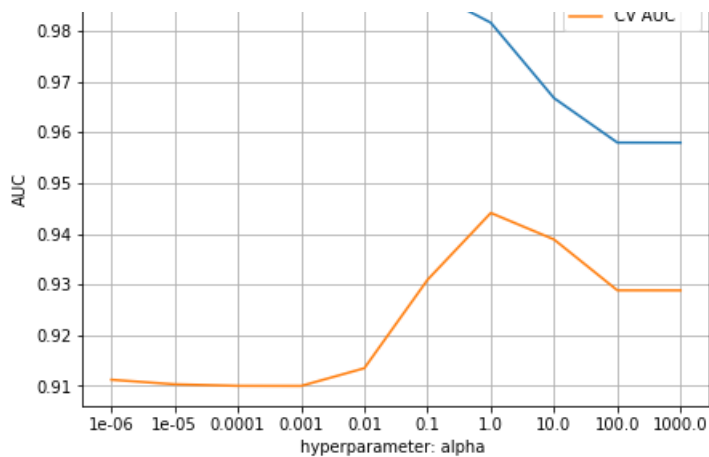

In [14]:

```
#Testing
from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score

optimum_alpha=1.0

# training model with linear SVM using 'optimum_alpha'
lin_svm=SGDClassifier(loss='hinge', penalty='l2', alpha=optimum_alpha,class_weight='balanced')
lin_svm.fit(train_tf_idf,y_train)

#calibrating model to get proba because svm doesn't explicitly give probability score
calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
calib.fit(train_tf_idf,y_train)
print("succesfully trained using optimum_alpha:",optimum_alpha)

#probabilty score for ROC_AUC score
y_train_pred_proba=calib.predict_proba(train_tf_idf)[:,-1]
y_test_pred_proba=calib.predict_proba(test_tf_idf)[:,-1]

train_roc_score=roc_auc_score(y_train,y_train_pred_proba)
test_roc_score=roc_auc_score(y_test,y_test_pred_proba)


#ploting confusion matrix
y_pred=calib.predict(test_tf_idf)
sn.heatmap(confusion_matrix(y_test,y_pred),annot=True, fmt="d",linewidths=.5)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test,y_pred))

# ROC Curve (reference:stack overflow with little modification)
train_fpr, train_tpr, train_threshold =roc_curve(y_train, y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test, y_test_pred_proba)

#ploting ROC curve
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()
```

succesfully trained using optimum alpha: 1.0


Successfully trained using Optimum_alpha: 1e-04

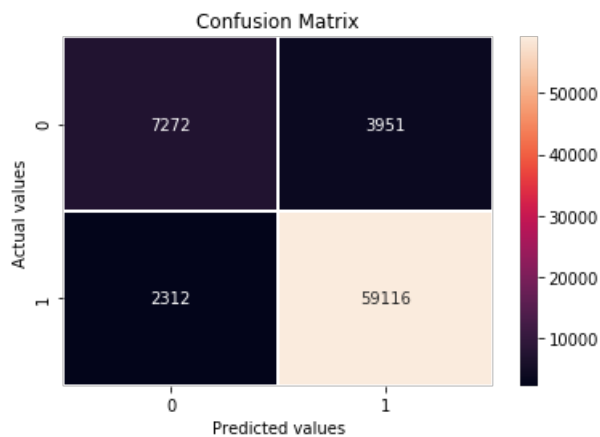

```
classification report:
              precision    recall  f1-score   support

    0       0.76         0.65         0.70       11223
    1       0.94         0.96         0.95       61428

 avg / total       0.91         0.91         0.91       72651
```

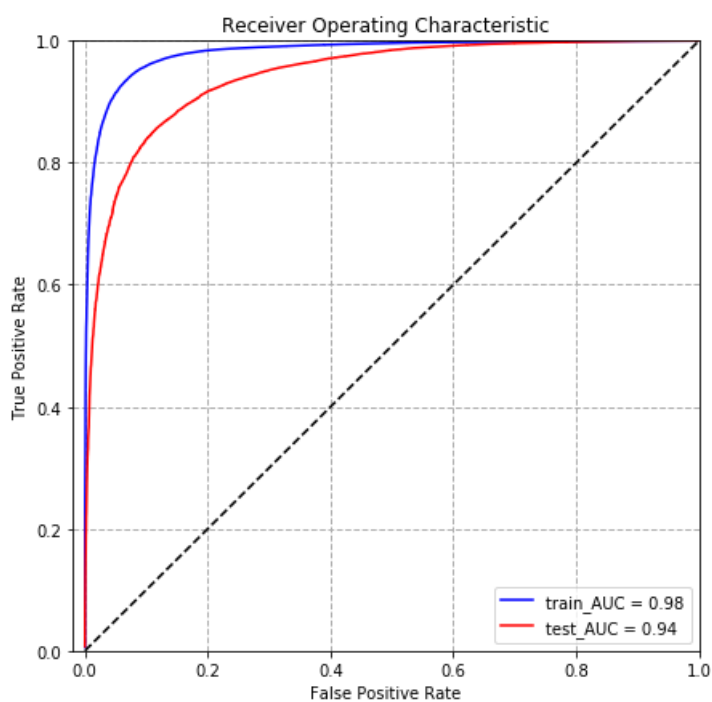

[5.1.3] Applying Linear SVM on AVG W2V, SET 3

'L1' penalty

In [17]:

```
from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]
```

```
for i in tqdm(alpha):

    # traing model with linear SVM
    lin_svm=SGDClassifier(loss='hinge',penalty='l1',alpha=i,class_weight='balanced')
    lin_svm.fit(train_w2v,y_train)

    #calibrating model to get proba because svm doesn't explicitly give probability score
    calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
    calib.fit(train_w2v,y_train)
    #print("succesfully trained")


    # ROC AUC score of 'x_train_bow' and 'x_cv_bow'
    y_train_predict_proba=calib.predict_proba(train_w2v)[:,-1]
    y_cv_predict_proba=calib.predict_proba(cv_w2v)[:,-1]

    train_auc_score.append(roc_auc_score(y_train, y_train_predict_proba))
    cv_auc_score.append(roc_auc_score(y_cv,y_cv_predict_proba))

#ploting result
plt.figure(figsize=(7,5))

plt.plot(np.arange(1,(len(alpha)+1),1),train_auc_score,label='Train AUC')
plt.plot(np.arange(1,(len(alpha)+1),1),cv_auc_score,label='CV AUC')

plt.xlabel(np.arange(1,(len(alpha)+1)))
plt.xticks(np.arange(1,(len(alpha)+1)),(alpha))
plt.legend()
plt.xlabel("hyperparameter: alpha ")
plt.ylabel("AUC")
plt.title("hyperparameter V/S AUC: 'L1' penalty\n")
plt.grid()
plt.show()
```

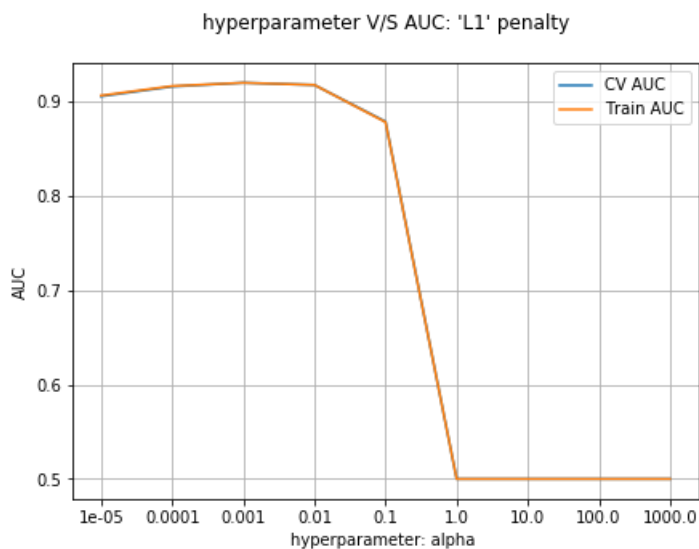

```
#Testing
from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score

optimum_alpha=0.01

# training model with linear SVM using 'optimum_alpha'
lin_svm=SGDClassifier(loss='hinge', penalty='l1', alpha=optimum_alpha,class_weight='balanced')
lin_svm.fit(training_data, training_labels)
```

```

lin_svm.fit(train_w2v,y_train)

#calibrating model to get proba because svm doesn't explicitly give probability score
calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
calib.fit(train_w2v,y_train)
print("succesfully trained using optimum_alpha:",optimum_alpha)

#probabilty score for ROC_AUC score
y_train_pred_proba=calib.predict_proba(train_w2v)[: ,1]
y_test_pred_proba=calib.predict_proba(test_w2v)[: ,1]

train_roc_score=roc_auc_score(y_train,y_train_pred_proba)
test_roc_score=roc_auc_score(y_test,y_test_pred_proba)


#ploting confusion matrix
y_pred=calib.predict(test_w2v)
sn.heatmap(confusion_matrix(y_test,y_pred),annot=True, fmt="d",linewidths=.5)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test,y_pred))

# ROC Curve (reference:stack overflow with little modification)
train_fpr, train_tpr, train_threshold =roc_curve(y_train, y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test, y_test_pred_proba)

#ploting ROC curve
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()

```

succesfully trained using optimum_alpha: 0.01

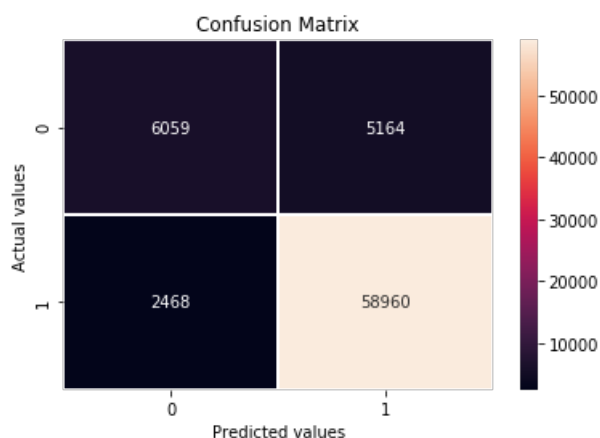


```


classification report:
              precision    recall  f1-score   support

     0       0.71         0.54         0.61       11223
     1       0.92         0.96         0.94       61428

 avg / total       0.89         0.89         0.89       72651

```



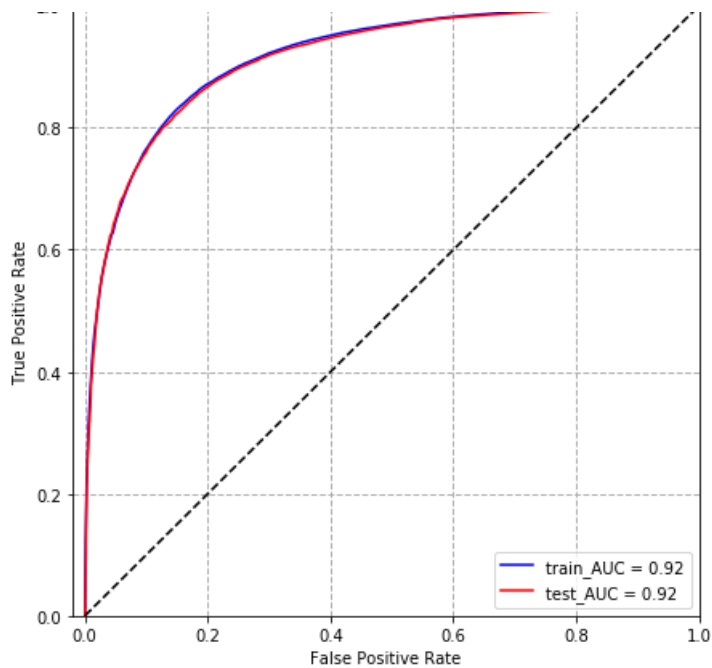

'l2' Penalty

In [27]:

```
from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]

for i in tqdm(alpha):

    # training model with linear SVM
    lin_svm=SGDClassifier(loss='hinge',penalty='l2',alpha=i,class_weight='balanced')
    lin_svm.fit(train_w2v,y_train)

    #calibrating model to get proba because svm doesn't explicitly give probability score
    calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
    calib.fit(train_w2v,y_train)
    #print("succesfully trained")


    # ROC AUC score of 'x_train_bow' and 'x_cv_bow'
    y_train_predict_proba=calib.predict_proba(train_w2v)[:,-1]
    y_cv_predict_proba=calib.predict_proba(cv_w2v)[:,-1]

    train_auc_score.append(roc_auc_score(y_train, y_train_predict_proba))
    cv_auc_score.append(roc_auc_score(y_cv, y_cv_predict_proba))

#ploting result
plt.figure(figsize=(7,5))

plt.plot(np.arange(1, (len(alpha)+1),1),train_auc_score,label='Train AUC')
plt.plot(np.arange(1, (len(alpha)+1),1),cv_auc_score,label='CV AUC')

plt.xlabel(np.arange(1, (len(alpha)+1)))
plt.xticks(np.arange(1, (len(alpha)+1)), (alpha))
plt.legend()
plt.xlabel("hyperparameter: alpha ")
plt.ylabel("AUC")
plt.title("hyperparameter V/S AUC: 'L2' penalty\n")
plt.grid()
plt.show()
```

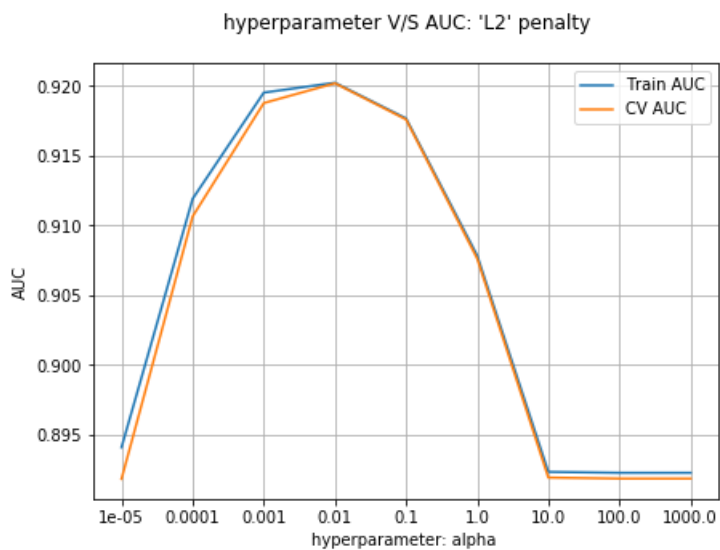[illegible]

In [16]:

```
#Testing
from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score

optimum_alpha=0.01

# training model with linear SVM using 'optimum_alpha'
lin_svm=SGDClassifier(loss='hinge', penalty='l2', alpha=optimum_alpha,class_weight='balanced')
lin_svm.fit(train_w2v,y_train)

#calibrating model to get proba because svm doesn't explicitly give probability score
calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
calib.fit(train_w2v,y_train)
print("succesfully trained using optimum_alpha:",optimum_alpha)

#probabilty score for ROC_AUC score
y_train_pred_proba=calib.predict_proba(train_w2v)[:,-1]
y_test_pred_proba=calib.predict_proba(test_w2v)[:,-1]

train_roc_score=roc_auc_score(y_train,y_train_pred_proba)
test_roc_score=roc_auc_score(y_test,y_test_pred_proba)


#ploting confusion matrix
y_pred=calib.predict(test_w2v)
sn.heatmap(confusion_matrix(y_test,y_pred),annot=True, fmt="d",linewidths=.5)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test,y_pred))

# ROC Curve (reference:stack overflow with little modification)
train_fpr, train_tpr, train_threshold =roc_curve(y_train, y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test, y_test_pred_proba)

#ploting ROC curve
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
```

```
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()
```


successfully trained using optimum_alpha: 0.01

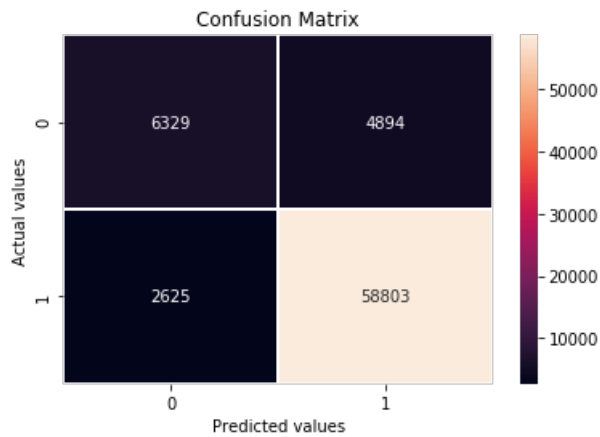

```
classification report:
              precision    recall  f1-score   support

     0               0.71       0.56       0.63       11223
     1               0.92       0.96       0.94       61428

 avg / total          0.89       0.90       0.89       72651
```

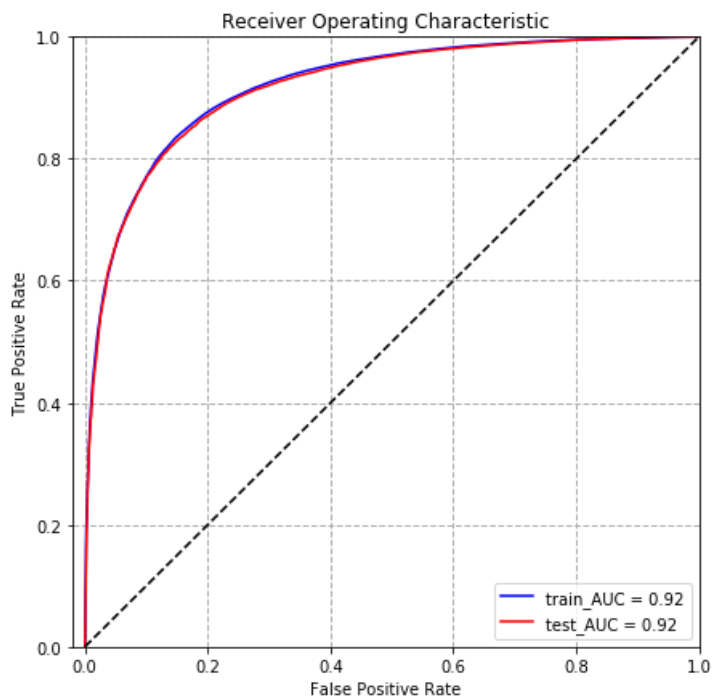

[5.1.4] Applying Linear SVM on TFIDF W2V, SET 4

'L1' penalty

In [8]:

```
from sklearn.linear_model import SGDClassifier
```

```

from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]

for i in tqdm(alpha):

    # training model with linear SVM
    lin_svm=SGDClassifier(loss='hinge',penalty='l1',alpha=i,class_weight='balanced')
    lin_svm.fit(train_tf_idf_w2v,y_train[:60000])

    #calibrating model to get proba because svm doesn't explicitly give probability score
    calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
    calib.fit(train_tf_idf_w2v,y_train[:60000])
    #print("succesfully trained")

    # ROC AUC score of 'x_train_bow' and 'x_cv_bow'
    y_train_predict_proba=calib.predict_proba(train_tf_idf_w2v)[:,:1]
    y_cv_predict_proba=calib.predict_proba(cv_tf_idf_w2v)[:,:1]

    train_auc_score.append(roc_auc_score(y_train[:60000], y_train_predict_proba))
    cv_auc_score.append(roc_auc_score(y_cv[:20000],y_cv_predict_proba))


#ploting result
plt.figure(figsize=(7,5))

plt.plot(np.arange(1,(len(alpha)+1),1),train_auc_score,label='Train AUC')
plt.plot(np.arange(1,(len(alpha)+1),1),cv_auc_score,label='CV AUC')

plt.xlabel(np.arange(1,(len(alpha)+1)))
plt.xticks(np.arange(1,(len(alpha)+1)),(alpha))
plt.legend()
plt.xlabel("hyperparameter: alpha ")
plt.ylabel("AUC")
plt.title("hyperparameter V/S AUC: 'L1' penalty\n")
plt.grid()
plt.show()

```

100% | 9/9 [00:07<00:00, 1.07it/s]

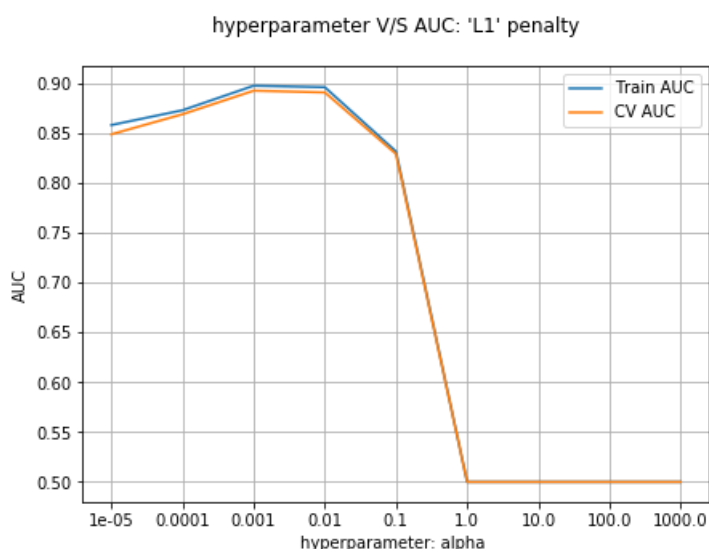

In [17]:

```

#Testing
from sklearn.linear_model import SGDClassifier

```

```

from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score

optimum_alpha=0.001

# training model with linear SVM using 'optimum_alpha'
lin_svm=SGDClassifier(loss='hinge', penalty='l1', alpha=optimum_alpha,class_weight='balanced')
lin_svm.fit(train_tf_idf_w2v,y_train[:60000])

#calibrating model to get proba because svm doesn't explicitly give probability score
calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
calib.fit(train_tf_idf_w2v,y_train[:60000])
print("succesfully trained using optimum_alpha:",optimum_alpha)

#probability score for ROC_AUC score
y_train_pred_proba=calib.predict_proba(train_tf_idf_w2v)[:,:1]
y_test_pred_proba=calib.predict_proba(test_tf_idf_w2v)[:,:1]

train_roc_score=roc_auc_score(y_train[:60000],y_train_pred_proba)
test_roc_score=roc_auc_score(y_test[:20000],y_test_pred_proba)


#ploting confusion matrix
y_pred=calib.predict(test_tf_idf_w2v)
sn.heatmap(confusion_matrix(y_test[:20000],y_pred),annot=True, fmt="d",linewidths=.5)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test[:20000],y_pred))

# ROC Curve (reference:stack overflow with little modification)
train_fpr, train_tpr, train_threshold =roc_curve(y_train[:60000], y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test[:20000], y_test_pred_proba)

#ploting ROC curve
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()


```

succesfully trained using optimum_alpha: 0.001

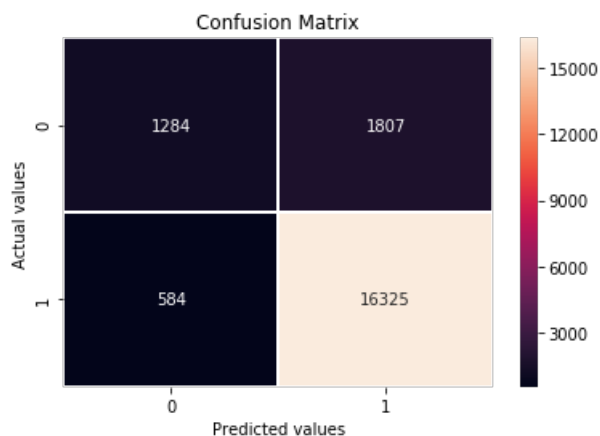

classification report:
precision recall f1-score support

	precision	recall	f1 score	support
0	0.69	0.42	0.52	3091
1	0.90	0.97	0.93	16909
avg / total	0.87	0.88	0.87	20000

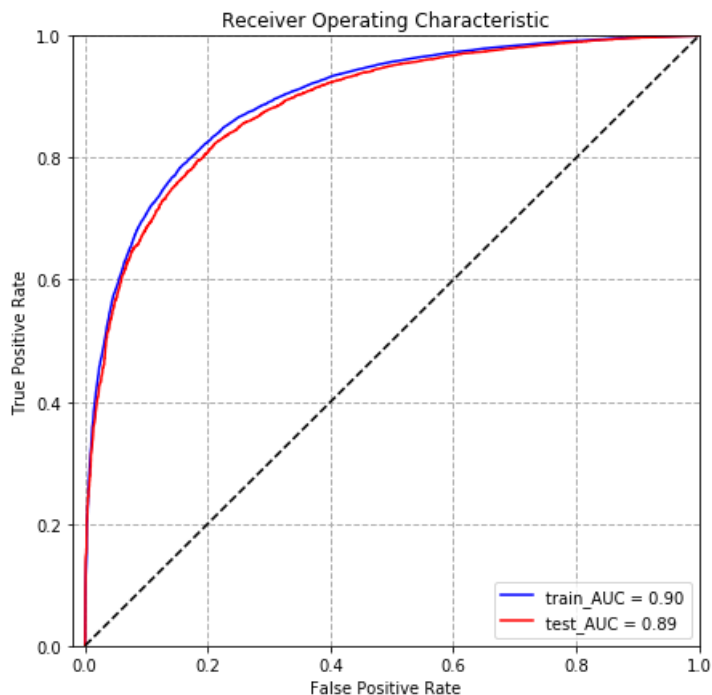

'L2' Penalty

In [10]:

```
from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]

for i in tqdm(alpha):

    # training model with linear SVM
    lin_svm=SGDClassifier(loss='hinge',penalty='l2',alpha=i,class_weight='balanced')
    lin_svm.fit(train_tf_idf_w2v,y_train[:60000])


    #calibrating model to get proba because svm doesn't explicitly give probability score
    calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
    calib.fit(train_tf_idf_w2v,y_train[:60000])
    #print("succesfully trained")

    # ROC AUC score of 'x_train_bow' and 'x_cv_bow'
    y_train_predict_proba=calib.predict_proba(train_tf_idf_w2v)[:,:1]
    y_cv_predict_proba=calib.predict_proba(cv_tf_idf_w2v)[:,:1]

    train_auc_score.append(roc_auc_score(y_train[:60000], y_train_predict_proba))
    cv_auc_score.append(roc_auc_score(y_cv[:20000],y_cv_predict_proba))

#ploting result
plt.figure(figsize=(7,5))

plt.plot(np.arange(1,(len(alpha)+1),1),train_auc_score,label='Train AUC')
```

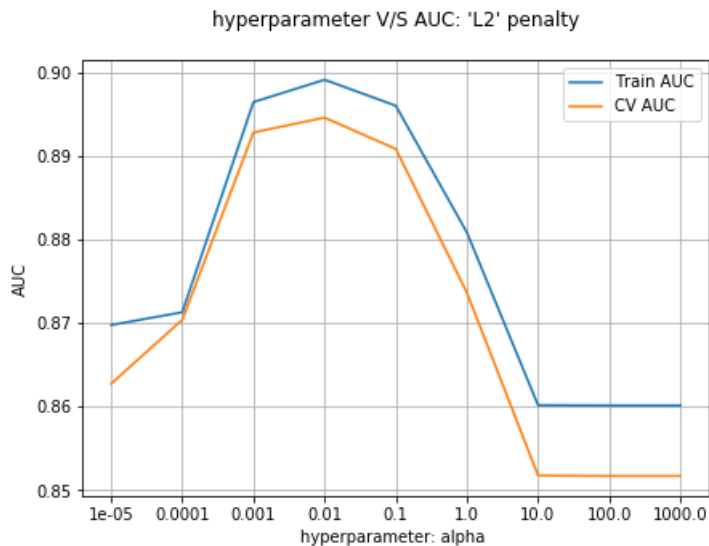[illegible]

In [18]:

```
#Testing
from sklearn.linear_model import SGDClassifier
from sklearn.model_selection import GridSearchCV
from sklearn.calibration import CalibratedClassifierCV
from sklearn.metrics import roc_auc_score

optimum_alpha=0.01

# training model with linear SVM using 'optimum_alpha'
lin_svm=SGDClassifier(loss='hinge', penalty='l2', alpha=optimum_alpha,class_weight='balanced')
lin_svm.fit(train_tf_idf_w2v,y_train[:60000])

#calibrating model to get proba because svm doesn't explicitly give probability score
calib=CalibratedClassifierCV(base_estimator=lin_svm, method='isotonic')
calib.fit(train_tf_idf_w2v,y_train[:60000])
print("succesfully trained using optimum_alpha:",optimum_alpha)

#probailty score for ROC_AUC score
y_train_pred_proba=calib.predict_proba(train_tf_idf_w2v)[:,:1]
y_test_pred_proba=calib.predict_proba(test_tf_idf_w2v)[:,:1]


train_roc_score=roc_auc_score(y_train[:60000],y_train_pred_proba)
test_roc_score=roc_auc_score(y_test[:20000],y_test_pred_proba)

#ploting confusion matrix
y_pred=calib.predict(test_tf_idf_w2v)
sn.heatmap(confusion_matrix(y_test[:20000],y_pred),annot=True, fmt="d",linewidths=.5)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test[:20000],y_pred))
```

```
# ROC Curve (reference:stack overflow with little modification)
train_fpr, train_tpr, train_threshold =roc_curve(y_train[:60000], y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test[:20000], y_test_pred_proba)

#ploting ROC curve
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()
```


succesfully trained using optimum_alpha: 0.01

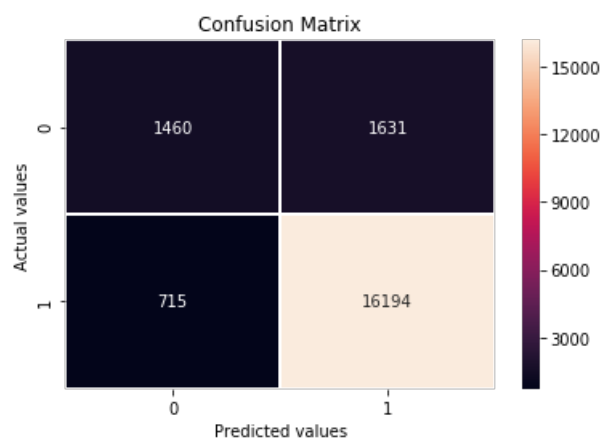

```
classification report:
              precision    recall  f1-score   support

     0       0.67         0.47         0.55         3091
     1       0.91         0.96         0.93        16909

 avg / total       0.87         0.88         0.87        20000
```

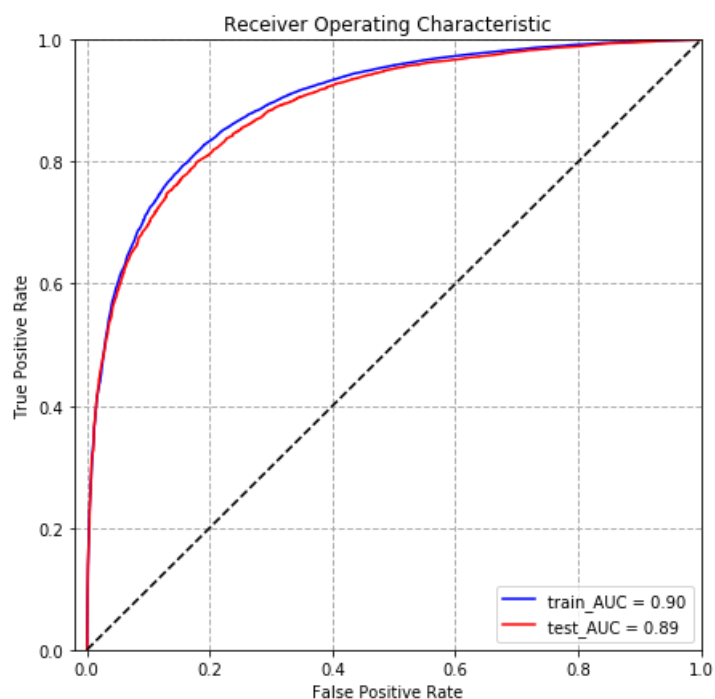

[5.2] RBF SVM

[5.2.1] Applying RBF SVM on BOW, SET 1

In [3]:


```
#BoW with 500 features for SVM RBF

count_vect = CountVectorizer(max_df=1.0, min_df=10, max_features=500)#in scikit-learn

train_bow_500_feat=count_vect.fit_transform(x_train)
print("some feature names ", count_vect.get_feature_names()[:10])
print('='*100)

# transform cv and test dataset
cv_bow_500_feat=count_vect.transform(x_cv)
test_bow_500_feat=count_vect.transform(x_test)

some feature names  ['able', 'absolutely', 'actually', 'add', 'added', 'adding', 'aftertaste', 'ag
o', 'almost', 'already']
=====
```



In [4]:

```
train_bow_500_feat.shape,cv_bow_500_feat.shape,test_bow_500_feat.shape
```

Out[4]:

```
((217951, 500), (72651, 500), (72651, 500))
```

Using only 40k points to train model as rbf SVM has high time complexity

In [4]:

```
from sklearn.svm import SVC
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]

for i in tqdm(alpha):

    # training model with rbf SVM
    svc_rbf=SVC(C=i, kernel='rbf',probability=True, class_weight='balanced')
    svc_rbf.fit(train_bow_500_feat[:40000],y_train[:40000])


    # ROC AUC score of 'x_train_bow' and 'x_cv_bow'
    y_train_predict_proba=svc_rbf.predict_proba(train_bow_500_feat[:40000])[:,1]
    y_cv_predict_proba=svc_rbf.predict_proba(cv_bow_500_feat[:20000])[:,1]

    train_auc_score.append(roc_auc_score(y_train[:40000], y_train_predict_proba))
    cv_auc_score.append(roc_auc_score(y_cv[:20000],y_cv_predict_proba))

#ploting result
plt.figure(figsize=(7,5))

plt.plot(np.arange(1, (len(alpha)+1),1),train_auc_score,label='Train AUC')
plt.plot(np.arange(1, (len(alpha)+1),1),cv_auc_score,label='CV AUC')

plt.xlabel(np.arange(1, (len(alpha)+1)))
plt.xticks(np.arange(1, (len(alpha)+1)), (alpha))
plt.legend()
plt.xlabel("hyperparameter: alpha ")
plt.ylabel("AUC")
```

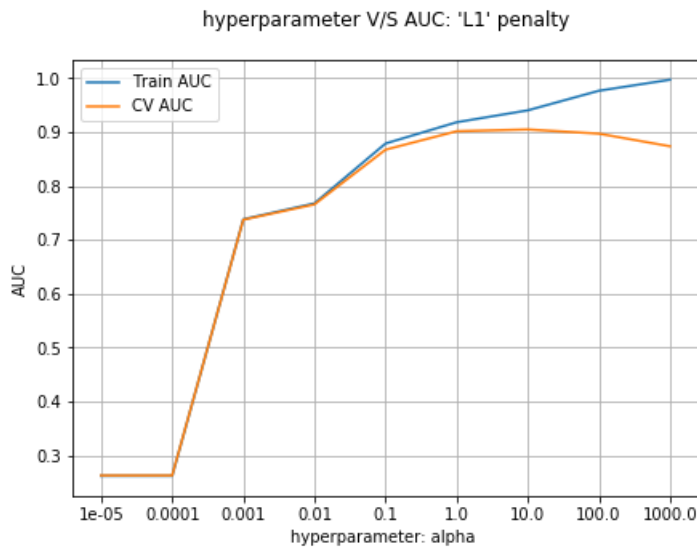[illegible]

In [6]:

```
#Testing
```

```
from sklearn.svm import SVC
from sklearn.model_selection import GridSearchCV
from sklearn.metrics import roc_auc_score

optimum_alpha=1.0

# traning model with rbf SVM using 'optimum_alpha'
svc_rbf=SVC(C=optimum_alpha, kernel='rbf',probability=True, class_weight='balanced')
svc_rbf.fit(train_bow_500_feat[:40000],y_train[:40000])
print("succesfully trained using optimum_alpha:",optimum_alpha)

#probability score for ROC_AUC score
y_train_pred_proba=svc_rbf.predict_proba(train_bow_500_feat[:40000])[:,1]
y_test_pred_proba=svc_rbf.predict_proba(test_bow_500_feat[:20000])[:,1]

train_roc_score=roc_auc_score(y_train[:40000],y_train_pred_proba)
test_roc_score=roc_auc_score(y_test[:20000],y_test_pred_proba)


#ploting confusion matrix
y_pred=svc_rbf.predict(test_bow_500_feat[:20000])
sn.heatmap(confusion_matrix(y_test[:20000],y_pred),annot=True, fmt="d",linewidths=.5)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test[:20000],y_pred))

# ROC Curve (reference:stack overflow with little modification)
train_fpr, train_tpr, train_threshold =roc_curve(y_train[:40000], y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test[:20000], y_test_pred_proba)

#ploting ROC curve
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
```

```
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()
```


successfully trained using optimum_alpha: 1.0

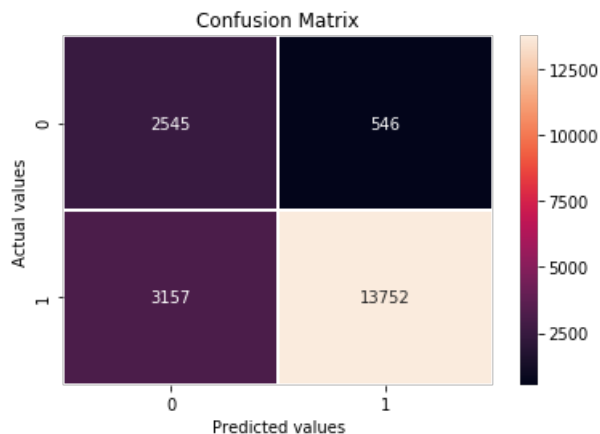

```
classification report:
              precision    recall  f1-score   support

     0       0.45         0.82         0.58         3091
     1       0.96         0.81         0.88        16909

 avg / total       0.88         0.81         0.83        20000
```

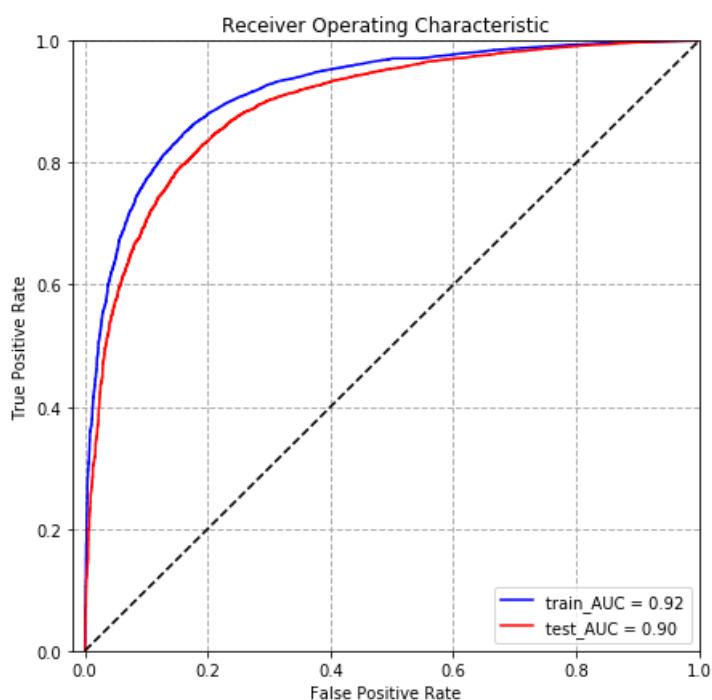

[5.2.2] Applying RBF SVM on TFIDF, SET 2

In [3]:

```
#BoW with 500 features for SVM RBF

count_vect = TfidfVectorizer(max_df=1.0, min_df=10, max_features=500)#in scikit-learn

train_tf_idf_500_feat=count_vect.fit_transform(x_train)
print("some feature names ", count_vect.get_feature_names()[:10])
print('='*100)
```

```

# transform cv and test dataset
cv_tf_idf_500_feat=count_vect.transform(x_cv)
test_tf_idf_500_feat=count_vect.transform(x_test)

```

some feature names ['able', 'absolutely', 'actually', 'add', 'added', 'adding', 'aftertaste', 'ago', 'almost', 'already']



In [4]:

```

from sklearn.preprocessing import StandardScaler
sc=StandardScaler(with_mean=False)

train_tf_idf_500_feat=sc.fit_transform(train_tf_idf_500_feat)
cv_tf_idf_500_feat=sc.transform(cv_tf_idf_500_feat)
test_tf_idf_500_feat=sc.transform(test_tf_idf_500_feat)

```

In [11]:

```
train_tf_idf_500_feat.shape, cv_tf_idf_500_feat.shape, test_tf_idf_500_feat.shape
```

Out[11]:

```
((217951, 500), (72651, 500), (72651, 500))
```

Using only 40k points to train model as rbf SVM has high time complexity

In [10]:

```

from sklearn.svm import SVC
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]

for i in tqdm(alpha):

    # training model with linear SVM
    svc_rbf=SVC(C=1, kernel='rbf', probability=True, class_weight='balanced')
    svc_rbf.fit(train_tf_idf_500_feat[:40000], y_train[:40000])

    # ROC AUC score of 'x_train_TFIDF' and 'x_cv_TFIDF'
    y_train_predict_proba=svc_rbf.predict_proba(train_tf_idf_500_feat[:40000])[:,1]
    y_cv_predict_proba=svc_rbf.predict_proba(cv_tf_idf_500_feat[:20000])[:,1]

    train_auc_score.append(roc_auc_score(y_train[:40000], y_train_predict_proba))
    cv_auc_score.append(roc_auc_score(y_cv[:20000], y_cv_predict_proba))


#plotting result
plt.figure(figsize=(7,5))

plt.plot(np.arange(1, (len(alpha)+1), 1), train_auc_score, label='Train AUC')
plt.plot(np.arange(1, (len(alpha)+1), 1), cv_auc_score, label='CV AUC')

plt.xlabel(np.arange(1, (len(alpha)+1)))
plt.xticks(np.arange(1, (len(alpha)+1)), (alpha))
plt.legend()
plt.xlabel("hyperparameter: alpha ")
plt.ylabel("AUC")
plt.title("hyperparameter V/S AUC: 'L1' penalty\n")
plt.grid()
plt.show()

```

hyperparameter V/S AUC: 'L1' penalty

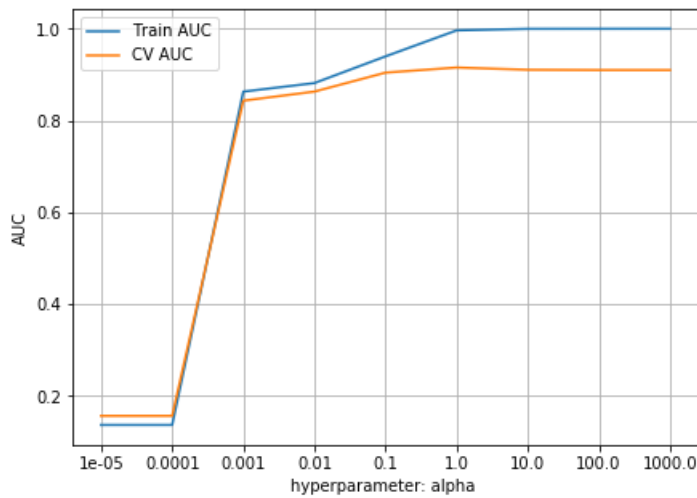

In [5]:

#Testing

```
from sklearn.svm import SVC
from sklearn.model_selection import GridSearchCV
from sklearn.metrics import roc_auc_score
```

```
optimum_alpha=0.1
```

traning model with rbf SVM using 'optimum_alpha'

```
svc_rbf=SVC(C=optimum_alpha, kernel='rbf',probability=True, class_weight='balanced')
svc_rbf.fit(train_tf_idf_500_feat[:40000],y_train[:40000])
print("succesfully trained using optimum_alpha:",optimum_alpha)
```

#probability score for ROC_AUC score

```
y_train_pred_proba=svc_rbf.predict_proba(train_tf_idf_500_feat[:40000])[:,1]
y_test_pred_proba=svc_rbf.predict_proba(test_tf_idf_500_feat[:20000])[:,1]
```

```
train_roc_score=roc_auc_score(y_train[:40000],y_train_pred_proba)
test_roc_score=roc_auc_score(y_test[:20000],y_test_pred_proba)
```

#ploting confusion matrix

```
y_pred=svc_rbf.predict(test_tf_idf_500_feat[:20000])
sn.heatmap(confusion_matrix(y_test[:20000],y_pred),annot=True, fmt="d",linewidths=.5)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test[:20000],y_pred))
```


ROC Curve (reference:stack overflow with little modification)

```
train_fpr, train_tpr, train_threshold =roc_curve(y_train[:40000], y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test[:20000], y_test_pred_proba)
```

#ploting ROC curve

```
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()
```



successfully trained using optimum_alpha: 0.1

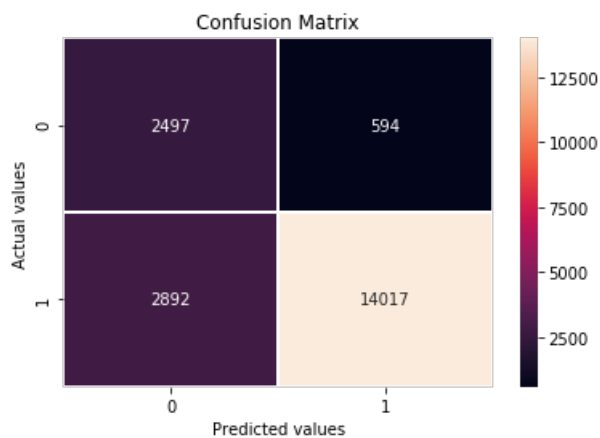

```
classification report:
              precision    recall  f1-score   support

     0       0.46         0.81         0.59         3091
     1       0.96         0.83         0.89        16909

 avg / total       0.88         0.83         0.84        20000
```

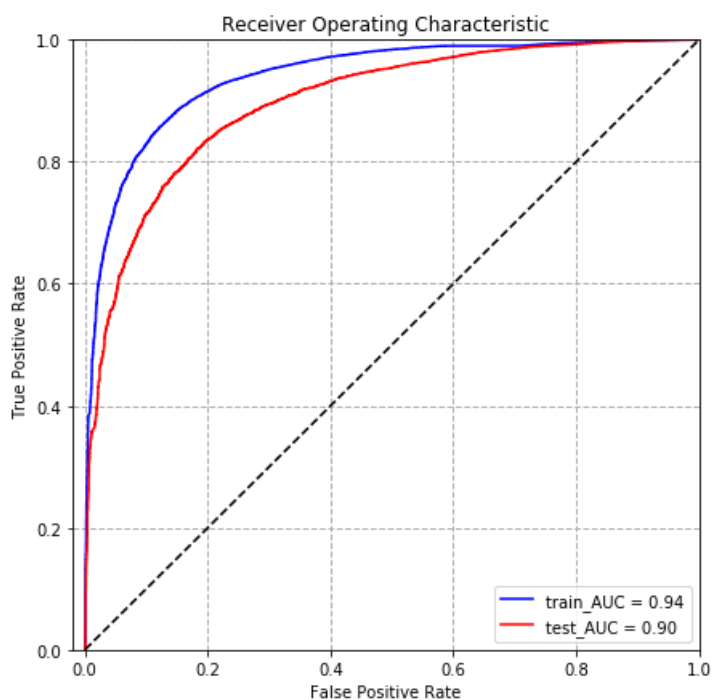

[5.2.3] Applying RBF SVM on AVG W2V, SET 3

In [3]:

```
from sklearn.svm import SVC
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]

for i in tqdm(alpha):
    # training model with rbf SVM
```

```

svc_rbf=SVC(C=1, kernel='rbf',probability=True, class_weight='balanced')
svc_rbf.fit(train_w2v[:40000],y_train[:40000])

# ROC AUC score of 'x_train_TFIDF' and 'x_cv_TFIDF'
y_train_predict_proba=svc_rbf.predict_proba(train_w2v[:40000])[:,1]
y_cv_predict_proba=svc_rbf.predict_proba(cv_w2v[:20000])[:,1]

train_auc_score.append(roc_auc_score(y_train[:40000], y_train_predict_proba))
cv_auc_score.append(roc_auc_score(y_cv[:20000],y_cv_predict_proba))


#ploting result
plt.figure(figsize=(7,5))

plt.plot(np.arange(1,(len(alpha)+1),1),train_auc_score,label='Train AUC')
plt.plot(np.arange(1,(len(alpha)+1),1),cv_auc_score,label='CV AUC')

plt.xlabel(np.arange(1,(len(alpha)+1)))
plt.xticks(np.arange(1,(len(alpha)+1)),(alpha))
plt.legend()
plt.xlabel("hyperparameter: alpha ")
plt.ylabel("AUC")
plt.title("hyperparameter V/S AUC: 'L1' penalty\n")
plt.grid()
plt.show()

```

100% | 9/9
[4:41:42<00:00, 2537.96s/it]

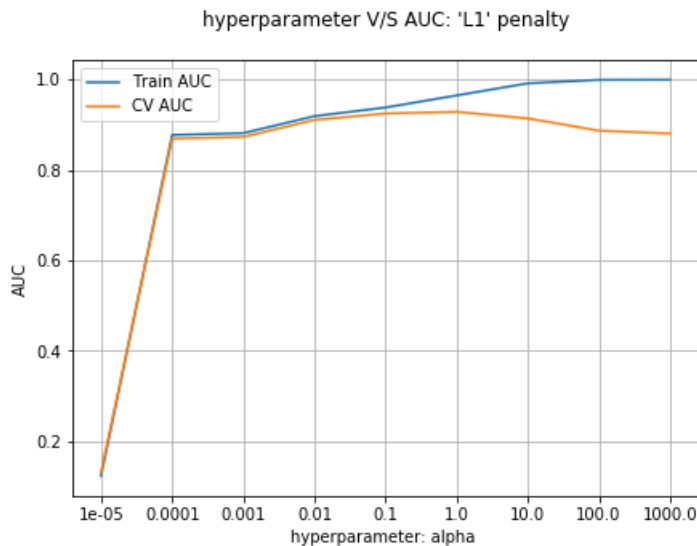

In [5]:

```

#Testing

from sklearn.svm import SVC
from sklearn.model_selection import GridSearchCV
from sklearn.metrics import roc_auc_score

optimum_alpha=0.1

# traning model with rbf SVM using 'optimum_alpha'
svc_rbf=SVC(C=optimum_alpha, kernel='rbf',probability=True, class_weight='balanced')
svc_rbf.fit(train_w2v[:40000],y_train[:40000])
print("succesfully trained using optimum_alpha:",optimum_alpha)

#probabilty score for ROC_AUC score
y_train_pred_proba=svc_rbf.predict_proba(train_w2v[:40000])[:,1]
y_test_pred_proba=svc_rbf.predict_proba(test_w2v[:20000])[:,1]

train_roc_score=roc_auc_score(y_train[:40000],y_train_pred_proba)
test_roc_score=roc_auc_score(y_test[:20000],y_test_pred_proba)

#ploting confusion matrix

```

```


y_pred=svc_rbf.predict(test_w2v[:20000])
sn.heatmap(confusion_matrix(y_test[:20000],y_pred),annot=True, fmt="d",linewidths=.5)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test[:20000],y_pred))

# ROC Curve (reference:stack overflow with little modification)
train_fpr, train_tpr, train_threshold =roc_curve(y_train[:40000], y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test[:20000], y_test_pred_proba)

#ploting ROC curve
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()

```

succesfully trained using optimum_alpha: 0.1

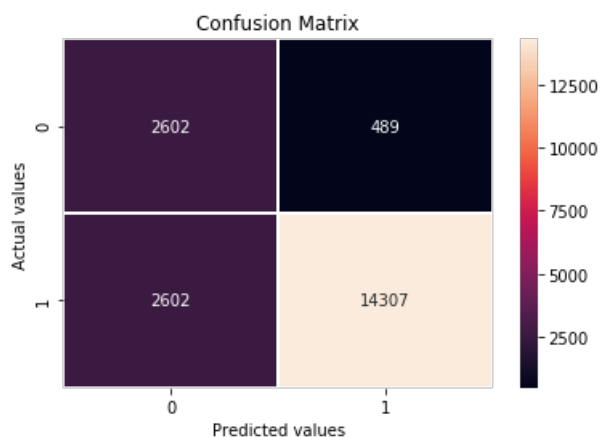


```


classification report:
              precision    recall  f1-score   support

     0           0.50       0.84      0.63       3091
     1           0.97       0.85      0.90      16909

 micro avg       0.85       0.85      0.85      20000
 macro avg       0.73       0.84      0.76      20000
 weighted avg     0.89       0.85      0.86      20000

```

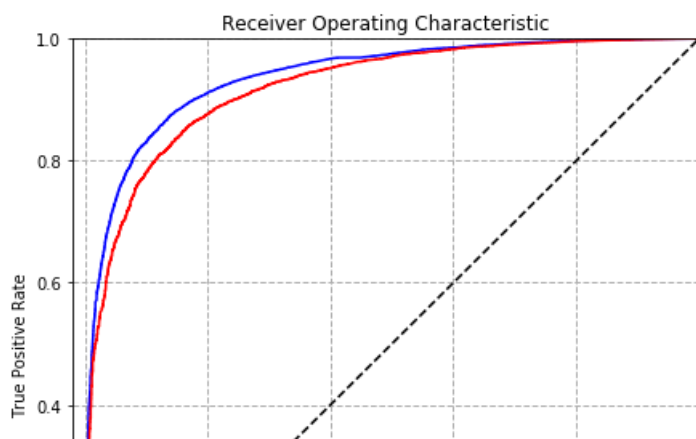

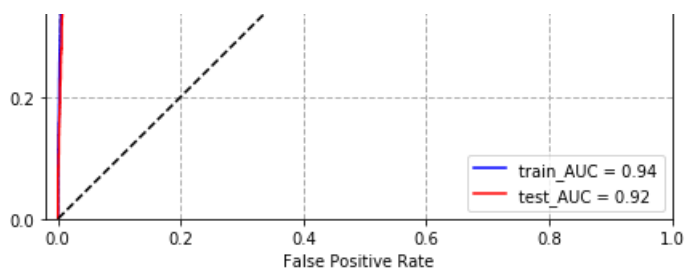

[5.2.4] Applying RBF SVM on TFIDF W2V, SET 4

In [3]:

```
from sklearn.svm import SVC
from sklearn.metrics import roc_auc_score
from tqdm import tqdm

alpha=[10e-6,10e-5,10e-4,10e-3,10e-2,10e-1,10e0,10e1,10e2]

train_auc_score=[]
cv_auc_score=[]

for i in tqdm(alpha):

    # traing model with rbf SVM
    svc_rbf=SVC(C=i, kernel='rbf',probability=True, class_weight='balanced')
    svc_rbf.fit(train_tf_idf_w2v[:40000],y_train[:40000])


    # ROC AUC score of 'x_train_TFIDF' and 'x_cv_TFIDF'
    y_train_predict_proba=svc_rbf.predict_proba(train_tf_idf_w2v[:40000])[:,1]
    y_cv_predict_proba=svc_rbf.predict_proba(cv_tf_idf_w2v[:20000])[:,1]


    train_auc_score.append(roc_auc_score(y_train[:40000], y_train_predict_proba))
    cv_auc_score.append(roc_auc_score(y_cv[:20000],y_cv_predict_proba))

#ploting result
plt.figure(figsize=(7,5))

plt.plot(np.arange(1, (len(alpha)+1),1),train_auc_score,label='Train AUC')
plt.plot(np.arange(1, (len(alpha)+1),1),cv_auc_score,label='CV AUC')

plt.xlabel(np.arange(1, (len(alpha)+1)))
plt.xticks(np.arange(1, (len(alpha)+1)), (alpha))
plt.legend()
plt.xlabel("hyperparameter: alpha ")
plt.ylabel("AUC")
plt.title("hyperparameter V/S AUC: 'L1' penalty\n")
plt.grid()
plt.show()
```

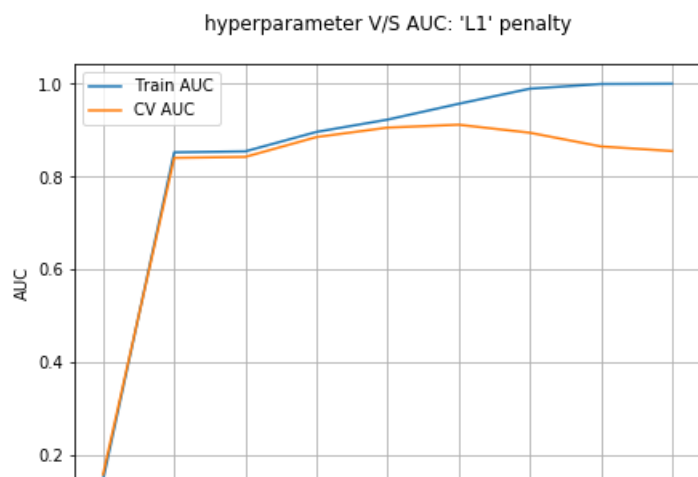[illegible]



In [3]:

```
#Testing
from sklearn.svm import SVC
from sklearn.model_selection import GridSearchCV
from sklearn.metrics import roc_auc_score

optimum_alpha=0.1

# traning model with rbf SVM using 'optimum_alpha'
svc_rbf=SVC(C=optimum_alpha, kernel='rbf',probability=True, class_weight='balanced')
svc_rbf.fit(train_tf_idf_w2v[:40000],y_train[:40000])
print("succesfully trained using optimum_alpha:",optimum_alpha)

#probabilty score for ROC_AUC score
y_train_pred_proba=svc_rbf.predict_proba(train_tf_idf_w2v[:40000])[:,1]
y_test_pred_proba=svc_rbf.predict_proba(test_tf_idf_w2v[:20000])[:,1]


train_roc_score=roc_auc_score(y_train[:40000],y_train_pred_proba)
test_roc_score=roc_auc_score(y_test[:20000],y_test_pred_proba)

#ploting confusion matrix
y_pred=svc_rbf.predict(test_tf_idf_w2v[:20000])
sn.heatmap(confusion_matrix(y_test[:20000],y_pred),annot=True, fmt="d",linewidths=.5)
plt.title('Confusion Matrix')
plt.xlabel('Predicted values')
plt.ylabel('Actual values')
plt.show()
print("\n\nclassification report:\n",classification_report(y_test[:20000],y_pred))

# ROC Curve (reference:stack overflow with little modification)
train_fpr, train_tpr, train_threshold =roc_curve(y_train[:40000], y_train_pred_proba)
test_fpr, test_tpr, test_threshold =roc_curve(y_test[:20000], y_test_pred_proba)

#ploting ROC curve
plt.figure(figsize=(7,7))
plt.title('Receiver Operating Characteristic')
plt.plot(train_fpr, train_tpr, 'b', label = 'train_AUC = %0.2f' % train_roc_score)
plt.plot(test_fpr, test_tpr, 'r', label = 'test_AUC = %0.2f' % test_roc_score)
plt.legend(loc = 'lower right')
plt.plot([0, 1], [0, 1], 'k--')
plt.xlim([-0.02, 1])
plt.ylim([0, 1])
plt.ylabel('True Positive Rate')
plt.xlabel('False Positive Rate')
plt.grid(linestyle='--', linewidth=1)
plt.show()
```

succesfully trained using optimum_alpha: 0.1

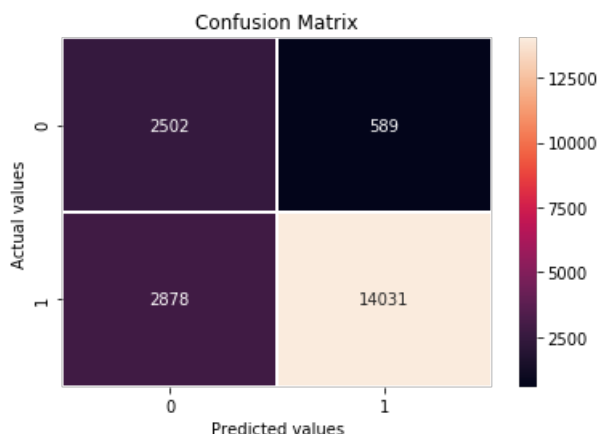


```

classification report:
              precision    recall  f1-score   support

     0       0.47         0.81         0.59         3091
     1       0.96         0.83         0.89        16909

 avg / total         0.88         0.83         0.84        20000

```

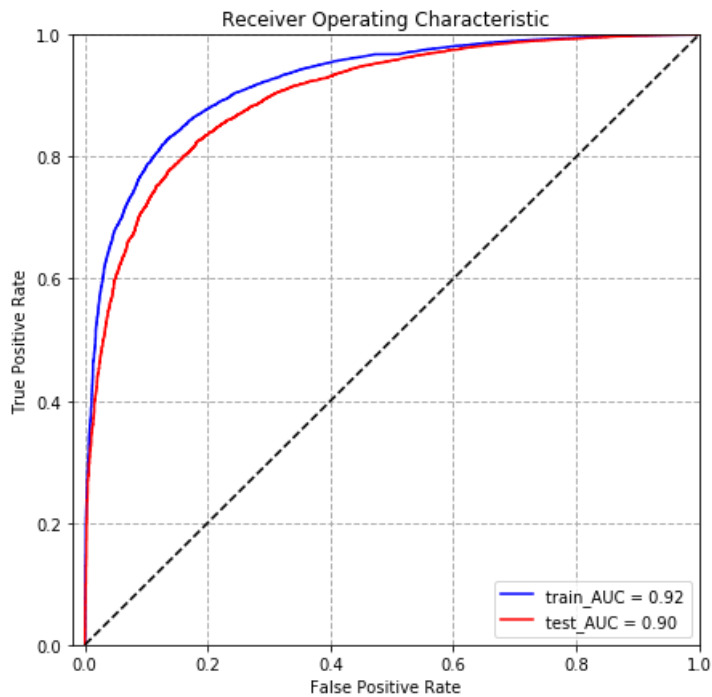

[6] Conclusions

In [10]:

```

# Please compare all your models using Prettytable library
from prettytable import PrettyTable

print(30*'*',"Linear SVM", 30*'*')
x = PrettyTable()
x.field_names = ["text featurization", "optimum_hyperparameter:C", "generalization ROC AUC(%age) ",
, "regularizer",]

x.add_row(["BOW", 0.0001,94, "l1"])
x.add_row(["BOW", 0.001,95, "l2"])

x.add_row(["TF-IDF", 0.001,91, "l1"])
x.add_row(["TF-IDF", 1.0,94, "l2"])

x.add_row([" W2V", 0.01,92, "l1"])
x.add_row([" W2V", 0.01,92, "l2"])

x.add_row([" TF-IDF W2V", 0.001,89, "l1"])
x.add_row([" TF-IDF W2V", 0.01,89, "l2"])

print(x)
print('\n',30*'*',"RBF SVM", 30*'*')

#*****

x = PrettyTable()
x.field_names = ["text featurization", "optimum_hyperparameter:C", "generalization ROC AUC(%age) "
]

x.add_row(["BOW", 1.0,90,])
x.add_row(["TF-IDF", 0.1,90,])
x.add_row([" W2V", 0.1,92,])
x.add_row([" TF-IDF W2V", 0.1,90.1])

```

```
print(x)
```

```
***** Linear SVM *****
```

text featurization	optimum_hyperparameter:C	generalization ROC AUC(%age)	regularizer
BOW	0.0001	94	11
BOW	0.001	95	12
TF-IDF	0.001	91	11
TF-IDF	1.0	94	12
W2V	0.01	92	11
W2V	0.01	92	12
TF-IDF W2V	0.001	89	11
TF-IDF W2V	0.01	89	12

```
***** RBF SVM *****
```

text featurization	optimum_hyperparameter:C	generalization ROC AUC(%age)
BOW	1.0	90
TF-IDF	0.1	90
W2V	0.1	92
TF-IDF W2V	0.1	90

conclusion

- Linear SVM works exactly like logistic regression therefore execution time is fast and generalization ROC AUC is also good.
- Maximum ROC AUC is achieved by using BOW text featurization with hyperparameter C:0.001 and generalization ROC AUC:95% using l2 penalty.
- Execution time of RBF SVM is very high because kernalisation increases time complexity drastically therefore training using RBF SVM takes a lot of time

NOTE: only 40k datapoints are used to train RBF SVM

In []: