


Extended Finite State Machine - UserName Recognizer

CSE 360 - Individual Homework 1

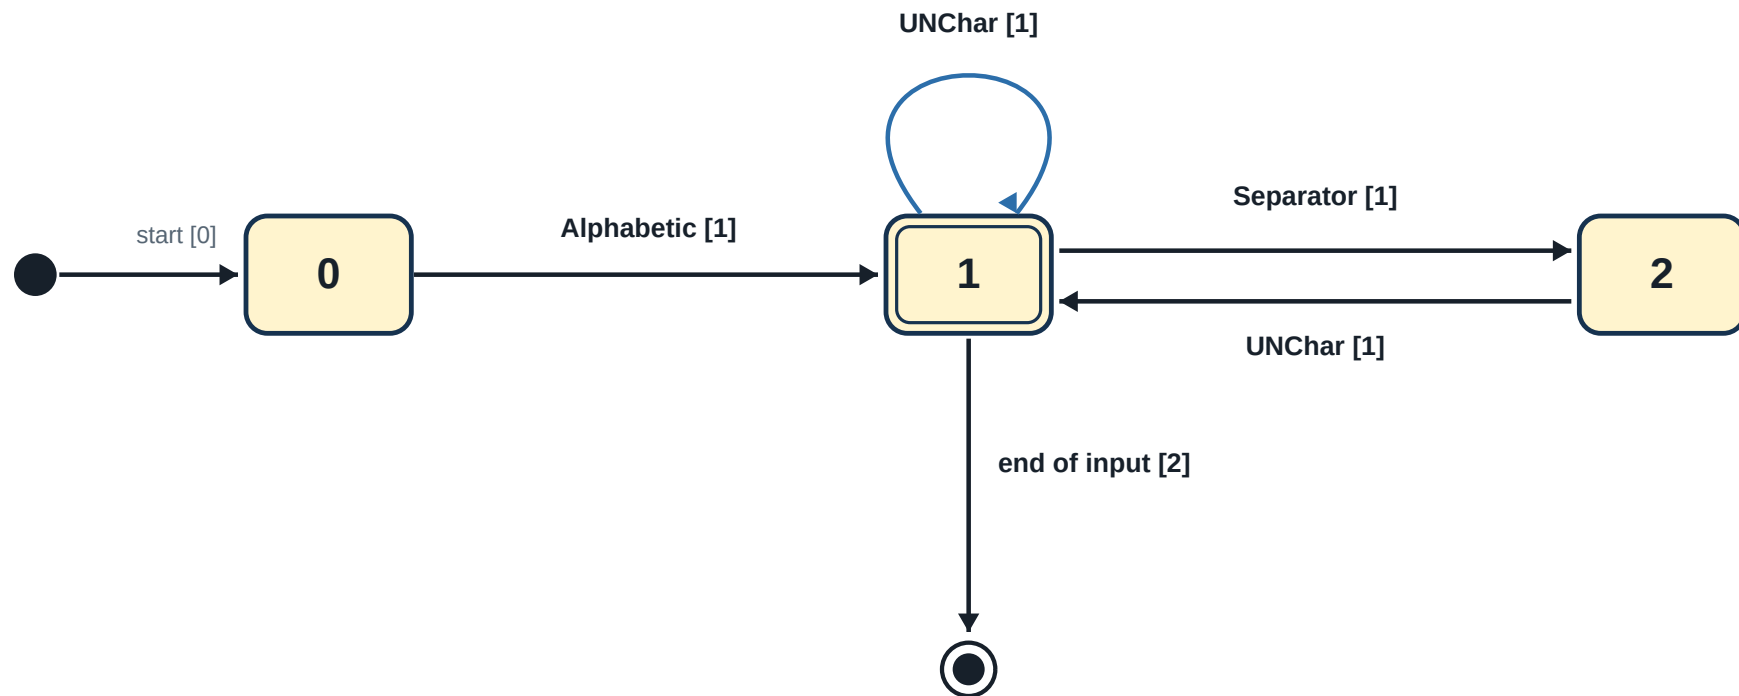

Definitions

Alphabetic = A-Z or a-z

UNChar = A-Z, a-z, or 0-9

Separator = -, _, ., or &

Semantic actions and constraints

[0] Set SizeCounter to zero.

[1] Increment SizeCounter; reject input longer than 32 characters.

[2] Accept only in State 1 and only when SizeCounter is at least 4.

A separator is valid only between two UNChar values. The first character must be Alphabetic.

Only State 1 is accepting