Can Adaptive Planning, Tool Use, Memory, and Self-Verification Amplify Local Large Language Models on Complex Reasoning?

Aditya Sopan Jatad
Independent Researcher
aditya.jatad@gmail.com

October 2026

Abstract

Agentic scaffolds that add planning, tool use, memory, and self-verification around a language model are usually built and evaluated with frontier models. We ask whether the same components amplify local 8B models on complex reasoning. We build a training-free modular agent with switchable planner, Python tool, episodic reflection memory, and grounded or intrinsic verifier, plus an adaptive controller that escalates to the full pipeline only when sampled answers disagree or confidence is low. We evaluate Qwen3-8B and Llama-3.1-8B-Instruct on 300 MATH-500 problems, with exact paired tests against chain-of-thought (CoT) and all costs reported in tokens. External scaffolding did not amplify either model. For Qwen3-8B, reflection memory (80.0%) and Self-Refine (79.7%, at 4.6× the tokens) tie CoT (79.7%), tool-augmented ReAct is at best statistically tied, and the always-on pipeline (57.7%) and adaptive controller (73.3%) are significantly worse. For Llama-3.1-8B every ReAct and full-pipeline variant falls significantly below CoT (48.7%), largely because the model fails to terminate agent loops, and the adaptive controller only ties CoT at 11.9× the tokens. Mechanistically, a code-based verifier broke 37 correct answers while fixing 15, and switching the Python tool from print-only to notebook-style execution narrowed ReAct's gap to CoT from 11.3 to 3.0 points. Internal test-time compute does help: Qwen3's thinking mode reaches 90.0% (89.4 ± 0.7% over three seeds, each significantly above CoT), with most of the gain on the hardest problems, against 83.0% for self-consistency at about the same average token cost. The controller's gate separates easy from hard problems well: sending hard problems to thinking mode matches always-thinking, and a cheaper two-sample gate keeps 89.7% with 19% fewer tokens, whereas sending them to the tool pipeline costs 6.3 points.

1 Introduction

Running a language model locally keeps data on the device, removes per-call fees, and gives full control over decoding. The cost is capability: open 7–8B models lag frontier models on multi-step reasoning. A common proposal for closing part of that gap is to wrap the model in an agent. A planner decomposes the task, tools handle exact computation, memory carries lessons across problems, and a verifier catches mistakes before they reach the user [Yao et al., 2022, Shinn et al., 2023, Madaan et al., 2023, Zhu et al., 2025]. Most of the evidence for these components comes from strong API models, and it is not obvious that it transfers. Small models need guided decoding or validators to call tools reliably [Sharma and Mehta, 2025], function calling degrades under naturalistic input variation [Rabinovich and Anaby-Tavor, 2025], models may struggle to judge their own answers [Huang et al., 2023], and every extra component costs tokens that could have been spent on the reasoning itself.

This paper tests the transfer directly. We build a modular, training-free agent around an unmodified local model and switch each component on and off: an explicit planner, a Python tool, an episodic memory of verified reflections, and a verifier that is either grounded in code execution or intrinsic (the model critiques itself). We also build an adaptive controller that first samples three cheap chain-of-thought (CoT) answers and escalates to the full pipeline only when they disagree or the model is unsure. We compare all of this with CoT, self-consistency [Wang et al., 2022], and Qwen3's native thinking mode [Yang et al., 2025], and we report cost as tokens per problem so that methods with very different budgets can be compared fairly, as argued by Kapoor et al. [2024].

Our study covers two model families (Qwen3-8B and Llama-3.1-8B-Instruct [Grattafiori et al., 2024]), MATH-500 [Hendrycks et al., 2021, Lightman et al., 2023] as the main benchmark, and GSM-Hard [Gao et al., 2022] as a task where exact computation should matter. Every comparison is paired against CoT run in the same job, under the same backend and hardware, with exact McNemar tests and Holm correction. The main findings are:

- **External scaffolding does not amplify either model on MATH-500.** The best external scaffolds tie CoT, and the full pipeline and adaptive controller are significantly worse for Qwen3-8B (Table 1). For Llama-3.1-8B, every ReAct and full-pipeline variant is significantly worse and the adaptive controller only ties CoT (Table 2).
- **Internal test-time compute does amplify.** Qwen3's thinking mode reaches 90.0% against 79.7% for CoT, and the gain holds across three sampling seeds (Table 3). Self-consistency at about the same average cost reaches 83.0% (Figure 1). The gain from thinking is concentrated on the hardest problems.
- **The failures have identifiable mechanisms.** A grounded verifier overrides correct answers more often than it repairs wrong ones (Table 5), tool semantics change results as much as the choice of method does (Table 4), and Llama-3.1-8B fails to terminate agent loops.
- **Adaptivity is useful when it routes to the right resource.** The controller's gate separates easy from hard problems well. Escalating hard problems to the tool pipeline hurts, escalating them to thinking mode matches always-thinking, and a cheaper gate saves 19% of tokens for 0.3 points of accuracy (Section 5.4). The gate $\rightarrow$ thinking variants were added after the main runs and are exploratory (Section 4).

We do not propose a new method, and several of our conclusions echo prior findings for larger models, in particular that simple baselines often match complex agents at lower cost [Kapoor et al., 2024] and that intrinsic self-correction is unreliable [Huang et al., 2023]. Our contribution is a controlled, cost-matched measurement of these questions for local 8B models across two families, including native function calling and thinking mode, together with a breakdown of where the losses come from.

2 Related Work

Agent scaffolds. ReAct interleaves reasoning steps with tool actions [Yao et al., 2022]. Reflexion stores verbal reflections on failures in an episodic memory and retries [Shinn et al., 2023], and Self-Refine iterates generate, critique, and revise with a single model [Madaan et al., 2023]. Code execution as a reasoning aid appears in PAL and Program of Thoughts [Gao et al., 2022, Chen et al., 2022], and Toolformer trains a model to call tools on its own [Schick et al., 2023]. MemGPT manages memory beyond the context window [Packer et al., 2023]. OAgents assembles planning,

memory, tools, and test-time verification into one framework and studies which parts matter [Zhu et al., 2025]. Surveys organize the planning, memory, and tool-learning literature [Huang et al., 2024, Du, 2026, Yang et al., 2026]. Our components follow these designs closely; the question is whether they help small local models.

Small and local models as agents. Sharma and Mehta [2025] survey small models for agentic systems and argue that, with guided decoding and validator-first tool execution, they often match larger models on schema-constrained tool use. TinyLLM evaluates small models on agentic tasks for edge devices [Haque et al., 2025], and Rabinovich and Anaby-Tavor [2025] show that function calling is brittle under query variation and larger toolkits. Agent distillation transfers full agent behaviour, including retrieval and code tools, into small models through training [Kang et al., 2025], and Factored Agents delegates planning to a larger model [Roth et al., 2025]. We instead keep the model fixed and training-free.

Self-verification. Huang et al. [2023] find that LLMs cannot reliably self-correct reasoning without external feedback. ReVISE trains models to verify and refine at test time [Lee et al., 2025], and asking the model to verify first is a cheap prompting variant [Wu and Yao, 2025]. Long et al. [2026] find that most self-verification steps in large reasoning models confirm rather than correct intermediate results. We compare a grounded verifier (re-derivation by executed code) with an intrinsic one and separate detection quality from what happens after a rejection.

Adaptive and test-time compute. Self-consistency samples several reasoning paths and takes a majority vote [Wang et al., 2022]. Paglieri et al. [2025] train agents with supervised fine-tuning and reinforcement learning to decide when to plan, and show that planning before every action is costly and can hurt long-horizon performance. Qwen3 ships a hybrid model with a switchable thinking mode [Yang et al., 2025]. Nolasque et al. [2026] find a token-budget threshold for financial reasoning with GPT-5.4 mini: below roughly 1,500 tokens the overhead of planning and verification hurts, and above it a verified search architecture wins. Our local-model results differ, since external structure did not help even at average budgets of several thousand tokens. Our adaptive controller is training-free and our cost-matched comparison includes thinking mode.

Evaluation methodology. Kapoor et al. [2024] argue for cost-controlled agent evaluation and show that simple baselines can beat complex agents. The harness around a model can matter more than the choice of model [Zhang et al., 2026], and a more structured harness can help one model tier while hurting another [Cho, 2026]. Agents also over-trust tool outputs that fail silently [Zhu et al., 2026]. Failure analyses of agentic behaviour identify premature action and fragile execution as recurring problems [Roig, 2025]. Our tool-semantics results (Section 5.2) are a concrete local-model instance of this harness sensitivity.

3 Method

3.1 Setting and cost accounting

Given a problem x with reference answer y^*, a method makes one or more calls to a fixed local model M and returns an answer $\hat{y}$. A problem is solved if $\hat{y}$ matches y^* after normalization. We report accuracy and the cost $C(x) = \sum_k \left(n_k^{\text{in}} + n_k^{\text{out}}\right)$, the prompt plus generated tokens summed over all

model calls k for that problem, averaged over the test set. Token cost is hardware-independent; latency is logged but not used for comparisons.

3.2 Components

Planner. Before solving, the model writes a short numbered plan without a solution (at most 150 tokens). The plan is prepended to the solver's prompt.

Python tool. The model writes a code block (text format) or emits a function call (native format), the code runs in a sandboxed subprocess with a timeout, and the output is returned as an observation. We study three tool designs. The *print-only* tool runs each block as a fresh script and returns only printed output. The *REPL* tool behaves like a notebook: variables persist across calls, the value of a final bare expression is displayed, and an empty result is reported as "(no output)". The *native* variant uses the same REPL tool but exposes it through the model's own function-calling format, parsed by vLLM's tool parsers (Hermes format for Qwen3, Llama-3 JSON for Llama) [Kwon et al., 2023]. With the REPL and native tools, if the step budget runs out without an answer, the model is asked once for a final answer.

Episodic memory. Following Reflexion [Shinn et al., 2023], the model attempts 100 held-out problems with CoT. For each wrong attempt it receives the correct answer as environment feedback and writes a one-sentence general lesson that must not reveal the answer. At test time the three lessons from the most similar held-out questions (bag-of-words cosine similarity) are prepended to the prompt. The store is frozen before testing, and held-out and test problems are disjoint.

Verifier. The *grounded* verifier asks the model to write an independent program that computes the answer, runs it, and compares the result with the candidate; on disagreement the program's value replaces the candidate. The *intrinsic* verifier asks the model whether the proposed answer is correct; on "No" the problem is re-solved with CoT.

3.3 Compositions

ReAct. Thought, action, and observation steps with up to 8 tool steps; generation stops at "Observation:" so that the model cannot hallucinate tool results.

Always-on pipeline. Plan, then ReAct with retrieved memory, then the grounded verifier, for every problem.

Adaptive controller. Algorithm 1 first draws three CoT samples at temperature 0.7. If all three agree and their mean token log-probability exceeds a threshold, the agreed answer is returned. Otherwise the problem escalates to the always-on pipeline. The threshold is the 25th percentile of mean log-probabilities of temperature-0.7 CoT samples on the held-out problems, so no test data is used for calibration.

Gate → thinking (exploratory). The same gate, but escalated problems go to Qwen3's thinking mode instead of the tool pipeline.

Algorithm 1 Adaptive controller (training-free).

Input: problem x, model M, memory $\mathcal{M}$, threshold τ calibrated on held-out problems
Sample $a_1, a_2, a_3 \sim M(\mathrm{CoT}(x))$ at temperature 0.7, with mean token log-probabilities ℓ_1, ℓ_2, ℓ_3
if $a_1 = a_2 = a_3$ **and** $\frac{1}{3}\sum_i \ell_i > \tau$ **then**
  return a_1 {cheap path}
end if
$p \leftarrow \mathrm{Plan}(x)$; $\hat{y} \leftarrow \mathrm{ReAct}(x, p, \mathrm{Retrieve}(\mathcal{M}, x))$ {escalation}
return $\mathrm{GroundedVerify}(x, \hat{y})$

3.4 Baselines

Direct answers with only the final answer. *CoT* solves step by step and ends with "Final Answer:". *Self-consistency@5* takes a majority vote over five temperature-0.7 CoT samples [Wang et al., 2022], which costs about as much as the multi-call scaffolds. *Self-Refine* runs one round of critique and revision [Madaan et al., 2023]. *Thinking mode* enables Qwen3's native reasoning with the sampling settings recommended for it [Yang et al., 2025].

4 Experimental Setup

Models and serving. Qwen3-8B [Yang et al., 2025] in non-thinking mode unless stated, and Llama-3.1-8B-Instruct [Grattafiori et al., 2024], both in bf16 on a single NVIDIA A100 via vLLM [Kwon et al., 2023]. Native function calling uses vLLM's OpenAI-compatible server; all other runs use the offline engine. No weights are updated.

Decoding and budgets. Single-sample methods decode greedily. Sampled methods use temperature 0.7 and top-p 0.95. Thinking mode uses temperature 0.6, top-p 0.95, and top-k 20. On MATH-500 each CoT call may generate up to 4,096 tokens, each ReAct step up to 1,024, and thinking up to 16,384.

Data. MATH-500 [Lightman et al., 2023], a 500-problem subset of MATH [Hendrycks et al., 2021], is shuffled once with seed 42. The first 100 problems form the held-out slice used for memory and calibration, and the next 300 form the test set used by every run. GSM-Hard [Gao et al., 2022] is split the same way. Appendix A reports an early GSM8K run [Cobbe et al., 2021], where CoT already reaches 91.7%.

Answer matching. We extract the text after the last "Final Answer:" (or the last `\boxed{}`), normalize LaTeX, and accept exact string matches or numeric equality, including simple fractions. Re-scoring every stored CoT, Self-Refine, and reflection output whose full text was retained reproduced the stored verdict in all cases.

Statistics. We report 95% bootstrap confidence intervals and compare each method with CoT from the *same run* using an exact McNemar test on per-problem correctness, with Holm correction within each table. Greedy methods are deterministic up to batch effects, so we repeat only the sampled headline method, thinking mode, over three seeds; self-consistency and the gates use one seed. Across runs under different conditions, CoT accuracy for Qwen3-8B ranged from 77.7% to 80.0% (six runs) and for Llama-3.1-8B from 48.7% to 52.0% (three runs), so differences of a few

points between runs should not be over-read. All statistical tests are within a run. Where we contrast variants from different runs (Table 4, and thinking mode against self-consistency), we compare each variant's gap to the CoT of its own run and do not report a paired test.

Process. We logged 28 runs: 19 completed and 9 failed or were cancelled (setup errors, an answer-extraction bug, a dropped client connection, and re-runs stopped when compute ran out). Small pilots validated each harness change. The component ablations, verifier comparison, and adaptive controller were planned from the start. The REPL and native tools, thinking-mode baselines, gate → thinking, GSM-Hard, and the cheaper gate variants were added after the first results and should be read as exploratory. Appendix B lists every run.

Sampling seeds and gated methods. Our first runs reused one per-request seed for every sampled request, which made repeated samples of the same prompt highly correlated in vLLM: in the original self-consistency run only 110 of 300 problems had five distinct samples. We fixed the harness to give every sampled request its own seed and re-ran self-consistency@5 for Qwen3-8B on MATH-500 and GSM-Hard and for Llama-3.1-8B on MATH-500 (runs 023 to 025); 299, 299, and 300 of 300 problems now have five distinct samples. The adaptive controller and gate → thinking are rebuilt from these samples instead of being re-run. The gate's decision for each problem uses the first three samples and the threshold calibrated in the original run, which used one temperature-0.7 sample per held-out problem and was therefore not affected by the bug. Because each original run calibrated its own threshold on the held-out slice, the adaptive controller uses run 007's threshold and gate → thinking uses run 018's, which is why they escalate 105 and 100 problems respectively from the same run-023 samples. An accepted problem takes the agreed answer. An escalated problem takes the escalation target's answer from an existing clean run on the same 300 problems: the always-on pipeline (runs 007 and 017, and run 016 for GSM-Hard), which decodes greedily and so gives exactly the answer the controller would have produced, or thinking mode (run 018), whose sampled answer is an independent draw of the same procedure. The rebuilt cost per problem is the tokens of the gate's samples plus, for escalated problems only, the escalation target's tokens from the same source run. Each rebuilt row is tested against the CoT of its escalation source run (007 for Qwen3-8B, 017 for Llama-3.1-8B, 018 for gate → thinking, and 016 for GSM-Hard). Before re-running, we decided that if the corrected numbers did not support the routing result, the adaptive controller and gating would move to an exploratory section.

5 Results

5.1 Main results

Tables 1 and 2 give the central answer: no external scaffold beats CoT for either model. For Qwen3-8B, reflection memory (80.0%) and Self-Refine (79.7%) are statistically indistinguishable from CoT (79.7%), and Self-Refine spends 4.6× the tokens to get there. ReAct with the original print-only tool loses 11.3 points, and with a REPL tool it is tied with CoT (-3.0, $p = 1.0$ after correction). The always-on pipeline loses 22.0 points, the adaptive controller loses 6.3, and both losses are significant. For Llama-3.1-8B the picture is worse. Self-Refine, reflection memory, and the adaptive controller tie CoT (the adaptive controller at 11.9× the tokens), and every ReAct and pipeline variant is significantly below it. Self-consistency, the compute-matched baseline we added for Llama, gains 6.3 points (56.3% against 50.0% in its own run), though the gain does not survive Holm correction ($p = 0.073$).

Table 1: Qwen3-8B on MATH-500 (300 test problems). Tokens are prompt plus generated tokens per problem. *×CoT, Δ, and McNemar p-values are relative to CoT from the run in the Run column, Holm-corrected over the 12 comparisons. ×CoT is computed from unrounded token means, so it can differ in the last digit from the ratio of the rounded Tokens entries. Same-run CoT: run 007 79.7%, 937 tokens; run 014 78.3%, 932 tokens; run 018 79.7%, 974 tokens; run 023 80.0%, 925 tokens. ‡Rebuilt from independent samples (Section 4); the Run column gives the gate's run and the escalation run, and Δ and p are against the escalation run's CoT.

Method	Run	Accuracy (95% CI)	Tokens	×CoT*	Δ vs CoT*	p (Holm)
Direct answer	007	19.3 [15.0, 24.0]	127	0.14	-60.3	<0.001
Chain-of-thought (CoT)	007	79.7 [75.0, 84.0]	937	1.00	–	–
Self-Refine	007	79.7 [75.0, 84.0]	4280	4.57	+0.0	1.000
Reflection memory	007	80.0 [75.7, 84.3]	1015	1.08	+0.3	1.000
ReAct, print-only tool	007	68.3 [63.3, 73.3]	1709	1.82	-11.3	<0.001
ReAct, REPL tool	014	75.3 [70.7, 80.3]	1934	2.08	-3.0	0.759
ReAct, native calls	014	73.3 [68.3, 78.3]	1951	2.09	-5.0	0.314
Always-on pipeline	007	57.7 [52.0, 63.0]	3201	3.42	-22.0	<0.001
Always-on, native calls	014	61.0 [55.7, 66.3]	3404	3.65	-17.3	<0.001
Adaptive controller‡	023+007	73.3 [68.0, 78.3]	4071	4.34	-6.3	0.048
Self-consistency@5	023	83.0 [78.7, 87.0]	4409	4.76	+3.0	0.702
Thinking mode	018	90.0 [86.3, 93.3]	4457	4.58	+10.3	<0.001
Gate → thinking‡	023+018	90.0 [86.3, 93.3]	5042	5.18	+10.3	<0.001

Internal test-time compute behaves differently (Figure 1, Table 3). Qwen3's thinking mode reaches 90.0% [86.3, 93.3], 10.3 points above same-run CoT, at 4,457 tokens per problem. Two further sampling seeds give 88.7% and 89.7%, each significantly above the CoT of its own run, for a mean of 89.4 ± 0.7% and a mean gain of 10.3 ± 1.7 points. Self-consistency@5 with independent samples costs about the same on average, 4,409 tokens, and reaches 83.0%, 3.0 points above the CoT of its own run (not significant). Neither method was capped to a fixed budget; their average costs happen to match. Because thinking mode and self-consistency come from different runs, we compare their gains over each run's own CoT (+10.3 against +3.0) rather than test them against each other. At most 9 of 300 thinking runs hit the 16,384-token cap in any seed.

5.2 Tool use: semantics, format, and termination

Much of ReAct's deficit for Qwen3-8B came from the tool, not from tool use as such (Table 4, Figure 2). With the print-only tool the model often wrote notebook-style code, ending a block with a bare expression or reusing a variable from an earlier block, even though the prompt asked it to print results. At least 108 of 583 observations (18.5%) came back empty, and the 82 problems with an empty observation were answered wrongly 69.5% of the time against 31.7% overall. The model rarely noticed. It guessed instead of rerunning. The print-only and REPL results come from different runs, so we compare each with the CoT of its own run: with the print-only tool ReAct trailed CoT by 11.3 points (run 007), and with a notebook-like REPL tool by 3.0 points (run 014), a gap that is no longer significant. Native function calling did not help further for Qwen3 (73.3%), and only 71% of its native calls executed without error.

Llama-3.1-8B fails differently. In text format it almost never concludes. With the print-only tool 87% of problems used all 8 steps without an answer (accuracy 4.7%), and with the REPL tool 85% needed the forced final answer (21.3%). Native calling cut looping sharply (20% forced), but

Table 2: Llama-3.1-8B-Instruct on MATH-500 (same 300 problems). *Relative to CoT from the run in the Run column, Holm-corrected over 10 comparisons. ×CoT is computed from unrounded token means. Same-run CoT: run 017 48.7%, 800 tokens; run 015 52.0%, 935 tokens; run 024 50.0%, 802 tokens. Llama-3.1 has no thinking mode. ‡Rebuilt from independent samples (run 024) and the always-on pipeline of run 017 (Section 4); tested against run 017's CoT.

Method	Run	Accuracy (95% CI)	Tokens	×CoT*	Δ vs CoT*	p (Holm)
Direct answer	017	10.7 [7.7, 14.3]	125	0.16	-38.0	<0.001
Chain-of-thought (CoT)	017	48.7 [43.3, 54.7]	800	1.00	–	–
Self-Refine	017	48.0 [42.7, 54.3]	4083	5.10	-0.7	1.000
Reflection memory	017	44.3 [39.0, 49.7]	1180	1.47	-4.3	0.479
ReAct, print-only tool	017	4.7 [2.7, 7.0]	9160	11.45	-44.0	<0.001
ReAct, REPL tool	015	21.3 [16.7, 26.3]	11466	12.26	-30.7	<0.001
ReAct, native calls	015	33.0 [27.7, 38.3]	1504	1.61	-19.0	<0.001
Always-on pipeline	017	35.3 [30.0, 41.0]	10010	12.51	-13.3	<0.001
Always-on, native calls	015	38.0 [32.7, 43.3]	2883	3.08	-14.0	<0.001
Adaptive controller‡	024+017	49.3 [43.7, 55.0]	9520	11.90	+0.7	1.000
Self-consistency@5	024	56.3 [51.0, 61.7]	3743	4.67	+6.3	0.073

Table 3: Thinking mode over three sampling seeds (Qwen3-8B, MATH-500). Each seed is tested against CoT from its own run with an exact McNemar test; CoT decodes greedily and varies only through batch effects.

Seed (run)	CoT	Thinking	Δ	p	Truncated
1 (018)	79.7	90.0	+10.3	<0.001	8
2 (026)	80.0	88.7	+8.7	<0.001	9
3 (027)	77.7	89.7	+12.0	<0.001	9
Mean ± s.d.		89.4 ± 0.7	+10.3 ± 1.7		

Llama then tended to issue a single code call before reasoning, and half of its calls failed (49% valid), leaving accuracy at 33.0% against 52.0% for same-run CoT. Measured against each run's own CoT, the REPL tool narrowed Llama's gap from 44.0 to 30.7 points and native calling to 19.0 points.

5.3 Self-verification

Each verifier is best read against its own pre-verification candidates, because every variant re-runs the plan and ReAct stages (Table 5). The grounded verifier took its candidates from 66.7% to 59.3%. It flagged 77, repaired 15, and replaced 37 correct answers with wrong program outputs (Figure 3); against the pipeline without a verifier (65.0%) the drop is significant ($p = 0.050$). As a detector it is informative, flagging 40.0% of wrong candidates while rejecting 18.5% of correct ones, but its correction step is not: a freshly written program is less reliable than the model's own worked solution. The intrinsic verifier took its candidates from 67.3% to 75.7% for a different reason. It rejected 199 of 300 candidates, 69.4% of the wrong ones but also 64.9% of the correct ones, which makes it close to uninformative as a detector, and every rejection fell back to CoT, which is strong for this model. Even with a CoT fallback neither verifier reaches CoT's own accuracy (75.3% and 76.7% against 79.7%), because the pipeline's candidates start from a lower base. Self-Refine shows the same pattern at small scale: its first draft scored 79.3% (238 of 300); it then changed 30 answers,

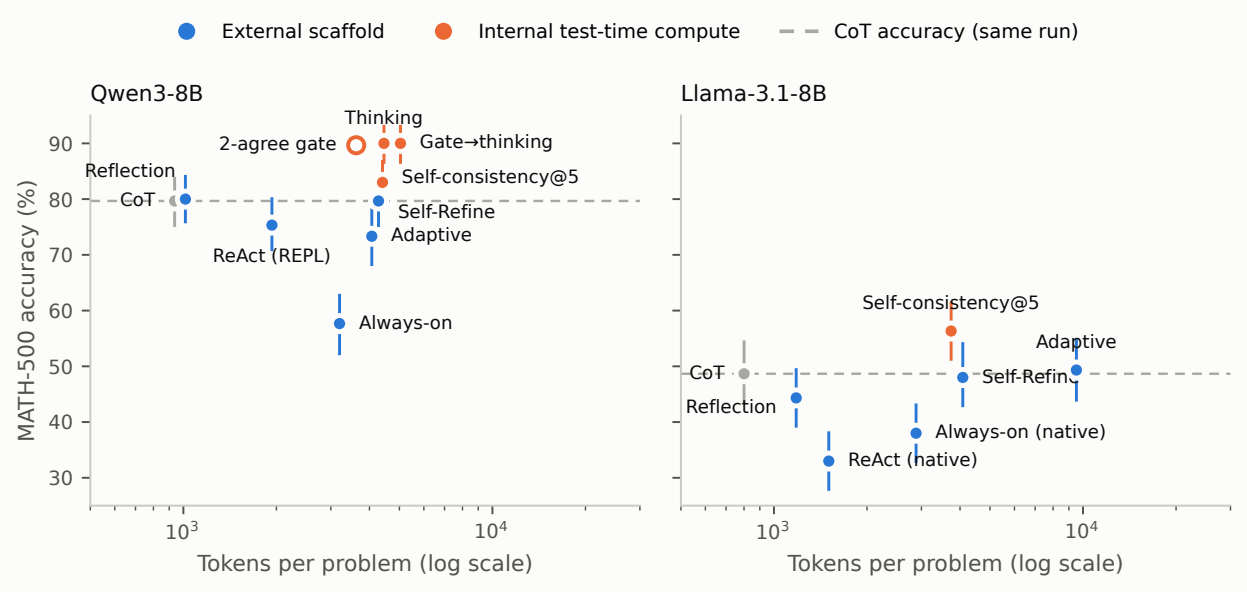


Figure 1: Accuracy against token cost on MATH-500. Blue: external scaffolds. Orange: internal test-time compute (self-consistency, thinking mode, and gated thinking; the hollow marker is the cheaper two-sample gate, Section 5.4). Bars are 95% bootstrap intervals; the dashed line is CoT. Variants not shown are in Tables 1 and 2.

fixing 6 and breaking 5, for 239 correct (79.7%). These results are consistent with Huang et al. [2023].

5.4 Adaptive planning and gating

The adaptive controller's gate is a good difficulty detector (Figure 4). Recomputed from independent samples with the threshold of run 007, it accepted 195 problems, on which CoT scores 93.8%, and escalated 105, on which CoT scores only 53.3%. The trouble is the escalation target. On the 105 escalated problems the tool pipeline scored 33.3%, below CoT (53.3%) and reflection memory (56.2%). Keeping the gate but falling back to CoT would have given 80.3%, essentially CoT's accuracy at higher cost.

Routing escalated problems to thinking mode instead reverses the effect (Table 6). With the threshold calibrated in run 018, the gate accepted 200 problems and escalated 100. On the escalated problems thinking scored 80.0% against 51.0% for CoT, and on the accepted ones the gate's agreed answer was as accurate as thinking (95.0% for both). Overall, gate → thinking reached 90.0%, the same as always-thinking, but cost 5,042 tokens per problem against 4,457, because the three-sample gate itself costs more than half of always-thinking's average cost. A cheaper gate shifts the trade-off. Accepting whenever the first two samples agree gives 89.7% at 3,624 tokens, 0.3 points below always-thinking (not significant) for 19% fewer tokens, and dropping the confidence test from the three-sample gate gives 89.7% at 4,725 tokens. The routing result therefore holds in comparative form: sending hard problems to thinking mode is far better than sending them to external tools, and a cheap agreement gate can save tokens, but no gate beat always-thinking on accuracy.

Table 4: ReAct by tool design and call format. "Hit step limit" is the share of problems that used all 8 steps without an answer (print-only) or needed the forced final answer (REPL, native). Rows come from different runs (print-only: runs 007 and 017; REPL and native: runs 014 and 015), so compare each row with the CoT column from its own run rather than across rows.

Model	Tool / format	Accuracy	CoT (same run)	Tokens	Calls/problem	Valid calls	Hit step limit
Qwen3-8B	print-only	68.3	79.7	1709	1.3	88%	2%
	REPL	75.3	78.3	1934	1.4	85%	2%
	native	73.3	78.3	1951	1.1	71%	7%
Llama-3.1-8B	print-only	4.7	48.7	9160	7.2	97%	87%
	REPL	21.3	52.0	11466	7.3	96%	85%
	native	33.0	52.0	1504	1.6	49%	20%

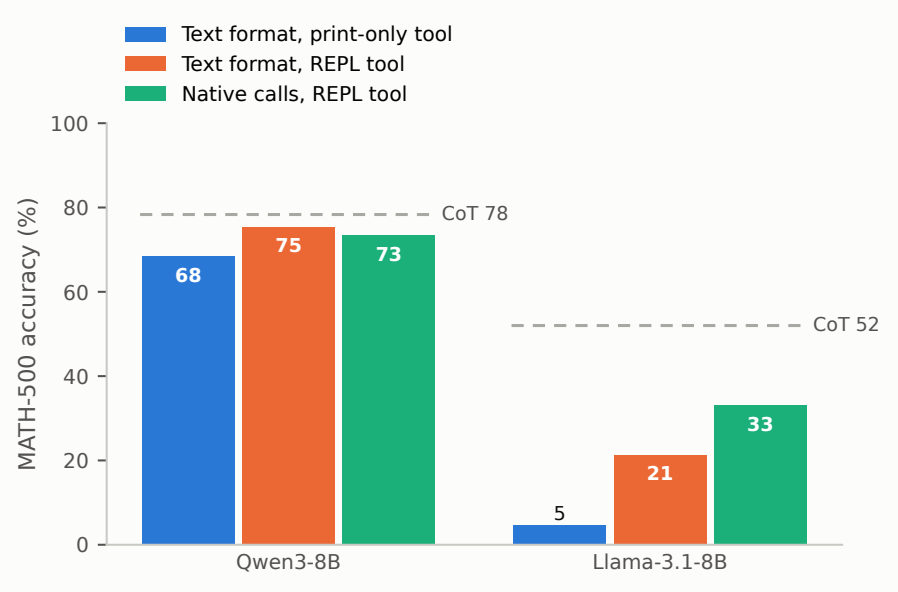


Figure 2: ReAct accuracy on MATH-500 by tool design and call format. Dashed lines: CoT from the run that used the REPL and native tools. The print-only results come from a different run (CoT 79.7% for Qwen3, 48.7% for Llama).

5.5 Difficulty and failure modes

No difficulty level shows a benefit from external scaffolding for Qwen3-8B (Figure 5). On level-5 problems CoT scores 53.3% (run 007), the REPL ReAct agent 48.0%, the adaptive controller 48.0%, and the always-on pipeline 30.7%. Thinking mode is where the hard problems are won: 80.0% on level 5 against 50.7% for same-run CoT, and 64.0% for self-consistency (run 023). For Llama-3.1-8B, the adaptive controller and the always-on pipeline are slightly above CoT on level 5 (18.7% and 17.3% against 13.3%), and neither difference is significant (adaptive controller: 12 wins and 8 losses, $p = 0.50$).

Table 7 attributes the losses. For Qwen3-8B, the always-on pipeline's 127 wrong answers include 37 verifier overrides and 47 answers given after a failed tool call. Most of the adaptive controller's errors come from tool errors (26), escalation harm (19), and verifier overrides (14). For Llama-3.1-8B, 260 of the print-only ReAct agent's 286 errors are loops. Thinking mode's 30 errors are mostly plain reasoning errors (20), with 8 truncations.

Table 5: Verifier ablation in the always-on pipeline (Qwen3-8B, run 008, shared memory). Pre-verifier: accuracy of the candidates before verification. Each row re-runs the plan and ReAct stages, so the candidates differ slightly between rows; candidates without an answer count as wrong, and Final = Pre-verifier + Fixed − Broke exactly. Recall: share of wrong candidates flagged. False-reject: share of correct candidates flagged. †Counterfactual accuracy if flagged problems fell back to plain CoT.

Verifier	Pre-verifier	Final	Flagged	Fixed	Broke	Recall	False-reject	+CoT fallback†
None	65.0	65.0	–	–	–	–	–	–
Grounded (code re-derivation)	66.7	59.3	77	15	37	0.400	0.185	75.3
Intrinsic (self-critique)	67.3	75.7	199	38	13	0.694	0.649	76.7

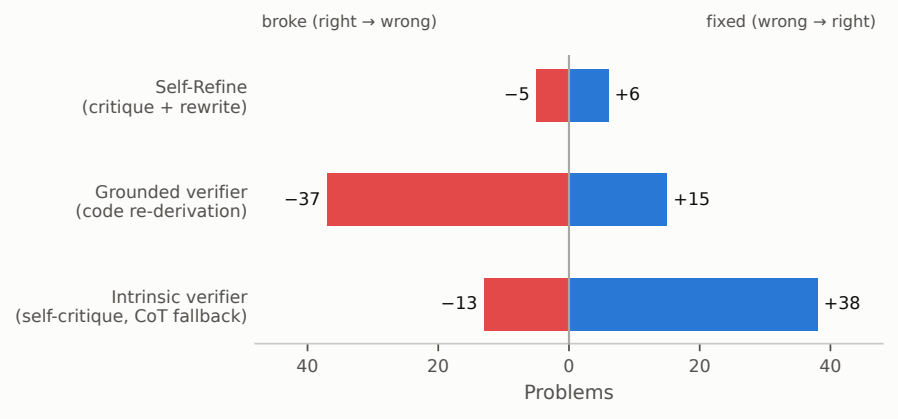


Figure 3: Answers fixed (wrong to right) and broken (right to wrong) by each self-correction mechanism for Qwen3-8B on MATH-500. Self-Refine's counts are relative to its own first draft (79.3%); the verifiers' are relative to their own pre-verification candidates (Table 5).

5.6 When tools should help: GSM-Hard

GSM-Hard replaces the numbers in GSM8K problems with large values, so exact arithmetic should favour tools. Here the pipelines trend in the expected direction (Table 8). The always-on pipeline (79.7%) and the adaptive controller (79.3%) are 3.0 and 2.7 points above CoT (76.7%), but neither difference is significant after correction. ReAct with the REPL tool ties CoT exactly, self-consistency gains nothing (77.0% against 77.3% in its own run), and native calling is significantly worse (−7.0). Qwen3-8B handles long arithmetic in plain CoT better than we expected, which leaves little room for tools or sampling on this benchmark.

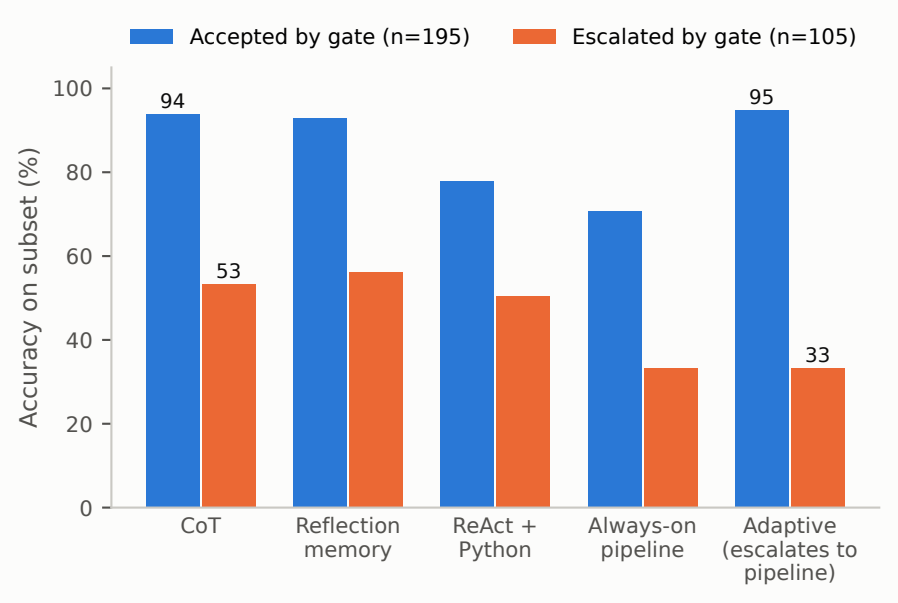


Figure 4: Accuracy on the problems the adaptive controller's gate accepted (blue) and escalated (orange), Qwen3-8B. Gate decisions come from independent samples (run 023, threshold from run 007); method accuracies are from run 007. The gate separates easy from hard problems; the pipeline it escalates to is worse than CoT on the hard ones.

Table 6: Gating into thinking mode, Qwen3-8B, MATH-500. Gate decisions use the first k independent samples of run 023; escalated problems take the thinking-mode answer from run 018, whose tokens are added only for escalated problems (Section 4). Self-consistency is from run 023, where CoT scored 80.0%.

Strategy	Accuracy	Tokens/problem	Escalated
CoT (run 018)	79.7	974	–
Self-consistency@5 (run 023)	83.0	4409	–
Always thinking (run 018)	90.0	4457	100%
Gate: 3 agree + confidence → thinking	90.0	5042	33%
Gate: 3 agree → thinking	89.7	4725	27%
Gate: 2 agree → thinking	89.7	3624	23%

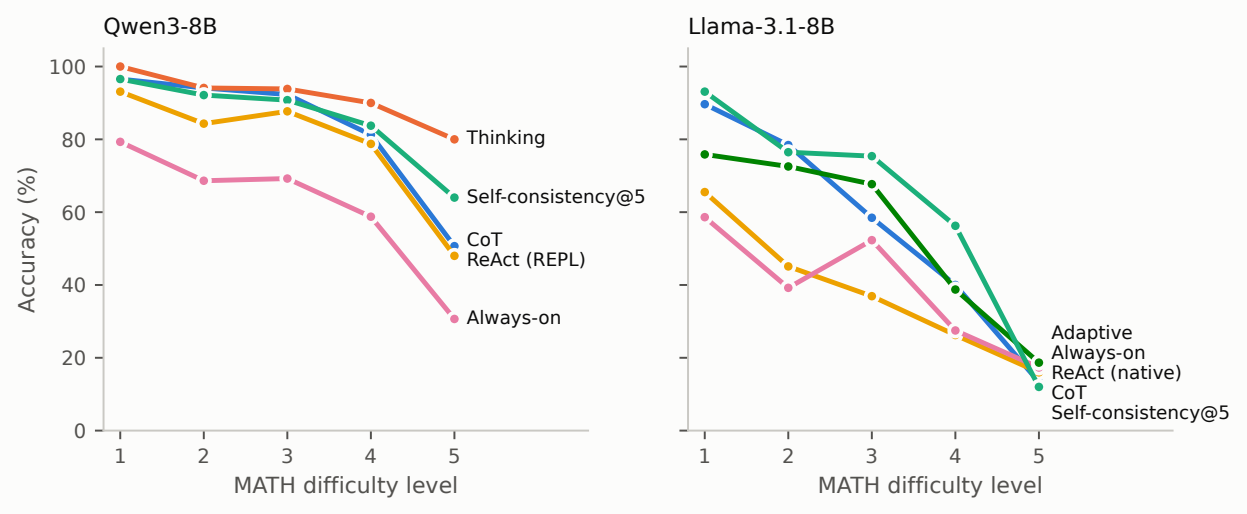


Figure 5: Accuracy by MATH difficulty level (level 1 has 29 test problems, level 5 has 75).

Table 7: Failure categories among wrong answers (first matching rule). Trunc.: no answer within the token cap. Loop: all agent steps used without an answer. Verif. override: verifier replaced a correct candidate. Escal. harm: escalated, pipeline wrong, CoT right. Tool err.: answer given after at least one failed tool call.

Model	Method	Wrong	Trunc.	Loop	No ans.	Verif. override	Escal. harm	Tool err.	Reasoning
Qwen3-8B	CoT	61	14	0	3	0	0	0	44
	ReAct, REPL	74	0	0	0	0	0	11	63
	Always-on	127	4	1	0	37	0	47	38
	Adaptive	80	3	1	0	14	19	26	17
	Thinking	30	8	0	2	0	0	0	20
Llama-3.1-8B	CoT	154	17	0	0	0	0	0	137
	ReAct, print-only	286	2	260	0	0	0	1	23
	ReAct, native	201	3	0	0	0	0	54	144
	Always-on	194	10	44	0	19	0	45	76
	Adaptive	152	15	30	0	10	19	31	47

Table 8: Qwen3-8B on GSM-Hard (300 test problems with large numbers). *Relative to CoT from the run in the Run column, Holm-corrected over 7 comparisons. ×CoT is computed from unrounded token means. Same-run CoT: run 016 76.7%, 458 tokens; run 025 77.3%, 464 tokens. ‡Rebuilt from independent samples of run 025 and the always-on pipeline of run 016 (Section 4); tested against run 016's CoT.

Method	Run	Accuracy (95% CI)	Tokens	×CoT*	Δ vs CoT*	p (Holm)
Direct answer	016	12.0 [8.3, 15.7]	115	0.25	-64.7	<0.001
Chain-of-thought (CoT)	016	76.7 [72.0, 81.0]	458	1.00	–	–
ReAct, print-only tool	016	72.3 [67.0, 77.3]	961	2.10	-4.3	0.147
ReAct, REPL tool	016	76.7 [71.7, 81.0]	1000	2.18	+0.0	1.000
ReAct, native calls	016	69.7 [64.7, 75.0]	996	2.17	-7.0	0.019
Always-on pipeline	016	79.7 [75.0, 84.3]	1854	4.05	+3.0	0.751
Adaptive controller‡	025+016	79.3 [75.0, 84.0]	2054	4.48	+2.7	0.751
Self-consistency@5	025	77.0 [72.0, 81.7]	2325	5.02	-0.3	1.000

6 Discussion and Limitations

What amplified and what did not. In our setting, extra compute helped when it stayed inside the model's own reasoning (thinking mode; majority voting gave smaller gains that were not significant after correction) and did not help when it went into external structure. Each external component added a new way to fail: a tool whose behaviour the model misjudged, a verifier whose correction was worse than the original answer, an agent loop the model could not end. For a strong 8B reasoner on competition maths these costs outweighed the benefits; for a weaker one they dominated. The useful form of adaptivity was deciding *when* to spend more compute, not adding more machinery.

Scope. We study two 8B models, mathematical reasoning, and 300 test problems per benchmark. With 300 problems, 95% intervals are roughly ± 5 points, so small differences remain unresolved, including the GSM-Hard trends. Thinking mode was run with three seeds; self-consistency, the gates, and the deterministic greedy methods were run once. Retrieval-heavy or long-context tasks, where tools supply information the model lacks, may behave differently, and we did not test them. Thinking mode was available only for Qwen3.

Harness dependence. Our results depend on implementation choices, and we found this directly: changing the tool's execution semantics narrowed ReAct's gap to CoT from 11.3 to 3.0 points for Qwen3-8B. We used reasonable defaults (a stateful REPL, native parsers from vLLM, a forced final answer), but other prompts or tool designs could shift the numbers, as reported more broadly by Cho [2026]. The verifier variants also differ in what happens after a rejection, which we separated by reporting detection rates and a CoT-fallback counterfactual.

Other limitations. Memory retrieval uses bag-of-words similarity. The answer matcher is conservative and may reject some equivalent forms, equally for all methods. GSM-Hard labels come from executing programs with substituted numbers, and some are implausible. Runs used A100 GPUs with 40 GB or 80 GB of memory and two serving paths, which is why every comparison is made within a run. Several analyses were exploratory, as noted in Section 4. The adaptive controller and gate $\rightarrow$ thinking are reconstructed from independent samples and clean runs of their escalation targets rather than re-run end to end (Section 4).

7 Conclusion

We asked whether adaptive planning, tool use, memory, and self-verification amplify local 8B models on complex reasoning. On MATH-500, with costs reported and comparisons paired, they did not: the best external scaffolds tied chain-of-thought, and the full pipeline was significantly worse for both Qwen3-8B and Llama-3.1-8B. The losses trace to concrete mechanisms, namely tool semantics the model misjudges, verifiers that override correct answers, and agent loops that do not terminate. Internal reasoning did amplify, with Qwen3's thinking mode gaining 10.3 points over the CoT of its own run, consistently across three seeds; at about the same average cost, self-consistency gained 3.0 points over the CoT of its own run, which was not significant. For practitioners running models locally, our results suggest testing CoT, self-consistency, and native thinking before adding external structure, and, where tokens matter, using a cheap agreement gate to decide when to think rather than when to call tools.

Acknowledgments

Experiment code, runs, analysis, and drafting were carried out with the help of an AI coding assistant (Claude); the author reviewed the design and the results.

References

Wenhu Chen, Xueguang Ma, Xinyi Wang, and William W. Cohen. Program of Thoughts Prompting: Disentangling Computation from Reasoning for Numerical Reasoning Tasks, 2022. URL https://arxiv.org/abs/2211.12588.

Yong-eun Cho. It's Not the Capability: Harness Sensitivity Is Non-Monotone Across LLM Agent Tiers, 2026. URL https://arxiv.org/abs/2605.26731.

Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, et al. Training Verifiers to Solve Math Word Problems, 2021. URL https://arxiv.org/abs/2110.14168.

Pengfei Du. Memory for Autonomous LLM Agents:Mechanisms, Evaluation, and Emerging Frontiers, 2026. URL https://arxiv.org/abs/2603.07670.

Luyu Gao, Aman Madaan, Shuyan Zhou, Uri Alon, Pengfei Liu, Yiming Yang, Jamie Callan, and Graham Neubig. PAL: Program-aided Language Models, 2022. URL https://arxiv.org/abs/2211.10435.

Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, et al. The Llama 3 Herd of Models, 2024. URL https://arxiv.org/abs/2407.21783.

Mohd Ariful Haque, Fahad Rahman, Kishor Datta Gupta, Khalil Shujaee, and Roy George. TinyLLM: Evaluation and Optimization of Small Language Models for Agentic Tasks on Edge Devices, 2025. URL https://arxiv.org/abs/2511.22138.

Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring Mathematical Problem Solving With the MATH Dataset, 2021. URL https://arxiv.org/abs/2103.03874.

Jie Huang, Xinyun Chen, Swaroop Mishra, Huaixiu Steven Zheng, Adams Wei Yu, Xinying Song, and Denny Zhou. Large Language Models Cannot Self-Correct Reasoning Yet, 2023. URL https://arxiv.org/abs/2310.01798.

Xu Huang, Weiwen Liu, Xiaolong Chen, Xingmei Wang, Hao Wang, Defu Lian, Yasheng Wang, Ruiming Tang, et al. Understanding the planning of LLM agents: A survey, 2024. URL https://arxiv.org/abs/2402.02716.

Minki Kang, Jongwon Jeong, Seanie Lee, Jaewoong Cho, and Sung Ju Hwang. Distilling LLM Agent into Small Models with Retrieval and Code Tools, 2025. URL https://arxiv.org/abs/2505.17612.

Sayash Kapoor, Benedikt Stroebl, Zachary S. Siegel, Nitya Nadgir, and Arvind Narayanan. AI Agents That Matter, 2024. URL https://arxiv.org/abs/2407.01502.

Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, et al. Efficient Memory Management for Large Language Model Serving with PagedAttention, 2023. URL https://arxiv.org/abs/2309.06180.

Hyunseok Lee, Seunghyuk Oh, Jaehyung Kim, Jinwoo Shin, and Jihoon Tack. ReVISE: Learning to Refine at Test-Time via Intrinsic Self-Verification, 2025. URL https://arxiv.org/abs/2502.14565.

Hunter Lightman, Vineet Kosaraju, Yura Burda, Harri Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, et al. Let's Verify Step by Step, 2023. URL https://arxiv.org/abs/2305.20050.

Quanyu Long, Kai Jie Jiang, Jianda Chen, Xu Guo, Leilei Gan, and Wenya Wang. Self-Verification Dilemma: Experience-Driven Suppression of Overused Checking in LLM Reasoning, 2026. URL https://arxiv.org/abs/2602.03485.

Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegreffe, Uri Alon, Nouha Dziri, et al. Self-Refine: Iterative Refinement with Self-Feedback, 2023. URL https://arxiv.org/abs/2303.17651.

Thomas Nolasque, John Grey, Calista Pham, and Ankit Vani. Thinking Costs Tokens: When More Structure is Worth the Price, 2026. URL https://arxiv.org/abs/2608.27506.

Charles Packer, Sarah Wooders, Kevin Lin, Vivian Fang, Shishir G. Patil, Ion Stoica, and Joseph E. Gonzalez. MemGPT: Towards LLMs as Operating Systems, 2023. URL https://arxiv.org/abs/2310.08560.

Davide Paglieri, Bartłomiej Cupiał, Jonathan Cook, Ulyana Piterbarg, Jens Tuyls, Edward Grefenstette, Jakob Nicolaus Foerster, Jack Parker-Holder, et al. Learning When to Plan: Efficiently Allocating Test-Time Compute for LLM Agents, 2025. URL https://arxiv.org/abs/2509.03581.

Ella Rabinovich and Ateret Anaby-Tavor. On the Robustness of Agentic Function Calling, 2025. URL https://arxiv.org/abs/2504.00914.

JV Roig. How Do LLMs Fail In Agentic Scenarios? A Qualitative Analysis of Success and Failure Scenarios of Various LLMs in Agentic Simulations, 2025. URL https://arxiv.org/abs/2512.07497.

Nicholas Roth, Christopher Hidey, Lucas Spangher, William F. Arnold, Chang Ye, Nick Masiewicki, Jinoo Baek, Peter Grabowski, et al. Factored Agents: Decoupling In-Context Learning and Memorization for Robust Tool Use, 2025. URL https://arxiv.org/abs/2503.22931.

Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language Models Can Teach Themselves to Use Tools, 2023. URL https://arxiv.org/abs/2302.04761.

Raghav Sharma and Manan Mehta. Small Language Models for Agentic Systems: A Survey of Architectures, Capabilities, and Deployment Trade offs, 2025. URL https://arxiv.org/abs/2510.03847.

Noah Shinn, Federico Cassano, Edward Berman, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language Agents with Verbal Reinforcement Learning, 2023. URL https://arxiv.org/abs/2303.11366.

Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. Self-Consistency Improves Chain of Thought Reasoning in Language Models, 2022. URL https://arxiv.org/abs/2203.11171.

Shiguang Wu and Quanming Yao. Asking LLMs to Verify First is Almost Free Lunch, 2025. URL https://arxiv.org/abs/2511.21734.

An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, et al. Qwen3 Technical Report, 2025. URL https://arxiv.org/abs/2505.09388.

Xiaofang Yang, Lijun Li, Heng Zhou, Tong Zhu, Xiaoye Qu, Yuchen Fan, Qianshan Wei, Rui Ye, et al. Toward Efficient Agents: Memory, Tool learning, and Planning, 2026. URL https://arxiv.org/abs/2601.14192.

Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing Reasoning and Acting in Language Models, 2022. URL https://arxiv.org/abs/2210.03629.

Yunbei Zhang, Janet Wang, Yingqiang Ge, Weijie Xu, Jihun Hamm, and Chandan K. Reddy. Stop Comparing LLM Agents Without Disclosing the Harness, 2026. URL https://arxiv.org/abs/2605.23950.

Dongsheng Zhu, Xuchen Ma, Yucheng Shen, Xiang Li, Yukun Zhao, Shuaiqiang Wang, Lingyong Yan, and Dawei Yin. When Tools Fail: Benchmarking Dynamic Replanning and Anomaly Recovery in LLM Agents, 2026. URL https://arxiv.org/abs/2606.05806.

He Zhu, Tianrui Qin, King Zhu, Heyuan Huang, Yeyi Guan, Jinxiang Xia, Yi Yao, Hanhao Li, et al. OAgents: An Empirical Study of Building Effective Agents, 2025. URL https://arxiv.org/abs/2506.15741.

A GSM8K

Table 9: Qwen3-8B on GSM8K (300 test problems, run 004). Only methods unaffected by a ReAct bug in that run are shown; CoT is near ceiling.

Method	Accuracy (95% CI)	Tokens/problem	p vs CoT
Direct answer	14.0 [10.3, 18.0]	99	<0.001
Chain-of-thought (CoT)	91.7 [88.7, 95.0]	353	–
Reflection memory	92.3 [89.3, 95.3]	476	0.815
Self-Refine	92.7 [89.7, 95.7]	1892	0.453

B Run log

Table 10: All logged runs (`.rstack/experiments.jsonl`). Runs 017 and 018 were each split across three parallel jobs and merged. Pilot runs validated harness changes only.

Run	Status	Note
run-001	failed	Baselines: direct vs CoT vs ReAct+python tool on Qwen3-8B, GSM8K-300
run-002	failed	Baselines: direct vs CoT vs ReAct+python tool on Qwen3-8B, GSM8K-300 (retry after CUDA fork fix)
run-003	completed	Baselines: direct vs CoT vs ReAct+python tool on Qwen3-8B, GSM8K-300 (single seed; direct truncated at 16 ...
run-004	completed	All 7 methods, Qwen3-8B GSM8K-300, grounded verifier
run-005	failed	All 7 methods, Qwen3-8B, MATH-500 (300 test)
run-006	completed	PILOT n=60 MATH-500 validating harness fixes
run-007	completed	MAIN: 7 methods, Qwen3-8B, MATH-500 (300 test + 100 held-out), validated harness
run-008	completed	Verifier ablation, always-on pipeline, same 300 MATH-500 problems, shared memory
run-009	completed	PILOT n=30 Llama-3.1-8B-Instruct MATH-500: harness validation
run-010	failed	Llama-3.1-8B all 7 methods MATH-500
run-011	failed	Qwen3-8B gated routing (cot, sc5, think, gate_think)
run-012	completed	PILOT n=20 Qwen3-8B native tool calling (hermes) + stateful REPL tool
run-013	completed	PILOT n=20 Llama-3.1-8B native tool calling (llama3_json) + stateful REPL tool
run-014	completed	#3 native tool calling, Qwen3-8B MATH-500 (server backend)
run-015	completed	#3 native tool calling, Llama-3.1-8B MATH-500
run-016	completed	#4 GSM-Hard Qwen3-8B (300 test + 100 held-out)
run-017	completed	Llama-3.1-8B all 7 methods MATH-500 (rerun of run-010; merged from 3 parallel detached jobs, A100-80GB)
run-018	completed	Qwen3-8B gated routing MATH-500 (rerun of run-011; merged from 3 jobs): cot .797 (974 tok), sc5 .820 (4467), ...
run-019	failed	Seed-fix rerun (CoT, SC@5, thinking; Qwen3-8B)
run-019-pilot	completed	PILOT n=10: verify per-request sampling seeds
run-020	failed	Seed-fix rerun (gate→thinking; Qwen3-8B)
run-021	failed	Seed-fix rerun (adaptive; Qwen3-8B)
run-022	failed	Seed-fix rerun (adaptive; Llama-3.1-8B)
run-023	completed	Seed-fix: CoT + SC@5 with independent per-request seeds, Qwen3-8B MATH-500
run-024	completed	Seed-fix: CoT + SC@5 with independent seeds, Llama-3.1-8B MATH-500
run-025	completed	Seed-fix: CoT + SC@5 with independent seeds, Qwen3-8B GSM-Hard
run-026	completed	Extra seed (2): CoT + thinking mode, Qwen3-8B MATH-500
run-027	completed	Extra seed (3): CoT + thinking mode, Qwen3-8B MATH-500

C Prompts

CoT. `Solve step by step. End with 'Final Answer: <answer>'.` followed by the question, with retrieved lessons prepended for reflection memory.

ReAct (text format). The model is told to reason in each Thought, compute by writing `Action:` followed by a Python code block, check each Observation against its reasoning, and end with `Final Answer:`; one worked example is included. The tool description states either that code must print its result (print-only) or that variables persist and a final bare expression is shown (REPL).

Grounded verifier. `Write a Python program that computes the answer to this problem. Print only the final answer in simplest exact form (use sympy if helpful).`

Intrinsic verifier. `Question: ... Proposed solution: ... Is this answer correct? Reply Yes or No.`

Code, prompts, run logs, and analysis scripts: https://github.com/adityajatad-spec/agentic-local-llms.