


Lab 10 (28 March 2019)

Problem 1 : Implement the Bellman-Ford algorithm for computing the shortest paths from a source vertex s to all other vertices in a graph. Consider your input graph to be a weighted directed graph where edge weights might be negative. Print the distance table for each iteration, as shown below. If the input graph has negative weight cycles, your code should detect this and print a message saying 'Graph has a negative weight cycle'. For e.g. in the graph shown below, if the weight of edge (C,D) is changed to 1, a negative weight cycle is formed.

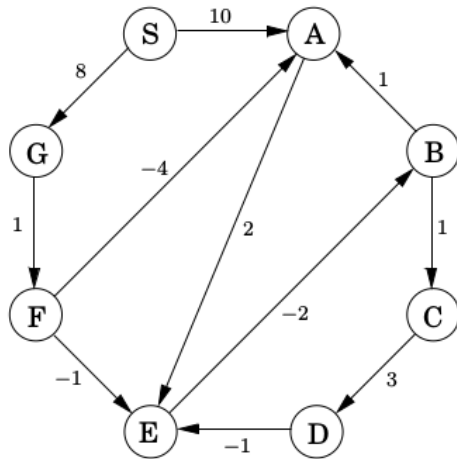

Node	Iteration							
	0	1	2	3	4	5	6	7
S	0	0	0	0	0	0	0	0
A	∞	10	10	5	5	5	5	5
B	∞	∞	∞	10	6	5	5	5
C	∞	∞	∞	∞	11	7	6	6
D	∞	∞	∞	∞	∞	14	10	9
E	∞	∞	12	8	7	7	7	7
F	∞	∞	9	9	9	9	9	9
G	∞	8	8	8	8	8	8	8

Problem 2: Implement the dynamic-programming algorithm to solve the Knapsack Problem.